SECTION A–A

WING ROOT · BL 0 · LS(1)-0417MOD · INCIDENCE +1.4° · SCALE 1:10

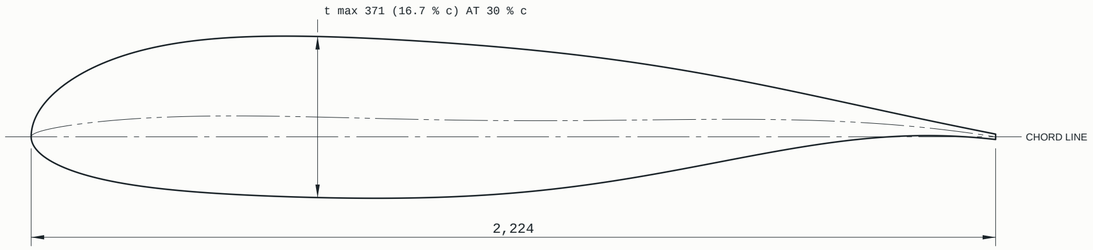

SECTION B–B

WING TIP · BL 7,430 · LS(1)-0313 · INCIDENCE -2.6° · SCALE 1:10

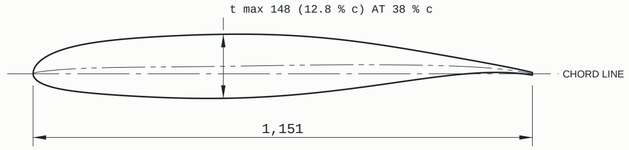

DETAIL C · FOWLER FLAP

SECTION AT BL 3,000 · CHORD 1,765 · FLAP 0° SOLID, 15° / 30° / 40° PHANTOM · SCALE 1:5

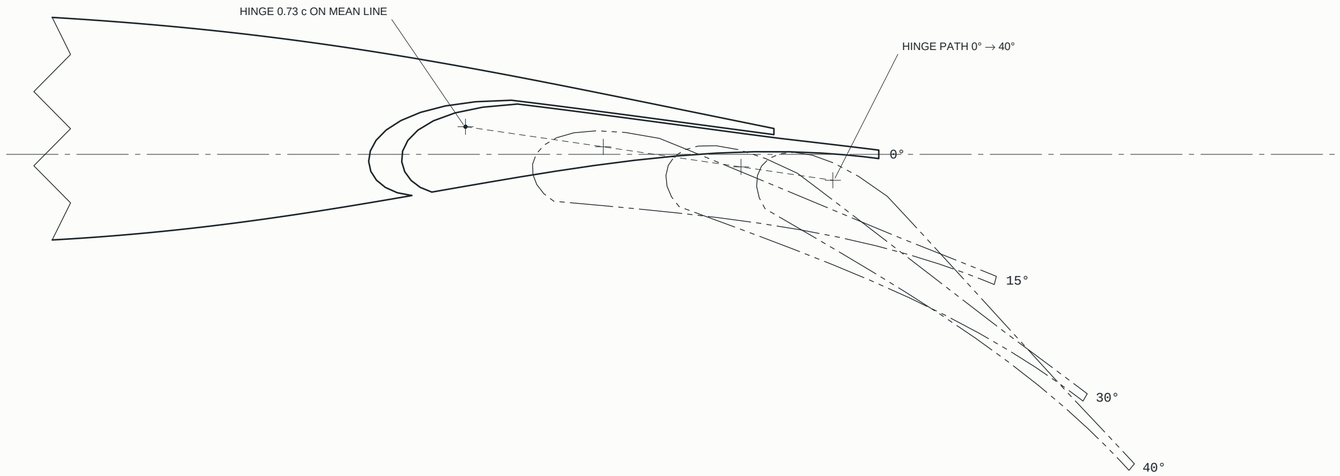

FLAP SETTINGS (mm AT BL 3,000)

SETTING	ROTATION	AFT TRAVEL	DROP
0°	0°	0	0
15°	15°	132	23
30°	30°	265	46
40°	40°	353	62

DETAIL D · PROPELLER BLADE

HARTZELL 5-BLADE · Ø2,670 · PLANFORM ABOUT THE PITCH AXIS, LE UP · SCALE 1:10

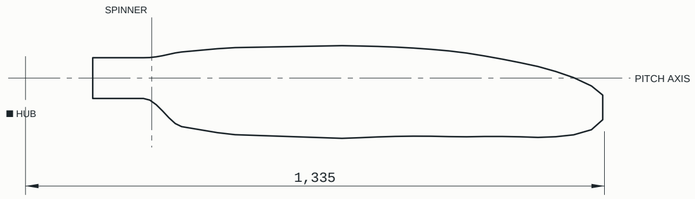

BLADE STATIONS (β FROM THE PLANE OF ROTATION)

r / R	r	CHORD	β	t / c
0.20	267	94	59.8°	99.9 %
0.30	400	183	49.1°	19.1 %
0.40	534	204	40.9°	13.4 %
0.50	668	210	34.7°	12.1 %
0.60	801	210	30.0°	11.0 %
0.70	934	200	26.3°	10.0 %
0.80	1,068	184	23.4°	8.9 %
0.90	1,202	157	21.0°	7.9 %
0.95	1,268	129	20.0°	7.4 %
1.00	1,331	57	19.1°	6.9 %

NOTES

1. Dimensions in millimetres unless stated. Aerofoils drawn in their chord frame (chord line horizontal).
2. LS(1)-0417MOD / LS(1)-0313 sections are model reconstructions (CST fits to the sections of the Pilatus NGX model drawing), not certified ordinates.
3. Flap kinematics per model: rotation about the hinge at 0.73 c on the mean line, aft travel 0.20 c and drop 0.035 c, both proportional to deflection (full at 40°).
4. Blade chord, angle β and t/c measured from the lofted blade at flight-fine pitch (geometric pitch 2.9 m).

PILATUS PC-12 PRO

SECTIONS

FIRST ANGLE PROJECTION

DWG NO	REV	SCALE	SHEET	UNITS
PC12-SEC-002	B	AS SHOWN	A2 · 1 OF 1	mm

DRAWN	DATE
Claude · loftkit parametric model	2026-09-24

RECONSTRUCTION FROM PUBLISHED DATA — NOT FOR MANUFACTURE