

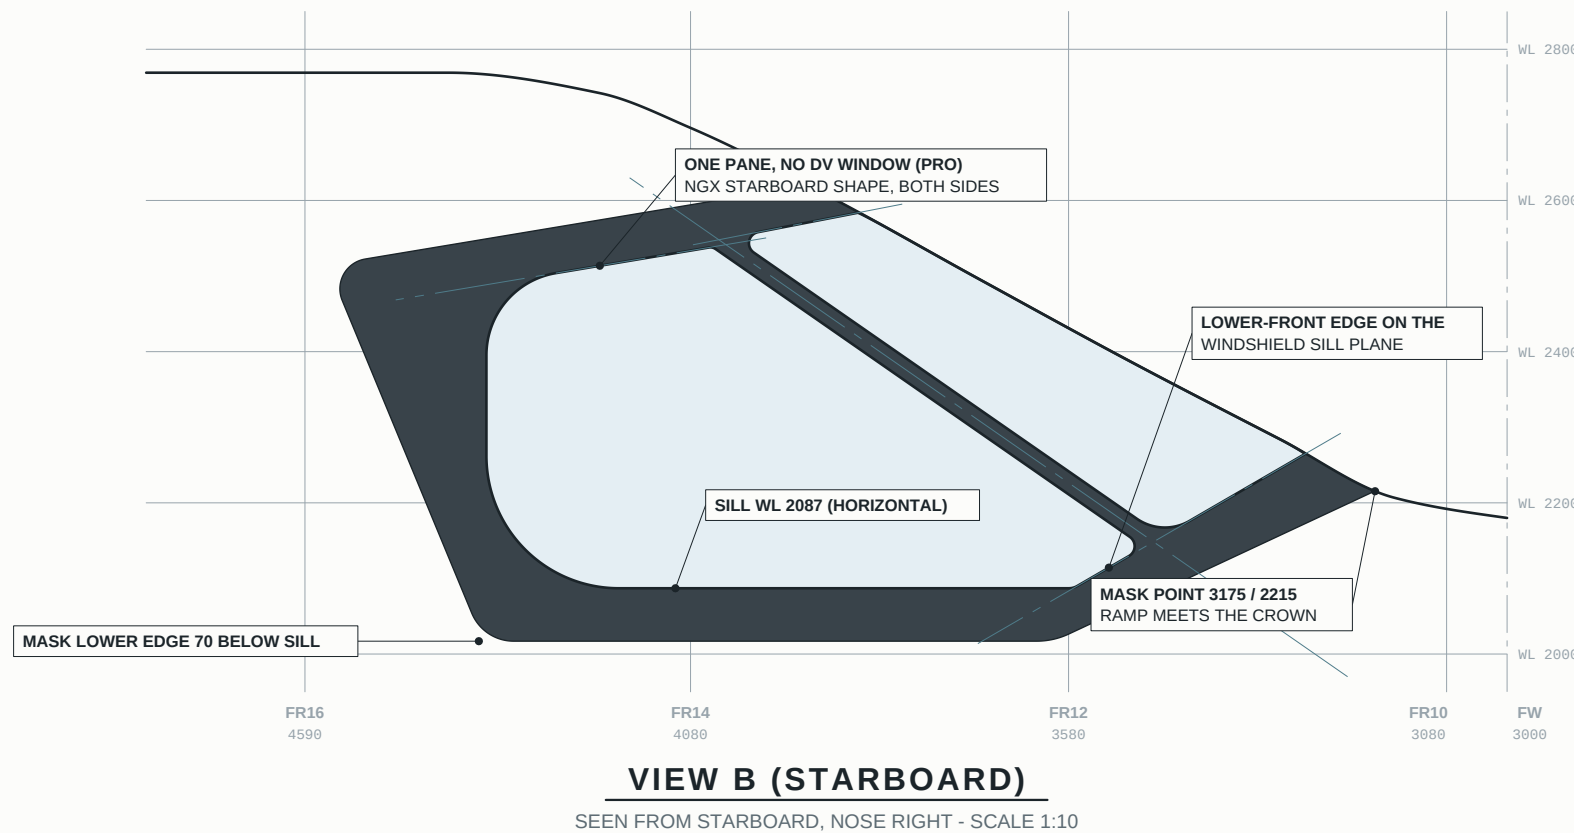
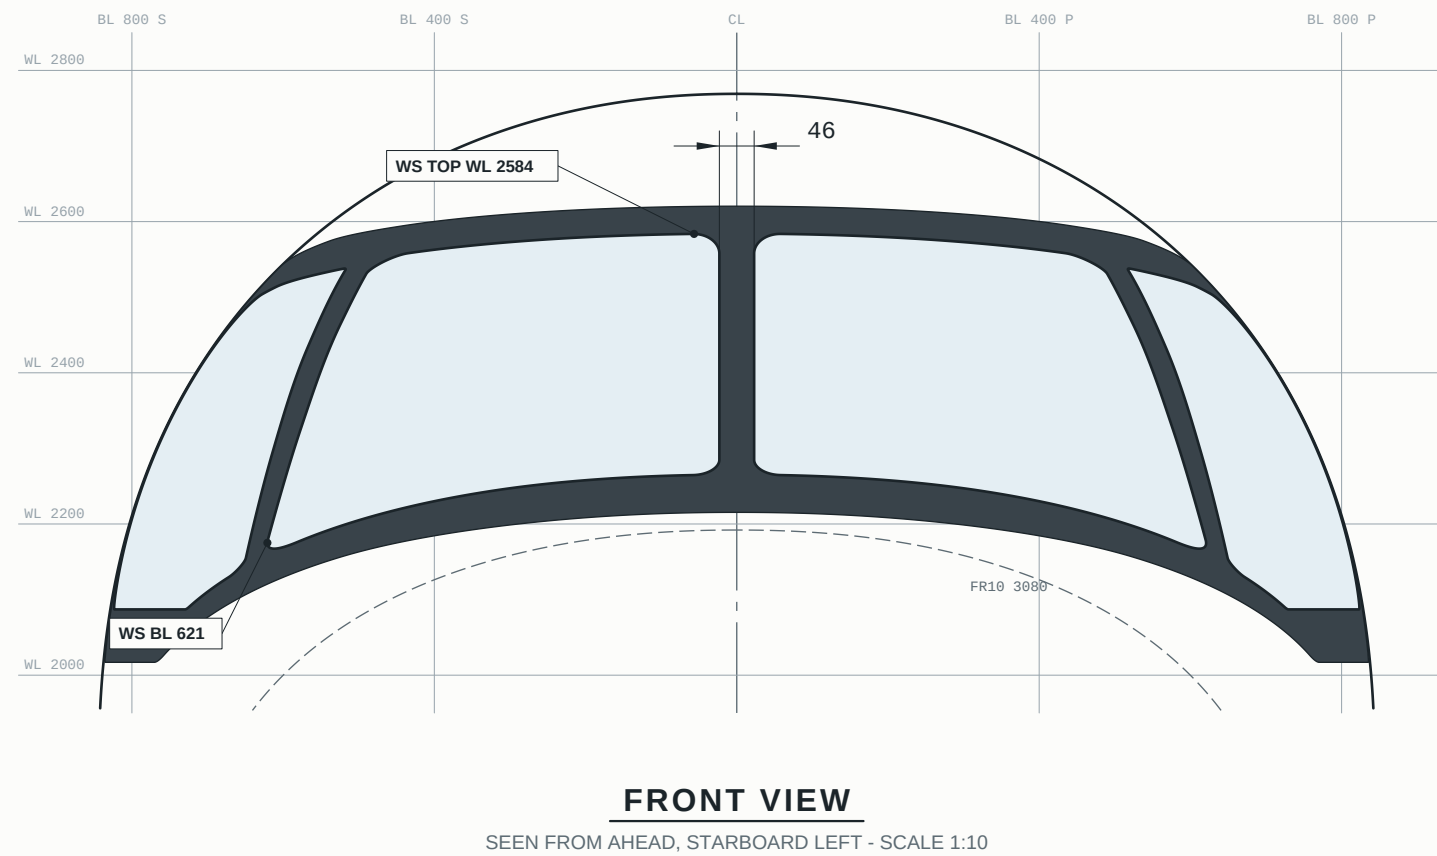


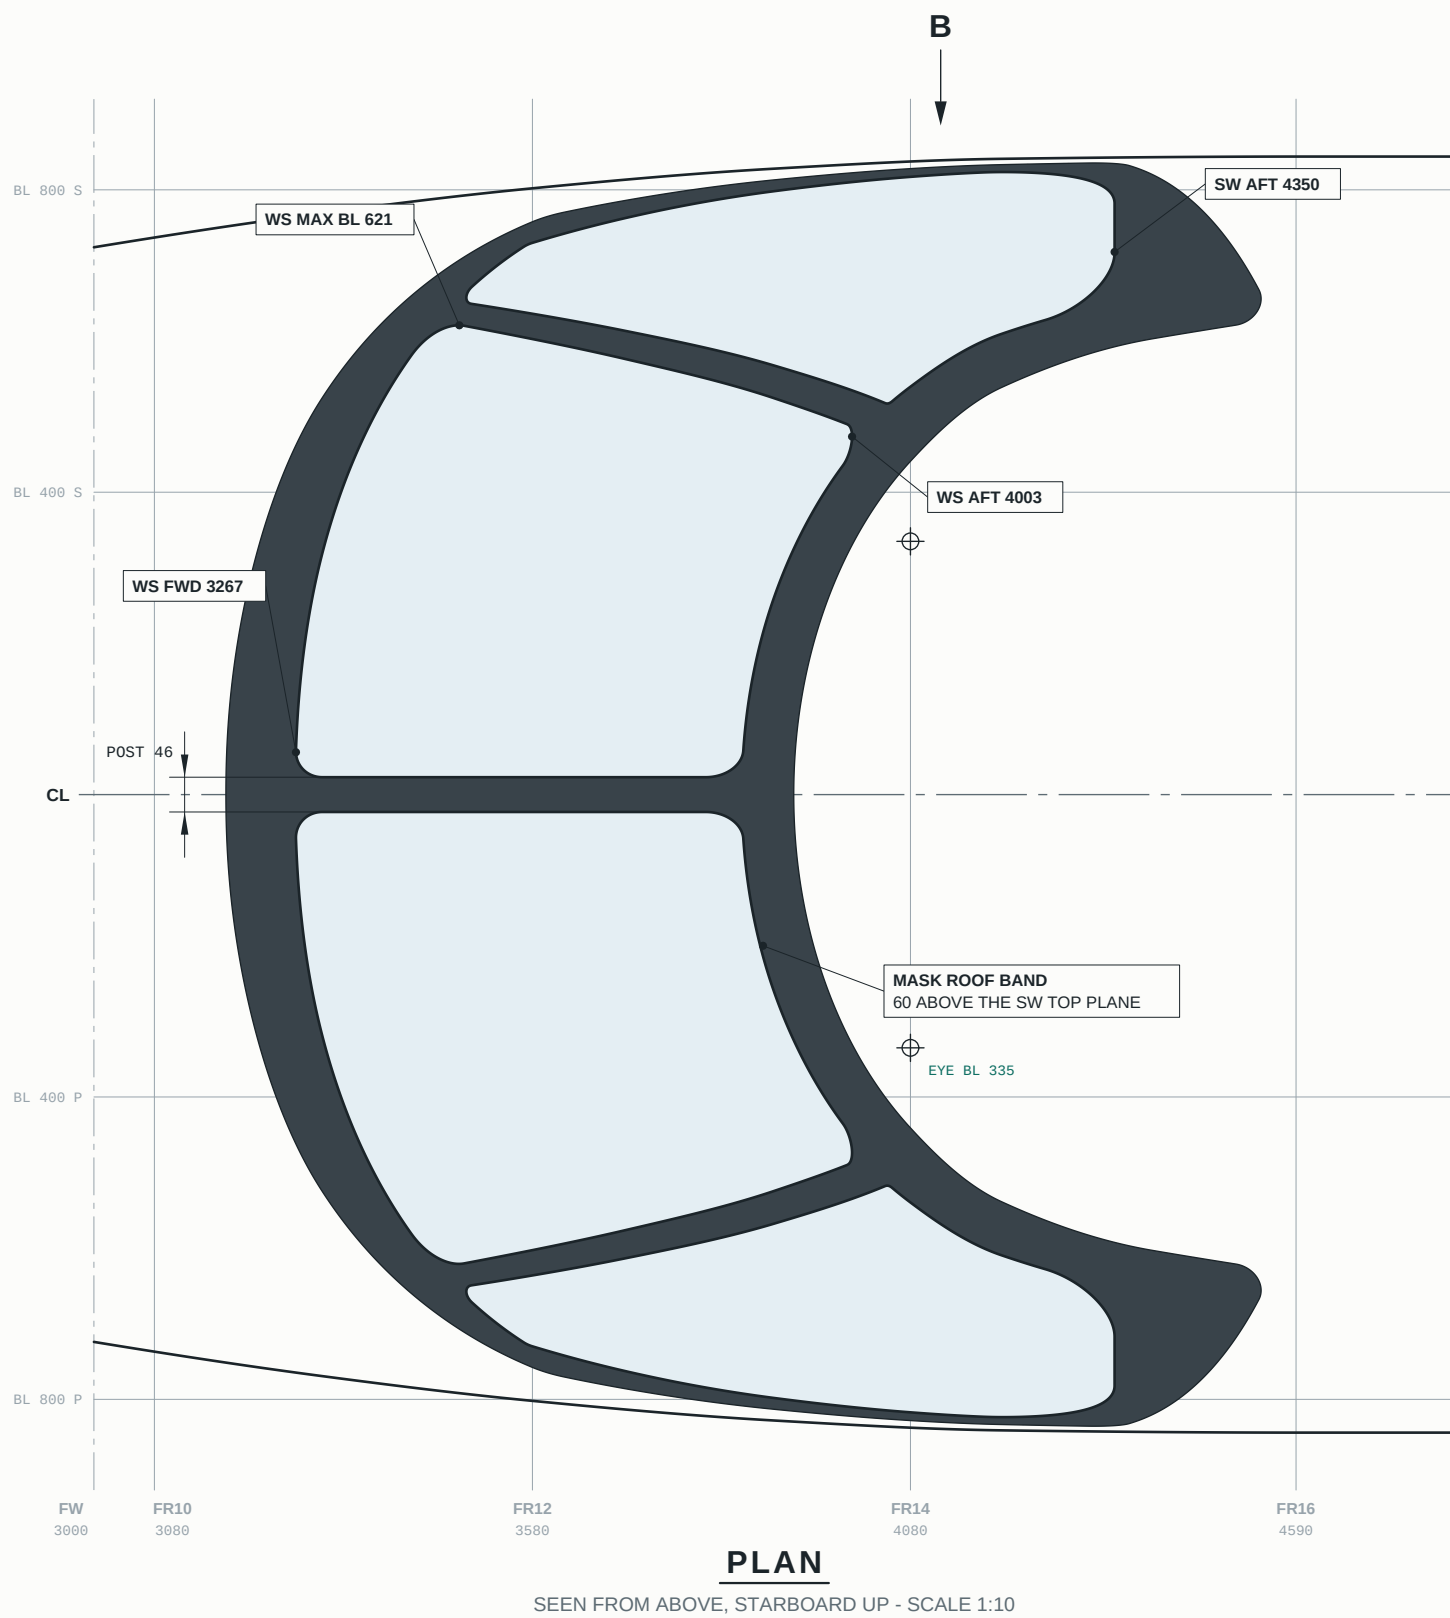

- ## NOTES

1. Drawn from the parameters of model/coskit_glazing.py: zero contours of the glazing and mask signed-distance fields on the outer mould line of model/fuselage.py (sheet L1), projected. Never from the mesh. STA = m aft of datum (3000 mm ahead of the firewall); WL above the static ground line.
2. Every edge except the centre post is a plane normal to the plane of symmetry: straight in side projection (chain-dotted construction lines). Post |BL| = 23. Corners filleted (side projection).
3. PC-12 PRO: no direct vision window, the NGX starboard single pane is used on both sides (Pilatus PRO release; photos of s/n 3001, 3010, 3036, 3066).
4. Dark mask (filled): PRO livery item, one continuous area around all four panes - roof band, centre post, lower band with a ramp to the windshield's forward corner, straight leaning aft edge ahead of the airstair door. Drawn for the MSN 3008 scheme (edge 22.5°); the aft edges vary per airframe: model/livery.py MASK_SCHEMES; Mask corner tip: low-aft 60, top-aft 40, ramp 100.
5. Windshield roof edge: its own plane (11.0°, 9 mm above the side-window top plane at STA 4000) - our crown section at STA 3900 is 5.12 mm fuller than the drawing's; so plan and front cannot both match a single plane better than -11.7° mm.

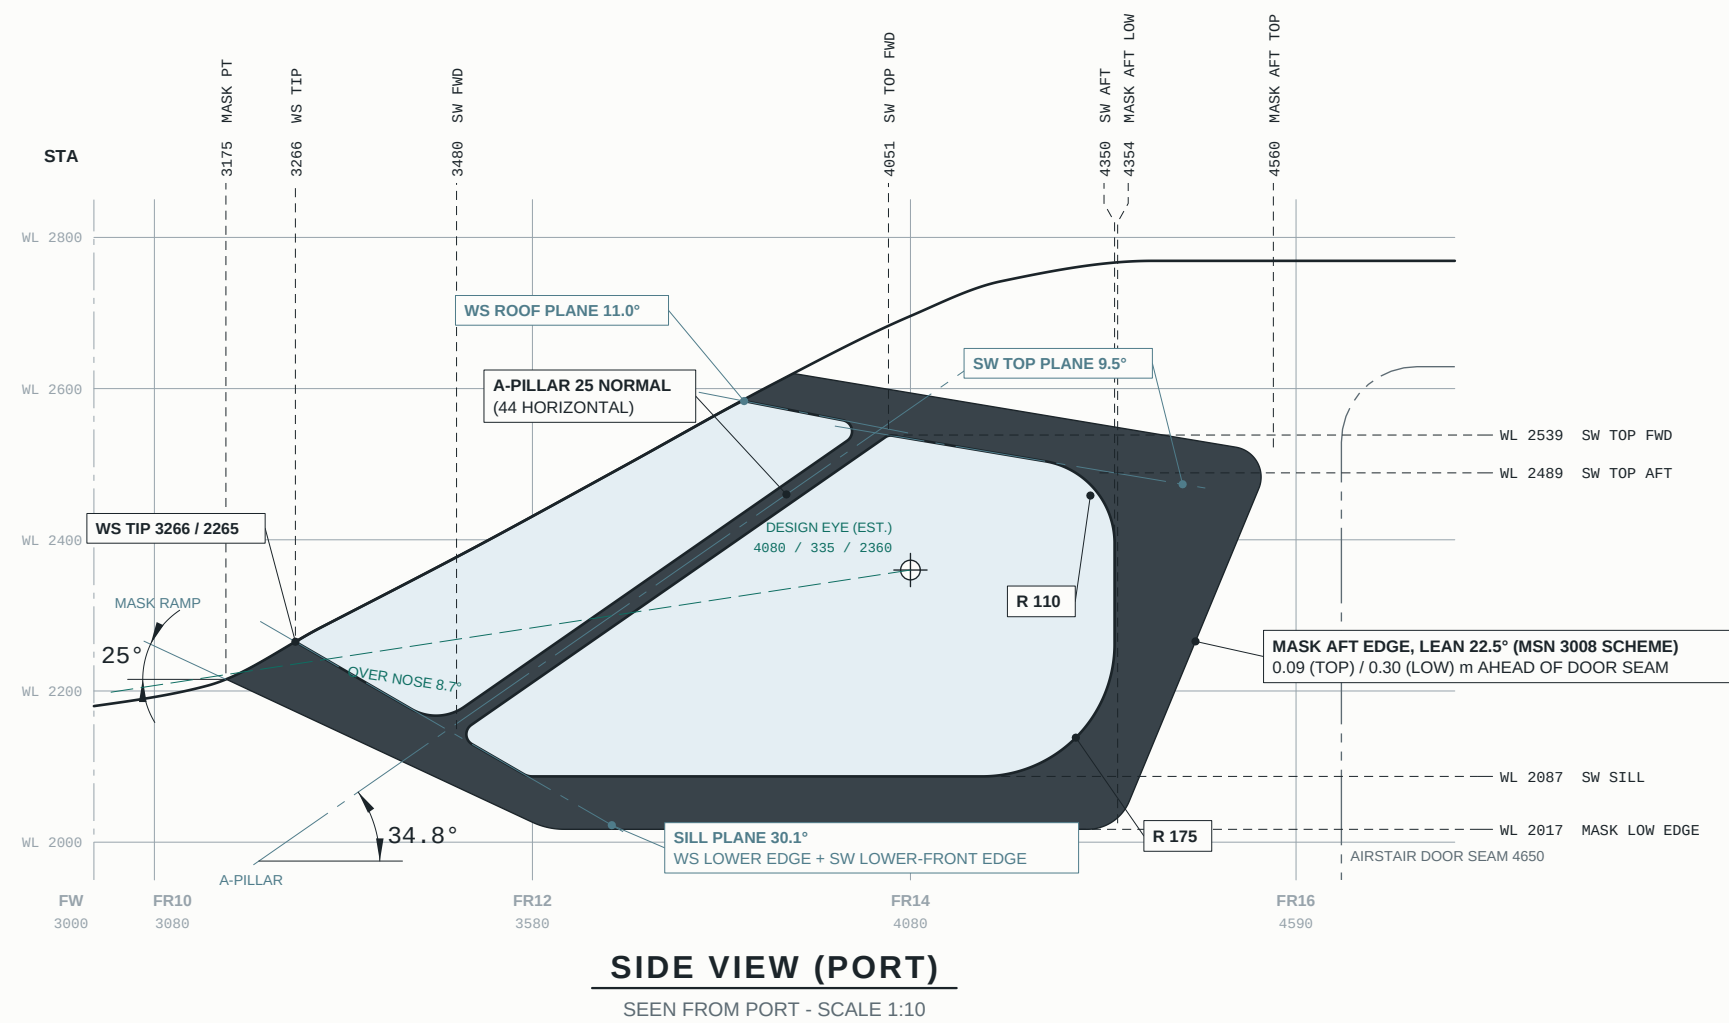

vs PILATUS 190.10.40.432 SHEET 1 (mm)						
PANE	VIEW	REFERENCE	RMS	MAX	WORST AT	
windshield	side	ws_port	2.4	6.0	3267 / 2265	
side window	side	NGX port DV+main	5.1	13.5	3654 / 2087	
side window	side	sw_sbtb_dslan=QML *	8.8	20.7	3095 / 2066	
windshield sbtd	plan	ws_sbtb_d	5.2	11.4	3905 / 243	
windshield port	plan	ws_port	5.2	11.3	3905 / 241	
side window sbtd	sw_sbtb_d		5.6	11.7	3814 / 590	
side window port	plan	NGX port DV+main	6.0	12.2	3810 / 578	
windshield sbtd	front	ws_sbtb_d	4.0	6.7	226 / 2578	
windshield port	front	ws_port	4.0	6.6	223 / 2572	
side window sbtd	front	sw_sbtb_d	4.9	10.4	587 / 2382	
side window port	front	NGX port DV+main	4.8	13.6	765 / 2087	

vs PHOTOS (refs/photo_notes.md)				
ITEM	PHOTOS	OURS	DRAWING / NOTE	
pillar edge angle	32.39 deg	34.8 deg	DWG 3.14-3.6	
A-pillar width, side (horiz.)	0.05-0.06	0.044	dwg 0.038	
side-window sill WL	2.09-2.11	2.087	DWG 2.087 (DV 2.073)	
side-window at extreme STA glass height	-0.43	4.356	DWG 4.356	
side-window at extreme STA glass height	0.40-0.45 (a)	0.451	DWG 0.448	
sill length / height	1.98-2.09 (a)	1.93	DWG 1.93	
top length / height	0.71-0.85 (a)	0.66	DWG 0.66	
D radius top / bottom	0.09-0.14 / 0.09-0.17	0.110 / 0.105	DWG 0.12 / 0.21 (b)	
D straight vertical	0.15-0.19	0.097	DWG 0.06 (b)	
side-window top rise (fwd)	2-6 deg	9.5 deg	DWG 9-10 deg	
windshield roof rise (fwd)	-25 deg (c)	11.0 deg	DWG 10.3 deg	
centre peak rise to glass	0.05-0.08 (d)	0.046	DWG 0.046	
mask below sill	0.05-0.08	0.070	photos only	
mask ramp angle	21-27 deg	25.0 deg	photos only	
mask fwd point STA / WL	3.17 / 2.21	3.175 / 2.215	ramp meets crown	
mask aft edge frame (f)	3008: 22-26 deg	22.5 deg	MSM 3008, bottom fwd	
other airframes (f)	3010: 12-16, 3036: 0		3066: curved (glass) fwd	
mask at STA, WL 2.10 / 2.40	3008: 4.395 / 4.515	4.384 / 4.513	stbd_ground cam	
mask at margin low top / mask top margin	0.07-0.15 / 0.20	0.004 / 0.210	from aft extreme	
mask at margin low top / mask top margin	0.055-0.07 (e)	0.060	from aft extreme	
mask aft to door seam, top / low other airframes (f)	3008: -0.10 / -0.27	0.090 / 0.296	seam STA 450	
mask aft to door seam, top / low other airframes (f)	3036: 0.05-0.21		reaches the door	

VISION FROM THE DESIGN EYE (ESTIMATED)	
design eye STA / BL / WL	4080 / 335 / 2360
over the nose (eye BL, ahead)	8.7° down
abeam, over the side-window sill	29.5° down
abeam, to the side-window top	40.3° up
ahead, to the windshield roof edge	54.4° up

PILATUS PC-12 PRO COCKPIT GLAZING & PRO MASK				 FIRST ANGLE PROJECTION
DWG NO	REV	SCALE	SHEET	UNITS
PC12-L2	A	1:10	A2 · 1 OF 1	mm
DRAWN				DATE
Claude - loftkit parametric model				2026-09-24
RECONSTRUCTION FROM PUBLISHED DATA - NOT FOR CONSTRUCTION				