



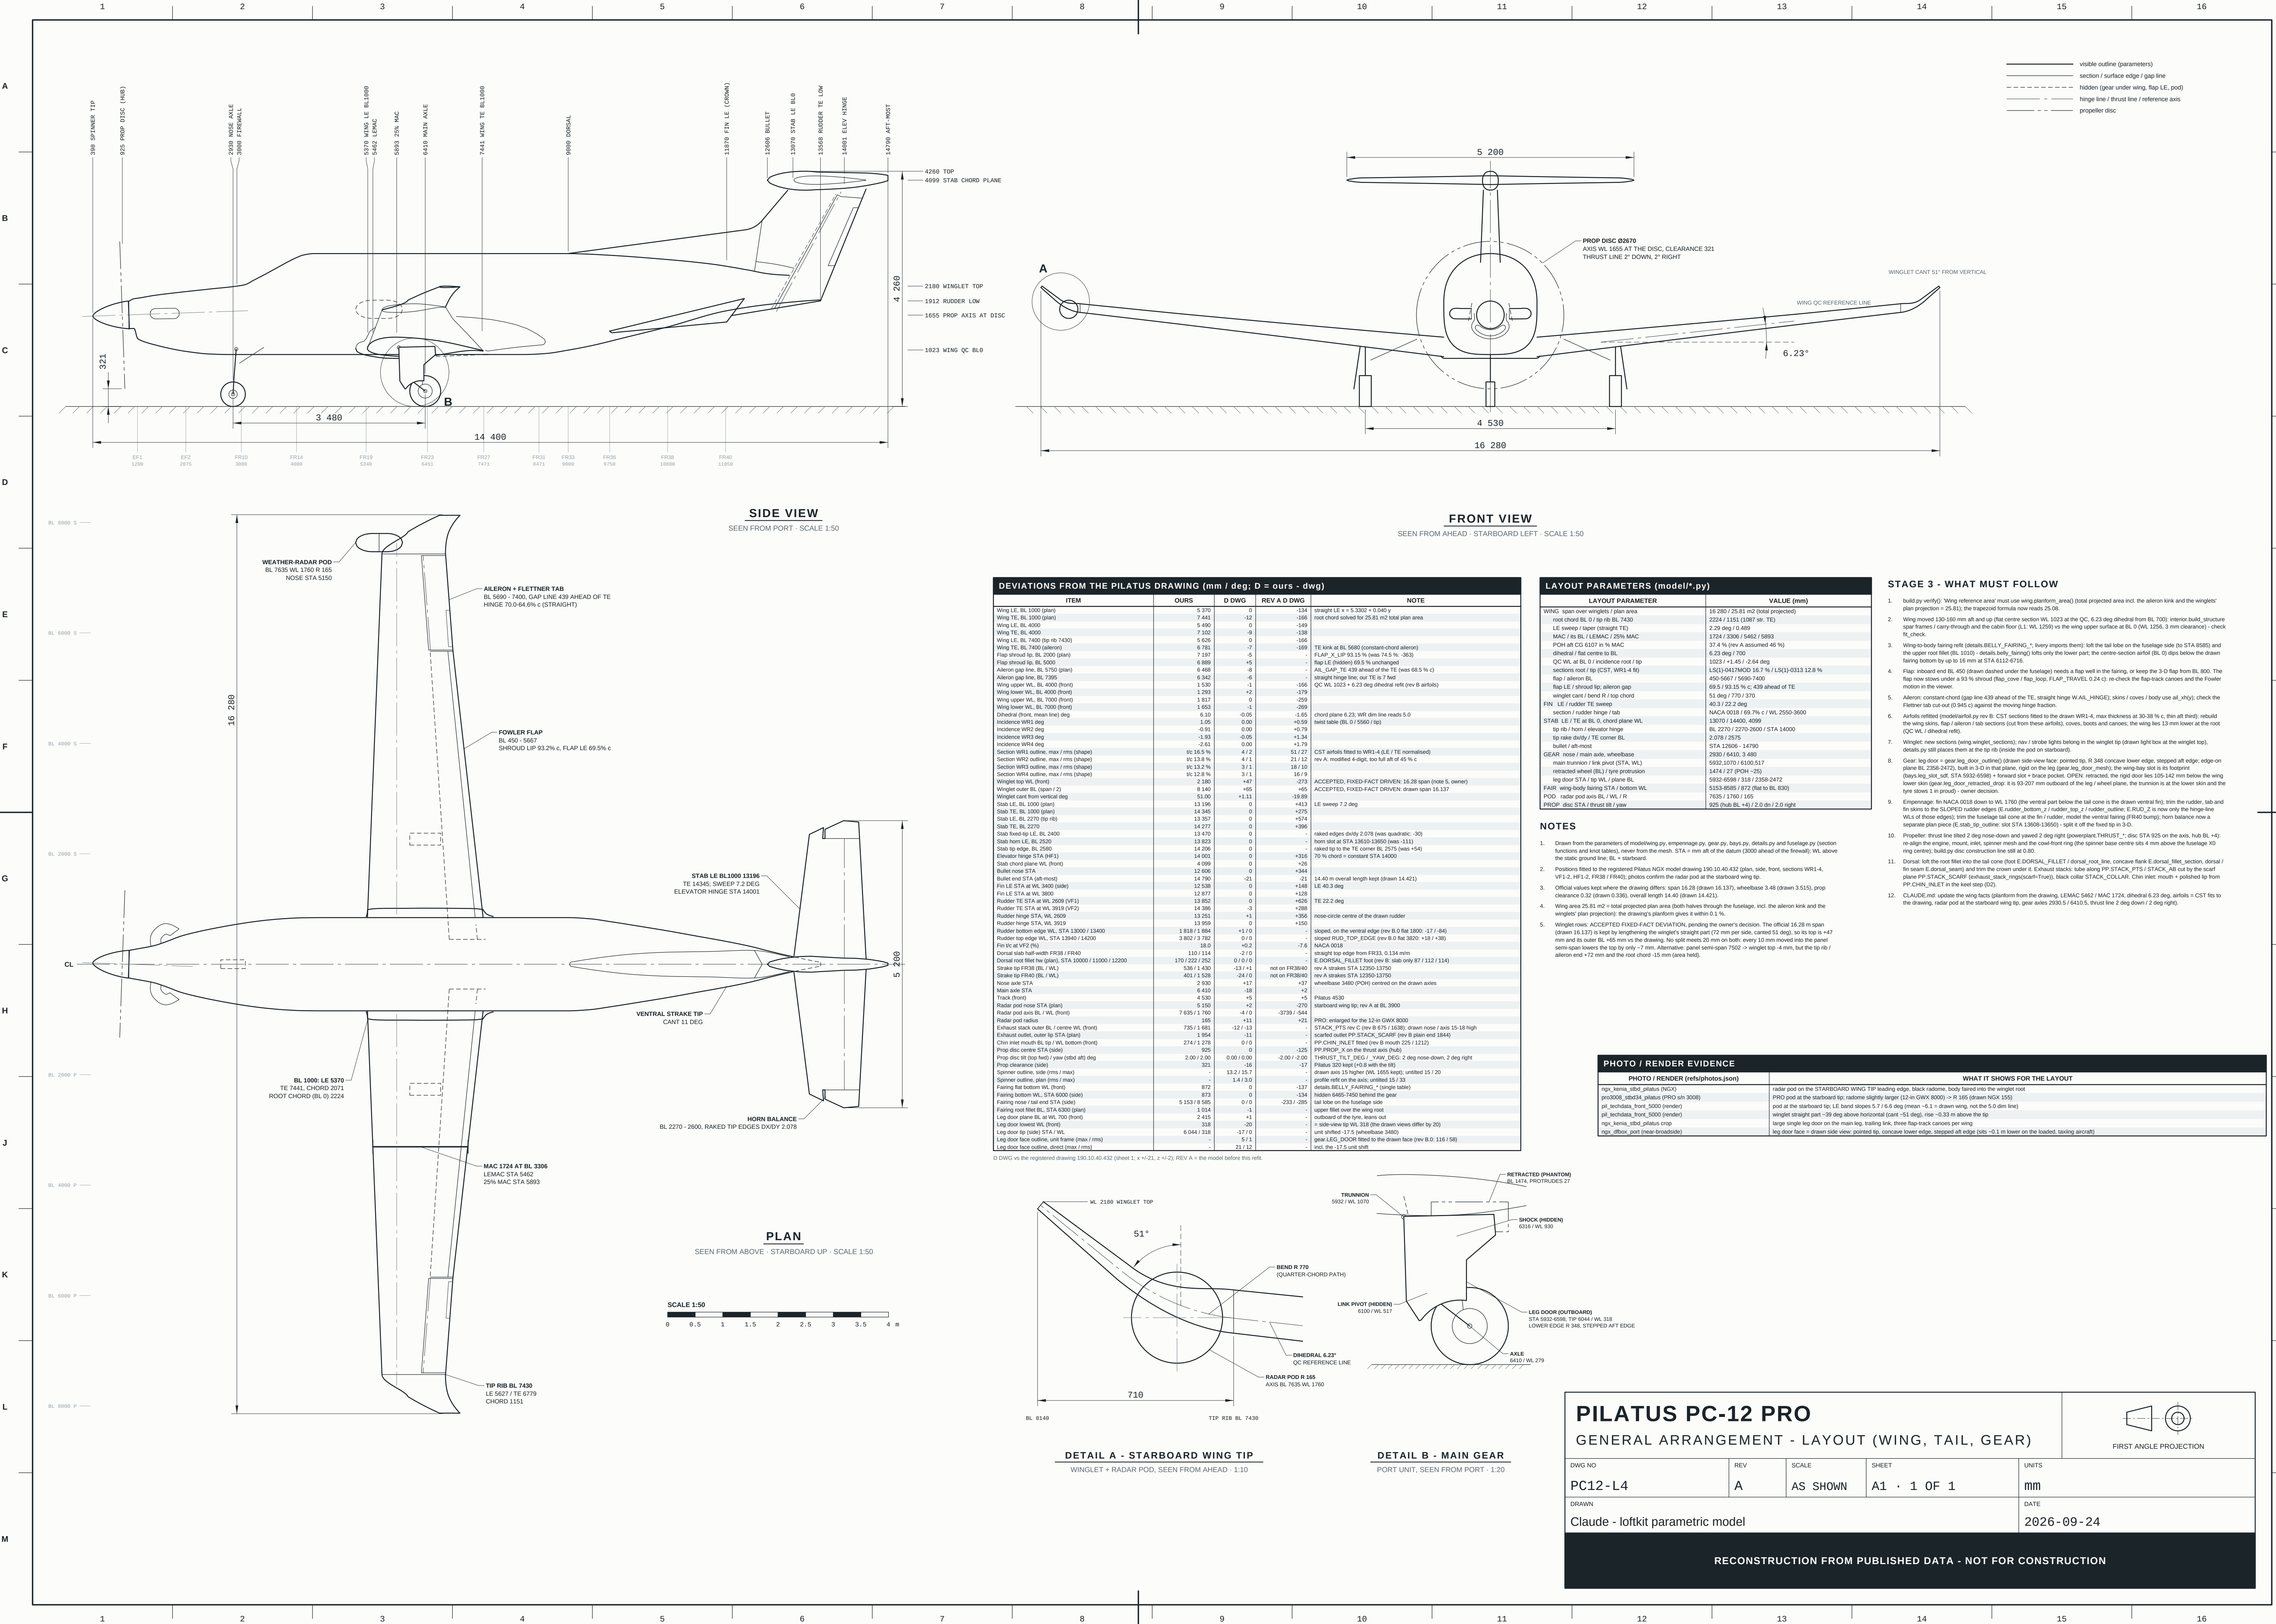

LAYOUT PARAMETERS (model/*.py)		
LAYOUT PARAMETER	VALUE (mm)	
WING span over wingtips / plan area	16 280 / 25.81 m2 (total projected)	
root chord BL 0 / tip rib BL 7430	2224 / 1151 (1087 se: TE)	
LE sweep / taper (straight TE)	2.29 deg / 0.449	
MAC / % BL LEMAC / 25% MAC	3724 / 3300 / 5462 / 5893	
POW alt CG 107 % % MAC	37.4 % (rev A assumed 46 %)	
FLAP_X_LIP 83.15 % (was 74.5 % -363)	6.23 deg / 700	
FLAP LE (inboard) 69.5 % unchanged	1023 / +1.45 / -2.64 deg	
sections root / tip (CST, WR1-4 fit)	LS(Q)-0417MOD 16.7 % / LS(Q)-0313 12.8 %	
QC WL at BL 0 / incidence root / tip	450-5667 / 5690-7400	
flap / aileron BL	68.5 / 63.35 % c 430 ahead of TE	
flap LE / chord tip, aileron gap	51 deg / 770 / 370	
winglet cant / bend R / tip chord	40.3 / 22.2 deg	
FIN LE / rudder TE sweep	NACA 0011 / 69.7 % / WL 2550-3600	
section / rudder hinge / tab	13070 / 14400, 4099	
STAB LE / TE at BL 0, chord plane WL	BL 2270 / 2270-2600 / STA 14000	
tip rib / horn / elevator hinge	2.078 / 2576	
tip rake dolly / TE corner BL	STA 12606 - 14790	
buffer / aft-most	2930 / 6410, 3490	
GEAR nose / main axle, wheelbase	5932.070 / 6100.517	
main trunnion / line pivot (STA, WL)	1474 / 27 (PO4 -25)	
retracted wheel (BL) / tyre protrusion	5932-6598 / 319 / 2358-2472	
leg door STA / tip WL / plane BL	5153-5955 / 872 (But to BL 830)	
FAIR wing body fairing STA / fin root WL	7035 / 1760 / 165	
POD radar pod axis BL / WL / R	925 (hub BL -40) / 2.0 dh / 2.0 right	
PROP disc STA / thrust BL / yaw		

- NOTES**
- Drawn from the parameters of modelling wing, empennage, gear, bay, py, details py and fuselage py (section functions and knot tables), never from the mesh. STA = mm aft of the datum (3000 ahead of the firewall), WL above the static ground line. BL = starboard.
 - Positions fitted to the registered Pilatus NGX model drawing 190.10.40.432 (sheet 1, x=+21, z=+72); REV A is the model before this edit.
 - Official values kept where the drawing differs: span 16.28 (drawn 16.37), wheelbase 3.48 (drawn 3.515), prop clearance 0.32 (drawn 0.35), overall length 14.40 (drawn 14.421).
 - Wing area 25.81 m2 = total projected plan area (both halves within the fuselage, incl. the aileron skin and the wingtip plan projection); the drawing's platform gives it only 0.1 %.
 - Winglet new, ACCEPTED FIXED-FACT DEVIATION, pending the owner's decision. The official 16.28 m span (drawn 16.37) is kept by lengthening the winglet's straight part (72 mm per side, carried 51 deg), so its tip is +47 mm and its outer BL -405 mm vs the drawing. No split meets 20 mm on both: every 10 mm moved into the panel semi-open lowers the tip by only ~7 mm. Alternative: panel semi-span 7502 > winglet top -4 mm, but the tip rib / aileron end +72 mm and the root chord -15 mm (area held).

PHOTO / RENDER EVIDENCE	
PHOTO / RENDER (refs/photos/son)	WHAT IT SHOWS FOR THE LAYOUT
ngx_kenna_sbird_pilatus (NGX)	radar pod on the STARBOARD wing TIP leading edge, black radome, body tapered into the winglet root
pro008_sbird_pilatus (PRO sh 3008)	PRO pod at the starboard tip; radome slightly longer (12 in BL 6900) - R 165 (drawn NGX 155)
pL_schduata_front_3000 (render)	pod at the starboard tip; LE band slopes 5.7 / 6.6 deg (mean =6.15 in drawn wing, not the 5.0 dim line)
pL_schduata_front_3000 (render)	winglet straight part ~39 deg above horizontal (cant -51 deg), rise =0.33 m above the tip
ngx_kenna_sbird_pilatus (ngx)	large single leg door on the main leg, trailing link, three flap-track canoes per wing
ngx_othos_pod (near-boardside)	leg door face = drawn side view; pointed tip, concave lower edge, stepped aft edge (axis -0.1 m lower on the loaded, taxiing aircraft)

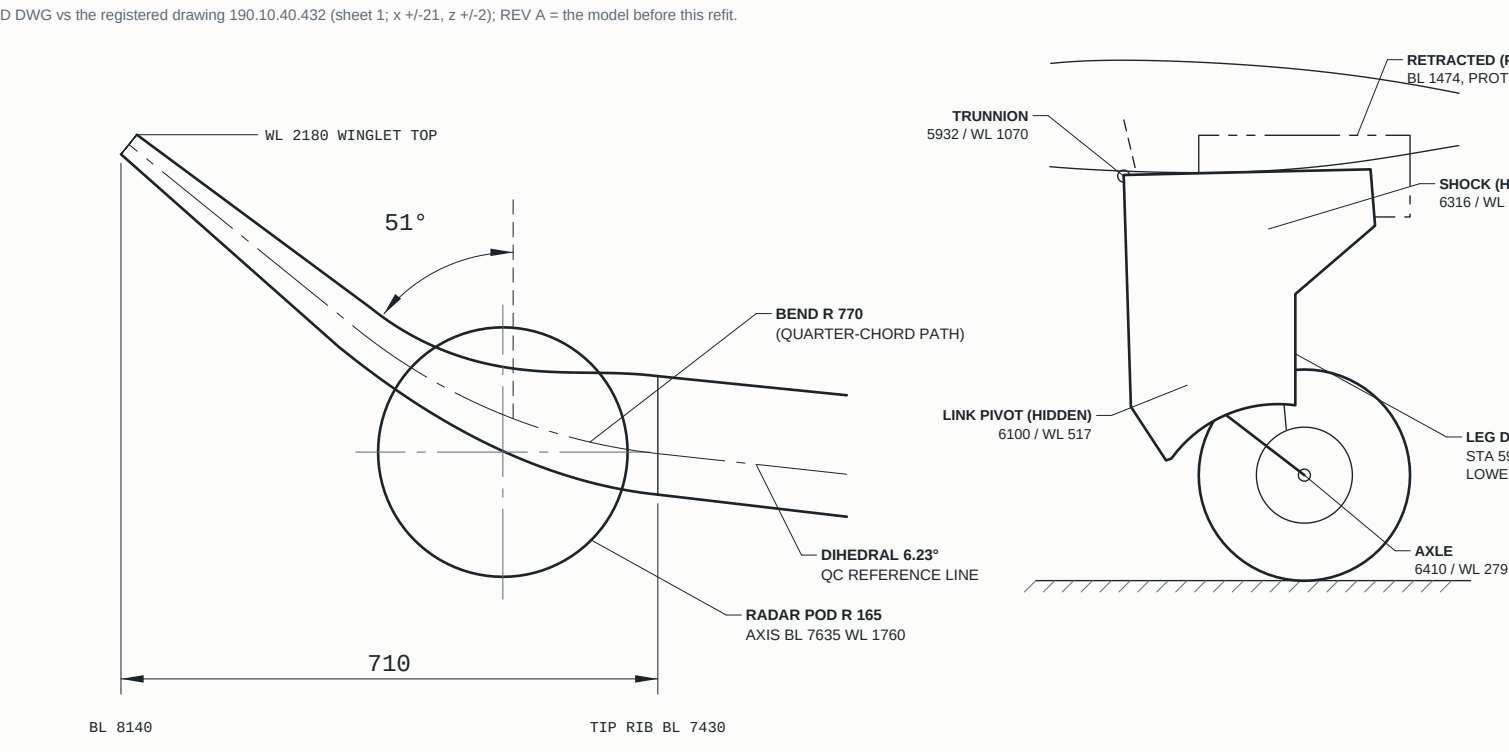

DETAIL A - STARBOARD WING TIP	DETAIL B - MAIN GEAR
WINGLET + RADAR POD, SEEN FROM AHEAD - 1:10	PORT UNIT, SEEN FROM PORT - 1:20

PILATUS PC-12 PRO

GENERAL ARRANGEMENT - LAYOUT (WING, TAIL, GEAR)

DWG NO

PC12-L4

DRAWN

Claude - loftkit parametric model

REV

A

SCALE

AS SHOWN

SHEET

A1 · 1 OF 1

UNITS

mm

DATE

2026-09-24

RECONSTRUCTION FROM PUBLISHED DATA - NOT FOR CONSTRUCTION