




KEY DIMENSIONS - modelwheels.py TABLES			
ITEM (mm)	MAIN	HOSE	SOURCE
Type (exhausted)	8.0x18.11 psi	17.5x6.25 x5	oak dealer (model 2000-09-10); 5 type w/ parts / lists
Part numbers	800706-3 / 800-308-9	376080-1 / 021-327-0	Goodyear / Michelin (parts lists)
Pty / type / pressure	10 PM 11, 60 psi	8 PM 11, 60 psi	5 oak book / PM played, 600 02527
Gravel / section	446 / 250	445 / 150	445 / 150 / 200-221; 5 photo 628-658
Auto-Mk = loaded / 8' deflt.	270 / 41	287 / 15.5	6 main axle high; 4 main 278-280, 200-210
Control panel / blend 8'	200 / 160	190 / 78	E (fore chubs 13 / 163)
Grass / 8' aspect	133 / 6 / 8.9	100 / 6 / 8.92	ETM 8-90 / 6 / 902
Seed steel / Flange dia	544 / 295.1	352 / 100	ETM 8-90 / 6 / 902
Bottom flange / 30 x 30	100 / 30 / 30	127 / 22.9	ETM 8-90 / 6 / 902
Grass / 8' trend width	200 / 164	120 / 116	E main, 8 M / 8
Shoulder / 8' wheel 8'	22 / 162	16 / 7	E / 8 (solvent tangent)
Grass / 8' center	90, 16 (2 pairs)	16 / 8	8 head-on photos, 3800, 3001
Grass width x depth	8 x 12	8 x 12	W / 8' x 8' depth
Hub center / 8' outer wheel	32 / 18 / 12	24 / 27 / 12	W / 8' center to the shoulder
Wheel	split hub, 2 halves	split hub, 2 halves	5 POM 7-4-11; POM 7-4-11; 3-1591
Tie bolts on no PCD	8 on 280	4 on 110	E (load relief); PCD; E 3543 / 3
Flange dia (cush depth)	11 (split plate)	11 (split plate)	5 main (cush plate); 8' nose (cush plate, bolts seen)
Valve / safety plug	8 / 77 / 1	8 / 65 / 3	W position 5 POM
Position (cush plate)	1 (cushard hole)	1 (cushard hole)	POM 7-4-11 / 5 position
Hub Fairing / split / P / ground	206 / 244 / 28	-	W 3036, 3006, 3501, 3008, MX
Fairing covers / hole	5 on 209 / 000 (err)	-	5 x 172 gnd
Grass / 8' 1st / 3' retr., steel	8 / 214 / 3	-	POM 7-4-11; kit 3-1674-1
Brake discs	3 rotors / 3, 2 rotors	-	5 rotors / 5 rotors
Housing / 8' rotor dia	121 / 251	-	5 hub / 121 / 5
Brake stick	-180 - .20	-	5 (c 8' in 4' board)
Axle dia x bore	52 / 45	-	5 gear; 5' W / 8' open bore
Work area (flange) / boss	-	48 - 118 / 83	5 two area (head on photos)
Grass arch height / are fore-AFT	-	76 / 42-52	5 3001 head-on, 3036 max
Fore projector / rotor / flange	17 / 2.5	12.5 / 2.0	5 position / 5 height
Flange-face bore chamfer	8	10	W flange ring width

PHOTO CHECK - DEVIATION CALL-OUTS (mm)					
ITEM	PHOTOS [IN]	TABLE / MODEL	Δ	ACTION	
Main tyre OD (modelled)	628-650	640	0	owner	decision 2020-08-26
22x2.50-18 (superficial)	589	589	-51	MAIN TYRE CHOICE	
3-year MAXN tyre		640		from wheels.py	
Main section width	254-264	256			
Main loaded radius	270-280	wide 270		as flat drum	
Tyre R / fairing lip R	2.15-2.21	2.18			
Retracted tyre depth	<35 (POW 1 in)	23.5	-19.0	30 mm flat (check 5)	
Main grooves / W	0.14, 0.20	0.14, 0.26	0	0.30 geometry	
Render groove shape		up (pocestry)		-done	
Nose tyre OD	37.5 in	44.5			
Nose loaded radius	280-210	wide 207		15.5 flat drum	
Nose grooves / W	0.09, 0.28	0.09, 0.28			
Nose fork arm		year py 2		0.30 v-bike, round arch, saddle	
Nose yoke arch height / half-span	0.85 (3001)	0.86 (0.3.1)		round arch (R2: square portal)	
Nose are width four-aft	42.48	42.48		flat (R2: saddle)	
Nose axle mt / lock plate	dark box + tear-drop	0.30 both arms		0 steel, 0.30	
Nose tie-bleed PCD	-6.58 flange R	118		0.3036 nose-hub zoom	
Hin fairing gis / proud	268-300 / 25-38	290 / 28		0.30 B > W/2	
Main pressure	60 psi standard	year.py info 60			
Main brake	6-lobe, bright cast	3-D: brake housing			
Main rebound tones	6-lobe / bright	housing 8.06 / wheel 8.24		0	0: one grey
Main tread on the ground	flat (0-0)	flat (0-0)		R2: 0.30	R2: draw iris only

MATERIALS (model/assemble.py NAMES)			
PART	MAIN	NOSE	NOTE
Type idemall / tread / grooves	lire / _tread / _groove	wheel	matte dusty / satin / brass. No lettering
Wheel halves	wheel_half	wheel	weathered cast (w/ main) / glass white (nose)
Ww flaring	ww_flaring	leg-door 100 (nose)	leg-door 100 (nose)
Brake housing / discs, keys	brake_housing / brake_disc	brake	brilliant satin cast w/ heat-dark brass
Bells, valve stem	bell	- cabin	yellow / ch-ome cad cad / brass
Raising screws, valve cap	metal / black steel	- cabin	rubber-seal / black steel
Axle nut, hub cap	steel	ch-ome cad	dark steel nut + tear-drop lock plate (nose)
Assemble caps (nose hub ends)	Asm. fcs	gear_Lsq	rubber-seal / brass
	gear_Lsq		adjustant

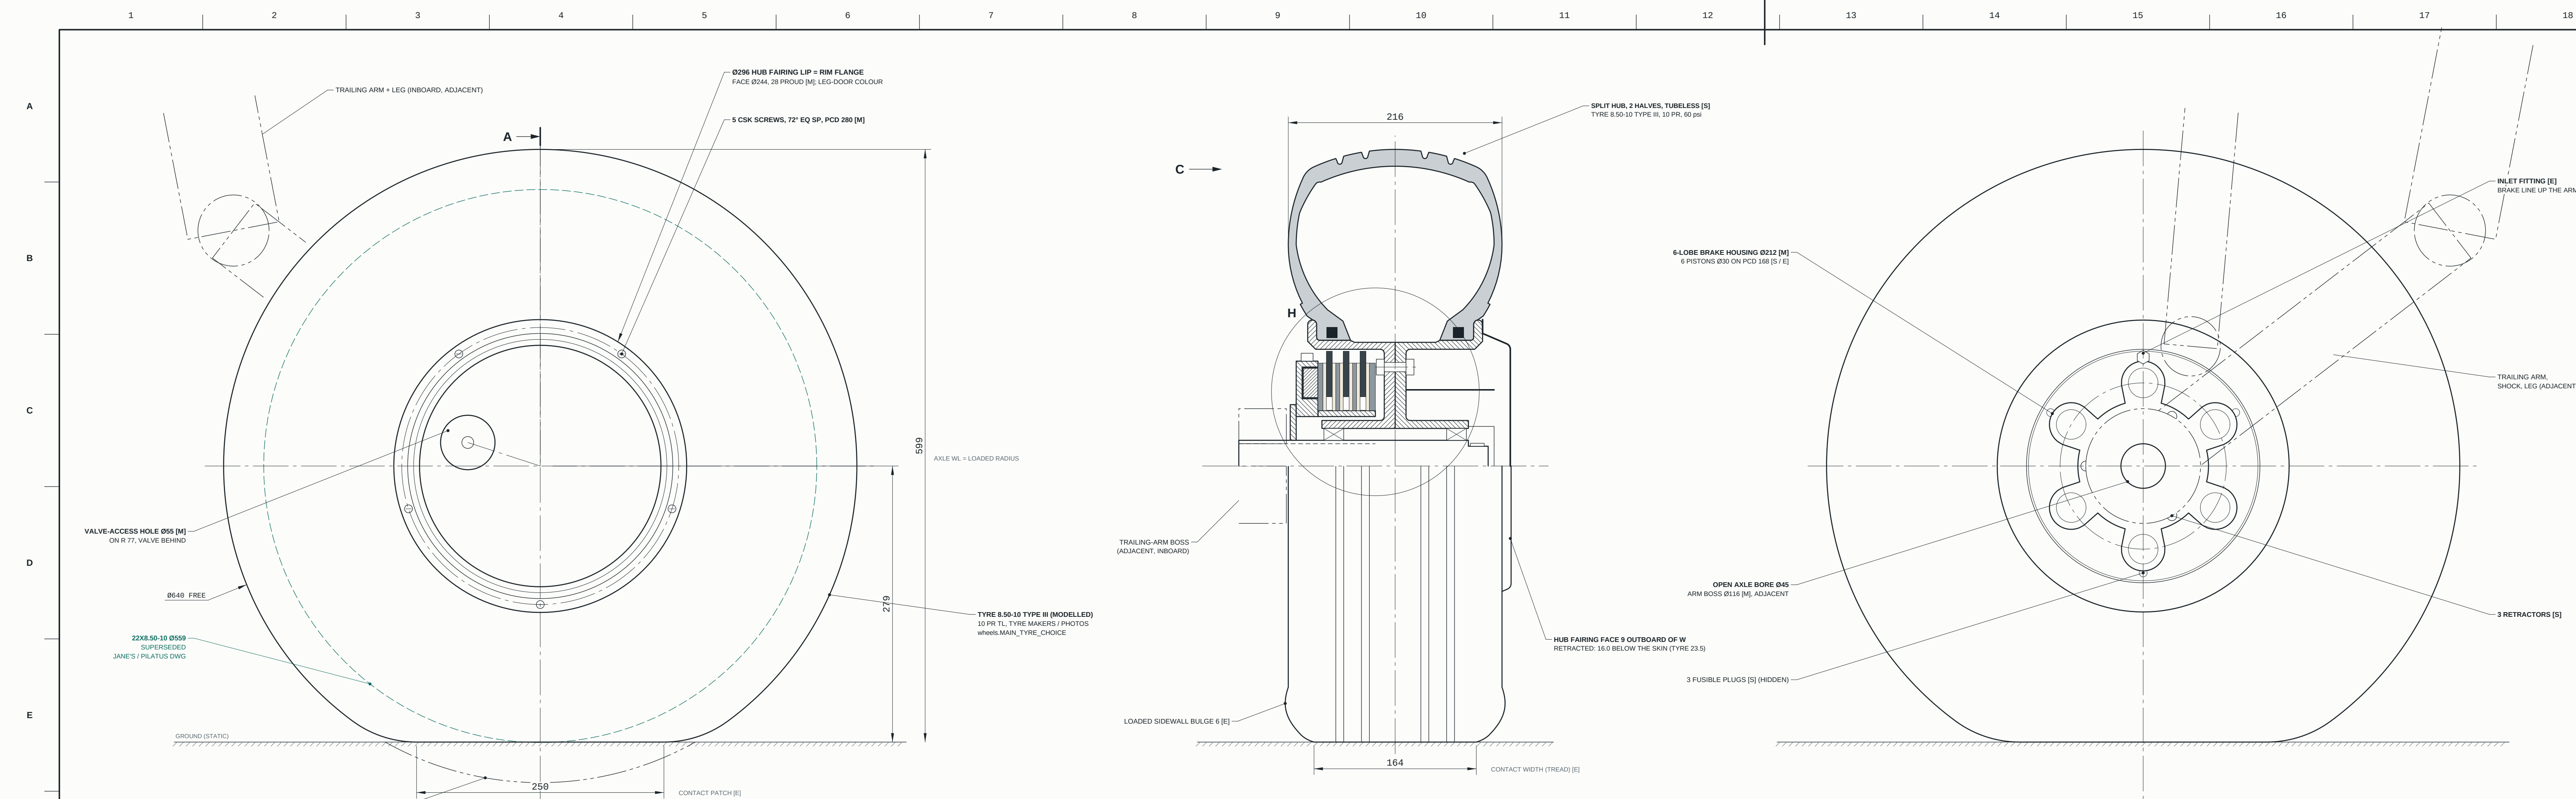