
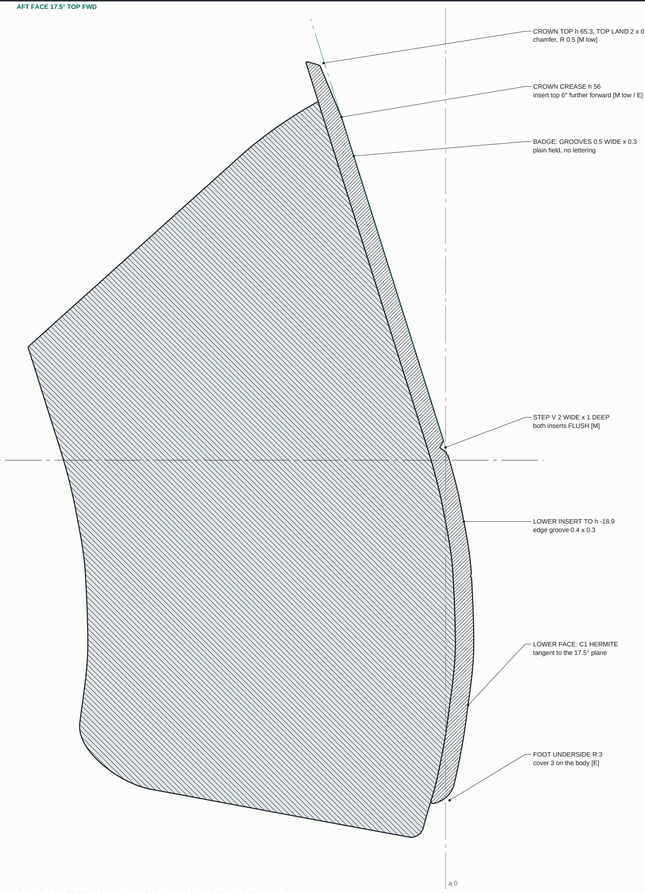


BODY: 60 DEEP [E], ITS TOP FALLING 35° FORWARD FROM THE TOP LINE (h 60.5 AT u 0)
forward edges R 8, foot R 14 [E]; black body and grips one moulding

SECTION Z-Z

YOKE CENTRELINE u 0, FROM OUTBOARD, NOSE LEFT - 2:1

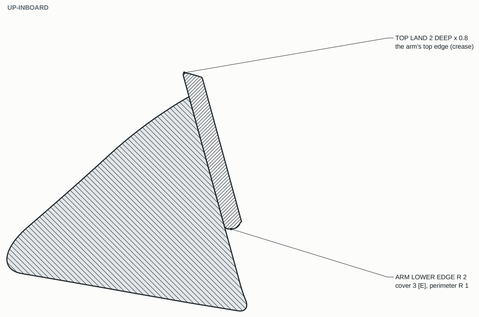

SECTION K-K


ACROSS THE OUTBOARD ARM AT (52, 45), LOOKING INBOARD - 2:1

OUTBOARD GRIP, NORMAL TO THE AXIS, LOOKING DOWN IT (FWD UP, PAD DOWN; OUTBOARD LEFT)




A1-A1	A2-A2	A3-A3	A4-A4
18.5 x 23.9	28.8 x 25.5	38.9 x 27.9	46.8 x 29.7
h -30 - 1:1	h -10 - 1:1	h 14 - 1:1	h 40 - 1:1

INBOARD GRIP, NORMAL TO THE AXIS, LOOKING DOWN IT (FWD UP, PAD DOWN; INBOARD RIGHT)



N1-N1	N2-N2	N3-N3	N4-N4
31.8 x 23.8	40.0 x 26.2	47.2 x 28.2	49.2 x 29.9
h -30 - 1:1	h -10 - 1:1	h 14 - 1:1	h 40 - 1:1


PAD: leather 2.5 below the 2 frame, crowned to 0.5 below over 8; frame edge R 1.5, forward R 11 [E]; depth: grip_depth



DETAIL S

A3 OUTER PAD EDGE - 5:1

AXIAL PLANES (AXIS + AFT NORMAL), FWD LEFT

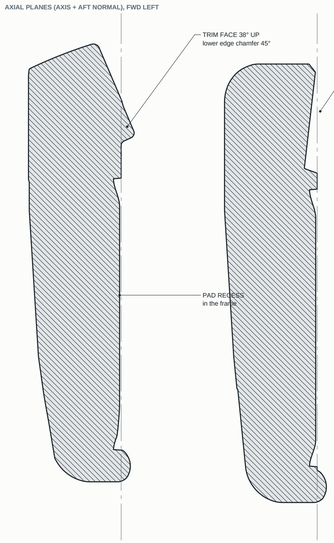


P-P

OUTBOARD GRIP - 1:1


Q-Q

INBOARD GRIP - 1:1



DETAIL P - HEEL


OUTBOARD GRIP, ON P-P, AFT RIGHT - 3:1

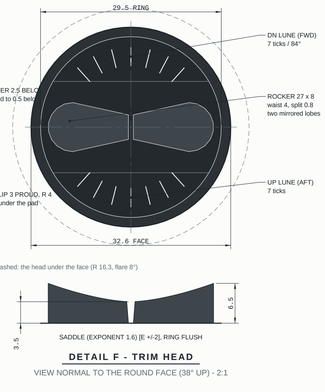

dashed: the head under the face (R 16.3, flare 8°)


DETAIL F - TRIM HEAD

VIEW NORMAL TO THE ROUND FACE (38° UP) - 2:1




DETAIL G - INBOARD HEAD

VIEW NORMAL TO THE SHIELD FACET - 2:1

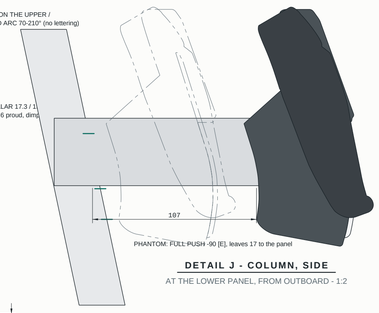

DETAIL J - COLUMN, SIDE


AT THE LOWER PANEL, FROM OUTBOARD - 1:2



phantom: the shell; hidden: the column dia 44

DETAIL J - SURROUND, FRONT


LOOKING FORWARD (PILOT, INBOARD RIGHT) - 1:2



bezel 1 proud R 1.5, dish r 4.8-8.7 0.8 deep, button dome 1.2, top 1 below the bezel [E]

DETAIL D - TCS


u 58.5 h 51.4 ON THE WHITE ARM - 3:1

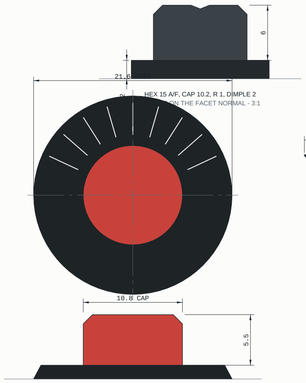

boss 1.5 proud [E] on the black body's lower edge; cap top R 1

DETAIL E - AFCS DISCONNECT

u 60.6 h 23.4; ROUND BOSS, LEGEND ON ITS UPPER HALF - 3:1



PLAIN FIELD (NO LETTERING); 3 SPEED-LINE GROOVES EACH WING

DETAIL H - BADGE

ABSTRACT WINGED PLATE, TOP AT h 53.2 - 2:1

PHOTO CHECK: THE DRAWN SOLIDS RAY-CAST THROUGH THE PHOTO CAMERAS (mm)

PHOTO (CAMERA)	COVER LM	HEADS	GRIP OUT: OUTER / SLOT	GRIP IN: OUTER / SLOT	PADS
P1046408 pilot (panel_408)	1.5 / 3.0	1.2 / 1.8	+0.1 (2.4) / +1.5 (2.7)	-0.4 (2.4) / -2.6 (3.8)	out 1.0 (2.7); in 0.5 (1.3)
P1046408 co-pilot (panel_408)	1.7 / 4.3	2.3 / 0.8	-1.1 (3.5) / +1.3 (2.6)	-0.2 (2.0) / -0.3 (1.6)	out 1.1 (2.6); in 0.5 (1.1)
Mexico press, pilot	1.9 / 3.9	1.7 / 1.7	- / -	-2.5 (3.2) / +1.6 (1.6)	in 2.2 (5.6)
Mexico press, co-pilot	2.0 / 3.1	1.4 / 1.3	+0.6 (2.7) / +3.1 (3.4)	+1.2 (1.7) / -3.2 (3.8)	-
AOPA press, pilot (from outboard)	1.8 / 3.5	2.5 / 0.5	+5.0 (5.7) / +1.1 (5.5)	+3.4 (4.4) / -1.5 (4.8)	out 5.8 (16.2); in 2.9 (9.0)
P1046410 pilot	0.8 / 2.1	5.0 / 1.8	+0.7 (2.5) / +0.7 (1.8)	-0.2 (2.3) / -1.3 (3.7)	-
rev I, P1046408 L (judges r1)	2.0 / 4.0	-	rows 65-85 %: +9 / +12	slot: -6,-8	in 6.6 (11.0)

INBOARD NECK (criterion, P1046408): the drawn moulding's top edge vs the photo per pixel column, arm tip to head -- pilot mean +0.2, |mean| 2.4, max +7.0 mm (against the red placard; rev I 'neck in' 14.2 / 20.7); co-pilot -4.4 / max -7.5 (drawn LOW near the head; against the dark PFD, low contrast; pose roll -1.3 deg)

Pose per photo fitted to the COVER landmarks only (TCS, AFCS, badge, step ends, lower insert, foot); heads, grips, pads and the neck are checks. Grip rows: the photo's silhouette edge per image row vs the ray-cast drawing, outer side h -38..68, slot side h -38..14, mean (rms). Neck (P1046408): the inboard neck's top edge per pixel column, arm tip to head. Overlays: refs/cache/overlays/yoke (private).

CORNERS & RADII (every other sample is on a C1 spline)

OUTLINE	N	CORNERS: SAMPLE #, (u, h), RADIUS (curve_law)
shell (white cover), half	49	#4 (22, 62.8) R 3; #10 (33.7, 52) R 1.5; #21 (66, 60.2) R 2; #22 (72.3, 54.8) R 2; #23 (72.3, 47.8) R 2; #24 (69, 44.6) R 2; #45 (20, -55.3) R 6
lower insert, half	8	#0 (0, 1) R 0; #1 (12.6, 3) R 0.5
outboard grip aft face	37	#6 (130.5, 93.6) R 4; #20 (137, -30) R 5; #23 (121.5, -38.5) R 4
inboard grip aft face	37	#2 (91.4, 84) R 4; #6 (118.5, 87.6) R 6; #10 (125.6, 60) R 3; #21 (140.5, -36) R 5; #24 (118.5, -45.8) R 4
outboard pad	29	#0 (125.5, 60) R 3; #7 (91, 38) R 5; #16 (123.5, -28.4) R 3; #19 (134.8, -25.5) R 4
inboard pad	31	#0 (127.8, 55.3) R 3; #7 (89.4, 32) R 4; #17 (116, -34.4) R 3; #21 (139, -29.6) R 4
shield facet	9	#0 (-15.5, 12) R 3; #1 (15.5, 12) R 3
insert corners	-	junction R 0; step_end R 0.5
cover edges	-	perimeter R 1; arm lower R 2; foot underside R 3; tip facet corners R 2
grip edges	-	frame R 1.5; forward R 11 [E]; heel tip R 4; trim face R 1.5
body edges	-	aft R 2; forward R 8 [E]; foot R 14 [E]; neck-to-head blend R 3

NOTES

1. CURVE LAW: centripetal Catmull-Rom (alpha 0.5) through the table samples, 0.25 sampling; corners as listed (R 0 sharp, R > 0 tangent fillet); YOKE_DESIGN curve_law.
2. SECTIONS: exact contours of the solids (model/yoke_geom.py) on the cutting planes; the black body and the grips are one moulding (smooth union R 3), the white cover a separate part; hatching per part.
3. Sources per value: the [M] / [E] / [S] tags of YOKE_DESIGN (printed in model/interior.py).

REVISIONS - PC12-L6Y2

REV	DATE	DESCRIPTION
A	2026-10-05	first issue with L6Y rev B (judges r1 D1 / D2 / D5 / D10, FID1-04..06 / 09..12): exact sections of the rev J solids -- centreline, arm, 8 grip sections, the grips' axial profiles with the heel lip; the round trim face and the shield facet; switch profiles; the column surround in front view; corner / radius table; photo check per grip row and the inboard neck

PILATUS PC-12 PRO

PC-24-STYLE CONTROL YOKE - SECTIONS & DETAILS

FIRST ANGLE PROJECTION

DWG NO	REV	SCALE	SHEET	UNITS
PC12-L6Y2	A	AS SHOWN	A1 · 2 OF 2	mm

DRAWN	DATE
Claude - loftkit parametric model	2026-10-05

RECONSTRUCTION FROM PUBLISHED DATA - NOT FOR CONSTRUCTION