
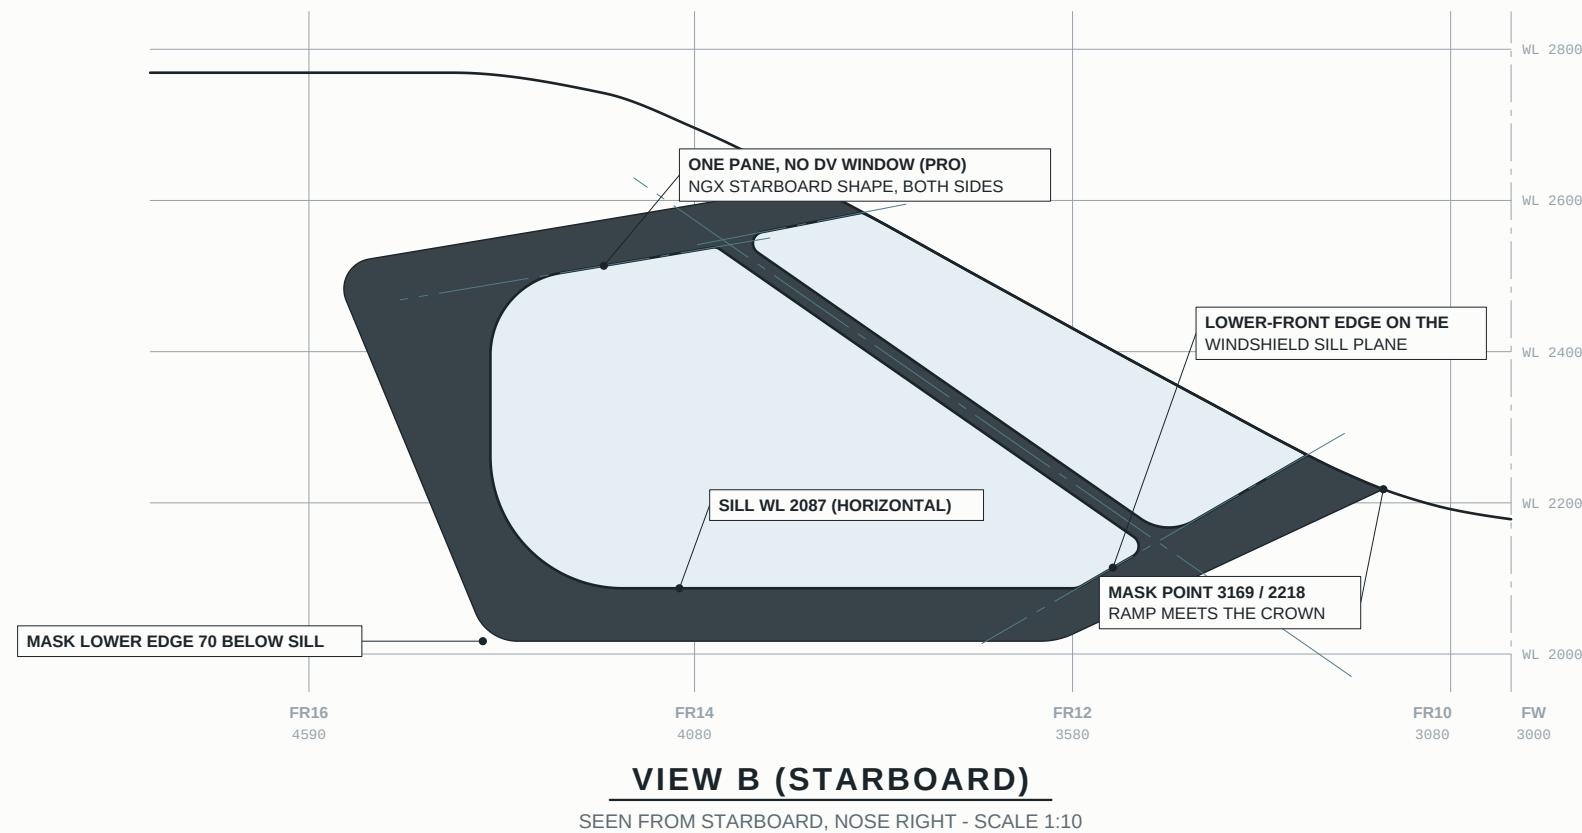
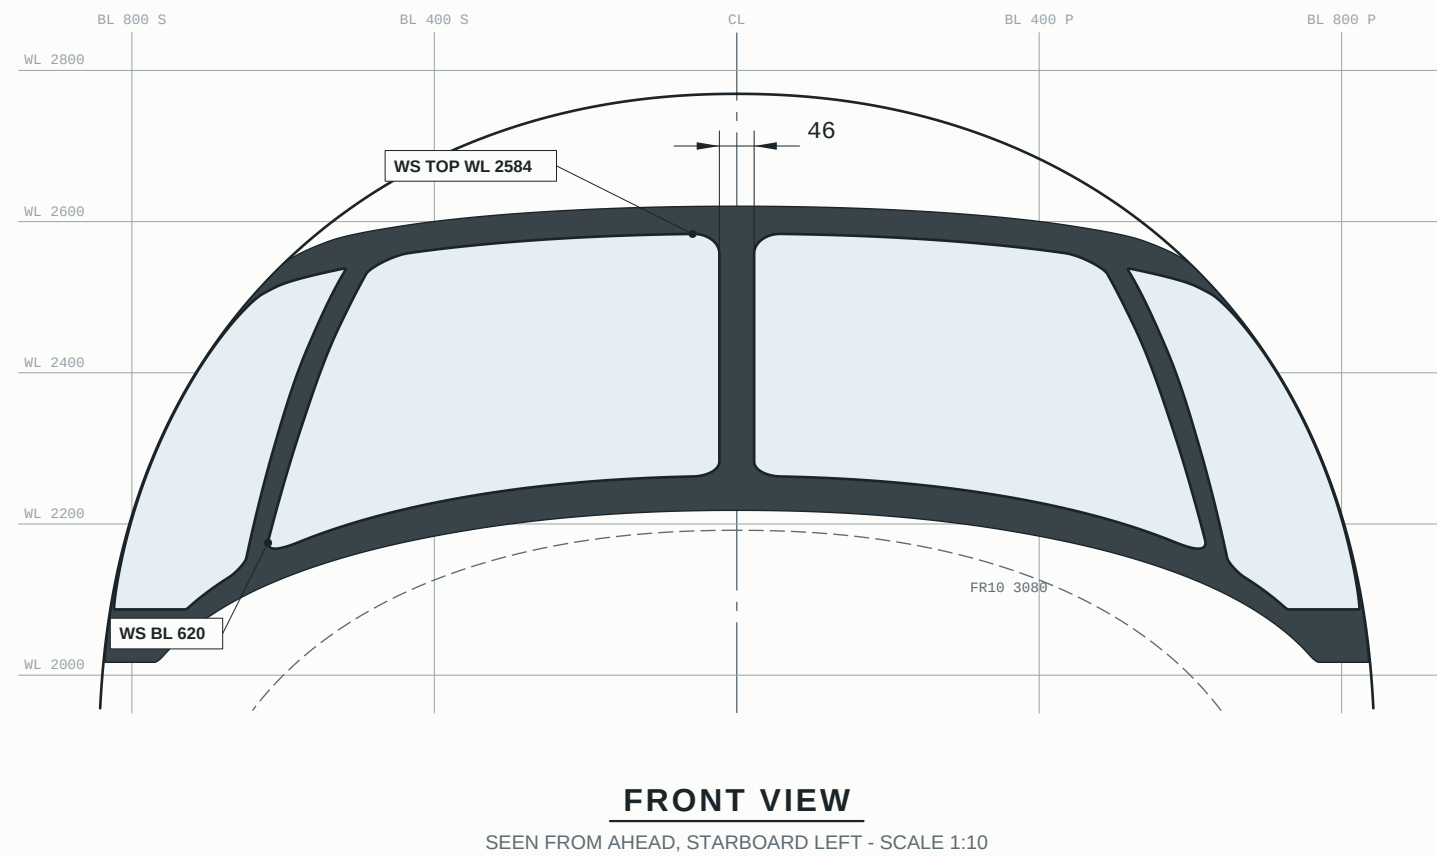
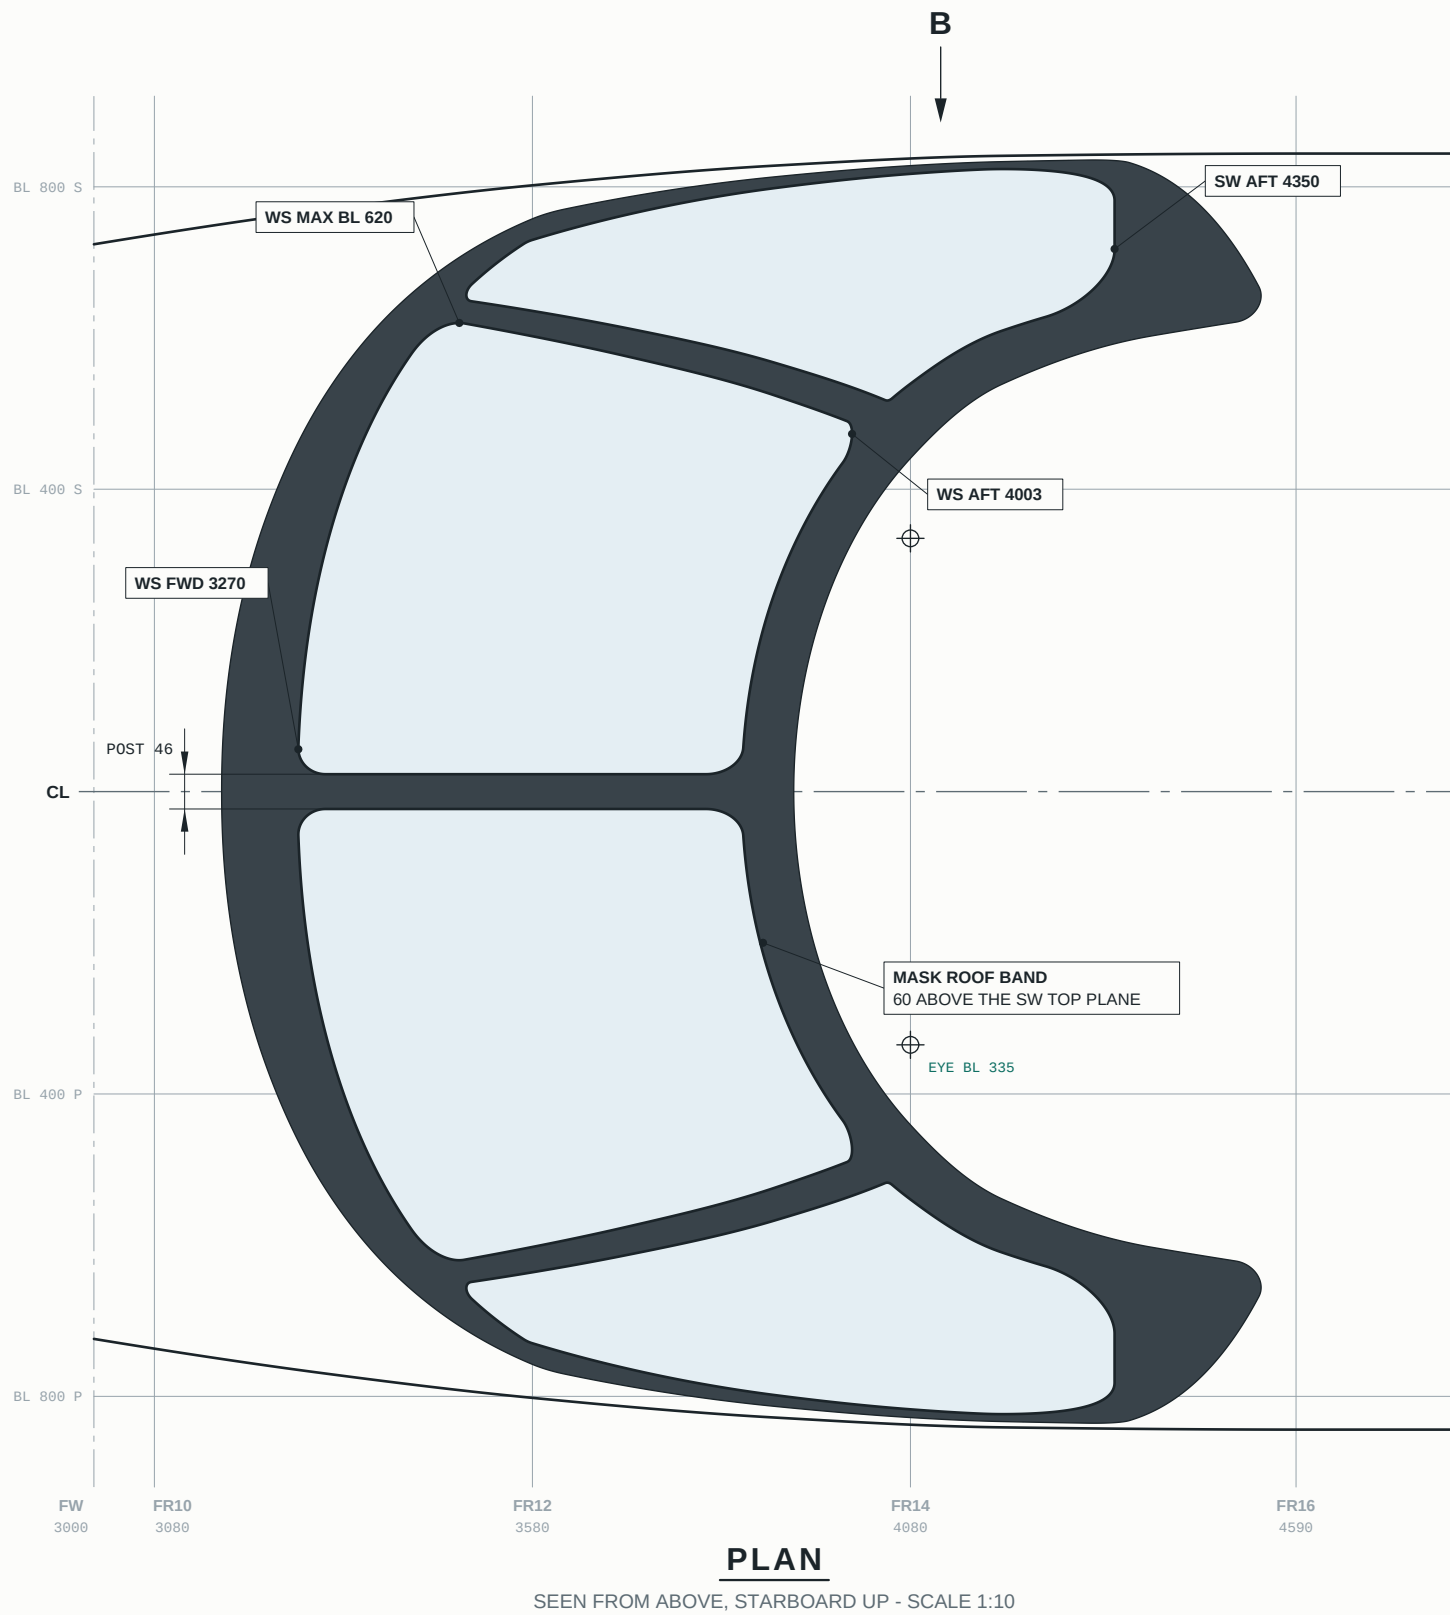


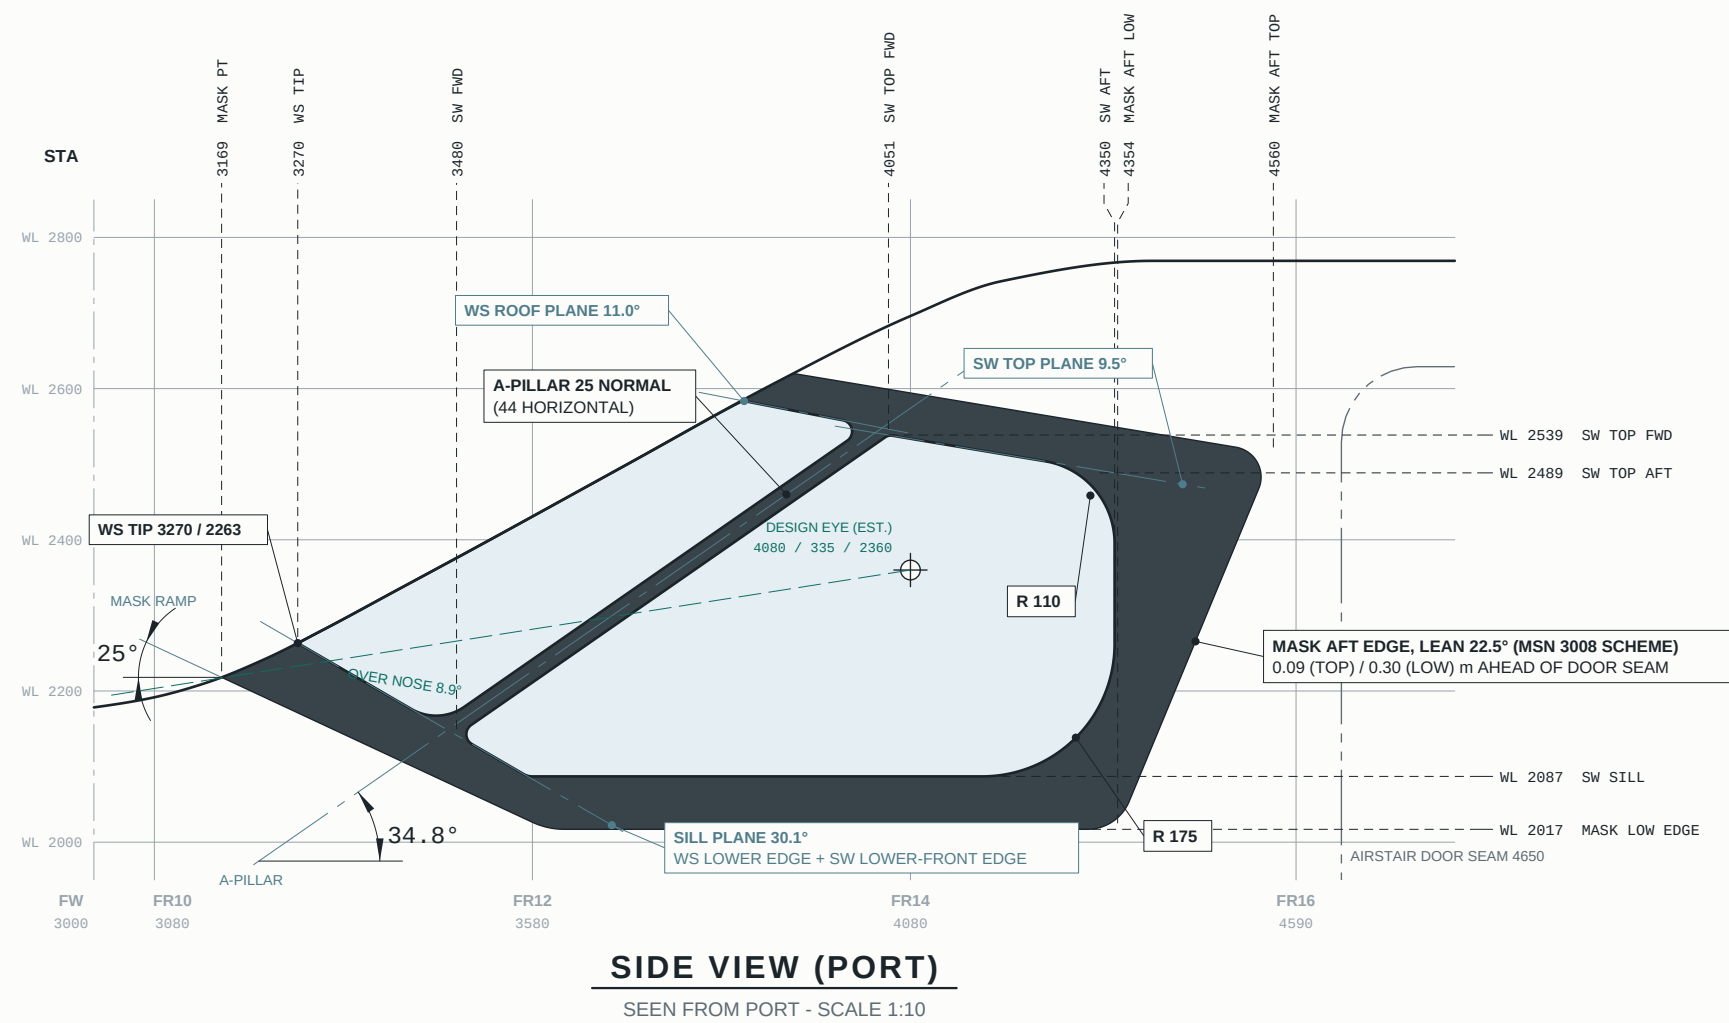

- ## NOTES

1. Drawn from the parameters of model/corocket_glazing from: zero contours of the glazing and mask signed-distance fields on the outer mould line of model/fuselaje_gip (sheet L1), projected, never from the mesh. STA = m aft of the datum (3000 mm ahead of the firewall); WL above the static ground line.
2. Every edge except the centre post is a plane normal to the plane of symmetry: straight in side projection (chain-dotted construction lines). Post: |BL| = 23. Corners filleted (side projection).
3. PC-12 BQ no direct-view glazing, the NGX starboard single pane is used on both sides (Pilatus PRO release; photos of s/n 3001, 3010, 3036, 3066).
4. Dark mask (filled): PRO livery item, one continuous area around all four panes - roof band, centre post, lower band with a ramp to the windshield's forward corner, straight leaning all ahead of the airstair door. Drawn for the MSN 3008 scheme (after edge 22.5'; the aft edge varies per airframe: model/livery/PC_MASK_SCHEMES; mask corner lat: low-60 ft, top-40 ft, ramp 100).
5. Windshield roof: its own plane (11.0', 9 mm above the side-window top plane at STA 4000) - our crown section at STA 3900 is 5.12 mm fuller than the drawing's, so plan and front cannot both match a single window better than -11.7 mm.

LEGEND

-  glass (pane outline)
-  dark mask (PRO)
-  construction plane (side projection)
-  airstair door seam / max-breadth W
- design eye, sight line



vs PILATUS 190.10.40.432 SHEET 1 (mm)						
PANE	VIEW	REFERENCE	RMS	MAX	WORST AT	
windshield	side	ws_port	2.6	5.4	3982 / 2514	
side window	side	NGX port DV+main	5.1	13.5	3654 / 2087	
side window	side	ws_std plan DV+main	8.8	20.7	3905 / 2066	
windshield stbd	plan	ws_std	4.4	11.4	3905 / 243	
windshield port	plan	ws_port	4.4	11.3	3894 / 244	
side window stbd	plan	ws_std	5.6	11.8	3814 / 590	
side window port	plan	NGX port DV+main	6.2	12.3	3810 / 578	
windshield stbd	front	ws_std	3.5	6.7	226 / 2578	
windshield port	front	ws_port	3.5	6.6	197 / 2580	
side window stbd	front	ws_std	4.9	10.4	589 / 2378	
side window port	front	NGX port DV+main	4.8	13.6	766 / 2087	

Symmetric point-to-outline distance, our OML contours vs the drawn loops. * starboard pane lifted onto our OML from the plan (sill ill-conditioned; information only).


vs PHOTOS (refs/photo_notes.md)				
ITEM	PHOTOS	OURS	DRAWING / NOTE	
pillar edge angle	32.30-36 deg	34.8 deg	DWG 3.4-13.6	
A-pillar width, side (horiz.)	0.05-0.06	0.044	DWG 2.038	
side-window sill WL	2.09-2.11	2.087	DWG 2.087 (D 2.073)	
side-window sill at extreme STA	4.35-4.56	4.356	DWG 4.356	
glass height	0.40-0.45 (a)	0.451	DWG 0.448	
sill length / height	1.98-2.09 (a)	1.93	DWG 1.93	
top length / height	0.71-0.85 (a)	0.66	DWG 0.66	
D radius top / bottom	0.09-0.14 / 0.09-0.17	0.110 / 0.175	DWG 0.12 / 0.21 (b)	
D straight vertical	0.15-0.19	0.097	DWG 0.06 (b)	
side-window top rise (fwd)	2-6 deg (a)	9.5 deg	DWG 9-10 deg	
windshield roof rise (fwd)	-25 deg (c)	11.0 deg	DWG 10.3 deg	
centre post to base to glass	0.05-0.06 (a)	0.046	DWG 0.046	
mask below sill	0.06-0.08	0.070	photos only	
mask ramp angle	21-27 deg	25.0 deg	photos only	
mask fwd point STA / WL	3.17 / 2.21	3.169 / 2.218	ramp meets crown	
mask at edge lean (f)	30.08-22.27 deg	22.5 deg	MSM 30.08, bottom fwd	
other airframes (f)	3010-12.16; 3036: 0	-	3036: curved (glass D)	
mask top STA, WL 2.10 / 2.40	3036: 4.385 / 4.515	4.388 / 4.513	stbd_ground cam	
mask top margin low / high	0.015-0.20	0.004 / 0.210	normal to extreme	
mask top margin	0.055-0.07 (f)	-	normal to top edge	
mask at to door seam, top / low	3036: 0.10 / -0.27	0.090 / 0.296	seam STA 4650	
other airframes (f)	3036: -0.05, vertical	-	reaches the door	

- perspective: ground-level camera at 10'15" below the window; the tumblehome shortens the glass height and flattens the top edge (0.448 m @ 0.40-0.41 m; 9.5" > 2-6").
- drawing vs photos conflict: kept 0.175 (within 15 mm of the drawing) - owner to decide.
- the side-projection slope of the windshield's outboard roof corner, not the roof plane.
- indicative only (oblique views).
- ratio to the glass height on PRO sin 3010 / 3036 and the long-lens NGX photo. (photo: notes: 0-0.05).
- the mask's 4" edge is a livery item and differs per airframe (model/livery per MASK_SCHEMES: sin 3008 photos rectified on the OML (stbd_ground / port_hangar_130 cameras); this sheet and L5 carry sin 3008.

VISION FROM THE DESIGN EYE (ESTIMATED)	
design eye STA / BL / WL	4080 / 335 / 2360
over the nose (eye BL, ahead)	8.9' down
abeam, over the side-window sill	29.5' down
abeam, to the side-window top	40.3' up
ahead, to the windshield roof edge	54.4' up

PILATUS PC-12 PRO

COCKPIT GLAZING & PRO MASK



DWG NO	REV	SCALE	SHEET	UNITS
PC12-L2	A	1:10	A2 · 1 OF 1	mm
DRAWN				DATE
Claude - loftkit parametric model				2026-09-24

RECONSTRUCTION FROM PUBLISHED DATA - NOT FOR CONSTRUCTION