
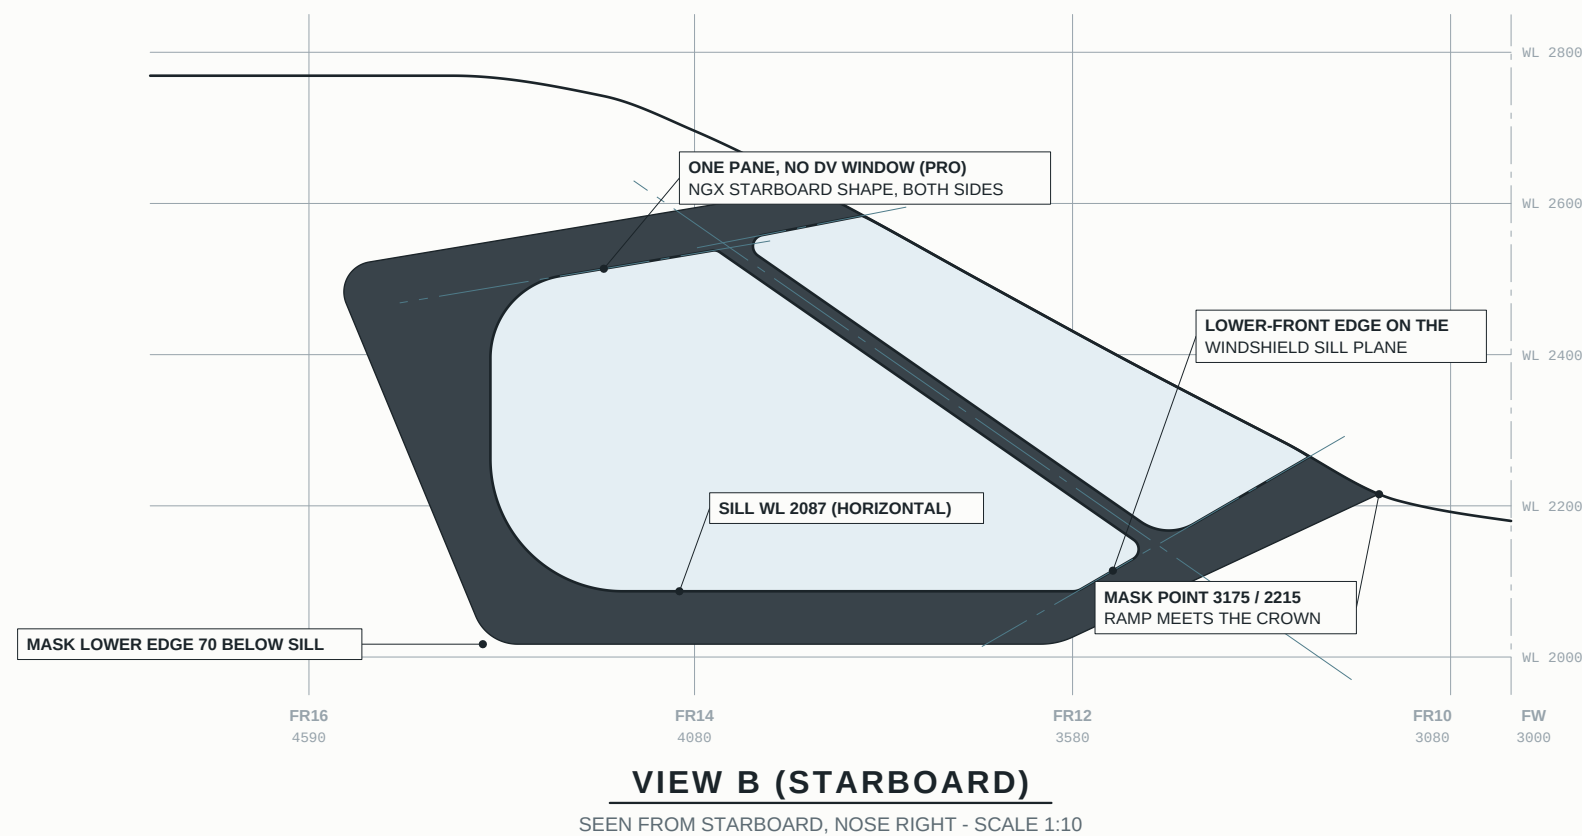
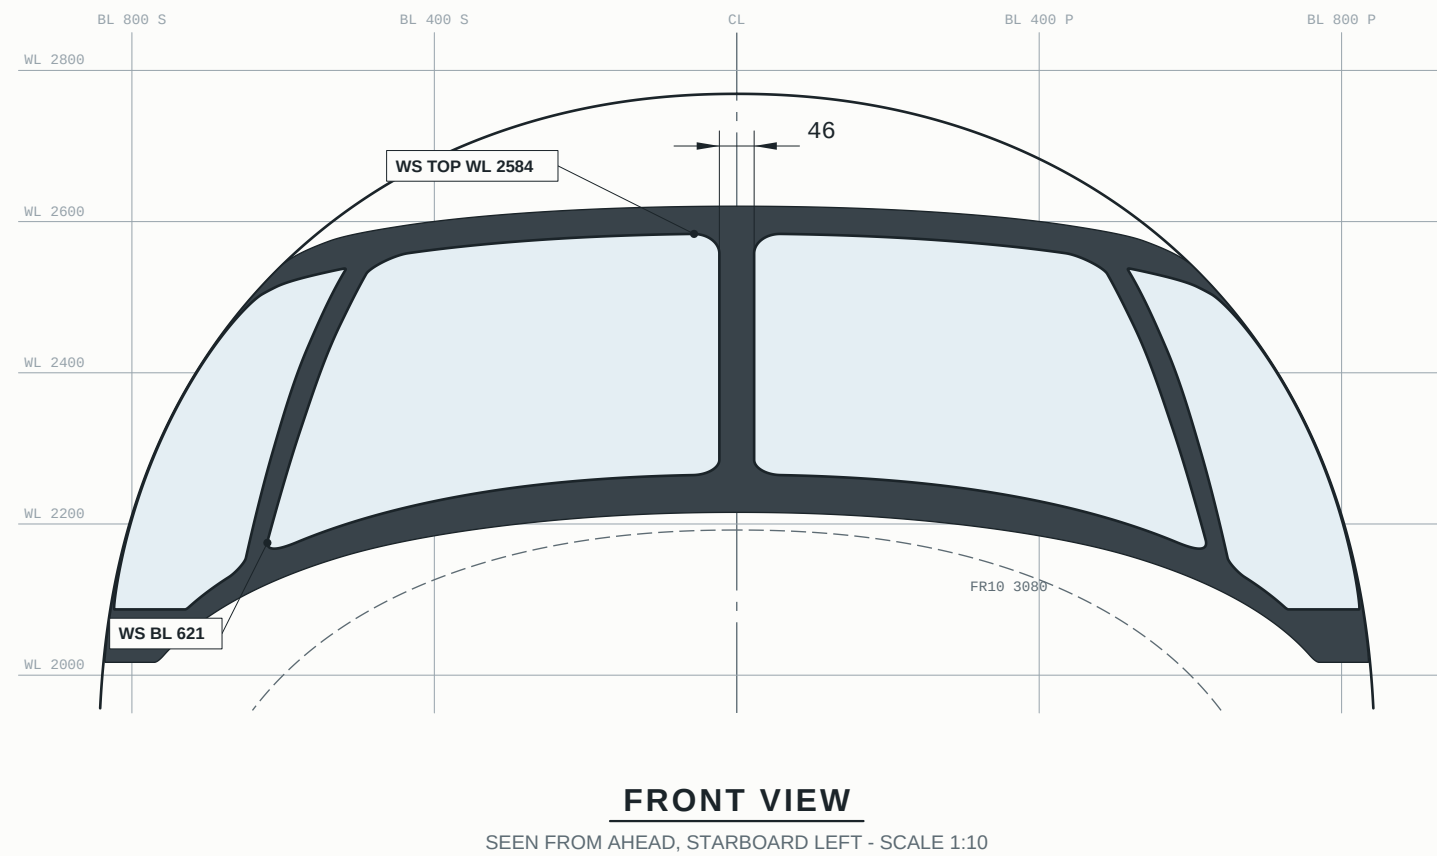
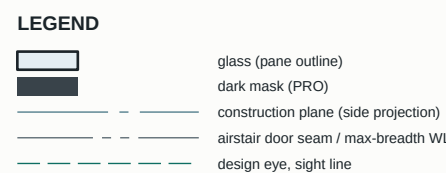
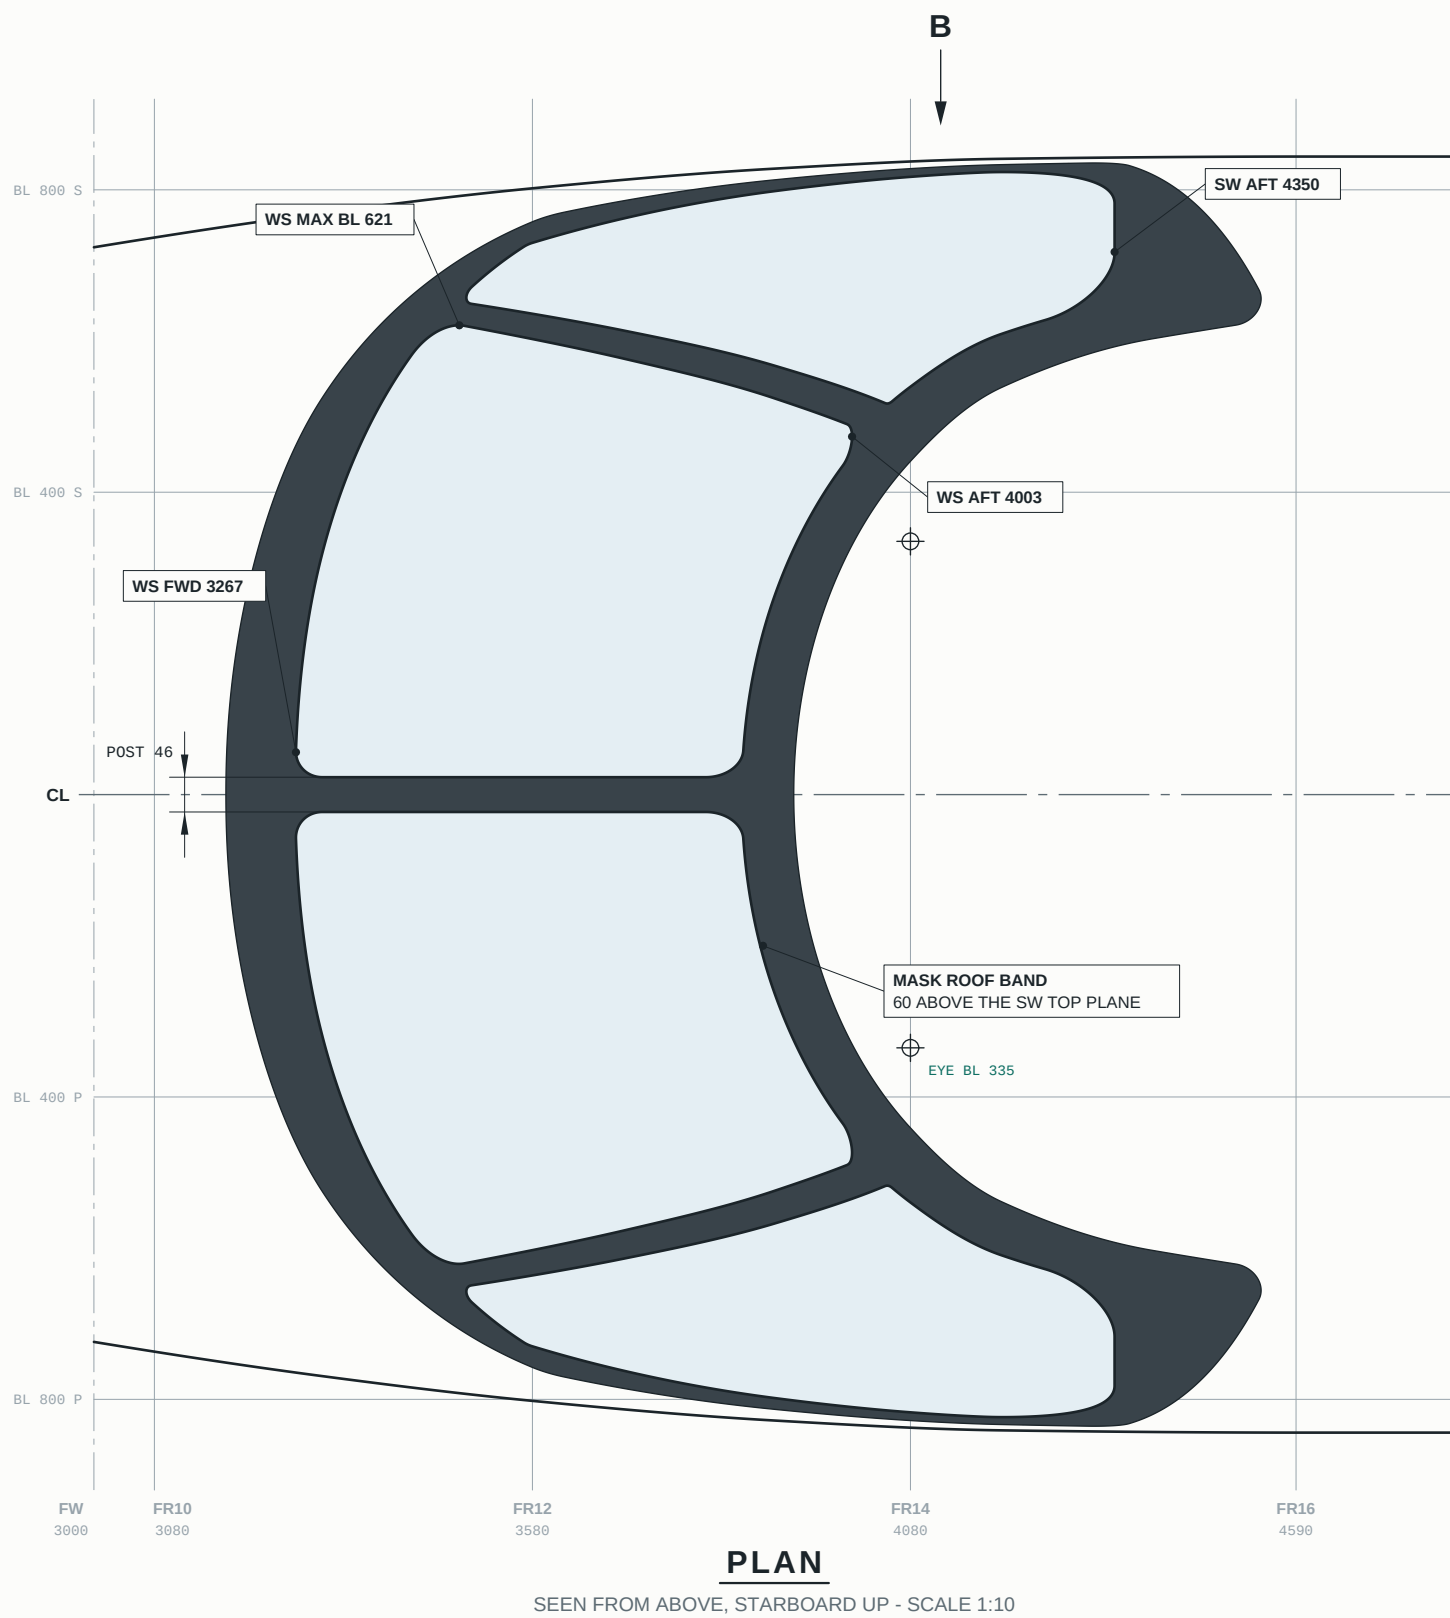


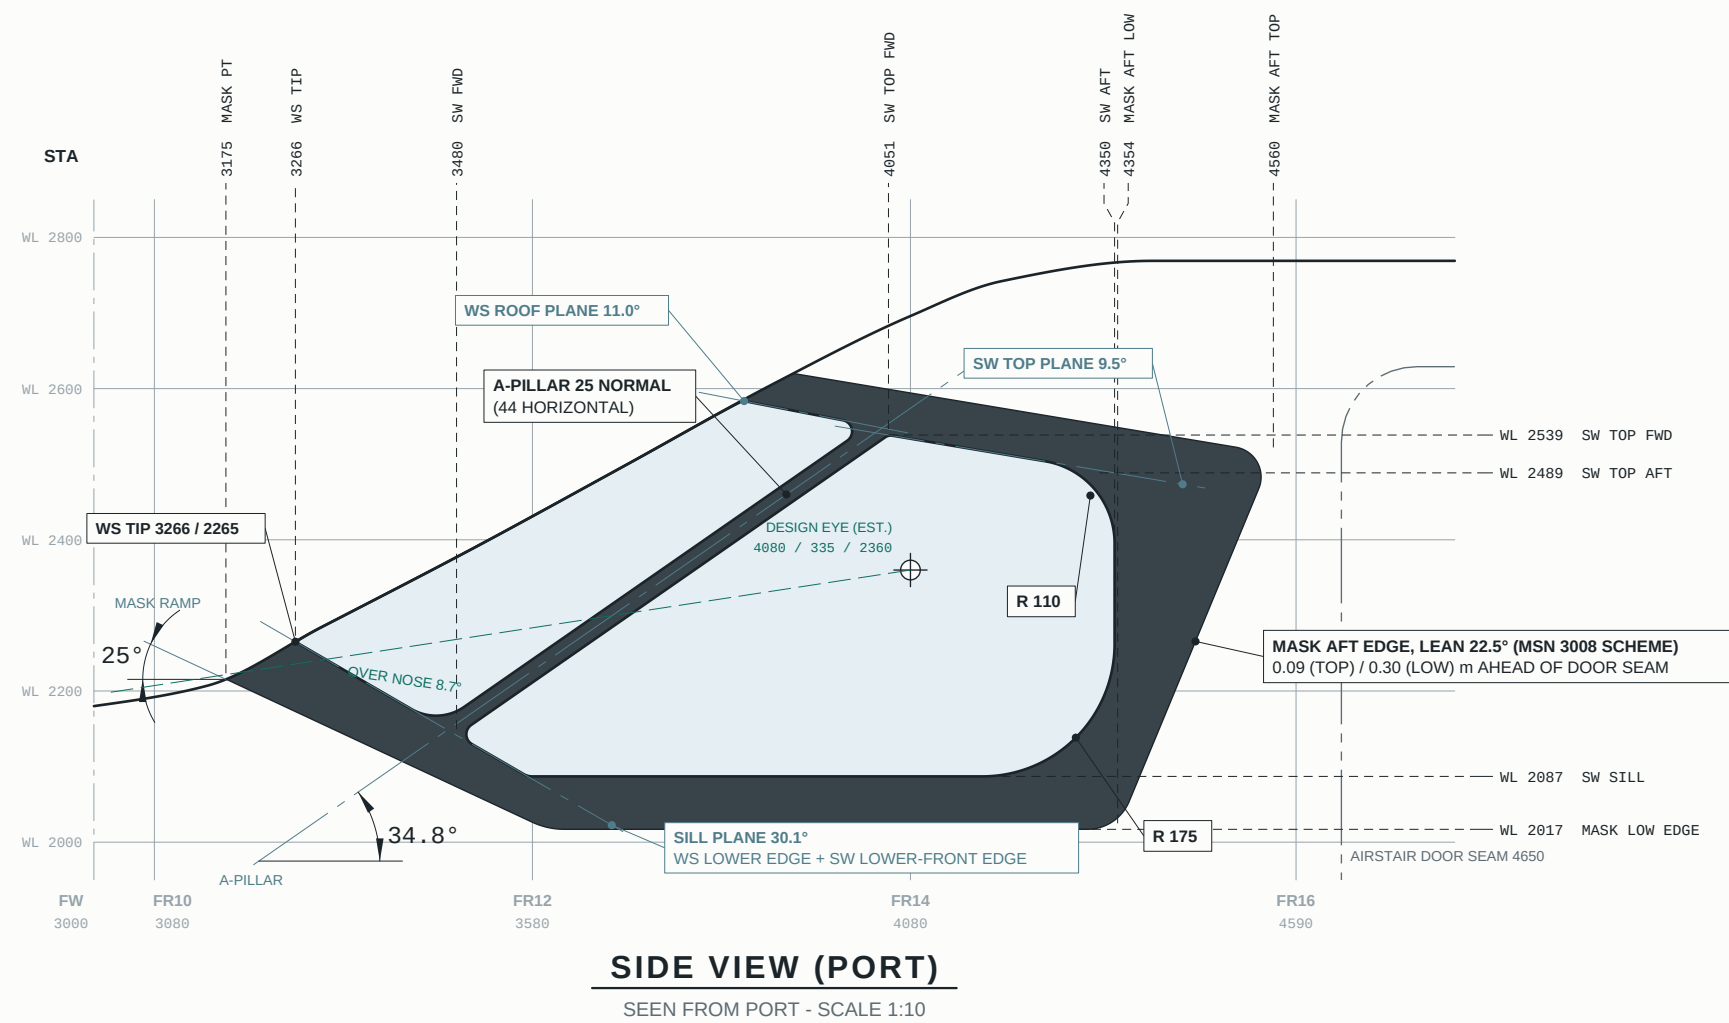


- ## NOTES

1. Drawn from the parameters of model/cockpit_glazing.py: zero contours of the glazing and mask signed-distance fields on the outer mould line of model/fuselage.py (sheet L1), projected, never from the mesh. STA = m alt of the datum (3000 mm ahead of the firewall), WL above the static ground line.
2. Every edge except the centre post is a plane normal to the plane of symmetry; straight in side projection (chain-dotted construction lines). Post: |BL| = 23. Corners filleted (side projection).
3. PC-12 PRO no direct-view glazing; the NGX starboard single pane is used on both sides (Pilatus PRO release; photos of s/n 3001, 3010, 3036, 3066).
4. Dark mask model: PRO livery item, one continuous area around all four panes - roof band, centre post, lower band with a ramp to the windshield's forward corner, straight leading aft edge ahead of the airstair door. Drawn for the MSN 3008 scheme (aft edge 22.5°; the aft edge varies per airframe: model/livery.py MASK_SCHEMES). Mask corner tip: low-aft 60, top-aft 40, ramp 100.
5. Windshield roof slope: its own plane (11.0°, 9 mm above the side window-top plane at STA 4000) - our crown section at STA 3900 is 5.12 mm fuller than the drawing's, so plan and front cannot both match a single-pane better than ~11.7 mm.

vs PILATUS 190.10.40.432 SHEET 1 (mm)						
PANE	VIEW	REFERENCE	RMS	MAX	WORST AT	
windshield	side	ws_port	2.4	6	3267 / 2205	
side window	side	NGX port DV+main	5.1	13.5	3654 / 2087	
side window	side	ws_std plan+OML *	8.8	20.7	3905 / 2066	
windshield stbd	plan	ws_std	5.2	11.4	3905 / 243	
windshield port	plan	ws_std	5.2	11.3	3905 / 241	
side window stbd	plan	ws_std	5.6	11.7	3814 / 590	
side window port	plan	NGX port DV+main	6.0	12.2	3810 / 578	
windshield stbd	front	ws_std	4.0	6.7	226 / 2578	
windshield port	front	ws_port	4.0	6.6	-223 / 2572	
side window stbd	front	ws_std	4.9	10.4	587 / 2382	
side window port	front	NGX port DV+main	4.8	13.6	-765 / 2087	

vs PHOTOS (refs/photos/notes.md)			
ITEM	PHOTOS	OURS	DRAWING / NOTE
pillar edge angle	32.39 deg	34.8 deg	dwg 34.1-34.6
A-pillar width, side (horiz.)	0.05-0.06	0.04	dwg 0.038
side-window sill WL	2.09-2.11	2.087	dwg 2.087 (DV 2.073)
side-window at extreme STA	-1.34	0.449	dwg 4.356
glass height	0.64-0.65	0.451	normal to top edge
sill length / height	1.96-2.08	1.93	dwg 1.93
top length / height	1.71-0.85	0.66	dwg 0.66
D radius top / bottom	0.09-0.14 / 0.09-0.17	0.110 / 0.175	dwg 0.12 / 0.21 (b)
D straight vertical	0.15-0.19	0.097	dwg 0.06 (b)
side-window top rise (fwd)	2-6 deg	9.5 deg	dwg 9-10 deg
windshield roof rise (fwd)	~25 deg	11.0 deg	dwg 10.3 deg
centre post top rise to glass	0.62-0.64 (b)	0.046	dwg 0.046
mask below sill	0.06-0.08	0.070	photos only
mask ramp angle	21-27 deg	25.0 deg	photos only
mask fwd point STA / WL	3.17 / 2.21	3.175 / 2.215	ramp meets crown
mask at edge lean (f)	3008 - 22-27 deg	22.5 deg	MSH 3008, glass fwd
other airframes (f)	3010 - 12-16, 3036: 0	-	3006: curved (dwd b)
mask at STA, WL 2.10 / 2.40	3008: 4.385 / 4.515	4.388 / 4.513	stbd ground crown
mask at margin low / top	0.05-0.10, 0.20	0.004 / 0.020	from aft extreme
mask top rap top edge	0.055-0.07 (b)	0.080	normal to top edge
mask at top to door seam, top / low	3008: 0.10 / -0.27	0.090 / 0.296	seam STA 4650
other airframes (f)	3036: -0.05, vertical	-	reaches the door

VISION FROM THE DESIGN EYE (ESTIMATED)	
design eye STA / BL / WL	4080 / 335 / 2360
over the nose (eye BL ahead)	8.7" down
abeam, over the side-window sill	29.5' down
abeam, to the side-window top	40.3' up
ahead, to the windshield roof edge	54.4" up



PILATUS PC-12 PRO COCKPIT GLAZING & PRO MASK				 FIRST ANGLE PROJECTION
DWG NO	REV	SCALE	SHEET	UNITS
PC12-L2	A	1:10	A2 · 1 OF 1	mm
DRAWN				DATE
Claude - loftkit parametric model				2026-09-24

RECONSTRUCTION FROM PUBLISHED DATA - NOT FOR CONSTRUCTION