
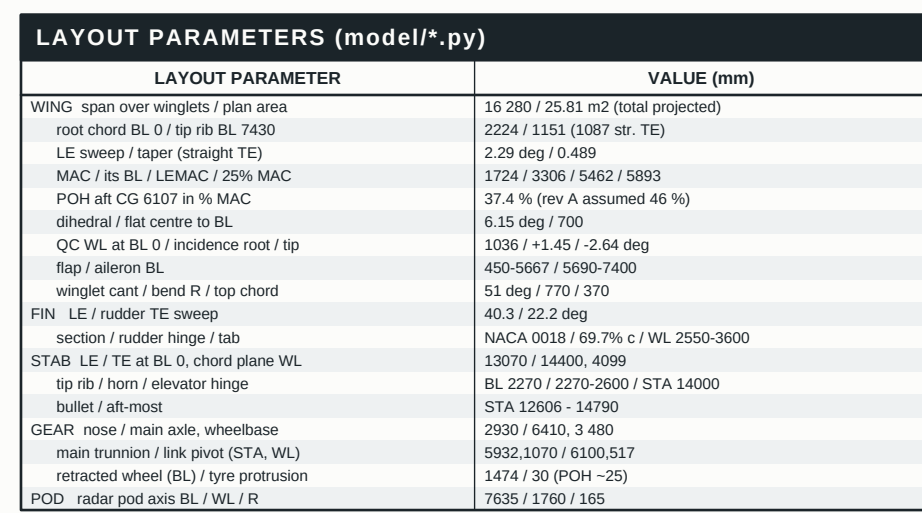
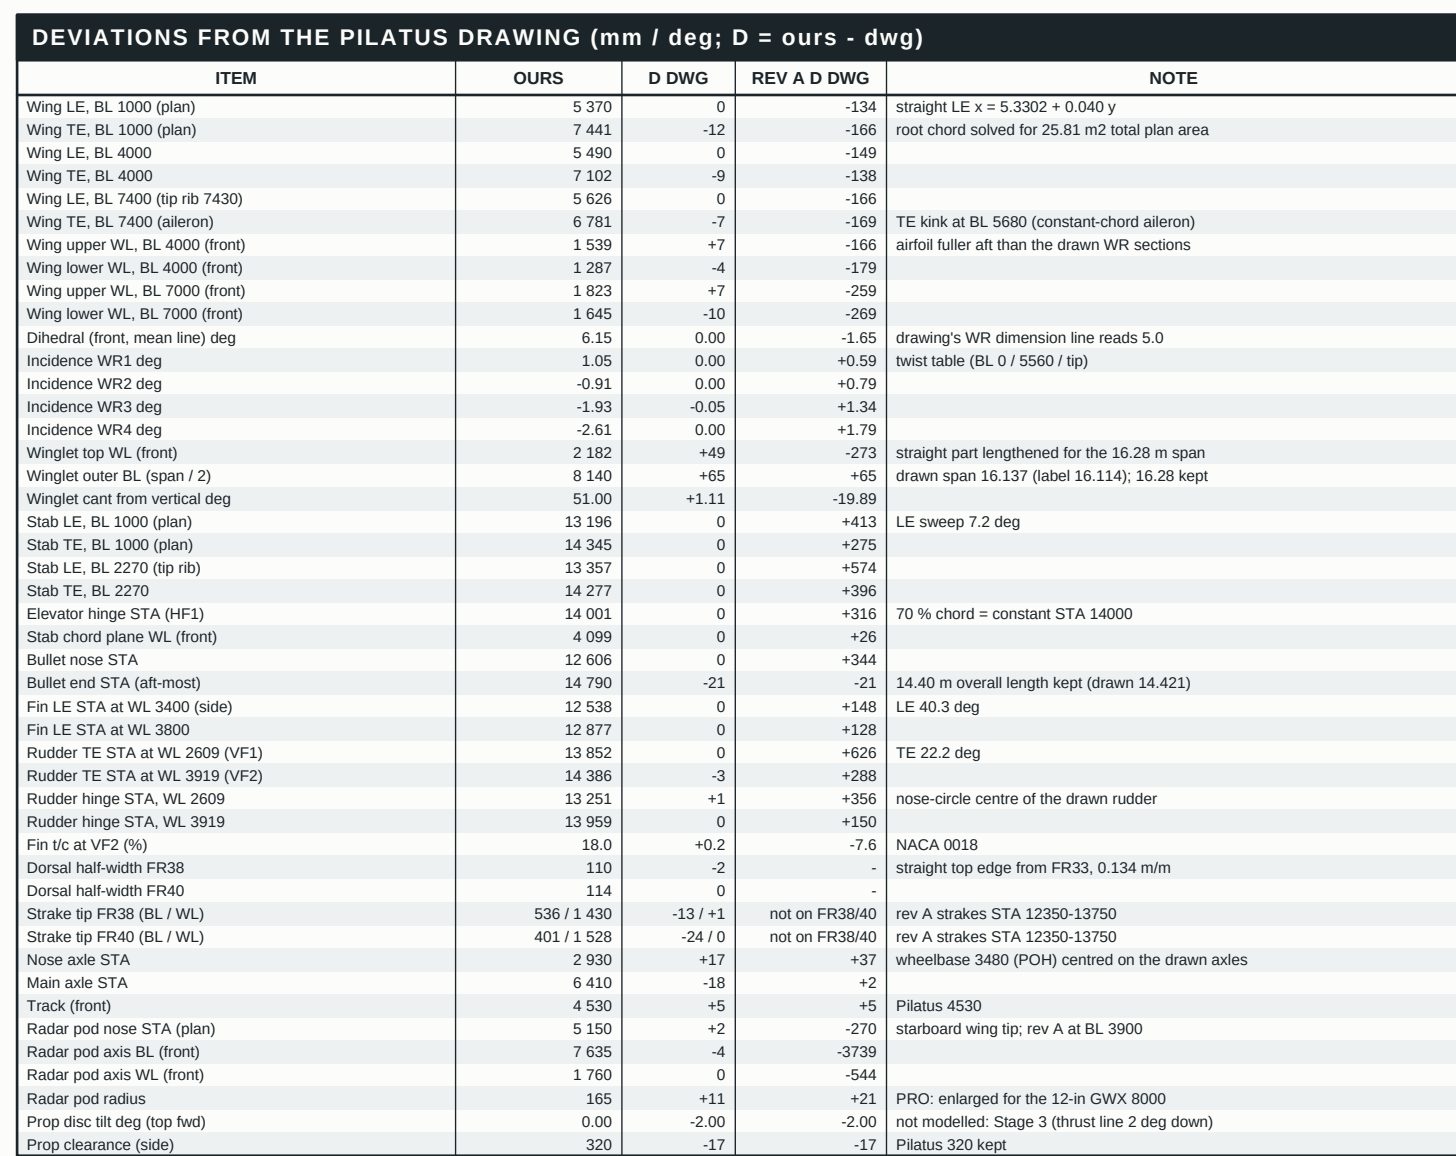
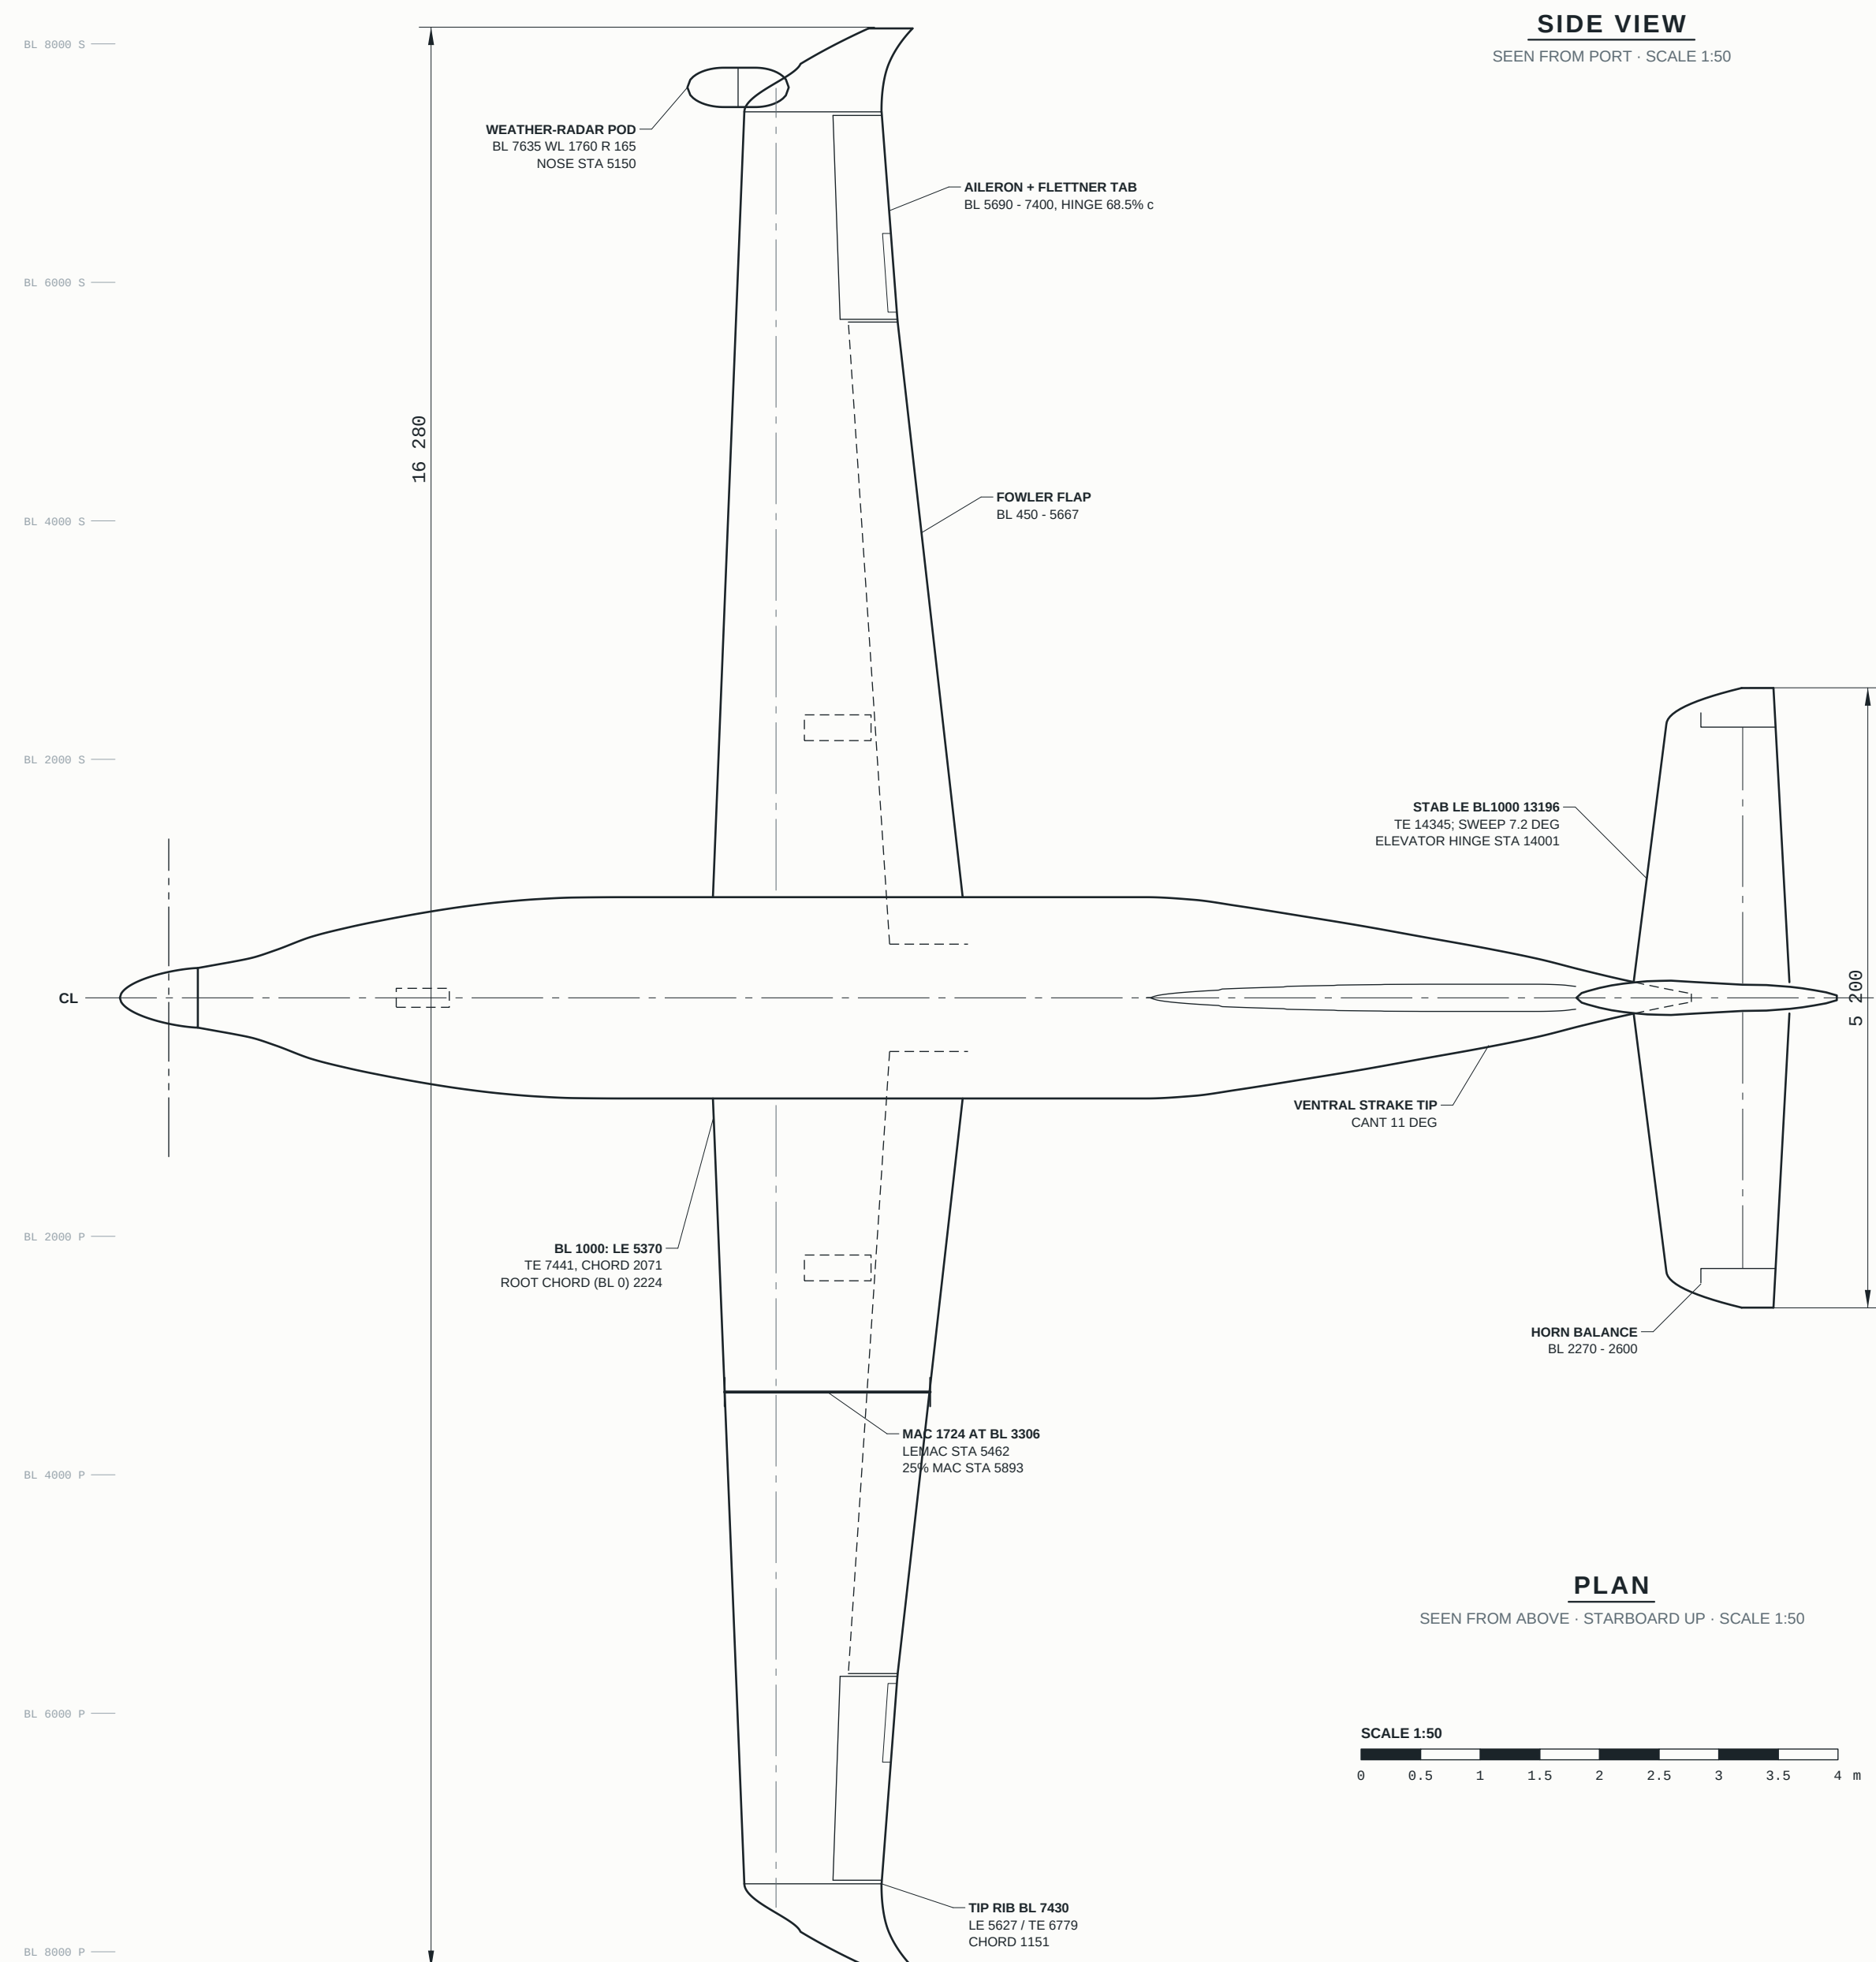
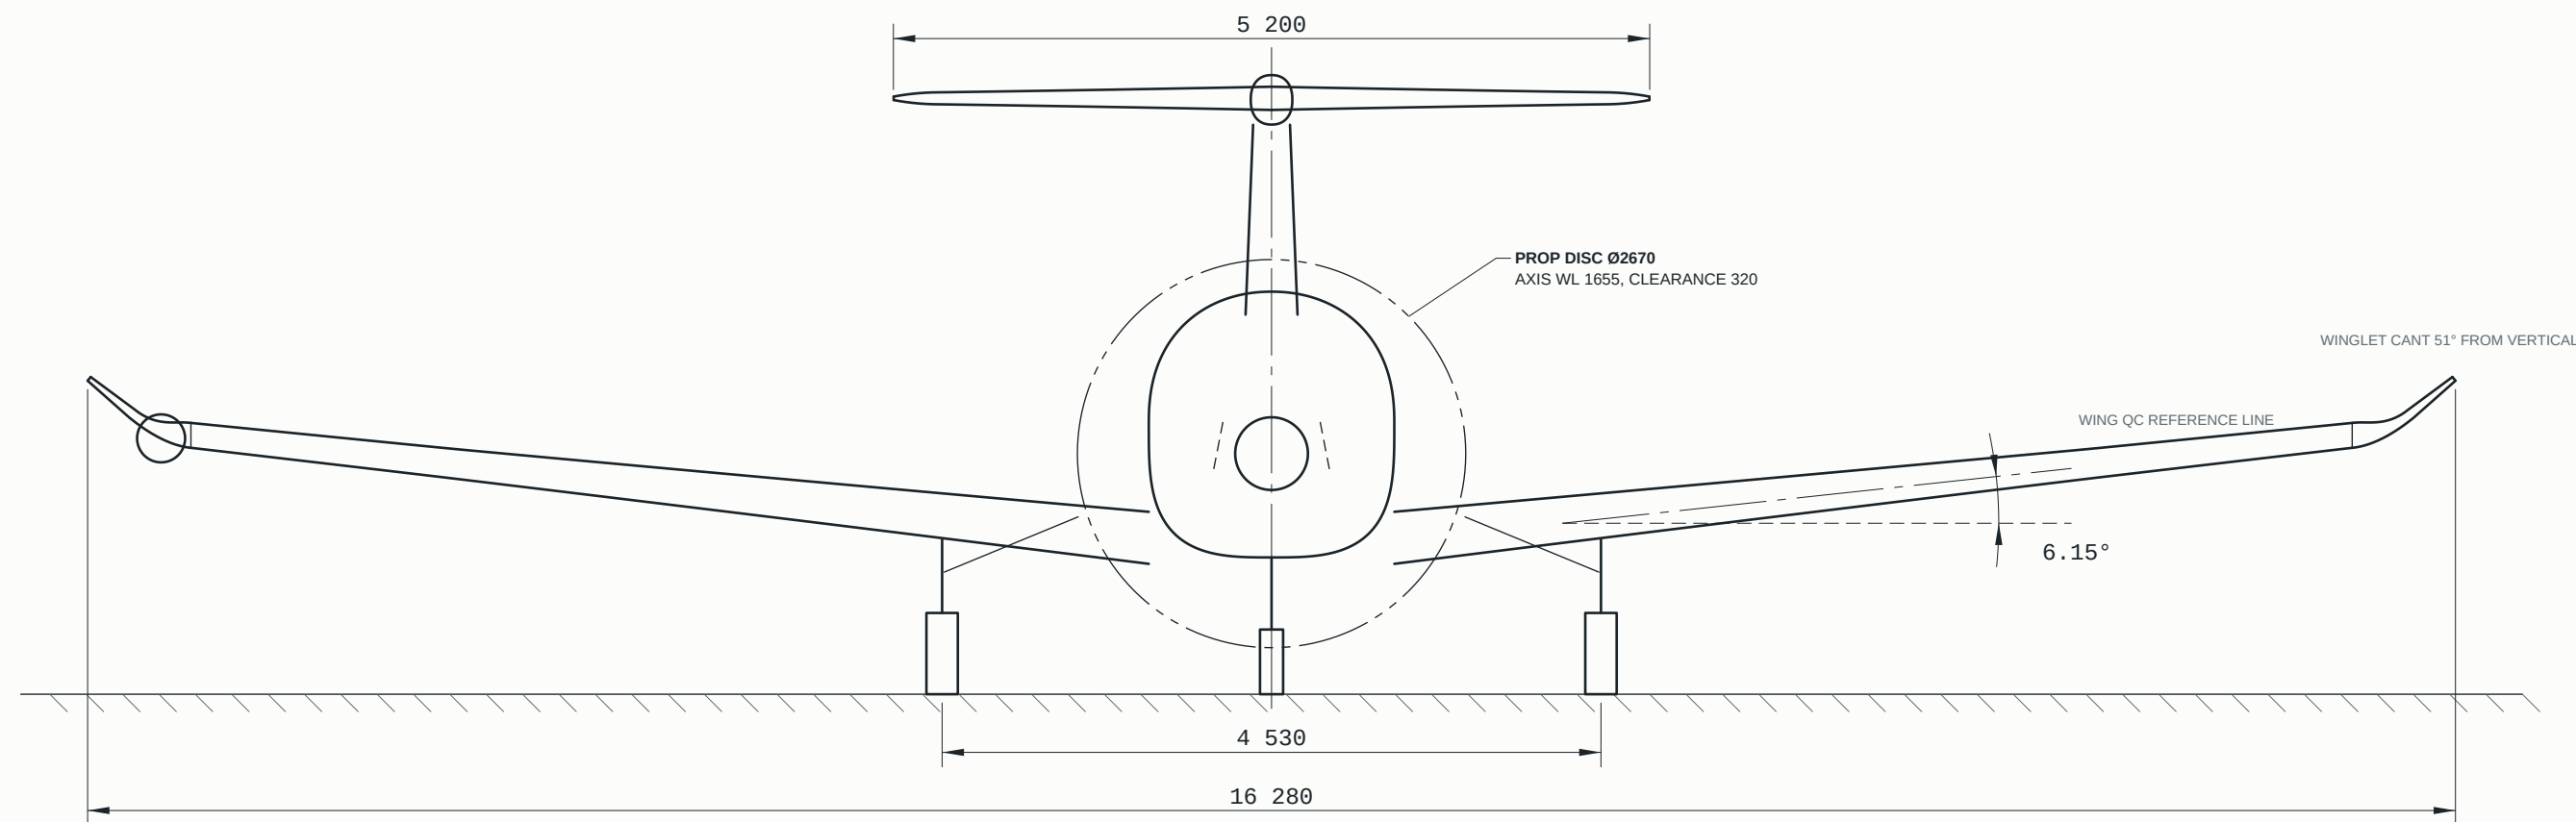


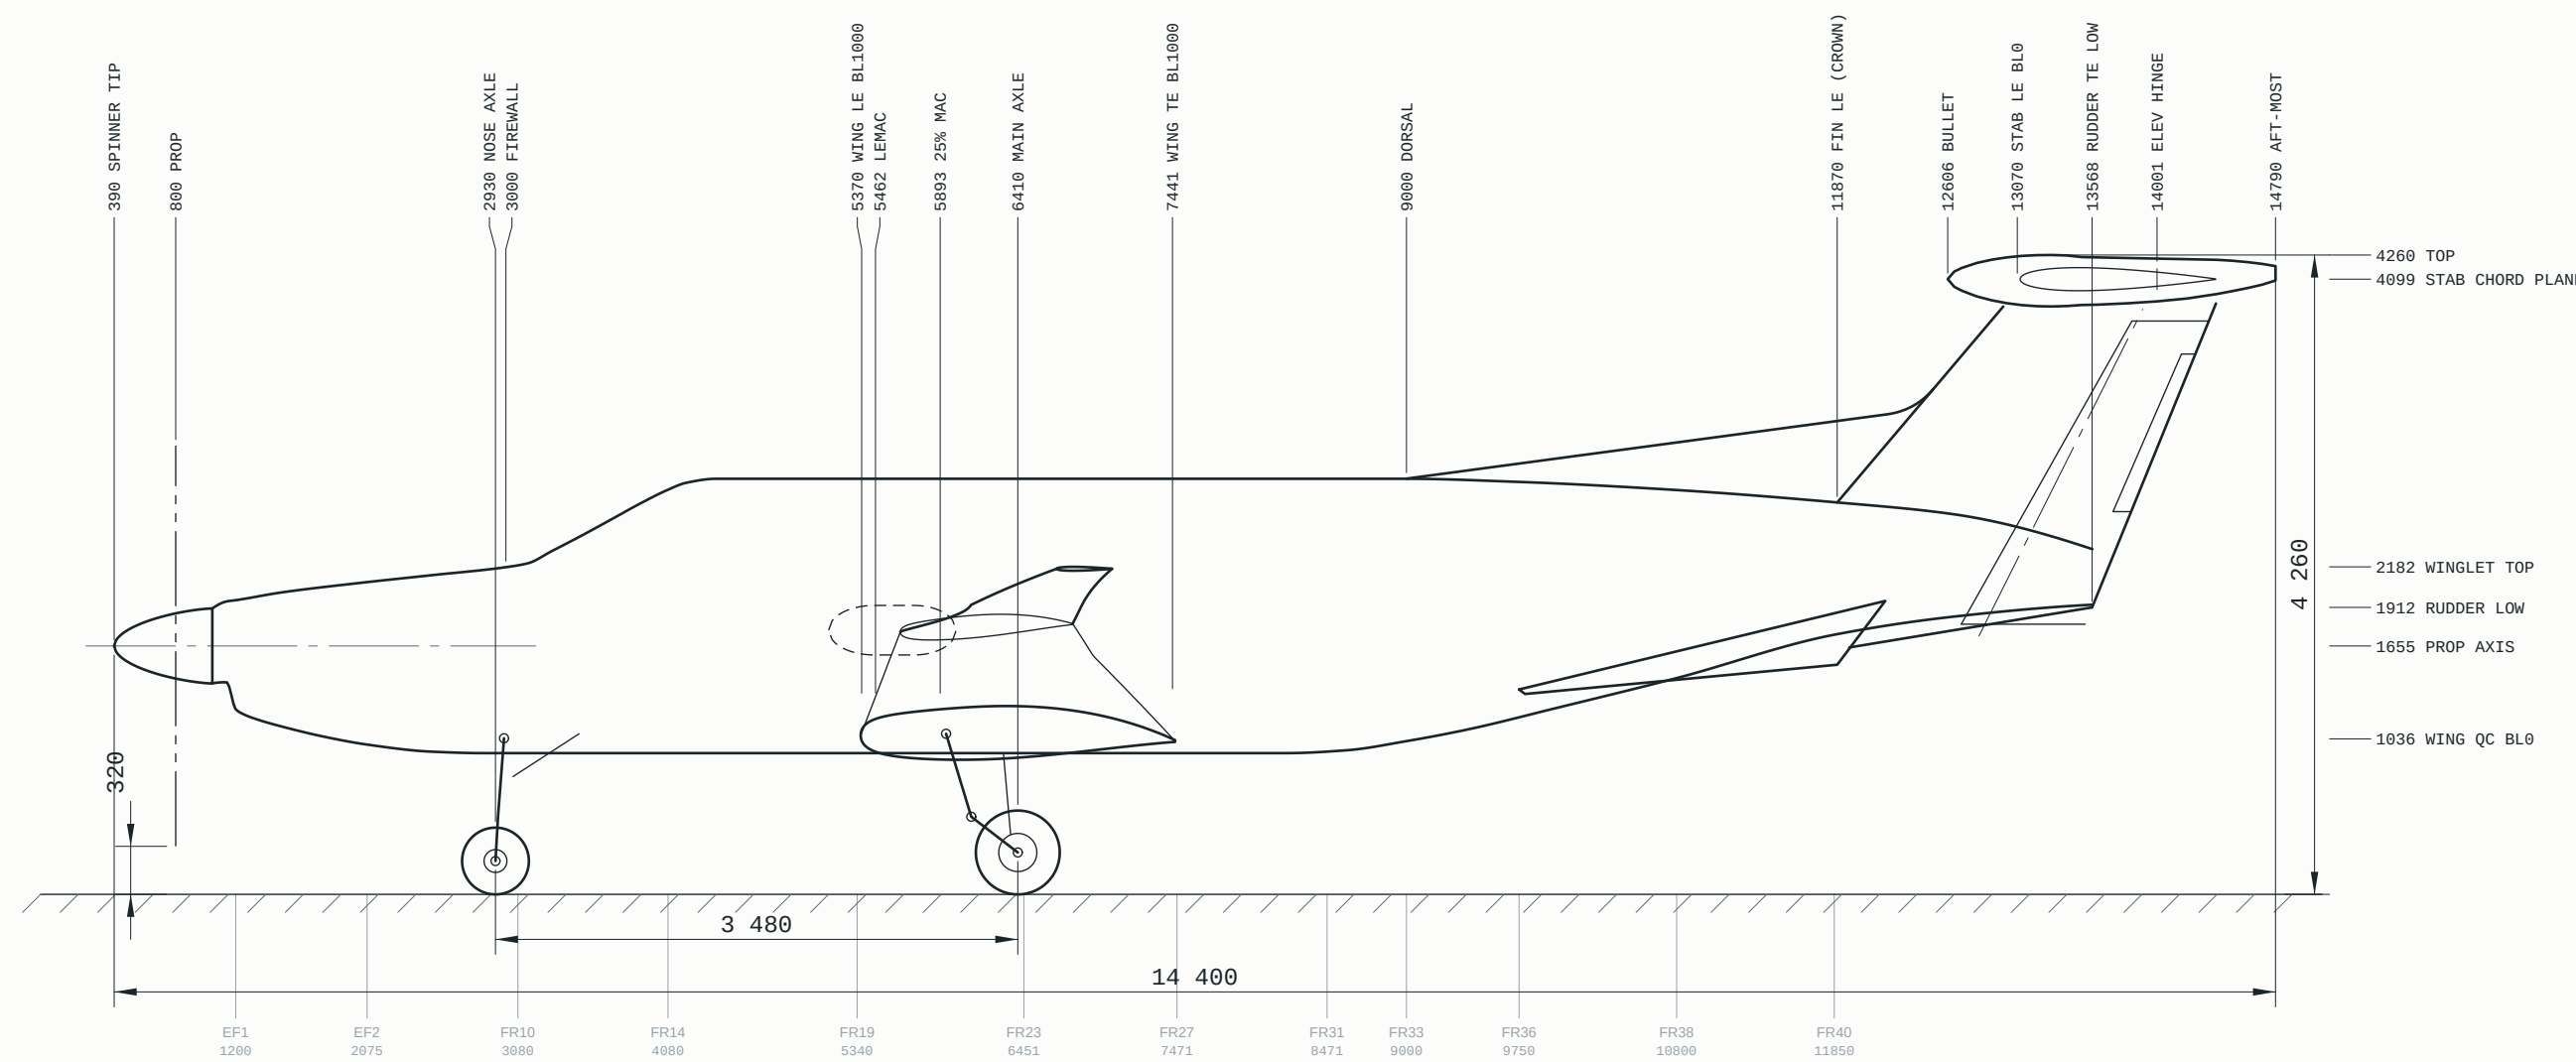

- ## STAGE 3 - WHAT MUST FOLLOW
1. build up wellbore: Wing reference area must use wing planform area (actual projected area) and not the airfoil mean and the winglets' outer projection = 25.81m²; the tapered forebody nose exists 23.0m
 2. Wing moved 130-160 mm down and up (flat centre section WL 1038 at the CG, 6.15 mm dydral from WL 700); details: belly, bearing (drain clearance) wing fairing STA = 5200-8500; move down -8700 must include wing upper surface (WU, 89.9 at 0.6m), belly structure (upper surface of belly), carry-through and the cabin floor (L1: WL 1255) vs the wing upper surface (WU, 0.0m, 1291, 8 mm clearance) - check fit, check fit
 3. Flap ribbed end now BL 450 (drain dashed under the fuselage); the fuselage 1/2 belly line creates a flap well, or keep the 3-0 flap from BL 500; Drain flap fairing (dashed) at -65° chord, that is, (FLAP_X_LIP 0.74) in the core geometry; airfoil chord is a constant 400 mm in the drawing (ALA_Xin fixed at 58.5 % - 30 mm)
 4. Airfoil reconstructions (wing/winglet) are false after that the drain WVR sections (max thickness at -30-35 % c; return: outward and inward 1.2-2 mm) are not needed
 5. Winglet nose sections (wing/winglet, sections) now / stroke lights bearing in the wingline tip (drain light hole at the winglet top), details tip stall places them at the rib (inside the pod on protrusion)
 6. Gear: main/wheel WL 1070s keeps (1 - not extracted type substitution) with the moved wing (well centre: belly: WELL at BL 1474); gear/strut extension clearance to the belly (the door (drain 90° 7165) and bare line (MAGN, BRACE) NOISE BRACE); nose bay / drain nose-door rectangle
 7. Empennage: In NACA 0018 down to WL 1760 (the ventral point below the tail cone in the drain ventral rib); still the fuselage tail cone at the 1st ruler; model the internal fairing (FR40 ribbed) and the elevator from below (ELEV_X_LIP 0.6) and stop of the fixed fairing ribbed to table to BL 2122
 8. Propeller: the design must be tilted 2.0 deg top-down (thrust line 2 deg nose-down) and drain at STA 928 (PROP. x 800) ; not modelled - x needs the engine, mounts, vent and cowl prop - not aligned together
 9. Chute/dive: use the wing planform from the drawing, LEMAC 56421 mm, MAC 1724, dihedral 6.15 deg; radar pod at

- ## NOTES
- Drawn from the parameters of modelisaving.py, empmpage.py, gear.py, gear.py, details.py and fuselage.py (section functions and knot tables), never from the mesh. STA = min alt of the datum (3000 ahead of the fireline), WL above the static ground line, BL = starboard.
 - Positions kept in the registered Planex NGX model drawing 190.10.40.422 (plan, side, front, sections WR1-4, VFS-2, FFSB, FFSB) photos confirm the radial plot at the starboard line.
 - Official values kept where the drawing differs: span 16.28 (drawn 16.137), wheelbase 3.48 (5.515), prop clearance 0.32 (drawn 0.336), overall length 14.40 (drawn 14.423).
 - Wing area 28.51 m² (not the projected plan area) (both halves through the fuselage, incl. the alleron knot and the winglet's plan projection) the projected plan gives it within 0.1 %.
 - Propeller: the drawing's disc is tilted 2° down (the drawing, LEMG 5462 / MAC 1724, dihedral 6.15 deg, radar plot at the starboard wing tip, gear axes 2930 S / 4410 S).
 - CLAUDE must: update his file (sketch from the drawing, LEMG 5462 / MAC 1724, dihedral 6.15 deg, radar plot at the starboard wing tip, gear axes 2930 S / 4410 S).


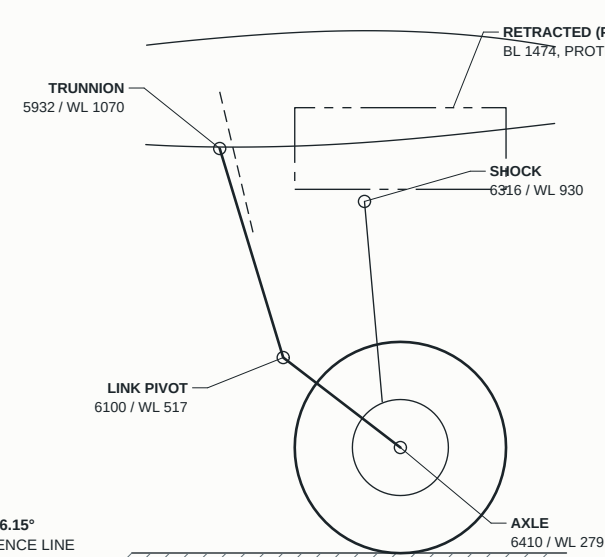


PHOTO / RENDER EVIDENCE		
PHOTO / RENDER (refs/photos.json)		WHAT IT SHOWS FOR THE LAYOUT
rdr_tecstda_rdr_platius (NEX) pro3008_rdr_tecstda_platius (PRO sin 3008) pl_tecstda_rdr_5000 (render) pl_tecstda_rdr_5000 (render) rdr_xenia_rdr_platius crop		rudder pod on the STARBOARD WING TIP leading edge, black rudder, body faired into the winglet root PRO pod at the starboard tip, rudome slightly larger (12-in GWY 8000) > R 155 (drawn NEX 155) pod at the starboard tip: L band slopes 5.7 / 6.6 deg (mean -6.1 = drawn root, not the 5.0 in deg) winglet straight part -39 deg above horizontal (cant -51 deg), rise -0.33 m above the tip large single leg door on the main leg, trailing leg, three flap-track canoes per wing

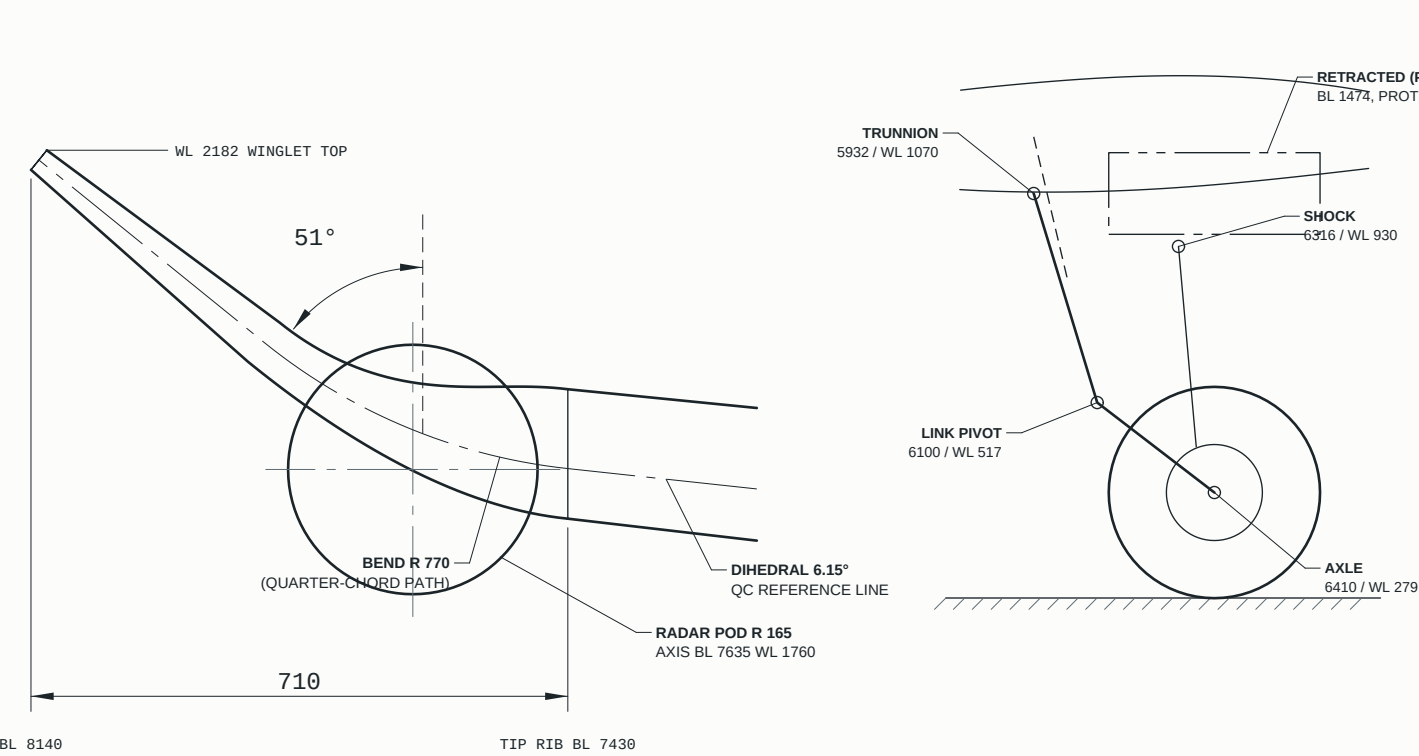