


## Bombal 3. Basic Config Lab

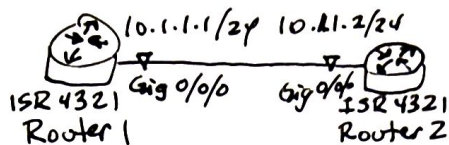

Tasks: Power on and configure as follows:

- 1) Configure IP addresses as in diagram
- 2) Ensure Routers can ping each other
- 3) Configure enable password "cisco"
- 4) encrypt enable password
- 5) configure secret "cisco123"
- 6) configure first 5 telnet lines to require "cisco" password
- 7) Ensure you can telnet between the devices
- 8) Configure console password "cisco" and test

> enable

# conf t

(config)# hostname Router1

(config)# int gig 0/0/0

(config-if)# ip address 10.1.1.1 255.255.255.0 } ①

(config-if)# no shut

(config-if)# exit

(config)# enable password cisco ← ③

# service password-encryption ← ④

# enable secret cisco123 ← ⑤

(config)# line vty 0 # } ⑥

(config-line)# password cisco

(config)# line con 0

(config-line)# password cisco

# login