

# Multi Degrees of Freedom Systems

## MDOF's

Giacomo Boffi

<http://intranet.dica.polimi.it/people/boffi-giacomo>

Dipartimento di Ingegneria Civile Ambientale e Territoriale  
Politecnico di Milano

April 9, 2016

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

The  
Homogeneous  
Problem

Modal Analysis

Examples

## Outline

Introductory Remarks

An Example

The Equation of Motion, a System of Linear Differential Equations

Matrices are Linear Operators

Properties of Structural Matrices

An example

The Homogeneous Problem

The Homogeneous Equation of Motion

Eigenvalues and Eigenvectors

Eigenvectors are Orthogonal

Modal Analysis

Eigenvectors are a base

EoM in Modal Coordinates

Initial Conditions

Examples

2 DOF System

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks


The  
Homogeneous  
Problem

Modal Analysis

Examples

## Introductory Remarks

Consider an undamped system with two masses and two degrees of freedom.

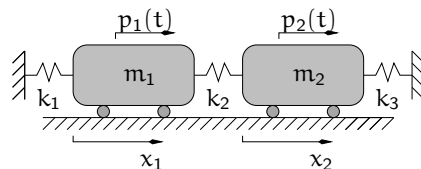

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

**An Example**  
The Equation of  
Motion  
Matrices are  
Linear Operators  
Properties of  
Structural  
Matrices  
An example


The  
Homogeneous  
Problem

Modal Analysis

Examples

## Introductory Remarks

We can separate the two masses, single out the spring forces and, using the D'Alembert Principle, the inertial forces and, finally, write an equation of dynamic equilibrium for each mass.

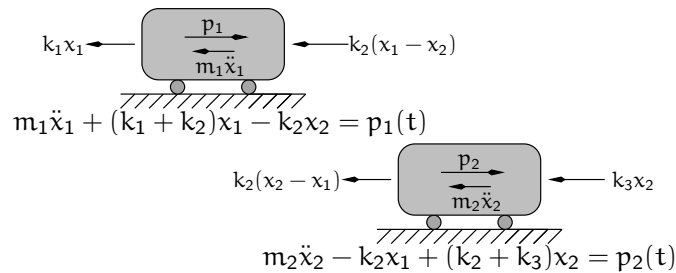

Generalized SDOF's

Giacomo Boffi

Introductory Remarks

An Example  
The Equation of Motion  
Matrices are Linear Operators  
Properties of Structural Matrices  
An example

The Homogeneous Problem

Modal Analysis

Examples

## The equation of motion of a 2DOF system

With some little rearrangement we have a system of two linear differential equations in two variables,  $x_1(t)$  and  $x_2(t)$ :

$$\begin{cases} m_1 \ddot{x}_1 + (k_1 + k_2)x_1 - k_2 x_2 = p_1(t), \\ m_2 \ddot{x}_2 - k_2 x_1 + (k_2 + k_3)x_2 = p_2(t). \end{cases}$$

Generalized SDOF's

Giacomo Boffi

Introductory Remarks

An Example  
The Equation of Motion  
Matrices are Linear Operators  
Properties of Structural Matrices  
An example

The Homogeneous Problem

Modal Analysis

Examples

## The equation of motion of a 2DOF system

Introducing the loading vector  $\mathbf{p}$ , the vector of inertial forces  $\mathbf{f}_I$  and the vector of elastic forces  $\mathbf{f}_S$ ,

$$\mathbf{p} = \begin{Bmatrix} p_1(t) \\ p_2(t) \end{Bmatrix}, \quad \mathbf{f}_I = \begin{Bmatrix} f_{I,1} \\ f_{I,2} \end{Bmatrix}, \quad \mathbf{f}_S = \begin{Bmatrix} f_{S,1} \\ f_{S,2} \end{Bmatrix}$$

we can write a vectorial equation of equilibrium:

$$\mathbf{f}_I + \mathbf{f}_S = \mathbf{p}(t).$$

Generalized SDOF's

Giacomo Boffi

Introductory Remarks

An Example  
The Equation of Motion  
Matrices are Linear Operators  
Properties of Structural Matrices  
An example

The Homogeneous Problem

Modal Analysis

Examples

$$\mathbf{f}_S = \mathbf{K} \mathbf{x}$$

It is possible to write the linear relationship between  $\mathbf{f}_S$  and the vector of displacements  $\mathbf{x} = \{x_1 x_2\}^T$  in terms of a matrix product, introducing the so called *stiffness matrix*  $\mathbf{K}$ .  
In our example it is

$$\mathbf{f}_S = \begin{bmatrix} k_1 + k_2 & -k_2 \\ -k_2 & k_2 + k_3 \end{bmatrix} \mathbf{x} = \mathbf{K} \mathbf{x}$$

The stiffness matrix  $\mathbf{K}$  has a number of rows equal to the number of elastic forces, i.e., one force for each *DOF* and a number of columns equal to the number of the *DOF*.

The stiffness matrix  $\mathbf{K}$  is hence a *square matrix*  $\mathbf{K}_{ndof \times ndof}$

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

An Example  
The Equation of  
Motion

**Matrices are  
Linear Operators**

Properties of  
Structural  
Matrices

An example

The  
Homogeneous  
Problem

Modal Analysis

Examples

$$\mathbf{f}_I = \mathbf{M} \ddot{\mathbf{x}}$$

Analogously, introducing the *mass matrix*  $\mathbf{M}$  that, for our example, is

$$\mathbf{M} = \begin{bmatrix} m_1 & 0 \\ 0 & m_2 \end{bmatrix}$$

we can write

$$\mathbf{f}_I = \mathbf{M} \ddot{\mathbf{x}}.$$

Also the mass matrix  $\mathbf{M}$  is a square matrix, with number of rows and columns equal to the number of *DOF*s.

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

An Example  
The Equation of  
Motion

**Matrices are  
Linear Operators**

Properties of  
Structural  
Matrices

An example

The  
Homogeneous  
Problem

Modal Analysis

Examples

## Matrix Equation

Finally it is possible to write the equation of motion in matrix format:

$$\mathbf{M} \ddot{\mathbf{x}} + \mathbf{K} \mathbf{x} = \mathbf{p}(t).$$

*Of course it is possible to take into consideration also the damping forces, taking into account the velocity vector  $\dot{\mathbf{x}}$  and introducing a damping matrix  $\mathbf{C}$  too, so that we can eventually write*

$$\mathbf{M} \ddot{\mathbf{x}} + \mathbf{C} \dot{\mathbf{x}} + \mathbf{K} \mathbf{x} = \mathbf{p}(t).$$

*But today we are focused on undamped systems...*

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

An Example  
The Equation of  
Motion

**Matrices are  
Linear Operators**

Properties of  
Structural  
Matrices

An example

The  
Homogeneous  
Problem

Modal Analysis

Examples

## Properties of **K**

- ▶ **K** is symmetrical.  
The elastic force exerted on mass  $i$  due to a unit displacement of mass  $j$ ,  $f_{S,i} = k_{ij}$  is equal to the force  $k_{ji}$  exerted on mass  $j$  due to a unit displacement of mass  $i$ , in virtue of *Betti's theorem* (also known as Maxwell-Betti reciprocal work theorem).
- ▶ **K** is a positive definite matrix.  
The strain energy  $V$  for a discrete system is

$$V = \frac{1}{2} \mathbf{x}^T \mathbf{f}_S,$$

and expressing  $\mathbf{f}_S$  in terms of **K** and  $\mathbf{x}$  we have

$$V = \frac{1}{2} \mathbf{x}^T \mathbf{K} \mathbf{x},$$

and because the strain energy is positive for  $\mathbf{x} \neq 0$  it follows that **K** is definite positive.

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks  
An Example  
The Equation of  
Motion  
Matrices are  
Linear Operators  
**Properties of  
Structural  
Matrices**  
An example  
The  
Homogeneous  
Problem  
Modal Analysis  
Examples

## Properties of **M**

Restricting our discussion to systems whose degrees of freedom are the displacements of a set of discrete masses, we have that the mass matrix is a diagonal matrix, with all its diagonal elements greater than zero. Such a matrix is symmetrical and definite positive. Both the mass and the stiffness matrix are symmetrical and definite positive.

*Note that the kinetic energy for a discrete system can be written*

$$T = \frac{1}{2} \dot{\mathbf{x}}^T \mathbf{M} \dot{\mathbf{x}}.$$

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks  
An Example  
The Equation of  
Motion  
Matrices are  
Linear Operators  
**Properties of  
Structural  
Matrices**  
An example  
The  
Homogeneous  
Problem  
Modal Analysis  
Examples

## Generalisation of previous results

The findings in the previous two slides can be generalised to the *structural matrices* of generic structural systems, with two main exceptions.

1. For a general structural system, in which not all DOFs are related to a mass, **M** could be *semi-definite* positive, that is for some particular displacement vector the kinetic energy is zero.
2. For a general structural system subjected to axial loads, due to the presence of *geometrical stiffness* it is possible that for some particular displacement vector the strain energy is zero and **K** is *semi-definite* positive.


Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks  
An Example  
The Equation of  
Motion  
Matrices are  
Linear Operators  
**Properties of  
Structural  
Matrices**  
An example  
The  
Homogeneous  
Problem  
Modal Analysis  
Examples

## The problem

Graphical statement of the problem

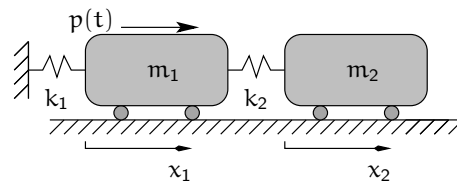

$$k_1 = 2k, \quad k_2 = k; \quad m_1 = 2m, \quad m_2 = m;$$

$$p(t) = p_0 \sin \omega t.$$

The equations of motion

$$m_1 \ddot{x}_1 + k_1 x_1 + k_2 (x_1 - x_2) = p_0 \sin \omega t,$$

$$m_2 \ddot{x}_2 + k_2 (x_2 - x_1) = 0.$$

... but we prefer the matrix notation ...

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks  
An Example  
The Equation of  
Motion  
Matrices are  
Linear Operators  
Properties of  
Structural  
Matrices  
An example

The  
Homogeneous  
Problem

Modal Analysis

Examples

## The steady state solution

because using the matrix notation we can follow the same steps we used to find the steady-state response of a *SDOF* system. First, the equation of motion

$$m \begin{bmatrix} 2 & 0 \\ 0 & 1 \end{bmatrix} \ddot{\mathbf{x}} + k \begin{bmatrix} 3 & -1 \\ -1 & 1 \end{bmatrix} \mathbf{x} = p_0 \begin{Bmatrix} 1 \\ 0 \end{Bmatrix} \sin \omega t$$

substituting  $\mathbf{x}(t) = \boldsymbol{\xi} \sin \omega t$  and simplifying  $\sin \omega t$ , dividing by  $k$ , with  $\omega_0^2 = k/m$ ,  $\beta^2 = \omega^2/\omega_0^2$  and  $\Delta_{st} = p_0/k$  the above equation can be written

$$\left( \begin{bmatrix} 3 & -1 \\ -1 & 1 \end{bmatrix} - \beta^2 \begin{bmatrix} 2 & 0 \\ 0 & 1 \end{bmatrix} \right) \boldsymbol{\xi} = \begin{bmatrix} 3-2\beta^2 & -1 \\ -1 & 1-\beta^2 \end{bmatrix} \boldsymbol{\xi} = \Delta_{st} \begin{Bmatrix} 1 \\ 0 \end{Bmatrix}$$

solving for  $\boldsymbol{\xi}/\Delta_{st}$  gives

$$\frac{\boldsymbol{\xi}}{\Delta_{st}} = \frac{\begin{bmatrix} 1-\beta^2 & 1 \\ 1 & 3-2\beta^2 \end{bmatrix} \begin{Bmatrix} 1 \\ 0 \end{Bmatrix}}{(\beta^2 - \frac{1}{2})(\beta^2 - 2)} = \frac{\begin{Bmatrix} 1-\beta^2 \\ 1 \end{Bmatrix}}{(\beta^2 - \frac{1}{2})(\beta^2 - 2)}.$$

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks  
An Example  
The Equation of  
Motion  
Matrices are  
Linear Operators  
Properties of  
Structural  
Matrices  
An example


The  
Homogeneous  
Problem

Modal Analysis

Examples

## The solution, graphically

steady-state response for a 2 dof system, harmonic load

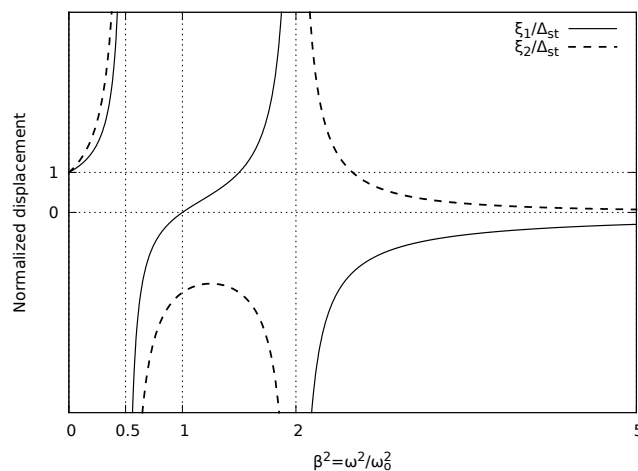

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks  
An Example  
The Equation of  
Motion  
Matrices are  
Linear Operators  
Properties of  
Structural  
Matrices  
An example

The  
Homogeneous  
Problem

Modal Analysis

Examples

## Comment to the Steady State Solution

The steady state solution is

$$\mathbf{x}_{s-s} = \Delta_{st} \frac{1}{(\beta^2 - \frac{1}{2})(\beta^2 - 2)} \begin{Bmatrix} 1 - \beta^2 \\ 1 \end{Bmatrix} \sin \omega t.$$

As it's apparent in the previous slide, we have two different values of the excitation frequency for which the *dynamic amplification factor* goes to infinity.

For an undamped SDOF system, we had a single frequency of excitation that excites a *resonant response*, now for a two degrees of freedom system we have *two* excitation frequencies that excite a resonant response.

*We know how to compute a particular integral for a MDOF system (at least for a harmonic loading), what do we miss to be able to determine the integral of motion?*

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

An Example  
The Equation of  
Motion

Matrices are  
Linear Operators

Properties of  
Structural  
Matrices

An example

The  
Homogeneous  
Problem

Modal Analysis

Examples

## Homogeneous equation of motion

To understand the behaviour of a *MDOF* system, we start writing the homogeneous equation of motion,

$$\mathbf{M} \ddot{\mathbf{x}} + \mathbf{K} \mathbf{x} = 0.$$

The solution, in analogy with the *SDOF* case, can be written in terms of a harmonic function of unknown frequency and, using the concept of separation of variables, of a constant vector, the so called *shape vector*  $\boldsymbol{\psi}$ :

$$\mathbf{x}(t) = \boldsymbol{\psi}(A \sin \omega t + B \cos \omega t).$$

Substituting in the equation of motion, we have

$$(\mathbf{K} - \omega^2 \mathbf{M}) \boldsymbol{\psi}(A \sin \omega t + B \cos \omega t) = 0$$

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

The  
Homogeneous  
Problem

The  
Homogeneous  
Equation of  
Motion

Eigenvalues and  
Eigenvectors  
Eigenvectors are  
Orthogonal

Modal Analysis

Examples

## Eigenvalues

The previous equation must hold for every value of  $t$ , so it can be simplified removing the time dependency:

$$(\mathbf{K} - \omega^2 \mathbf{M}) \boldsymbol{\psi} = 0.$$

This is a homogeneous linear equation, with unknowns  $\psi_i$  and the coefficients that depends on the parameter  $\omega^2$ .

Speaking of homogeneous systems, we know that there is always a trivial solution,  $\boldsymbol{\psi} = 0$ , and that different non-zero solutions are available when the determinant of the matrix of coefficients is equal to zero,

$$\det(\mathbf{K} - \omega^2 \mathbf{M}) = 0$$

The *eigenvalues* of the *MDOF* system are the values of  $\omega^2$  for which the above equation (the *equation of frequencies*) is verified.

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

The  
Homogeneous  
Problem

The  
Homogeneous  
Equation of  
Motion

Eigenvalues and  
Eigenvectors  
Eigenvectors are  
Orthogonal

Modal Analysis

Examples

## Eigenvalues, cont.

For a system with  $N$  degrees of freedom the expansion of  $\det(\mathbf{K} - \omega^2 \mathbf{M})$  is an algebraic polynomial of degree  $N$  in  $\omega^2$ . A polynomial of degree  $N$  has exactly  $N$  roots, either real or complex conjugate.

In Dynamics of Structures those roots  $\omega_i^2$ ,  $i = 1, \dots, N$  are all real because the structural matrices are symmetric matrices. Moreover, if both  $\mathbf{K}$  and  $\mathbf{M}$  are positive definite matrices (a condition that is always satisfied by stable structural systems) all the roots, all the *eigenvalues*, are strictly positive:

$$\omega_i^2 \geq 0, \quad \text{for } i = 1, \dots, N.$$

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

The  
Homogeneous  
Problem

The  
Homogeneous  
Equation of  
Motion

**Eigenvalues and  
Eigenvectors**  
Eigenvectors are  
Orthogonal

Modal Analysis

Examples

## Eigenvectors

Substituting one of the  $N$  roots  $\omega_i^2$  in the characteristic equation,

$$(\mathbf{K} - \omega_i^2 \mathbf{M}) \boldsymbol{\psi}_i = 0$$

the resulting system of  $N - 1$  linearly independent equations can be solved (except for a scale factor) for  $\boldsymbol{\psi}_i$ , the eigenvector corresponding to the eigenvalue  $\omega_i^2$ .

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

The  
Homogeneous  
Problem

The  
Homogeneous  
Equation of  
Motion

**Eigenvalues and  
Eigenvectors**  
Eigenvectors are  
Orthogonal

Modal Analysis

Examples

## Eigenvectors

The scale factor being arbitrary, you have to choose (arbitrarily) the value of one of the components and compute the values of all the other  $N - 1$  components using the  $N - 1$  linearly independent equations.

It is common to impose to each eigenvector a *normalisation with respect to the mass matrix*, so that

$$\boldsymbol{\psi}_i^T \mathbf{M} \boldsymbol{\psi}_i = 1.$$

*Please consider that, substituting **different eigenvalues** in the equation of free vibrations, you have **different linear systems**, leading to **different eigenvectors**.*

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

The  
Homogeneous  
Problem

The  
Homogeneous  
Equation of  
Motion

**Eigenvalues and  
Eigenvectors**  
Eigenvectors are  
Orthogonal

Modal Analysis

Examples

## Initial Conditions

The most general expression (*the general integral*) for the displacement of a homogeneous system is

$$\mathbf{x}(t) = \sum_{i=1}^N \boldsymbol{\psi}_i (A_i \sin \omega_i t + B_i \cos \omega_i t).$$

In the general integral there are  $2N$  unknown *constants of integration*, that must be determined in terms of the initial conditions.

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

The  
Homogeneous  
Problem

The  
Homogeneous  
Equation of  
Motion

**Eigenvalues and  
Eigenvectors**  
Eigenvectors are  
Orthogonal

Modal Analysis

Examples

## Initial Conditions

Usually the initial conditions are expressed in terms of initial displacements and initial velocities  $\mathbf{x}_0$  and  $\dot{\mathbf{x}}_0$ , so we start deriving the expression of displacement with respect to time to obtain

$$\dot{\mathbf{x}}(t) = \sum_{i=1}^N \boldsymbol{\psi}_i \omega_i (A_i \cos \omega_i t - B_i \sin \omega_i t)$$

and evaluating the displacement and velocity for  $t = 0$  it is

$$\mathbf{x}(0) = \sum_{i=1}^N \boldsymbol{\psi}_i B_i = \mathbf{x}_0, \quad \dot{\mathbf{x}}(0) = \sum_{i=1}^N \boldsymbol{\psi}_i \omega_i A_i = \dot{\mathbf{x}}_0.$$

The above equations are vector equations, each one corresponding to a system of  $N$  equations, so we can compute the  $2N$  constants of integration solving the  $2N$  equations

$$\sum_{i=1}^N \boldsymbol{\psi}_{ji} B_i = x_{0,j}, \quad \sum_{i=1}^N \boldsymbol{\psi}_{ji} \omega_i A_i = \dot{x}_{0,j}, \quad j = 1, \dots, N.$$

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

The  
Homogeneous  
Problem

The  
Homogeneous  
Equation of  
Motion

**Eigenvalues and  
Eigenvectors**  
Eigenvectors are  
Orthogonal

Modal Analysis

Examples

## Orthogonality - 1

Take into consideration two distinct eigenvalues,  $\omega_r^2$  and  $\omega_s^2$ , and write the characteristic equation for each eigenvalue:

$$\mathbf{K} \boldsymbol{\psi}_r = \omega_r^2 \mathbf{M} \boldsymbol{\psi}_r$$

$$\mathbf{K} \boldsymbol{\psi}_s = \omega_s^2 \mathbf{M} \boldsymbol{\psi}_s$$

premultiply each equation member by the transpose of the *other* eigenvector

$$\boldsymbol{\psi}_s^T \mathbf{K} \boldsymbol{\psi}_r = \omega_r^2 \boldsymbol{\psi}_s^T \mathbf{M} \boldsymbol{\psi}_r$$

$$\boldsymbol{\psi}_r^T \mathbf{K} \boldsymbol{\psi}_s = \omega_s^2 \boldsymbol{\psi}_r^T \mathbf{M} \boldsymbol{\psi}_s$$

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

The  
Homogeneous  
Problem

The  
Homogeneous  
Equation of  
Motion

**Eigenvalues and  
Eigenvectors**  
**Eigenvectors are  
Orthogonal**

Modal Analysis

Examples



## Orthogonality - 2

The term  $\psi_s^T \mathbf{K} \psi_r$  is a scalar, hence

$$\psi_s^T \mathbf{K} \psi_r = (\psi_s^T \mathbf{K} \psi_r)^T = \psi_r^T \mathbf{K}^T \psi_s$$

but  $\mathbf{K}$  is symmetrical,  $\mathbf{K}^T = \mathbf{K}$  and we have

$$\psi_s^T \mathbf{K} \psi_r = \psi_r^T \mathbf{K} \psi_s.$$

By a similar derivation

$$\psi_s^T \mathbf{M} \psi_r = \psi_r^T \mathbf{M} \psi_s.$$

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

The  
Homogeneous  
Problem

The  
Homogeneous  
Equation of  
Motion

Eigenvalues and  
Eigenvectors  
**Eigenvectors are  
Orthogonal**

Modal Analysis

Examples

## Orthogonality - 3

Substituting our last identities in the previous equations, we have

$$\psi_r^T \mathbf{K} \psi_s = \omega_r^2 \psi_r^T \mathbf{M} \psi_s$$

$$\psi_r^T \mathbf{K} \psi_s = \omega_s^2 \psi_r^T \mathbf{M} \psi_s$$

subtracting member by member we find that

$$(\omega_r^2 - \omega_s^2) \psi_r^T \mathbf{M} \psi_s = 0$$

We started with the hypothesis that  $\omega_r^2 \neq \omega_s^2$ , so for every  $r \neq s$  we have that the corresponding eigenvectors are *orthogonal with respect to the mass matrix*

$$\psi_r^T \mathbf{M} \psi_s = 0, \quad \text{for } r \neq s.$$

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

The  
Homogeneous  
Problem

The  
Homogeneous  
Equation of  
Motion

Eigenvalues and  
Eigenvectors  
**Eigenvectors are  
Orthogonal**

Modal Analysis

Examples

## Orthogonality - 4

The eigenvectors are orthogonal also with respect to the stiffness matrix:

$$\psi_s^T \mathbf{K} \psi_r = \omega_r^2 \psi_s^T \mathbf{M} \psi_r = 0, \quad \text{for } r \neq s.$$

By definition

$$M_i = \psi_i^T \mathbf{M} \psi_i$$

and

$$\psi_i^T \mathbf{K} \psi_i = \omega_i^2 M_i.$$

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

The  
Homogeneous  
Problem

The  
Homogeneous  
Equation of  
Motion

Eigenvalues and  
Eigenvectors  
**Eigenvectors are  
Orthogonal**

Modal Analysis

Examples

## Eigenvectors are a base

The eigenvectors are linearly independent, so for every vector  $\mathbf{x}$  we can write

$$\mathbf{x} = \sum_{j=1}^N \psi_j q_j.$$

The coefficients are readily given by premultiplication of  $\mathbf{x}$  by  $\psi_i^T \mathbf{M}$ , because

$$\psi_i^T \mathbf{M} \mathbf{x} = \sum_{j=1}^N \psi_i^T \mathbf{M} \psi_j q_j = \psi_i^T \mathbf{M} \psi_i q_i = M_i q_i$$

in virtue of the orthogonality of the eigenvectors with respect to the mass matrix, and the above relationship gives

$$q_j = \frac{\psi_j^T \mathbf{M} \mathbf{x}}{M_j}.$$

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

The  
Homogeneous  
Problem

Modal Analysis

**Eigenvectors are a  
base**

EoM in Modal  
Coordinates

Initial Conditions

Examples

## Eigenvectors are a base

Generalising our results for the displacement vector to the acceleration vector, we can write

$$\begin{aligned} \mathbf{x}(t) &= \sum_{j=1}^N \psi_j q_j(t), & \ddot{\mathbf{x}}(t) &= \sum_{j=1}^N \psi_j \ddot{q}_j(t), \\ x_i(t) &= \sum_{j=1}^N \psi_{ij} q_j(t), & \ddot{x}_i(t) &= \sum_{j=1}^N \psi_{ij} \ddot{q}_j(t). \end{aligned}$$

Introducing  $\mathbf{q}(t)$ , the *vector of modal coordinates* and  $\Psi$ , the *eigenvector matrix*, whose columns are the eigenvectors, we can write

$$\mathbf{x}(t) = \Psi \mathbf{q}(t), \quad \ddot{\mathbf{x}}(t) = \Psi \ddot{\mathbf{q}}(t).$$

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

The  
Homogeneous  
Problem

Modal Analysis

**Eigenvectors are a  
base**

EoM in Modal  
Coordinates

Initial Conditions

Examples

## EoM in Modal Coordinates...

Substituting the last two equations in the equation of motion,

$$\mathbf{M} \Psi \ddot{\mathbf{q}} + \mathbf{K} \Psi \mathbf{q} = \mathbf{p}(t)$$

premultiplying by  $\Psi^T$

$$\Psi^T \mathbf{M} \Psi \ddot{\mathbf{q}} + \Psi^T \mathbf{K} \Psi \mathbf{q} = \Psi^T \mathbf{p}(t)$$

introducing the so called *starred matrices*, with  $\mathbf{p}^*(t) = \Psi^T \mathbf{p}(t)$ , we can finally write

$$\mathbf{M}^* \ddot{\mathbf{q}} + \mathbf{K}^* \mathbf{q} = \mathbf{p}^*(t)$$

The vector equation above corresponds to the set of scalar equations

$$p_i^* = \sum m_{ij}^* \ddot{q}_j + \sum k_{ij}^* q_j, \quad i = 1, \dots, N.$$

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

The  
Homogeneous  
Problem

Modal Analysis

**Eigenvectors are a  
base**

**EoM in Modal  
Coordinates**

Initial Conditions

Examples

## ... are N independent equations!

We must examine the structure of the starred symbols.

The generic element, with indexes  $i$  and  $j$ , of the *starred* matrices can be expressed in terms of single eigenvectors,

$$\begin{aligned} m_{ij}^* &= \psi_i^T \mathbf{M} \psi_j &= \delta_{ij} M_i, \\ k_{ij}^* &= \psi_i^T \mathbf{K} \psi_j &= \omega_i^2 \delta_{ij} M_i. \end{aligned}$$

where  $\delta_{ij}$  is the *Kronecker symbol*,

$$\delta_{ij} = \begin{cases} 1 & i = j \\ 0 & i \neq j \end{cases}$$

Substituting in the equation of motion, with  $p_i^* = \psi_i^T \mathbf{p}(t)$  we have **a set of uncoupled equations**

$$M_i \ddot{q}_i + \omega_i^2 M_i q_i = p_i^*(t), \quad i = 1, \dots, N$$

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

The  
Homogeneous  
Problem

Modal Analysis  
Eigenvectors are a  
base

**EsM in Modal  
Coordinates**  
Initial Conditions

Examples

## Initial Conditions Revisited

The initial displacements can be written in modal coordinates,

$$\mathbf{x}_0 = \Psi \mathbf{q}_0$$

and premultiplying both members by  $\Psi^T \mathbf{M}$  we have the following relationship:

$$\Psi^T \mathbf{M} \mathbf{x}_0 = \Psi^T \mathbf{M} \Psi \mathbf{q}_0 = \mathbf{M}^* \mathbf{q}_0.$$

Premultiplying by the inverse of  $\mathbf{M}^*$  and taking into account that  $\mathbf{M}^*$  is diagonal,

$$\mathbf{q}_0 = (\mathbf{M}^*)^{-1} \Psi^T \mathbf{M} \mathbf{x}_0 \Rightarrow q_{i0} = \frac{\psi_i^T \mathbf{M} \mathbf{x}_0}{M_i}$$

and, analogously,

$$\dot{q}_{i0} = \frac{\psi_i^T \mathbf{M} \dot{\mathbf{x}}_0}{M_i}$$

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks


The  
Homogeneous  
Problem

Modal Analysis  
Eigenvectors are a  
base

**EsM in Modal  
Coordinates**  
Initial Conditions

Examples

## 2 DOF System

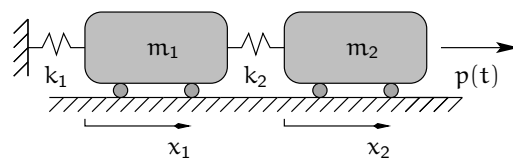

$$k_1 = k, \quad k_2 = 2k; \quad m_1 = 2m, \quad m_2 = m;$$

$$p(t) = p_0 \sin \omega t.$$

$$\mathbf{x} = \begin{Bmatrix} x_1 \\ x_2 \end{Bmatrix}, \quad \mathbf{p}(t) = \begin{Bmatrix} 0 \\ p_0 \end{Bmatrix} \sin \omega t,$$

$$\mathbf{M} = m \begin{bmatrix} 2 & 0 \\ 0 & 1 \end{bmatrix}, \quad \mathbf{K} = k \begin{bmatrix} 3 & -2 \\ -2 & 2 \end{bmatrix}.$$

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

The  
Homogeneous  
Problem

Modal Analysis

Examples

**2 DOF System**

## Equation of frequencies

The equation of frequencies is

$$\|\mathbf{K} - \omega^2 \mathbf{M}\| = \begin{vmatrix} 3k - 2\omega^2 m & -2k \\ -2k & 2k - \omega^2 m \end{vmatrix} = 0.$$

Developing the determinant

$$(2m^2)\omega^4 - (7mk)\omega^2 + (2k^2)\omega^0 = 0$$

Solving the algebraic equation in  $\omega^2$

$$\begin{aligned} \omega_1^2 &= \frac{k}{m} \frac{7 - \sqrt{33}}{4} & \omega_2^2 &= \frac{k}{m} \frac{7 + \sqrt{33}}{4} \\ \omega_1^2 &= 0.31386 \frac{k}{m} & \omega_2^2 &= 3.18614 \frac{k}{m} \end{aligned}$$

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

The  
Homogeneous  
Problem

Modal Analysis

Examples

2 DOF System

## Eigenvectors

Substituting  $\omega_1^2$  for  $\omega^2$  in the first of the characteristic equations gives the ratio between the components of the first eigenvector,

$$k(3 - 2 \times 0.31386)\psi_{11} - 2k\psi_{21} = 0$$

while substituting  $\omega_2^2$  gives

$$k(3 - 2 \times 3.18614)\psi_{12} - 2k\psi_{22} = 0.$$

Solving with the arbitrary assignment  $\psi_{21} = \psi_{22} = 1$  gives the *unnormalized* eigenvectors,

$$\psi_1 = \begin{Bmatrix} +0.84307 \\ +1.00000 \end{Bmatrix}, \quad \psi_2 = \begin{Bmatrix} -0.59307 \\ +1.00000 \end{Bmatrix}.$$

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

The  
Homogeneous  
Problem

Modal Analysis

Examples

2 DOF System

## Normalization

We compute first  $M_1$  and  $M_2$ ,

$$\begin{aligned} M_1 &= \psi_1^T \mathbf{M} \psi_1 \\ &= \{0.84307, \quad 1\} \begin{bmatrix} 2m & 0 \\ 0 & m \end{bmatrix} \begin{Bmatrix} 0.84307 \\ 1 \end{Bmatrix} \\ &= \{1.68614m, \quad m\} \begin{Bmatrix} 0.84307 \\ 1 \end{Bmatrix} = 2.42153m \end{aligned}$$

$$M_2 = 1.70346m$$

the *adimensional* normalisation factors are

$$\alpha_1 = \sqrt{2.42153}, \quad \alpha_2 = \sqrt{1.70346}.$$

Applying the normalisation factors to the respective unnormalised eigenvectors and collecting them in a matrix, we have the *matrix of normalized eigenvectors*

$$\Psi = \begin{bmatrix} +0.54177 & -0.45440 \\ +0.64262 & +0.76618 \end{bmatrix}$$

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

The  
Homogeneous  
Problem

Modal Analysis

Examples

2 DOF System

## Modal Loadings

The modal loading is

$$\begin{aligned} \mathbf{p}^*(t) &= \mathbf{\Psi}^T \mathbf{p}(t) \\ &= p_0 \begin{bmatrix} +0.54177 & +0.64262 \\ -0.45440 & +0.76618 \end{bmatrix} \begin{Bmatrix} 0 \\ 1 \end{Bmatrix} \sin \omega t \\ &= p_0 \begin{Bmatrix} +0.64262 \\ +0.76618 \end{Bmatrix} \sin \omega t \end{aligned}$$

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

The  
Homogeneous  
Problem

Modal Analysis

Examples

2 DOF System

## Modal EoM

Substituting its modal expansion for  $\mathbf{x}$  into the equation of motion and premultiplying by  $\mathbf{\Psi}^T$  we have the uncoupled modal equation of motion

$$\begin{cases} m\ddot{q}_1 + 0.31386k q_1 = +0.64262 p_0 \sin \omega t \\ m\ddot{q}_2 + 3.18614k q_2 = +0.76618 p_0 \sin \omega t \end{cases}$$

Note that all the terms are dimensionally correct. Dividing by  $m$  both equations, we have

$$\begin{cases} \ddot{q}_1 + \omega_1^2 q_1 = +0.64262 \frac{p_0}{m} \sin \omega t \\ \ddot{q}_2 + \omega_2^2 q_2 = +0.76618 \frac{p_0}{m} \sin \omega t \end{cases}$$

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

The  
Homogeneous  
Problem

Modal Analysis

Examples

2 DOF System

## Particular Integral

We set

$$\xi_1 = C_1 \sin \omega t, \quad \ddot{\xi}_1 = -\omega^2 C_1 \sin \omega t$$

and substitute in the first modal EoM:

$$C_1 (\omega_1^2 - \omega^2) \sin \omega t = \frac{p_1^*}{m} \sin \omega t$$

solving for  $C_1$

$$C_1 = \frac{p_1^*}{m} \frac{1}{\omega_1^2 - \omega^2}$$

with  $\omega_1^2 = K_1/m \Rightarrow m = K_1/\omega_1^2$ :

$$C_1 = \frac{p_1^*}{K_1} \frac{\omega_1^2}{\omega_1^2 - \omega^2} = \Delta_{st}^{(1)} \frac{1}{1 - \beta_1^2} \quad \text{with } \Delta_{st}^{(1)} = \frac{p_1^*}{K_1} = 2.047 \frac{p_0}{k} \text{ and } \beta_1 = \frac{\omega}{\omega_1}$$

of course

$$C_2 = \Delta_{st}^{(2)} \frac{1}{1 - \beta_2^2} \quad \text{with } \Delta_{st}^{(2)} = \frac{p_2^*}{K_2} = 0.2404 \frac{p_0}{k} \text{ and } \beta_2 = \frac{\omega}{\omega_2}$$

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

The  
Homogeneous  
Problem

Modal Analysis

Examples

2 DOF System

## Integrals

The integrals, for our loading, are thus

$$\begin{cases} q_1(t) = A_1 \sin \omega_1 t + B_1 \cos \omega_1 t + \Delta_{st}^{(1)} \frac{\sin \omega t}{1 - \beta_1^2} \\ q_2(t) = A_2 \sin \omega_2 t + B_2 \cos \omega_2 t + \Delta_{st}^{(2)} \frac{\sin \omega t}{1 - \beta_2^2} \end{cases}$$

for a system initially at rest

$$\begin{cases} q_1(t) = \Delta_{st}^{(1)} \frac{1}{1 - \beta_1^2} (\sin \omega t - \beta_1 \sin \omega_1 t) \\ q_2(t) = \Delta_{st}^{(2)} \frac{1}{1 - \beta_2^2} (\sin \omega t - \beta_2 \sin \omega_2 t) \end{cases}$$

we are interested in structural degrees of freedom, too... disregarding transient

$$\begin{cases} x_1(t) = \left( \psi_{11} \frac{\Delta_{st}^{(1)}}{1 - \beta_1^2} + \psi_{12} \frac{\Delta_{st}^{(2)}}{1 - \beta_2^2} \right) \sin \omega t = \left( \frac{1.10926}{1 - \beta_1^2} - \frac{0.109271}{1 - \beta_2^2} \right) \frac{p_0}{k} \sin \omega t \\ x_2(t) = \left( \psi_{21} \frac{\Delta_{st}^{(1)}}{1 - \beta_1^2} + \psi_{22} \frac{\Delta_{st}^{(2)}}{1 - \beta_2^2} \right) \sin \omega t = \left( \frac{1.31575}{1 - \beta_1^2} + \frac{0.184245}{1 - \beta_2^2} \right) \frac{p_0}{k} \sin \omega t \end{cases}$$

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

The  
Homogeneous  
Problem


Modal Analysis

Examples

2 DOF System

## The response in modal coordinates

To have a feeling of the response in modal coordinates, let's say that the frequency of the load is  $\omega = 2\omega_0$ , hence  $\beta_1 = \frac{2.0}{\sqrt{0.31386}} = 6.37226$  and  $\beta_2 = \frac{2.0}{\sqrt{3.18614}} = 0.62771$ .

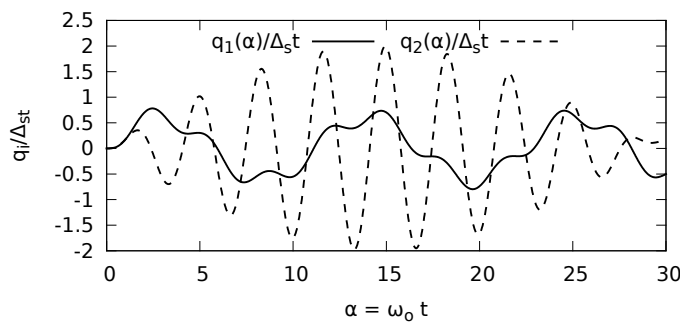

In the graph above, the responses are plotted against an adimensional time coordinate  $\alpha$  with  $\alpha = \omega_0 t$ , while the ordinates are adimensionalised with respect to  $\Delta_{st} = \frac{p_0}{k}$

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

The  
Homogeneous  
Problem


Modal Analysis

Examples

2 DOF System

## The response in structural coordinates

Using the same normalisation factors, here are the response functions in terms of  $x_1 = \psi_{11} q_1 + \psi_{12} q_2$  and  $x_2 = \psi_{21} q_1 + \psi_{22} q_2$ :

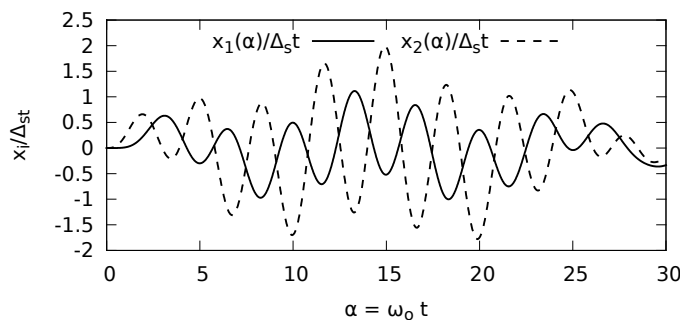

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

The  
Homogeneous  
Problem

Modal Analysis

Examples

2 DOF System