



Test

Andrew

Client: Andrew



brightgreen

Area 1

Area 1 summary


Electrical



Total Power: 129W
Legal Power Limit: 5W p/sqm
Average Power: 2W p/sqm

Photometric

Recommended Lumens: 6367lm
Reached Lumens: 8262lm

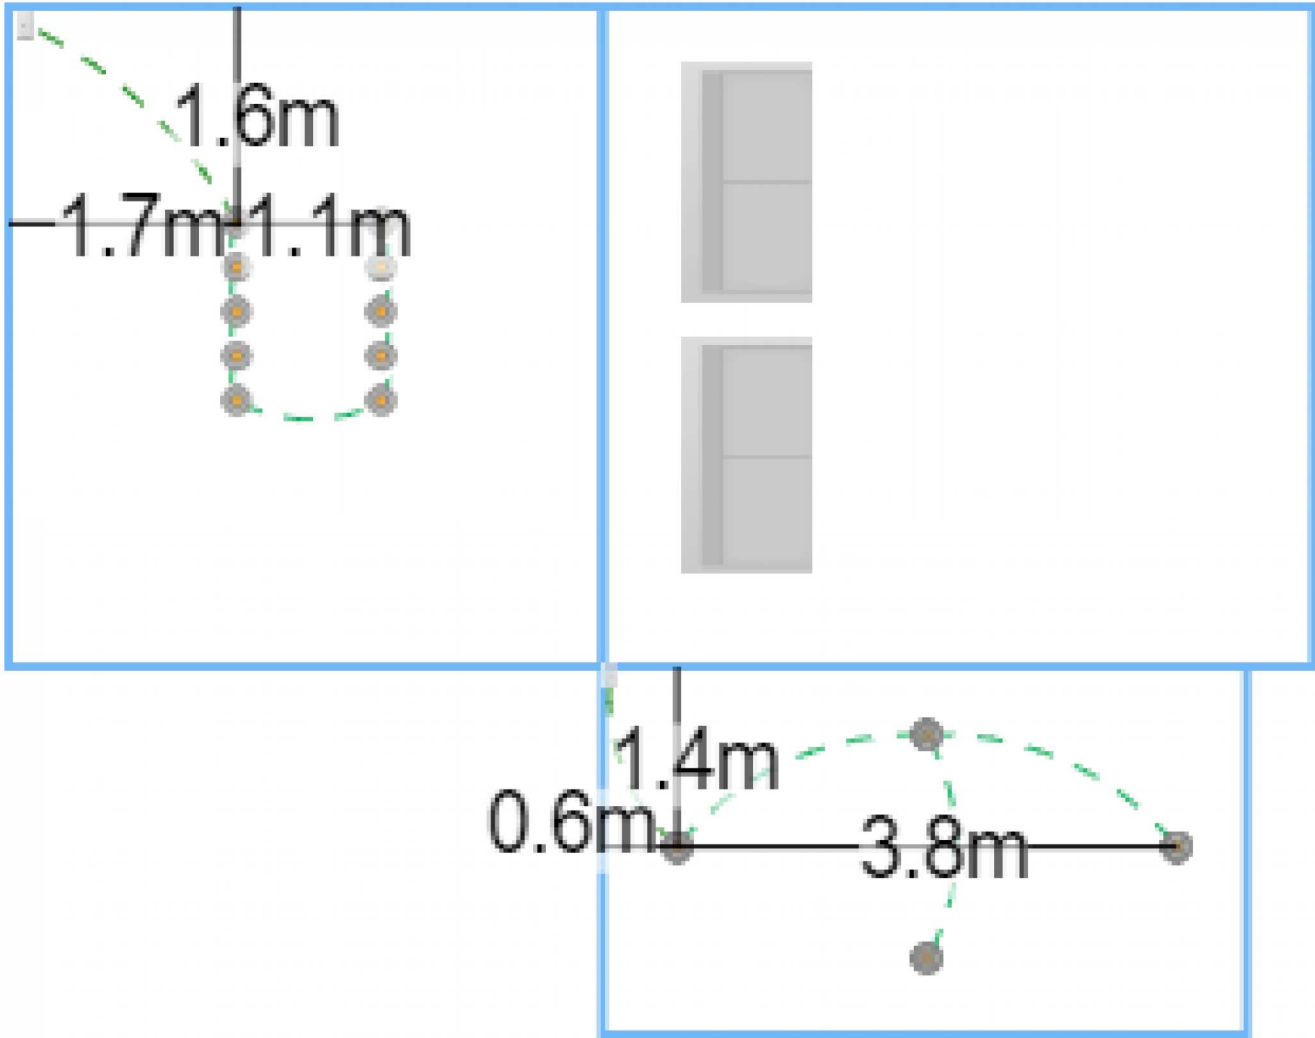Summary



Product	Units
solar	2
 D700-CR-3K-60-S	4
light-switch	2
 D550-CR-3K-36-S	10
Wiring	~13.22m

Lighting Design	PREPARE FOR: Area 1	Client: Andrew	Designer: Andrew
		Date: 10/12/2015	Contact:
		Square Metres: 63sqm	Email: andrewk@brightgreen.com

Summary

Area 1 - Roof

Electrical

Total Power: 0W

Recommended Wattage: 134.5W

Average Power: 0W p/sqm

Photometric

Recommended Lumens: 2001lm

Reached Lumens: 0lm

Reflectivity: Light

Assets

solar: 2

Area 1 - Room 3

Electrical

Total Power: 42W

Recommended Wattage: 68W

Average Power: 3.1W p/sqm

Photometric

Recommended Lumens: 1015lm

Reached Lumens: 2812lm

Reflectivity: Light

Assets

d700-cr-3k-60-s: 4

light-switch: 1

Area 1 - Toilet

Electrical

Total Power: 87W

Recommended Wattage: 112.5W

Average Power: 3.9W p/sqm

Photometric

Recommended Lumens: 3351lm

Reached Lumens: 5450lm

Reflectivity: Light


Assets

d550-cr-3k-36-s: 10

light-switch: 1

D400 Curve LED downlight

Datasheet

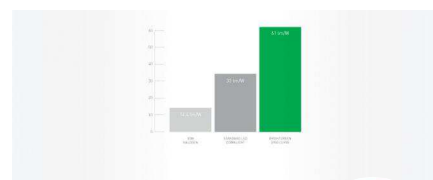

Product codes

Unit: D400	Family: CR	Colour temp. (K): 3K 5K	Beam angle (°): 36	Colour: S (Silver) W (White)
----------------------	----------------------	--------------------------------------	------------------------------	---

Electrical

Power Usage: 7W	Driver Power Factor: >0.9	IP Rating: IP44	Surge Protection: 3100V	Cable Length: 1.5m
Dimming Range: 3-100%	Driver: ED-CU3506HPA	Input Voltage: 220-240V	Colour Temperature: 3000K or 5000K	

Operational

Ambient Temp.: -28 to 65°C	Lumen Output: 400lm or 444lm	Efficacy: 57lm/W or 63lm/W	Beam Angle: 36°	Light Quality: 95CRI
Operating Temp.: -30 to 85°C	Average Temp.: 64°C	Lifetime: 70000 hrs		

Physical

Warranty: 7 years	Gimble Angle: ±15°	Weight: 310g	Fascia Colour: White or Silver
-----------------------------	------------------------------	------------------------	--

D700 Curve LED downlight

Datasheet



Product codes

Unit:	Family:	Base type:	Colour temp. (K):	Beam angle (°):	Colour:
D700	CR	GU10	3K 4K	40 60	W (White)

Electrical

Power Usage:	Driver Power Factor:	IP Rating:	Surge Protection:	Cable Length:
10.5W	~0.95	IP30	3100V	1.5m
Dimming Range:	Input Voltage:	Colour Temperature:		
10-100%	240V	3000K or 4000K		

Operational

Ambient Temp.:	Lumen Output:	Efficacy:	Beam Angle:	Light Quality:
-28 to 60°C	720lm or 703lm or 756lm or 738lm	69lm/W or 67lm/W or 72lm/W or 70lm/W	40° or 60°	83CRI
Operating Temp.:	Average Temp.:	Lifetime:		
-30 to 85°C	65°C	40000 hrs		

Physical

Warranty:	Type:	Gimble Angle:	Weight:	Fascia Colour:
3 years	GU10	±15°	200g	White