

# Profile PDS-T

Ref. A02057



IP20

IP67

CE

UK  
CA



- Mounting to 12,5 mm - 0.50" drywall
- No collision with the ceiling structure
- Stable mounting to a suspended ceiling
- Non visible aluminum elements

## APPLICATION

- main and decorative lighting


## MOUNTING

- in drywall, with screws

## ADDITIONAL INFORMATION

- smooth transition from a recessed into a suspended fixture
- in order to protect the lighting fixture during installation, a TECH-KA protective insert should be used
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

## TECHNICAL DRAWING



## TECHNICAL SPECIFICATIONS

|                                               |                                                                                                         |
|-----------------------------------------------|---------------------------------------------------------------------------------------------------------|
| Material                                      | aluminum                                                                                                |
| Color                                         |  silver non anodized |
| Possible fixture IP                           | 20, 67                                                                                                  |
| Possible fixture shapes                       | linear, polygonal                                                                                       |
| Profile cross-section                         | rectangular                                                                                             |
| Width                                         | 52.2 mm                                                                                                 |
| Height                                        | 15 mm                                                                                                   |
| LED gluing width A                            | 14 mm                                                                                                   |
| Number of LED strips A (8 mm wide)            | 1                                                                                                       |
| Width of the glow                             | 11.2 mm                                                                                                 |
| Max power of a single KLUŚ LED strip          | 24 W/m                                                                                                  |
| Possibility of obtaining a line of light      | yes                                                                                                     |
| Building type                                 | Commercial, HoReCa object, Retail, Residential, Entertainment/ Arts, Outdoor                            |
| Facility zone                                 | office, lobby / foyer, media rooms / av                                                                 |
| The cover is cut to the length of the profile | yes                                                                                                     |
| Can be easily connected into runs             | yes                                                                                                     |

| Length  | Ref       |
|---------|-----------|
| 1000 mm | A02057N_1 |
| 2005 mm | A02057N_2 |
| 3010 mm | A02057N_3 |

Standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance  $\pm 1.5$  mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)

|                            |     |
|----------------------------|-----|
| Mounting to drywall        | yes |
| To cover with plaster      | yes |
| Wire out back of extrusion | yes |

## LINE OF LIGHT TABLE

| LED tape        | LIGER-11 satin | LIGER-11 black | HS-11 frosted | KA-11 frosted, | KA-T-11R frosted |
|-----------------|----------------|----------------|---------------|----------------|------------------|
| K-0360-24       | ✓ (1)          | X              | ✓ (1)         | ✓ (1)          | ✓ (1)            |
| K-0720-24       | ✓ (1)          | X              | ✓ (1)         | ✓ (1)          | ✓ (1)            |
| K-1080-24       | ✓ (1)          | X              | ✓ (1)         | ✓ (1)          | ✓ (1)            |
| K-HD-0430-24    | ✓ (1)          | ✓ (1)          | ✓ (1)         | ✓ (1)          | ✓ (1)            |
| K-HD-0830-24    | ✓ (1)          | ✓ (1)          | ✓ (1)         | ✓ (1)          | ✓ (1)            |
| K-HD-1260-24    | ✓ (1)          | ✓ (1)          | ✓ (1)         | ✓ (1)          | ✓ (1)            |
| KWP-8K-0360-24  | ✓ (1)          | X              | ✓ (1)         | ✓ (1)          | ✓ (1)            |
| KWP-8K-0720-24  | ✓ (1)          | X              | ✓ (1)         | ✓ (1)          | ✓ (1)            |
| KWP-8K-1080-24  | ✓ (1)          | X              | ✓ (1)         | ✓ (1)          | ✓ (1)            |
| KWP-GHD-0430-24 | ✓ (1)          | ✓ (1)          | ✓ (1)         | ✓ (1)          | ✓ (1)            |
| KWP-GHD-0830-24 | ✓ (1)          | ✓ (1)          | ✓ (1)         | ✓ (1)          | ✓ (1)            |
| K-2400-24       | ✓ (1)          | X              | ✓ (1)         | ✓ (1)          | ✓ (1)            |
| K-RGBW-1530-24  | ✓ (1)          | ✓ (1)          | ✓ (1)         | ✓ (1)          | ✓ (1)            |
| K-RGB-0700-24V  | ✓ (1)          | X              | X             | ✓ (1)          | ✓ (1)            |
| K-RGB-1200-24   | ✓ (1)          | X              | X             | ✓ (1)          | ✓ (1)            |

## Description

✓ - Line of Light for a number (X) of rows - Pixel free imaging

X - Visible Dotting from Diodes

HL - Centered Line of Light - Concentrated in middle

HL (X) - Centered Line of Light for a number (X) of rows - Concentrated in middle

## Line of Light Guide



Clean Line of Light (Pixel free imaging)



Centered Line of Light




Visible Dotting from Diodes

# Profile PDS-T

Ref. A02057

## SAMPLE PROJECTS

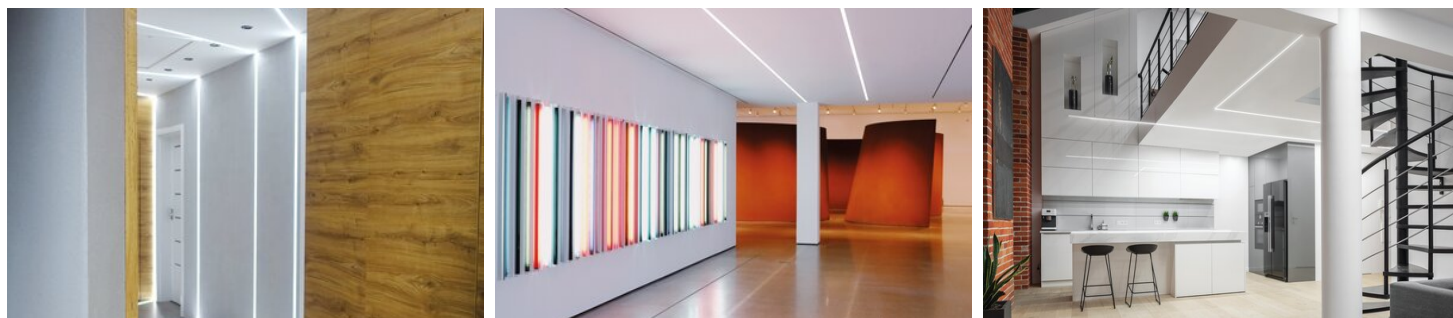

## SIMILAR PROFILES



**Profile PDS-ZM-PLUS**  
A02056



**Profile PDS-ZMG**  
A01418



**Profile PDS-UST**  
A02725



**Profile KOZMA**  
A18040



**Profile PDS-NK**  
A01588



**Profile PDS-H**  
A09204

## RELATED ACCESSORIES > COVERS

| NAME                          |                                                                                   | KEY FEATURES                                                                                                                                                                                      | MATERIAL | MATERIAL TRANSMITTANCE | COLOR            | REF.    |
|-------------------------------|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|------------------------|------------------|---------|
| Cover LIGER-11                |  | <ul style="list-style-type: none"> <li>- high light quality</li> <li>- Ease of obtaining a line of light</li> <li>- Perfectly diffusing</li> <li>- For indoor and outdoor applications</li> </ul> | PC       | 21 %                   | black            | B17037B |
|                               |                                                                                   |                                                                                                                                                                                                   |          | 59 %                   | satin            | B17037S |
| Cover HS-11                   |  | <ul style="list-style-type: none"> <li>- For indoor and outdoor applications</li> <li>- UV resistant</li> <li>- high durability</li> </ul>                                                        | PC       | 59 %                   | frosted          | B17208F |
|                               |                                                                                   |                                                                                                                                                                                                   |          | 88 %                   | clear            | B17208C |
| Focusing cover LENS-11-30°DEG |  | <ul style="list-style-type: none"> <li>- indoor use</li> <li>- focusing</li> </ul>                                                                                                                | PC       | 80 %                   | semi-transparent | B17112T |
| Cover KA-11                   |  | <ul style="list-style-type: none"> <li>- maximum brightness</li> <li>- indoor use</li> <li>- basic</li> <li>- universal</li> </ul>                                                                | PC       | 67 %                   | frosted          | B17064F |
|                               |                                                                                   |                                                                                                                                                                                                   |          | 89 %                   | clear            | B17064C |
| Cover KA-T-11                 |  | <ul style="list-style-type: none"> <li>- maximum brightness</li> <li>- indoor use</li> <li>- economic</li> <li>- universal for basic applications</li> </ul>                                      | PVC      | 54 %                   | frosted          | B17179F |
|                               |                                                                                   |                                                                                                                                                                                                   |          | 86 %                   | clear            | B17179C |

## RELATED ACCESSORIES > END CAPS

| NAME                |                                                                                     | MATERIAL | COLOR                                                                                        | REF.      |
|---------------------|-------------------------------------------------------------------------------------|----------|----------------------------------------------------------------------------------------------|-----------|
| End cap PDS-ZM-PLUS |  | ABS      |  black  | C24364C07 |
|                     |                                                                                     |          |  gray   | C24364C02 |
|                     |                                                                                     |          |  silver | C24364L01 |
|                     |                                                                                     |          |  white  | C24364C10 |

## RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CCT

| Name                       | Key features                                                                                 | IP protection rating | Power consumption | Ref.              |
|----------------------------|----------------------------------------------------------------------------------------------|----------------------|-------------------|-------------------|
| LED tape K-RGBW-1530-24    | <ul style="list-style-type: none"> <li>- RGBW (3000K)</li> <li>- high LED density</li> </ul> | 20                   | 15.3 W/m          | K-RGBW-1530-24    |
| LED tape KWP-8KRGB-0700-24 | <ul style="list-style-type: none"> <li>- RGB</li> <li>- easy snap-in installation</li> </ul> | 65                   | 7 W/m             | KWP-8KRGB-0700-24 |
| LED tape K-RGB-0700-24V    | <ul style="list-style-type: none"> <li>- RGB</li> </ul>                                      | 20                   | 7 W/m             | K-RGB-0700-24V    |
| LED tape K-RGB-1200-24     | <ul style="list-style-type: none"> <li>- RGB</li> </ul>                                      | 20                   | 12 W/m            | K-RGB-1200-24     |

## RELATED ACCESSORIES > RELATED LED > WHITE MONO

# Profile PDS-T

## Ref. A02057

| Name                                              | Key features                       | IP protection rating | Power consumption | Ref.                                                                                                  |
|---------------------------------------------------|------------------------------------|----------------------|-------------------|-------------------------------------------------------------------------------------------------------|
| LED tape KWP-8K-0360-24 3.6 W/m, IP65 <b>NEW</b>  |                                    | 65                   | 3.6 W/m           | KWP-8K27-0360-24<br>KWP-8K30-0360-24<br>KWP-8K35-0360-24<br>KWP-8K40-0360-24<br>KWP-8K50-0360-24      |
| LED tape KWP-8K-0720-24 7.2 W/m, IP65 <b>NEW</b>  |                                    | 65                   | 7.2 W/m           | KWP-8K27-0720-24<br>KWP-8K30-0720-24<br>KWP-8K35-0720-24<br>KWP-8K40-0720-24<br>KWP-8K50-0720-24      |
| LED tape KWP-8K-1080-24 10.8 W/m, IP65 <b>NEW</b> |                                    | 65                   | 10.8 W/m          | KWP-8K27-1080-24<br>KWP-8K30-1080-24<br>KWP-8K35-1080-24<br>KWP-8K40-1080-24<br>KWP-8K50-1080-24      |
| LED tape KWP-GHD-0430-24 4.3 W/m, IP65 <b>NEW</b> |                                    | 65                   | 4.3 W/m           | KWP-GHD27-0430-24<br>KWP-GHD30-0430-24<br>KWP-GHD35-0430-24<br>KWP-GHD40-0430-24<br>KWP-GHD50-0430-24 |
| LED tape KWP-GHD-0830-24 8.3 W/m, IP65 <b>NEW</b> |                                    | 65                   | 8.3 W/m           | KWP-GHD27-0830-24<br>KWP-GHD30-0830-24<br>KWP-GHD35-0830-24<br>KWP-GHD40-0830-24<br>KWP-GHD50-0830-24 |
| LED tape K-0360-24 3.6 W/m, IP20 <b>NEW</b>       |                                    | 20                   | 3.6 W/m           | K-27-0360-24<br>K-30-0360-24<br>K-35-0360-24<br>K-40-0360-24<br>K-50-0360-24                          |
| LED tape K-0720-24 7.2 W/m, IP20 <b>NEW</b>       |                                    | 20                   | 7.2 W/m           | K-27-0720-24<br>K-30-0720-24<br>K-35-0720-24<br>K-40-0720-24<br>K-50-0720-24                          |
| LED tape K-1080-24 10.8 W/m, IP20 <b>NEW</b>      |                                    | 20                   | 10.8 W/m          | K-27-1080-24<br>K-30-1080-24<br>K-35-1080-24<br>K-40-1080-24<br>K-50-1080-24                          |
| LED tape K-HD-0430-24 4.3 W/m, IP20 <b>NEW</b>    |                                    | 20                   | 4.3 W/m           | K-HD27-0430-24<br>K-HD30-0430-24<br>K-HD35-0430-24<br>K-HD40-0430-24<br>K-HD50-0430-24                |
| LED tape K-HD-0830-24 8.3 W/m, IP20 <b>NEW</b>    |                                    | 20                   | 8.3 W/m           | K-HD27-0830-24<br>K-HD30-0830-24<br>K-HD35-0830-24<br>K-HD40-0830-24<br>K-HD50-0830-24                |
| LED tape K-HD-1260-24 12.6 W/m, IP20 <b>NEW</b>   |                                    | 20                   | 12.6 W/m          | K-HD27-1260-24<br>K-HD30-1260-24<br>K-HD35-1260-24<br>K-HD40-1260-24<br>K-HD50-1260-24                |
| LED tape K-0480-24                                | - universal for basic applications | 20                   | 4.8 W/m           | K-27-0480-24<br>K-30-0480-24<br>K-35-0480-24<br>K-40-0480-24<br>K-50-0480-24                          |

# Profile PDS-T

## Ref. A02057

| Name                                    | Key features                                              | IP protection rating | Power consumption | Ref.                                                                                                                                 |
|-----------------------------------------|-----------------------------------------------------------|----------------------|-------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| LED tape K-0960-24                      | - universal for basic applications                        | 20                   | 9.6 W/m           | K-27-0960-24<br>K-30-0960-24<br>K-30-0960-24-R30<br>K-35-0960-24<br>K-40-0960-24<br>K-40-0960-24-R30<br>K-50-0960-24<br>K-65-0960-24 |
| LED tape K-1440-24                      | - universal for basic applications                        | 20                   | 14.4 W/m          | K-27-1440-24<br>K-30-1440-24<br>K-30-1440-24-R30<br>K-35-1440-24<br>K-40-1440-24<br>K-40-1440-24-R30<br>K-50-1440-24                 |
| LED tape KWP-GHD-0480-24                | - high LED density<br>- Ease of obtaining a line of light | 65                   | 4.8 W/m           | KWP-GHD27-0480-24<br>KWP-GHD30-0480-24<br>KWP-GHD35-0480-24<br>KWP-GHD40-0480-24<br>KWP-GHD50-0480-24                                |
| LED tape KWP-GHD-1260-24 12.6 W/m, IP65 |                                                           | 65                   | 12.6 W/m          | KWP-GHD27-1260-24<br>KWP-GHD30-1260-24<br>KWP-GHD35-1260-24<br>KWP-GHD40-1260-24<br>KWP-GHD50-1260-24                                |
| LED tape K-2300-24                      | - high power                                              | 20                   | 23 W/m            | K-30-2300-24<br>K-40-2300-24                                                                                                         |
| LED tape K-2400-24                      | - high power                                              | 20                   | 24 W/m            | K-27-2400-24<br>K-30-2400-24<br>K-35-2400-24<br>K-40-2400-24<br>K-50-2400-24                                                         |

### RELATED ACCESSORIES > RELATED LED > CRI 95+

| Name                  | Key features                                        | IP protection rating | Power consumption | Ref.                                                                                   |
|-----------------------|-----------------------------------------------------|----------------------|-------------------|----------------------------------------------------------------------------------------|
| LED tape K-CR-0480-24 | - universal for basic applications<br>- CRI over 95 | 20                   | 4.8 W/m           | K-CR27-0480-24<br>K-CR30-0480-24<br>K-CR35-0480-24<br>K-CR40-0480-24<br>K-CR50-0480-24 |

### RELATED ACCESSORIES > RELATED LED > ADJUSTABLE WHITE / DIM TO WARM

| Name                     | Key features        | IP protection rating | Power consumption | Ref.            |
|--------------------------|---------------------|----------------------|-------------------|-----------------|
| LED tape K-27T50-1440-24 | - RGB+Tunable White | 20                   | 14.4 W/m          | K-27T50-1440-24 |

### RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > OTHER

| Name          | Key features                           | Material                        | Color | Ref.      |
|---------------|----------------------------------------|---------------------------------|-------|-----------|
| Gland 9x1,5   |                                        | Materiał, Material, multiselect |       | C42295C07 |
| Gland 11x1,5  |                                        | rubber                          |       | C42296C07 |
| Gland 6,4x1,6 |                                        | rubber                          |       | C24518C07 |
| Gland M10x1   | - metal housing<br>- with M10x1 thread | mosiǳnik nielowany              |       | C28275N00 |

# Profile PDS-T

## Ref. A02057

| Name                                | Key features                                | Material                        | Color | Ref.      |
|-------------------------------------|---------------------------------------------|---------------------------------|-------|-----------|
| Hermetic coupler THB.391.A4A, 4 pin | - 4 power terminals<br>- compact dimensions | PA                              |       | C42268C10 |
| Hermetic coupler THB.381, 2pin      | - 2 power terminals<br>- compact dimensions | PA                              |       | C28125C07 |
| Hermetic coupler THB.391.A5A, 5 pin | - 5 power terminals<br>- compact dimensions | PA                              |       | C28156C07 |
| Joint connector THB.200.E5E, 5 pin  | - 5 power terminals<br>- 3-line branch      | Material, Material, multiselect |       | C28157C07 |

### RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > ADDITIONAL ITEMS

| Name          | Key features                             | Material | Color                                                                                                | Ref.   |
|---------------|------------------------------------------|----------|------------------------------------------------------------------------------------------------------|--------|
| Adapter LENSO | - Necessary when using the DILENSO cover | PC       |  transparent glossy | E62146 |

### RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONNECTORS

| Name            | Material        | Color                                                                                             | Ref.      |
|-----------------|-----------------|---------------------------------------------------------------------------------------------------|-----------|
| Connector ZM    | stainless steel |  silver          | 42716     |
|                 |                 |  silver          | 42717     |
|                 |                 |  silver          | 42720     |
|                 |                 |  silver         | 42728     |
|                 |                 |  black colored | C24797C07 |
|                 |                 | colorless non colored                                                                             | C24797N00 |
|                 |                 |  black colored | C28070C07 |
|                 |                 |  silver        | C28070N00 |
|                 |                 |  black colored | C28071C07 |
|                 |                 |  silver        | C28071N00 |
|                 |                 |  black colored | C28072C07 |
|                 |                 |  silver        | C28072N00 |
|                 |                 |  black colored | C28073C07 |
|                 |                 |  silver        | C28073N00 |
|                 |                 |  black colored | C28074C07 |
|                 |                 |  silver        | C28074N00 |
|                 |                 |  black colored | C28075C07 |
|                 |                 |  silver        | C28075N00 |
|                 |                 |  silver        | C28243N00 |
| Connector ZM-NA | stainless steel |                                                                                                   | 42305     |
|                 |                 |                                                                                                   | 42339     |
|                 |                 |  silver        | 42723     |
|                 |                 |                                                                                                   | 42724     |
|                 |                 |                                                                                                   | 42725     |
| Connector ZM-Y  | stainless steel |                                                                                                   | C28242N00 |
|                 |                 |                                                                                                   |           |
| Connector ZM-Y  | stainless steel |  black colored | C28082C07 |
|                 |                 |  silver        | C28082N00 |
| Connector ZM-X  | stainless steel |  black colored | C28079C07 |
|                 |                 |  silver        | C28079N00 |
|                 |                 |  black colored | C28080C07 |
|                 |                 |  silver        | C28080N00 |
|                 |                 |  black colored | C28081C07 |
|                 |                 |  silver        | C28081N00 |
| Connector ZM-T  | stainless steel |  black colored | C28076C07 |
|                 |                 |  silver        | C28076N00 |
|                 |                 |  black colored | C28077C07 |
|                 |                 |  silver        | C28077N00 |
|                 |                 |  black colored | C28078C07 |
|                 |                 |  silver        | C28078N00 |

| Name              | Material        | Color                                                                                           | Ref.      |
|-------------------|-----------------|-------------------------------------------------------------------------------------------------|-----------|
| Connector ZM-PION | stainless steel |  silver        | 42314     |
|                   |                 |  silver        | 42316     |
|                   |                 |  silver        | 42320     |
|                   |                 |  silver        | 42718     |
|                   |                 |  silver        | 42719     |
|                   |                 |  black colored | C28084C07 |
|                   |                 |  silver        | C28084N00 |
|                   |                 |  black colored | C28085C07 |
|                   |                 |  silver        | C28085N00 |
|                   |                 |  black colored | C28086C07 |
|                   |                 |  silver        | C28086N00 |
|                   |                 |  black colored | C28087C07 |
|                   |                 |  silver        | C28087N00 |
|                   |                 |  black colored | C28088C07 |
|                   |                 |  silver        | C28088N00 |

## RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > TECHNICAL AND PROTECTIVE INSERTS

| Name                                                                                                        | Key features                                             | Material | Color                                                                                          | Ref.                                      |
|-------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|----------|------------------------------------------------------------------------------------------------|-------------------------------------------|
| Protective insert TECH-11  | - Protection of the fixture interior during installation | PVC      |  gray colored | C24574C02_1<br>C24574C02_2<br>C24574C02_3 |

## RELATED ACCESSORIES > ELECTRONICS > SWITCHES

| Name                                                                                                         | Key features                                                                | IP protection rating | Ref.     |
|--------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|----------------------|----------|
| Proximity switch UNI-11   | - touchless switch<br>- width 11mm                                          | 20                   | E61603   |
| Proximity switch UNI-11P  | - touchless switch<br>- width 11mm<br>- factory pre-soldered wires          | 20                   | E61604   |
| Proximity switch UNI-P                                                                                       | - touchless switch<br>- width only 7mm<br>- factory pre-soldered wires      | 20                   | E61580   |
| Switch MICRO 96W IP20                                                                                        | - push button switch<br>- factory pre-soldered wires                        | 20                   | 1491     |
| Switch MICRO 96W IP20                                                                                        | - push button switch<br>- factory pre-soldered wires<br>- version with logo | 20                   | 1491LOGO |
| Proximity switch UNI                                                                                         | - touchless switch<br>- width only 7mm                                      | 20                   | E61579   |