



IP20



- Mounting to 16 mm | 0.63" drywall
- No collision with the ceiling structure
- Stable mounting to a suspended ceiling
- Non visible aluminum elements

APPLICATION

- main and decorative lighting


MOUNTING

- in drywall, with screws

ADDITIONAL INFORMATION

- smooth transition from a recessed into a suspended fixture
- in order to protect the lighting fixture during installation, a TECH-KA protective insert should be used
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING



TECHNICAL SPECIFICATIONS

Material	aluminum
Color	 silver non anodized
Possible fixture IP	20
Possible fixture shapes	linear, polygonal
Profile cross-section	rectangular
Width	52.2 mm
Height	19 mm
LED gluing width A	14 mm
Number of LED strips A (8 mm wide)	1
Width of the glow	11.2 mm
Max power of a single KLUŚ LED strip	24 W/m
Possibility of obtaining a line of light	yes
Building type	Commercial, HoReCa object, Retail, Residential, Entertainment/ Arts, Outdoor
Facility zone	office, lobby / foyer, media rooms / av
The cover is cut to the length of the profile	yes
Can be easily connected into runs	yes

Length	Ref
1000 mm	A02725N_1
2005 mm	A02725N_2
3010 mm	A02725N_3

Standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)

Mounting to drywall	yes
To cover with plaster	yes
Wire out back of extrusion	yes

LINE OF LIGHT TABLE

LED tape	LIGER-11 satin	LIGER-11 black	HS-11 frosted	KA-11 frosted,	KA-T-11R frosted
K-0360-24	✓ (1)	X	✓ (1)	✓ (1)	✓ (1)
K-0720-24	✓ (1)	X	✓ (1)	✓ (1)	✓ (1)
K-1080-24	✓ (1)	X	✓ (1)	✓ (1)	✓ (1)
K-HD-0430-24	✓ (1)	✓ (1)	✓ (1)	✓ (1)	✓ (1)
K-HD-0830-24	✓ (1)	✓ (1)	✓ (1)	✓ (1)	✓ (1)
K-HD-1260-24	✓ (1)	✓ (1)	✓ (1)	✓ (1)	✓ (1)
K-2400-24	✓ (1)	X	✓ (1)	✓ (1)	✓ (1)
K-RGBW-1530-24	✓ (1)	✓ (1)	✓ (1)	✓ (1)	✓ (1)
K-RGB-0700-24V	✓ (1)	X	X	✓ (1)	✓ (1)
K-RGB-1200-24	✓ (1)	X	X	✓ (1)	✓ (1)

Description


✓ - Line of Light for a number (X) of rows - Pixel free imaging

X - Visible Dotting from Diodes


HL - Centered Line of Light - Concentrated in middle

HL (X) - Centered Line of Light for a number (X) of rows - Concentrated in middle

Line of Light Guide



Clean Line of Light (Pixel free imaging)




Centered Line of Light



Visible Dotting from Diodes

SAMPLE PROJECTS

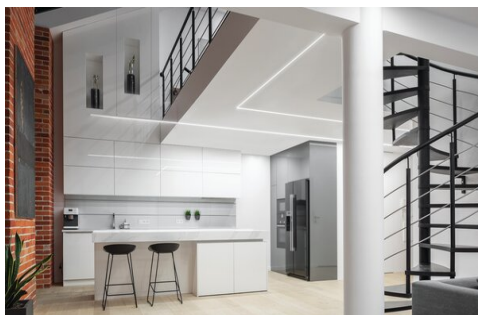

Profile PDS-UST

Ref. A02725

SIMILAR PROFILES



Profile PDS-H
A09204



Profile PDS-NK
A01588



Profile KOZMA
A18040



Profile PDS-T
A02057



Profile PDS-ZMG
A01418



Profile PDS-ZM-PLUS
A02056

RELATED ACCESSORIES > COVERS

NAME		KEY FEATURES	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
Focusing cover LENZO-11-30°DEG		- indoor use - focusing	PC	80 %	semi-transparent	B17112T
Cover LIGER-11		- high light quality - Ease of obtaining a line of light - Perfectly diffusing - For indoor and outdoor applications	PC	21 %	black	B17037B
				59 %	satın	B17037S
Cover HS-11		- For indoor and outdoor applications - UV resistant - high durability	PC	59 %	frosted	B17208F
				88 %	clear	B17208C
Cover KA-11		- maximum brightness - indoor use - basic - universal	PC	67 %	frosted	B17064F
				89 %	clear	B17064C
Cover KA-T-11		- maximum brightness - indoor use - economic - universal for basic applications	PVC	54 %	frosted	B17179F
				86 %	clear	B17179C

RELATED ACCESSORIES > END CAPS

NAME	MATERIAL	COLOR	REF.
End cap PDS-ZM-PLUS		ABS	 black C24364C07
			 gray C24364C02
			 silver C24364L01
			 white C24364C10

RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CCT

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-RGBW-1530-24	- RGBW (3000K) - high LED density	20	15.3 W/m	K-RGBW-1530-24
LED tape KWP-8KRGB-0700-24	- RGB - easy snap-in installation	65	7 W/m	KWP-8KRGB-0700-24
LED tape K-RGB-0700-24V	- RGB	20	7 W/m	K-RGB-0700-24V
LED tape KWP-GRGBW-1530-24	- RGBW (3000K)	65	15.3 W/m	KWP-GRGBW-1530-24
LED tape K-RGB-1200-24	- RGB	20	12 W/m	K-RGB-1200-24

RELATED ACCESSORIES > RELATED LED > WHITE MONO

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-0360-24 3.6 W/m, IP20 		20	3.6 W/m	K-27-0360-24 K-30-0360-24 K-35-0360-24 K-40-0360-24 K-50-0360-24
LED tape K-0720-24 7.2 W/m, IP20 		20	7.2 W/m	K-27-0720-24 K-30-0720-24 K-35-0720-24 K-40-0720-24 K-50-0720-24
LED tape K-1080-24 10.8 W/m, IP20 		20	10.8 W/m	K-27-1080-24 K-30-1080-24 K-35-1080-24 K-40-1080-24 K-50-1080-24
LED tape K-HD-0430-24 4.3 W/m, IP20 		20	4.3 W/m	K-HD27-0430-24 K-HD30-0430-24 K-HD35-0430-24 K-HD40-0430-24 K-HD50-0430-24
LED tape K-HD-0830-24 8.3 W/m, IP20 		20	8.3 W/m	K-HD27-0830-24 K-HD30-0830-24 K-HD35-0830-24 K-HD40-0830-24 K-HD50-0830-24

Profile PDS-UST

Ref. A02725

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-HD-1260-24 12.6 W/m, IP20 NEW		20	12.6 W/m	K-HD27-1260-24 K-HD30-1260-24 K-HD35-1260-24 K-HD40-1260-24 K-HD50-1260-24
LED tape K-0480-24	- universal for basic applications	20	4.8 W/m	K-27-0480-24 K-30-0480-24 K-35-0480-24 K-40-0480-24 K-50-0480-24
LED tape K-0960-24	- universal for basic applications	20	9.6 W/m	K-27-0960-24 K-30-0960-24 K-30-0960-24-R30 K-35-0960-24 K-40-0960-24 K-40-0960-24-R30 K-50-0960-24 K-65-0960-24
LED tape K-1440-24	- universal for basic applications	20	14.4 W/m	K-27-1440-24 K-30-1440-24 K-30-1440-24-R30 K-35-1440-24 K-40-1440-24 K-40-1440-24-R30 K-50-1440-24
LED tape K-HD-0480-24	- high LED density - Ease of obtaining a line of light	20	4.8 W/m	K-HD27-0480-24 K-HD30-0480-24 K-HD35-0480-24 K-HD40-0480-24 K-HD50-0480-24
LED tape K-HD-0960-24	- high LED density - Ease of obtaining a line of light	20	9.6 W/m	K-HD27-0960-24 K-HD30-0960-24 K-HD35-0960-24 K-HD40-0960-24 K-HD50-0960-24
LED tape K-HD-1440-24	- high LED density - Ease of obtaining a line of light	20	14.4 W/m	K-HD27-1440-24 K-HD30-1440-24 K-HD35-1440-24 K-HD40-1440-24 K-HD50-1440-24
LED tape KWP-8K-0480-24	- universal for basic applications - easy snap-in installation	65	4.8 W/m	KWP-8K27-0480-24 KWP-8K30-0480-24 KWP-8K35-0480-24 KWP-8K40-0480-24 KWP-8K50-0480-24
LED tape KWP-8K-0960-24	- universal for basic applications - easy snap-in installation	65	9.6 W/m	KWP-8K27-0960-24 KWP-8K30-0960-24 KWP-8K35-0960-24 KWP-8K40-0960-24 KWP-8K50-0960-24
LED tape KWP-GHD-0480-24	- high LED density - Ease of obtaining a line of light	65	4.8 W/m	KWP-GHD27-0480-24 KWP-GHD30-0480-24 KWP-GHD35-0480-24 KWP-GHD40-0480-24 KWP-GHD50-0480-24
LED tape K-2300-24	- high power	20	23 W/m	K-30-2300-24 K-40-2300-24
LED tape K-2400-24	- high power	20	24 W/m	K-27-2400-24 K-30-2400-24 K-35-2400-24 K-40-2400-24 K-50-2400-24

RELATED ACCESSORIES > RELATED LED > CRI 95+

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-CR-0480-24	- universal for basic applications - CRI over 95	20	4.8 W/m	K-CR27-0480-24 K-CR30-0480-24 K-CR35-0480-24 K-CR40-0480-24 K-CR50-0480-24
LED tape K-CR-0960-24	- universal for basic applications - CRI over 95	20	9.6 W/m	K-CR27-0960-24 K-CR30-0960-24 K-CR35-0960-24 K-CR40-0960-24 K-CR50-0960-24
LED tape K-CR-1440-24	- universal for basic applications - CRI over 95	20	14.4 W/m	K-CR27-1440-24 K-CR30-1440-24 K-CR35-1440-24 K-CR40-1440-24 K-CR50-1440-24
LED tape KWP-8KCR-0480-24	- universal for basic applications - easy snap-in installation - CRI over 95	65	4.8 W/m	KWP-8KCR27-0480-24 KWP-8KCR30-0480-24 KWP-8KCR35-0480-24 KWP-8KCR40-0480-24 KWP-8KCR50-0480-24
LED tape KWP-8KCR-0960-24	- universal for basic applications - easy snap-in installation	65	9.6 W/m	KWP-8KCR27-0960-24 KWP-8KCR30-0960-24 KWP-8KCR35-0960-24 KWP-8KCR40-0960-24 KWP-8KCR50-0960-24

RELATED ACCESSORIES > RELATED LED > HIGH EFFICACY

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-VHE-0480-24	- universal for basic applications - high efficacy - High Efficacy	20	4.8 W/m	K-VHE27-0480-24 K-VHE30-0480-24 K-VHE35-0480-24 K-VHE40-0480-24 K-VHE50-0480-24
LED tape K-VHE-0960-24	- universal for basic applications - high efficacy - High Efficacy	20	9.6 W/m	K-VHE27-0960-24 K-VHE30-0960-24 K-VHE35-0960-24 K-VHE40-0960-24 K-VHE50-0960-24
LED tape K-VHE-1440-24	- universal for basic applications - high efficacy - High Efficacy	20	14.4 W/m	K-VHE27-1440-24 K-VHE30-1440-24 K-VHE35-1440-24 K-VHE40-1440-24 K-VHE50-1440-24

RELATED ACCESSORIES > RELATED LED > ADJUSTABLE WHITE / DIM TO WARM

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-27T50-1440-24	- RGB+Tunable White	20	14.4 W/m	K-27T50-1440-24

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > OTHER

Name	Key features	Material	Ref.
Gland 9x1,5		Materiał, Material, multiselect	C42295C07
Gland 11x1,5		rubber	C42296C07
Gland 6,4x1,6		rubber	C24518C07
Gland M10x1	- metal housing - with M10x1 thread	mosiądz niklowany	C28275N00

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > ADDITIONAL ITEMS

Name	Key features	Material	Color	Ref.
Adapter LENSO	- Necessary when using the DILENSO cover	PC	 transparent glossy	E62146

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONNECTORS

Name	Material	Color	Ref.
Connector ZM	stainless steel	 silver	42716
		 silver	42717
		 silver	42720
		 silver	42728
		 black colored	C24797C07
		colorless non colored	C24797N00
		 black colored	C28070C07
		 silver	C28070N00
		 black colored	C28071C07
		 silver	C28071N00
		 black colored	C28072C07
		 silver	C28072N00
		 black colored	C28073C07
		 silver	C28073N00
		 black colored	C28074C07
		 silver	C28074N00
		 black colored	C28075C07
		 silver	C28075N00
		 silver	C28243N00
Connector ZM-NA	stainless steel		42305
			42339
		 silver	42723
			42724
			42725
Connector ZM-Y	stainless steel		C28242N00
Connector ZM-Y	stainless steel	 black colored	C28082C07
		 silver	C28082N00
Connector ZM-X	stainless steel	 black colored	C28079C07
		 silver	C28079N00
		 black colored	C28080C07
		 silver	C28080N00
		 black colored	C28081C07
Connector ZM-T	stainless steel	 silver	C28081N00
		 black colored	C28076C07
		 silver	C28076N00
		 black colored	C28077C07
		 silver	C28077N00
Connector ZM-T	stainless steel	 black colored	C28078C07
		 silver	C28078N00

Name	Material	Color	Ref.
Connector ZM-PION	stainless steel	 silver	42314
		 silver	42316
		 silver	42320
		 silver	42718
		 silver	42719
		 black colored	C28084C07
		 silver	C28084N00
		 black colored	C28085C07
		 silver	C28085N00
		 black colored	C28086C07
		 silver	C28086N00
		 black colored	C28087C07
		 silver	C28087N00
		 black colored	C28088C07
		 silver	C28088N00

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > TECHNICAL AND PROTECTIVE INSERTS

Name	Key features	Material	Color	Ref.
Protective insert TECH-11 	- Protection of the fixture interior during installation	PVC	 gray colored	C24574C02_1 C24574C02_2 C24574C02_3

RELATED ACCESSORIES > ELECTRONICS > SWITCHES

Name	Key features	IP protection rating	Ref.
Proximity switch UNI-11 	- touchless switch - width 11mm	20	E61603
Proximity switch UNI-11P 	- touchless switch - width 11mm - factory pre-soldered wires	20	E61604
Proximity switch UNI-P	- touchless switch - width only 7mm - factory pre-soldered wires	20	E61580
Switch MICRO 96W IP20	- push button switch - factory pre-soldered wires	20	1491
Switch MICRO 96W IP20	- push button switch - factory pre-soldered wires - version with logo	20	1491LOGO
Proximity switch UNI	- touchless switch - width only 7mm	20	E61579