


Profile 45-PLUS

Ref. A00005

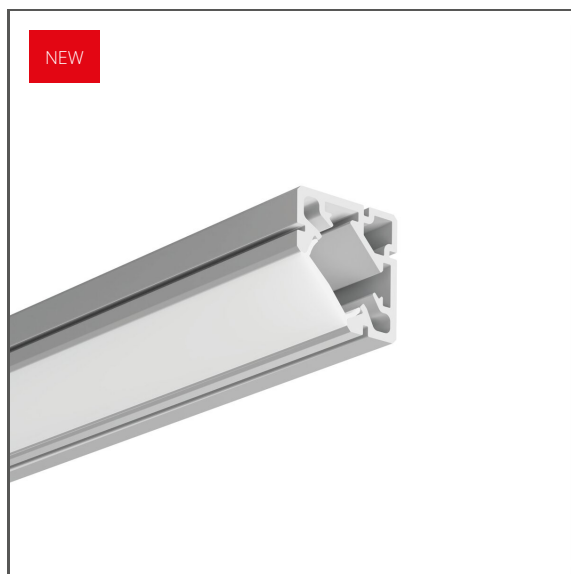

- Installation in corners
- Lighting at a 45° angle
- Wide range of accessories
- Ease of creating geometric figures
- Possibility of mounting sealed LED strips of the 8K series

APPLICATION

- furniture, under-cabinet and decorative lighting


MOUNTING

- to the surface or suspended, using dedicated accessories

ADDITIONAL INFORMATION

- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING



TECHNICAL SPECIFICATIONS

Material	aluminum
Possible fixture IP	20, 67
Possible fixture shapes	linear
Profile cross-section	angled
Width	19 mm
Height	19 mm
LED gluing width A	8.5 mm
Number of LED strips A (8 mm wide)	1
Width of the glow	11.2 mm
Max power of a single KLUŚ LED strip	24 W/m
Lighting at an angle	45
Possibility of obtaining a line of light	yes
Building type	Residential, Retail, HoReCa object, Entertainment/ Arts, Other
Facility zone	office, kitchen, bathroom, under-cabinet / furniture, cove / perimeter, exhibition / tradeshow / display

Color	Length	Ref
■ silver anodized	1000 mm	A00005A_1
	2005 mm	A00005A_2
	3010 mm	A00005A_3
■ silver non anodized	1000 mm	A00005N_1
	2005 mm	A00005N_2
	3010 mm	A00005N_3
□ white lacquered	1000 mm	A00005L100D_1
	2005 mm	A00005L100D_2
	3010 mm	A00005L100D_3
■ black anodized	1000 mm	A00005A07_1
	2005 mm	A00005A07_2
	3010 mm	A00005A07_3

Standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)

Profile 45-PLUS

Ref. A00005

Easy assembly and disassembly by snapping in and out	yes
The cover is cut to the length of the profile	yes
Can be easily connected into runs	yes
Furniture lighting	yes
Decorative lighting	yes
Functional lighting	yes
Wire out end cap	yes
Wire out back of extrusion	yes

LINE OF LIGHT TABLE

LED tape	LIGER-11 satin	LIGER-11 black	HS-11 frosted	KA-11R frosted	KA-T-11R frosted
K-0360-24	✓ (1)	X	✓ (1)	✓ (1)	✓ (1)
K-0720-24	✓ (1)	X	✓ (1)	✓ (1)	✓ (1)
K-1080-24	✓ (1)	X	✓ (1)	✓ (1)	✓ (1)
KWP-8K-0360-24	✓ (1)	X	✓ (1)	✓ (1)	✓ (1)
KWP-8K-0720-24	✓ (1)	X	✓ (1)	✓ (1)	✓ (1)
KWP-8K-1080-24	✓ (1)	X	✓ (1)	✓ (1)	✓ (1)
K-2400-24	✓ (1)	X	✓ (1)	✓ (1)	✓ (1)
K-RGBW-1530-24	✓ (1)	✓ (1)	✓ (1)	✓ (1)	✓ (1)
K-RGB-1200-24	✓ (1)	X	✓ (1)	✓ (1)	✓ (1)
KWP-8KRGB-1200-24	✓ (1)	X	✓ (1)	✓ (1)	✓ (1)

Description


✓ - Line of Light for a number (X) of rows - Pixel free imaging

X - Visible Dotting from Diodes


HL - Centered Line of Light - Concentrated in middle

HL (X) - Centered Line of Light for a number (X) of rows - Concentrated in middle

Line of Light Guide



Clean Line of Light (Pixel free imaging)



Centered Line of Light





Visible Dotting from Diodes

Profile 45-PLUS

Ref. A00005

SAMPLE PROJECTS

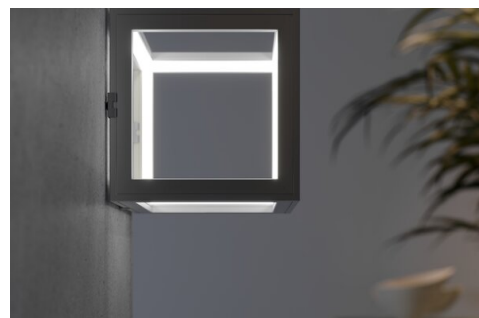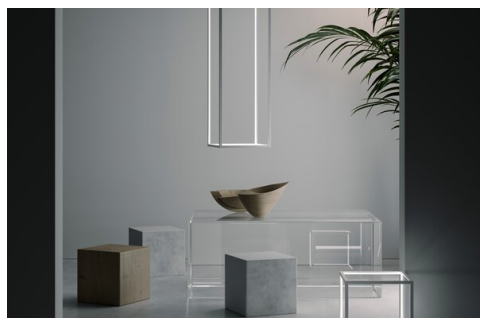

RELATED ACCESSORIES > COVERS

NAME		KEY FEATURES	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
Cover LIGER-11		- high light quality - Ease of obtaining a line of light - Perfectly diffusing - For indoor and outdoor applications	PC	21 %	black	B17037B
				59 %	satin	B17037S
Cover KA-11		- maximum brightness - indoor use - basic - universal	PC	67 %	frosted	B17064F
				89 %	clear	B17064C
Cover KA-11R		- maximum brightness - high durability - high light quality - indoor use - Perfectly diffusing	PC	62 %	frosted	B17076F
Cover KA-T-11		- maximum brightness - indoor use - economic - universal for basic applications	PVC	54 %	frosted	B17179F
				86 %	clear	B17179C
Cover HS-11		- For indoor and outdoor applications - UV resistant - high durability	PC	59 %	frosted	B17208F
				88 %	clear	B17208C

Profile 45-PLUS

Ref. A00005

RELATED ACCESSORIES > END CAPS

NAME			MATERIAL	COLOR	REF.
End cap 45-PLUS	NEW		ABS	black	C20007C07
				gray	C20007C02
				white	C20007C10
End cap with hole 45-PLUS-OTW	NEW		ABS	black	C20007C07TW
				gray	C20007C02TW
				white	C20007C10TW
End cap with hole 45-PLUS-R-OTW	NEW		ABS	black	C20008C07TW
				gray	C20008C02TW
				white	C20008C10TW
End cap 45-PLUS-R	NEW		ABS	black	C20008C07
				gray	C20008C02
				white	C20008C10

RELATED ACCESSORIES > RELATED LED > WHITE MONO

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-0360-24 3.6 W/m, IP20 NEW		20	3.6 W/m	K-27-0360-24 K-30-0360-24 K-35-0360-24 K-40-0360-24 K-50-0360-24
LED tape K-0720-24 7.2 W/m, IP20 NEW		20	7.2 W/m	K-27-0720-24 K-30-0720-24 K-35-0720-24 K-40-0720-24 K-50-0720-24
LED tape K-1080-24 10.8 W/m, IP20 NEW		20	10.8 W/m	K-27-1080-24 K-30-1080-24 K-35-1080-24 K-40-1080-24 K-50-1080-24
LED tape KWP-8K-0360-24 3.6 W/m, IP65 NEW		65	3.6 W/m	KWP-8K27-0360-24 KWP-8K30-0360-24 KWP-8K35-0360-24 KWP-8K40-0360-24 KWP-8K50-0360-24

Profile 45-PLUS

Ref. A00005

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape KWP-8K-0720-24 7.2 W/m, IP65 NEW		65	7.2 W/m	KWP-8K27-0720-24 KWP-8K30-0720-24 KWP-8K35-0720-24 KWP-8K40-0720-24 KWP-8K50-0720-24
LED tape KWP-8K-1080-24 10.8 W/m, IP65 NEW		65	10.8 W/m	KWP-8K27-1080-24 KWP-8K30-1080-24 KWP-8K35-1080-24 KWP-8K40-1080-24 KWP-8K50-1080-24
LED tape K-0480-24	- universal for basic applications	20	4.8 W/m	K-27-0480-24 K-30-0480-24 K-35-0480-24 K-40-0480-24 K-50-0480-24
LED tape K-0960-24	- universal for basic applications	20	9.6 W/m	K-27-0960-24 K-30-0960-24 K-30-0960-24-R30 K-35-0960-24 K-40-0960-24 K-40-0960-24-R30 K-50-0960-24 K-65-0960-24
LED tape K-2400-24	- high power	20	24 W/m	K-27-2400-24 K-30-2400-24 K-35-2400-24 K-40-2400-24 K-50-2400-24
LED tape K-1440-24	- universal for basic applications	20	14.4 W/m	K-27-1440-24 K-30-1440-24 K-30-1440-24-R30 K-35-1440-24 K-40-1440-24 K-40-1440-24-R30 K-50-1440-24
LED tape KWP-8K-0480-24	- universal for basic applications - easy snap-in installation	65	4.8 W/m	KWP-8K27-0480-24 KWP-8K30-0480-24 KWP-8K35-0480-24 KWP-8K40-0480-24 KWP-8K50-0480-24
LED tape KWP-8K-0960-24	- universal for basic applications - easy snap-in installation	65	9.6 W/m	KWP-8K27-0960-24 KWP-8K30-0960-24 KWP-8K35-0960-24 KWP-8K40-0960-24 KWP-8K50-0960-24
LED tape K-HD-0480-24	- high LED density - Ease of obtaining a line of light	20	4.8 W/m	K-HD27-0480-24 K-HD30-0480-24 K-HD35-0480-24 K-HD40-0480-24 K-HD50-0480-24
LED tape K-HD-0960-24	- high LED density - Ease of obtaining a line of light	20	9.6 W/m	K-HD27-0960-24 K-HD30-0960-24 K-HD35-0960-24 K-HD40-0960-24 K-HD50-0960-24
LED tape K-HD-1440-24	- high LED density - Ease of obtaining a line of light	20	14.4 W/m	K-HD27-1440-24 K-HD30-1440-24 K-HD35-1440-24 K-HD40-1440-24 K-HD50-1440-24

Profile 45-PLUS

Ref. A00005

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape KWP-1440-24	- universal for basic applications	65	14.4 W/m	KWP-27-1440-24 KWP-30-1440-24 KWP-35-1440-24 KWP-40-1440-24 KWP-50-1440-24
LED tape KWP-0960-24	- universal for basic applications	65	9.6 W/m	KWP-27-0960-24 KWP-30-0960-24 KWP-35-0960-24 KWP-40-0960-24 KWP-50-0960-24 KWP-65-0960-24
LED tape KWP-0480-24	- universal for basic applications	65	4.8 W/m	KWP-27-0480-24 KWP-30-0480-24 KWP-35-0480-24 KWP-40-0480-24 KWP-50-0480-24

RELATED ACCESSORIES > RELATED LED > CRI 95+

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-CR-0480-24	- universal for basic applications - CRI over 95	20	4.8 W/m	K-CR27-0480-24 K-CR30-0480-24 K-CR35-0480-24 K-CR40-0480-24 K-CR50-0480-24
LED tape K-CR-0960-24	- universal for basic applications - CRI over 95	20	9.6 W/m	K-CR27-0960-24 K-CR30-0960-24 K-CR35-0960-24 K-CR40-0960-24 K-CR50-0960-24
LED tape K-CR-1440-24	- universal for basic applications - CRI over 95	20	14.4 W/m	K-CR27-1440-24 K-CR30-1440-24 K-CR35-1440-24 K-CR40-1440-24 K-CR50-1440-24
LED tape KWP-8KCR-0480-24	- universal for basic applications - easy snap-in installation - CRI over 95	65	4.8 W/m	KWP-8KCR27-0480-24 KWP-8KCR30-0480-24 KWP-8KCR35-0480-24 KWP-8KCR40-0480-24 KWP-8KCR50-0480-24
LED tape KWP-8KCR-0960-24	- universal for basic applications - easy snap-in installation	65	9.6 W/m	KWP-8KCR27-0960-24 KWP-8KCR30-0960-24 KWP-8KCR35-0960-24 KWP-8KCR40-0960-24 KWP-8KCR50-0960-24
LED tape KWP-CR-0480-24	- universal for basic applications - CRI over 95	65	4.8 W/m	KWP-CR27-0480-24 KWP-CR30-0480-24 KWP-CR35-0480-24 KWP-CR40-0480-24 KWP-CR50-0480-24
LED tape KWP-CR-0960-24	- universal for basic applications - CRI over 95	65	9.6 W/m	KWP-CR27-0960-24 KWP-CR30-0960-24 KWP-CR35-0960-24 KWP-CR40-0960-24 KWP-CR50-0960-24

RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CCT

Name	Key features	IP protection rating	Power consumption	Ref.

Profile 45-PLUS

Ref. A00005

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-RGBW-1530-24	- RGBW (3000K) - high LED density	20	15.3 W/m	K-RGBW-1530-24
LED tape KWP-GRGBW-1530-24	- RGBW (3000K)	65	15.3 W/m	KWP-GRGBW-1530-24
LED tape K-RGB-1200-24	- RGB	20	12 W/m	K-RGB-1200-24
LED tape KWP-8KRGB-1200-24	- RGB - easy snap-in installation	65	12 W/m	KWP-8KRGB-1200-24

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > FASTENERS AND HEADS FOR PROFILES

Name	Material	Color	Ref.
Head 45-ST	stainless steel	 silver	C28111N00

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > MOUNTING BRACKETS

Name	Key features	Material	Color	Ref.
Mounting bracket 45-EXT NEW	- Mounting with angle adjustment function	aluminum, stainless steel	 gray	C28309N00
Mounting bracket 45-STN	- For indoor and outdoor applications	stainless steel	 silver  black  white	C24144N00 C24262L07 C24265L10

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > OTHER

Name	Key features	Material	Ref.
Gland M10x1	- metal housing - with M10x1 thread	mosiądz niklowany	C28275N00

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONNECTORS

Name	Material	Color	Ref.
Connector ZM	stainless steel	 silver	42716
		 silver	42717
		 silver	42720
		 silver	42728
		 black colored	C24797C07
		colorless non colored	C24797N00
		 black colored	C28070C07
		 silver	C28070N00
		 black colored	C28071C07
		 silver	C28071N00
		 black colored	C28072C07
		 silver	C28072N00
		 black colored	C28073C07
		 silver	C28073N00
		 black colored	C28074C07
		 silver	C28074N00
		 black colored	C28075C07
		 silver	C28075N00
		 silver	C28243N00
Connector ZM-NA	stainless steel	 silver	42305
			42339
			42723
			42724
			42725
			C28242N00

Profile 45-PLUS

Ref. A00005

Name	Material	Color	Ref.
Connector ZM-PION	stainless steel	 silver	42314
		 silver	42316
		 silver	42320
		 silver	42718
		 silver	42719
		 black colored	C28084C07
		 silver	C28084N00
		 black colored	C28085C07
		 silver	C28085N00
		 black colored	C28086C07
		 silver	C28086N00
		 black colored	C28087C07
		 silver	C28087N00
		 black colored	C28088C07
		 silver	C28088N00

RELATED ACCESSORIES > ELECTRONICS > SWITCHES

Name	Key features	IP protection rating	Ref.
Proximity switch UNI-11 	- touchless switch - width 11mm	20	E61603
Proximity switch UNI-11P 	- touchless switch - width 11mm - factory pre-soldered wires	20	E61604
Magnetic switch UNI-M07 	- magnetic switch with magnet included - width only 7mm	20	E62153
Magnetic switch UNI-M07P 	- magnetic switch with magnet included - width only 7mm - factory pre-soldered wires	20	E62154
Switch MICRO 96W IP20	- push button switch - factory pre-soldered wires	20	1491
Switch MICRO 96W IP20	- push button switch - factory pre-soldered wires - version with logo	20	1491LOGO
Proximity switch UNI-P	- touchless switch - width only 7mm - factory pre-soldered wires	20	E61580
Proximity switch UNI	- touchless switch - width only 7mm	20	E61579