


Profile PDS-4-PLUS

Ref. A01263

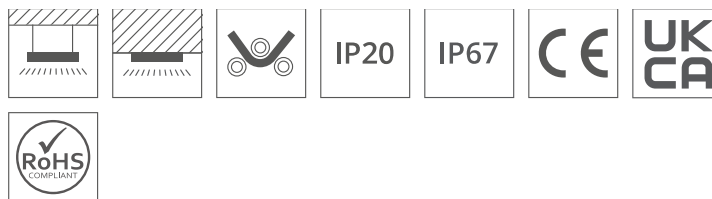

- Possibility of mounting sealed LED strips of the 8K series
- Small bending radius
- Possibility of bending in the light plane

APPLICATION

- main, functional, furniture and decorative lighting


MOUNTING

- to the surface, suspended or recessed, using dedicated accessories, properly selected screws, with double-sided adhesive tape or mounting adhesive
- easy assembly and disassembly by snapping in and out

ADDITIONAL INFORMATION

- cover length equal to the profile length only with the use of a dedicated PDS-4-PLUS end cap
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ
- NCS Premium paint option - minimum order quantity 30pcs - available immediately

TECHNICAL DRAWING



TECHNICAL SPECIFICATIONS

Material	aluminum	Color	Length	Ref
Possible fixture IP	20, 67	■ silver anodized	1000 mm	A01263A_1
Possible fixture shapes	linear, round		2005 mm	A01263A_2
Profile cross-section	rectangular		3010 mm	A01263A_3
Width	16.2 mm	■ silver non anodized	1000 mm	A01263N_1
Height	12 mm		2005 mm	A01263N_2
LED gluing width A	14 mm		3010 mm	A01263N_3
Number of LED strips A (8 mm wide)	1	□ white lacquered	1000 mm	A01263L10OD_1
Width of the glow	11.2 mm		2005 mm	A01263L10OD_2
Max power of a single KLUŚ LED strip	24 W/m	■ black anodized	1000 mm	A01263A07_1
Closet Rated	yes		2005 mm	A01263A07_2
Possibility of obtaining a line of light	yes		3010 mm	A01263A07_3
Possibility of bending	yes	■ black lacquered	1000 mm	A01263L07OD_1
Radius of the light arc	yes		2005 mm	A01263L07OD_2
Inward	180 mm	■ caramel (NCSS3030-Y60R) lacquered	2005 mm	A01263L14OD_2
Outdoor	200 mm	■ sand (NCSS2010-Y30R) lacquered	2005 mm	A01263L11OD_2
		■ light sage (NCSS2010-G50Y) lacquered	2005 mm	A01263L12OD_2

Profile PDS-4-PLUS

Ref. A01263

Downward light arc radius	yes
Down	500 mm
Building type	Commercial, HoReCa object, Retail, Residential, Entertainment/Arts, Outdoor
Facility zone	office, kitchen, bathroom, cove / perimeter, fascade lighting, stairs / hallways, under-cabinet / furniture, outdoor spaces, fitness / spa, media rooms / av
The cover is cut to the length of the profile	yes
Wire out end cap	yes
Wire out back of extrusion	yes

Color	Length	Ref
■ pastel blue (NCSS2010-B) lacquered	2005 mm	A01263L130D_2

Standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for select covers: 6050 mm, 10050 mm (tolerance + 5 mm)

LINE OF LIGHT TABLE

LED tape	LIGER-11 satin	HS-11 frosted	osłona	LIGER-11 black
KWP-8K-1220-24	✓ (1)	X	X	X
KWP-8K-1275-24	✓ (1)	X	X	X
KWP-8K-1440-24	✓ (1)	✓ (1)	X	X
K-0360-24	✓ (1)	✓ (1)	X	X
K-0720-24	✓ (1)	✓ (1)	X	X
K-1080-24	✓ (1)	✓ (1)	X	X
K-HD-0430-24	✓ (1)	✓ (1)	X	✓ (1)
K-HD-0830-24	✓ (1)	✓ (1)	X	✓ (1)
K-HD-1260-24	✓ (1)	✓ (1)	X	✓ (1)
KWP-8K-0360-24	✓ (1)	✓ (1)	X	X
KWP-8K-0720-24	✓ (1)	✓ (1)	X	X
KWP-8K-1080-24	✓ (1)	✓ (1)	X	X
KWP-GHD-0430-24	✓ (1)	✓ (1)	X	✓ (1)
KWP-GHD-0830-24	✓ (1)	✓ (1)	X	✓ (1)
K-2400-24	✓ (1)	✓ (1)	X	X
K-RGBW-1530-24	✓ (1)	✓ (1)	X	✓ (1)
K-RGB-0700-24V	✓ (1)	X	X	X
K-RGB-1200-24	✓ (1)	X	X	X
KWP-G22/50-1728-24	✓ (1)	✓ (1)	X	✓ (1)
K-18D30-0960-24	✓ (1)	✓ (1)	X	✓ (1)

Description

✓ - Line of Light for a number (X) of rows - Pixel free imaging

X - Visible Dotting from Diodes


Profile PDS-4-PLUS

Ref. A01263

HL - Centered Line of Light - Concentrated in middle

HL (X) - Centered Line of Light for a number (X) of rows - Concentrated in middle

Line of Light Guide



Clean Line of Light (Pixel free imaging)





Centered Line of Light



Visible Dotting from Diodes

SAMPLE PROJECTS

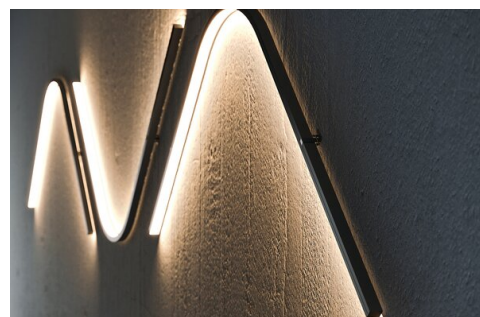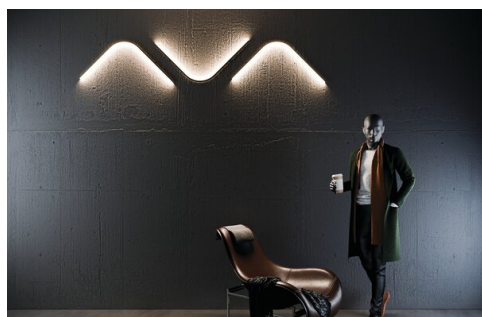

SIMILAR PROFILES



Profile PDS-H
A09204



Profile PDS-NK
A01588



Profile KOZMA
A18040



Profile PDS-UST
A02725



Profile PDS-T
A02057



Profile PDS-ZMG
A01418

RELATED ACCESSORIES > COVERS

NAME		KEY FEATURES	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
Cover BENCO-11		- For indoor and outdoor applications - UV resistant	silicon	50 %	frosted	B17215F
Cover LIGER-11		- high light quality - Ease of obtaining a line of light - Perfectly diffusing - For indoor and outdoor applications	PC	21 %	black	B17037B
				59 %	satin	B17037S
Cover KA-11		- maximum brightness - indoor use - basic - universal	PC	67 %	frosted	B17064F
				89 %	clear	B17064C
Cover KA-T-11		- maximum brightness - indoor use - economic - universal for basic applications	PVC	54 %	frosted	B17179F
				86 %	clear	B17179C
Cover HS-11		- For indoor and outdoor applications - UV resistant - high durability	PC	59 %	frosted	B17208F
				88 %	clear	B17208C
Focusing cover LENSO-11-30°DEG		- indoor use - focusing	PC	80 %	semi-transparent	B17112T

RELATED ACCESSORIES > END CAPS

NAME		MATERIAL	COLOR	REF.
End cap with hole PDS-4-PLUS-OTW		aluminum, PET-G	 silver	C28147AS
			 black	C24337C07TW
			 gray	C24337C02TW
			 white	C24337C10TW
End cap PDS-4-PLUS		ABS	 black	C24337C07
			 caramel (NCSS3030-Y60R)	C24337L14
			 gray	C24337C02
			 light sage (NCSS2010-G50Y)	C24337L12
			 pastel blue (NCSS2010-B)	C24337L13
			 sand (NCSS2010-Y30R)	C24337L11
			 silver	C24337L01
			 white	C24337C10
Electricity conductive end cap PDS-4-PLUS		ABS	 black	C28257C07P
			 gray	C28257C02P
			 white	C28257C10P

RELATED ACCESSORIES > RELATED LED > CRI 95+

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-CR-0480-24	- universal for basic applications - CRI over 95	20	4.8 W/m	K-CR27-0480-24 K-CR30-0480-24 K-CR35-0480-24 K-CR40-0480-24 K-CR50-0480-24
LED tape K-CR-0960-24	- universal for basic applications - CRI over 95	20	9.6 W/m	K-CR27-0960-24 K-CR30-0960-24 K-CR35-0960-24 K-CR40-0960-24 K-CR50-0960-24

Profile PDS-4-PLUS

Ref. A01263

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-CR-1440-24	- universal for basic applications - CRI over 95	20	14.4 W/m	K-CR27-1440-24 K-CR30-1440-24 K-CR35-1440-24 K-CR40-1440-24 K-CR50-1440-24
LED tape KWP-8KCR-0480-24	- universal for basic applications - easy snap-in installation - CRI over 95	65	4.8 W/m	KWP-8KCR27-0480-24 KWP-8KCR30-0480-24 KWP-8KCR35-0480-24 KWP-8KCR40-0480-24 KWP-8KCR50-0480-24
LED tape KWP-8KCR-0960-24	- universal for basic applications - easy snap-in installation	65	9.6 W/m	KWP-8KCR27-0960-24 KWP-8KCR30-0960-24 KWP-8KCR35-0960-24 KWP-8KCR40-0960-24 KWP-8KCR50-0960-24

RELATED ACCESSORIES > RELATED LED > HIGH EFFICACY

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-VHE-0480-24	- universal for basic applications - high efficacy - High Efficacy	20	4.8 W/m	K-VHE27-0480-24 K-VHE30-0480-24 K-VHE35-0480-24 K-VHE40-0480-24 K-VHE50-0480-24
LED tape K-VHE-0960-24	- universal for basic applications - high efficacy - High Efficacy	20	9.6 W/m	K-VHE27-0960-24 K-VHE30-0960-24 K-VHE35-0960-24 K-VHE40-0960-24 K-VHE50-0960-24
LED tape K-VHE-1440-24	- universal for basic applications - high efficacy - High Efficacy	20	14.4 W/m	K-VHE27-1440-24 K-VHE30-1440-24 K-VHE35-1440-24 K-VHE40-1440-24 K-VHE50-1440-24

RELATED ACCESSORIES > RELATED LED > WHITE MONO

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-0360-24 3.6 W/m, IP20 NEW		20	3.6 W/m	K-27-0360-24 K-30-0360-24 K-35-0360-24 K-40-0360-24 K-50-0360-24
LED tape K-0720-24 7.2 W/m, IP20 NEW		20	7.2 W/m	K-27-0720-24 K-30-0720-24 K-35-0720-24 K-40-0720-24 K-50-0720-24
LED tape K-1080-24 10.8 W/m, IP20 NEW		20	10.8 W/m	K-27-1080-24 K-30-1080-24 K-35-1080-24 K-40-1080-24 K-50-1080-24
LED tape K-HD-0430-24 4.3 W/m, IP20 NEW		20	4.3 W/m	K-HD27-0430-24 K-HD30-0430-24 K-HD35-0430-24 K-HD40-0430-24 K-HD50-0430-24

Profile PDS-4-PLUS

Ref. A01263

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-HD-0830-24 8.3 W/m, IP20 NEW		20	8.3 W/m	K-HD27-0830-24 K-HD30-0830-24 K-HD35-0830-24 K-HD40-0830-24 K-HD50-0830-24
LED tape K-HD-1260-24 12.6 W/m, IP20 NEW		20	12.6 W/m	K-HD27-1260-24 K-HD30-1260-24 K-HD35-1260-24 K-HD40-1260-24 K-HD50-1260-24
LED tape KWP-GHD-0430-24 4.3 W/m, IP65 NEW		65	4.3 W/m	KWP-GHD27-0430-24 KWP-GHD30-0430-24 KWP-GHD35-0430-24 KWP-GHD40-0430-24 KWP-GHD50-0430-24
LED tape KWP-GHD-0830-24 8.3 W/m, IP65 NEW		65	8.3 W/m	KWP-GHD27-0830-24 KWP-GHD30-0830-24 KWP-GHD35-0830-24 KWP-GHD40-0830-24 KWP-GHD50-0830-24
LED tape KWP-8K-0360-24 3.6 W/m, IP65 NEW		65	3.6 W/m	KWP-8K27-0360-24 KWP-8K30-0360-24 KWP-8K35-0360-24 KWP-8K40-0360-24 KWP-8K50-0360-24
LED tape KWP-8K-0720-24 7.2 W/m, IP65 NEW		65	7.2 W/m	KWP-8K27-0720-24 KWP-8K30-0720-24 KWP-8K35-0720-24 KWP-8K40-0720-24 KWP-8K50-0720-24
LED tape KWP-8K-1080-24 10.8 W/m, IP65 NEW		65	10.8 W/m	KWP-8K27-1080-24 KWP-8K30-1080-24 KWP-8K35-1080-24 KWP-8K40-1080-24 KWP-8K50-1080-24
LED tape K-HD-0480-24	- high LED density - Ease of obtaining a line of light	20	4.8 W/m	K-HD27-0480-24 K-HD30-0480-24 K-HD35-0480-24 K-HD40-0480-24 K-HD50-0480-24
LED tape K-HD-0960-24	- high LED density - Ease of obtaining a line of light	20	9.6 W/m	K-HD27-0960-24 K-HD30-0960-24 K-HD35-0960-24 K-HD40-0960-24 K-HD50-0960-24
LED tape K-HD-1440-24	- high LED density - Ease of obtaining a line of light	20	14.4 W/m	K-HD27-1440-24 K-HD30-1440-24 K-HD35-1440-24 K-HD40-1440-24 K-HD50-1440-24
LED tape KWP-8K-0480-24	- universal for basic applications - easy snap-in installation	65	4.8 W/m	KWP-8K27-0480-24 KWP-8K30-0480-24 KWP-8K35-0480-24 KWP-8K40-0480-24 KWP-8K50-0480-24
LED tape KWP-8K-0960-24	- universal for basic applications - easy snap-in installation	65	9.6 W/m	KWP-8K27-0960-24 KWP-8K30-0960-24 KWP-8K35-0960-24 KWP-8K40-0960-24 KWP-8K50-0960-24

Profile PDS-4-PLUS

Ref. A01263

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-0480-24	- universal for basic applications	20	4.8 W/m	K-27-0480-24 K-30-0480-24 K-35-0480-24 K-40-0480-24 K-50-0480-24
LED tape K-0960-24	- universal for basic applications	20	9.6 W/m	K-27-0960-24 K-30-0960-24 K-30-0960-24-R30 K-35-0960-24 K-40-0960-24 K-40-0960-24-R30 K-50-0960-24 K-65-0960-24
LED tape K-1440-24	- universal for basic applications	20	14.4 W/m	K-27-1440-24 K-30-1440-24 K-30-1440-24-R30 K-35-1440-24 K-40-1440-24 K-40-1440-24-R30 K-50-1440-24
LED tape KWP-GHD-0480-24	- high LED density - Ease of obtaining a line of light	65	4.8 W/m	KWP-GHD27-0480-24 KWP-GHD30-0480-24 KWP-GHD35-0480-24 KWP-GHD40-0480-24 KWP-GHD50-0480-24
LED tape K-2300-24	- high power	20	23 W/m	K-30-2300-24 K-40-2300-24
LED tape K-2400-24	- high power	20	24 W/m	K-27-2400-24 K-30-2400-24 K-35-2400-24 K-40-2400-24 K-50-2400-24
LED tape KWP-GHD-1260-24 12.6 W/m, IP65		65	12.6 W/m	KWP-GHD27-1260-24 KWP-GHD30-1260-24 KWP-GHD35-1260-24 KWP-GHD40-1260-24 KWP-GHD50-1260-24

RELATED ACCESSORIES > RELATED LED > BENDABLE

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-VBT-0720-24	- LED tape for bent profiles	20	7.2 W/m	K-VBT27-0720-24 K-VBT30-0720-24 K-VBT35-0720-24 K-VBT40-0720-24 K-VBT50-0720-24
LED tape K-BTRGB40-1510-24		20	15.1 W/m	K-BTRGB40-1510-24

RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CCT

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-RGBW-1530-24	- RGBW (3000K) - high LED density	20	15.3 W/m	K-RGBW-1530-24
LED tape K-RGB-0700-24V	- RGB	20	7 W/m	K-RGB-0700-24V
LED tape K-RGB-1200-24	- RGB	20	12 W/m	K-RGB-1200-24

RELATED ACCESSORIES > RELATED LED > ADJUSTABLE WHITE / DIM TO WARM

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-27T50-1440-24	- RGB+Tunable White	20	14.4 W/m	K-27T50-1440-24
LED tape K-18D30-0960-24	- Dim To Warm LED Tape	20	9.6 W/m	K-18D30-0960-24

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > MOUNTING BRACKETS

Name	Key features	Material	Color	Ref.
NEW Mounting bracket REG-PD-EXT	- Mounting with angle adjustment function	aluminum, stainless steel	■ black □ white ■ gray	C28303C07 C28303C10 C28303N00
Mounting bracket PDS-STN	- For indoor and outdoor applications	stainless steel	■ silver	C24190N00
Mounting bracket PDS	- For indoor and outdoor applications	stainless steel	■ silver □ white ■ black	C24189C02 C24223C10 C24189C07
Mounting bracket REG-PD	- Mounting with angle adjustment function	ASA	■ gray	C28055C02
Mounting bracket PL-PDM	- Aesthetic installation of linear fixtures	PP	■ gray	C24041C02
Mounting bracket PDS-STN-90G	- Angular mount for indoor and outdoor applications	stainless steel	■ silver □ white ■ black	C24370N00 C24370L10 C24370L07
Mounting bracket PDS-STN-90D	- Angular mount for indoor and outdoor applications	stainless steel	■ silver □ white ■ black	C24367N00 C24367L10 C24367L07
Mounting bracket PDS-STN-ALFA		stainless steel	■ silver	C28060N00
Mounting bracket PDS-STN-45D	- Angular mount for indoor and outdoor applications	stainless steel	■ silver	C24456N00
Mounting bracket PDS-STN-60D	- Angular mount for indoor and outdoor applications	stainless steel	■ silver	C24457N00

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > SURFACE SPRINGS

Name	Material	Color	Ref.
Spring PDS	stainless steel	■ silver	C24501N00

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONDUCTIVE FASTENERS AND HEADS FOR PROFILES

Name	Key features	Material	Color	Ref.
Head ZO		stainless steel	■ silver	C28115N00
Head BZP-ZO		stainless steel	■ silver	42214
Fastener PUSZ-PRET-MR	- Power supply cable - mounting in thin walls (from 1mm)	stainless steel, brass, nylon aluminum, brass, nylon aluminum, brass, nylon	■ silver □ white lacquered ■ black lacquered	C28166N00 C28166L10 C28166L07
Fastener PUSZ-LIN-MR	- Power supply cable - mounting in thin walls (from 1mm)	stainless steel, brass, nylon aluminum, brass, nylon aluminum, brass, nylon	■ silver □ white lacquered ■ black lacquered	C28163N00 C28163L10 C28163L07
Fastener PUSZ-PRET-MR, silver		stainless steel	■ silver	C28119N00
Fastener PUSZ-LIN-MR, silver		stainless steel	■ silver	C28122N00

Name	Key features	Material	Color	Ref.
Fastener FI-8-LIN-MR	- Power supply cable - mounting in thin walls (from 1mm)	stainless steel, PA aluminum, PA aluminum, PA	silver white black	C28172N00 C28172L10 C28172L07
Fastener DP-ZZ, silver		stainless steel	silver	00651
Fastener DP-MOC-ZO, silver		stainless steel	silver	00646
Fastener DP-MOC-ZZ, silver		stainless steel	silver	00647
Fastener PUSZ-MR	- Power supply cable - mounting in thin walls (from 1mm)	stainless steel aluminum aluminum	silver white lacquered black lacquered	C20011N00 C20011L10 C20011L07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > FASTENERS AND HEADS FOR PROFILES

Name	Material	Color	Ref.
Head ST	stainless steel	silver	C28114N00
Fastener DP, silver	stainless steel	silver	00644

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > TECHNICAL AND PROTECTIVE INSERTS

Name	Material	Color	Ref.
Base MW 11x5	aluminum	silver anodized	C24511A
Base MW 11x5 LED	aluminum	silver anodized	00036_1 00036_2 00036_3

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONNECTORS

Name	Material	Color	Ref.
Connector PD-MICRO	stainless steel	silver	C42150N00

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > SUSPENSION AND MOUNTING SETS

Name	Key features	Material	Color	Ref.
Fastener set PUSZ-MR-1 NEW	- Power supply, for wall and drywall, mounting in thin walls (from 1mm)	stainless steel, aluminum	silver white lacquered black lacquered	C28132N00 C28132L10 C28132L07
Fastener set PUSZ-MR-2 NEW	- Convenient cable length adjustment, mounting in thin walls (from 1mm)	stainless steel, aluminum	silver white lacquered black lacquered	C28133N00 C28133L10 C28133L07
Fastener set FI-8-MR-1 NEW	- Power supply, for wall and drywall, mounting in thin walls (from 1mm)	stainless steel, aluminum	silver white lacquered black lacquered	C28136N00 C28136L10 C28136L07
Fastener set FI-8-MR-2 NEW	- Convenient cable length adjustment, mounting in thin walls (from 1mm)	stainless steel, aluminum	silver white lacquered black lacquered	C28137N00 C28137L10 C28137L07
Fastener set RG-1	- Cable adjustment at the ceiling, cable included	brass	silver glossy silver satin white colored black colored	C28230P00 C28230P01 C28230L10 C28230L07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CANOPIES

Profile PDS-4-PLUS

Ref. A01263

Name	Key features	Material	Color	Ref.
Canopy BOX-M70 NEW		aluminum	 silver anodized  white lacquered  black anodized	C24541A C24541L10 C24541A07
Canopy BOX-M600 NEW		aluminum	 silver anodized  white lacquered  black anodized	C24542A C24542L10 C24542A07
Canopy Fi-60mm	- Convenient cable length adjustment, in the ZM system	steel	 gray lacquered  white lacquered  black lacquered	C24540L01 C24540L10 C24540L07
Canopy BOX-KR600		aluminum	 black lacquered  white lacquered	C24667L07 C24667L10
Canopy BOX-KS600		aluminum	 black lacquered  white lacquered	C24669L07 C24669L10
BOX-KR90		aluminum	 black lacquered  white lacquered	C24666L07 C24666L10
Canopy BOX-KS90		aluminum	 black lacquered  white lacquered	C24668L07 C24668L10

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > OTHER

Name	Key features	Material	Color	Ref.
Gland 9x1,5		Materiał, Material, multiselect		C42295C07
Gland 11x1,5		rubber		C42296C07
Gland 6,4x1,6		rubber		C24518C07
Gland M10x1	- metal housing - with M10x1 thread	mosiądz niklowany		C28275N00
Hermetic coupler THB.391.A4A, 4 pin	- 4 power terminals - compact dimensions	PA		C42268C10
Hermetic coupler THB.381, 2pin	- 2 power terminals - compact dimensions	PA		C28125C07
Hermetic coupler THB.391.A5A, 5 pin	- 5 power terminals - compact dimensions	PA		C28156C07
Joint connector THB.200.E5E, 5 pin	- 5 power terminals - 3-line branch	Materiał, Material, multiselect		C28157C07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > ADDITIONAL ITEMS

Name	Key features	Material	Color	Ref.
Adapter LENSO	- Necessary when using the DILENSO cover	PC	 transparent glossy	E62146

RELATED ACCESSORIES > ELECTRONICS > SWITCHES

Name	Key features	IP protection rating	Ref.
Proximity switch UNI-11 NEW	- touchless switch - width 11mm	20	E61603
Proximity switch UNI-11P NEW	- touchless switch - width 11mm - factory pre-soldered wires	20	E61604

Profile PDS-4-PLUS

Ref. A01263

Name	Key features	IP protection rating	Ref.
Proximity switch UNI-P	- touchless switch - width only 7mm - factory pre-soldered wires	20	E61580
Switch MICRO 96W IP20	- push button switch - factory pre-soldered wires	20	1491
Switch MICRO 96W IP20	- push button switch - factory pre-soldered wires - version with logo	20	1491LOGO
Proximity switch UNI	- touchless switch - width only 7mm	20	E61579