
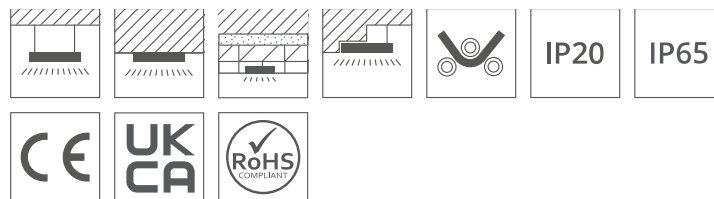


Profile LIPOD

Ref. A05554

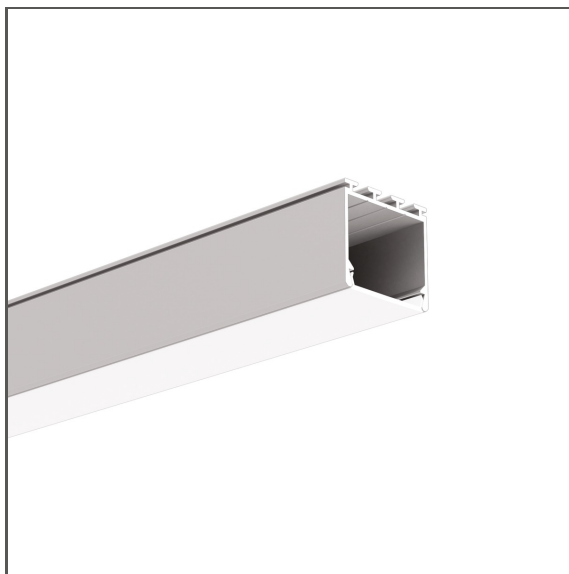

- Wide range of accessories
- Luminaire direction adjustment
- Possibility to mount the power supply in the luminous part of the luminaire
- Small bending radius
- Possibility to use current modules with efficiency up to 190lm/W and CRI>90. Available upon request.

APPLICATION

- main, decorative and functional lighting


MOUNTING

- suspended, to the surface or recessed, using dedicated accessories, a dedicated mounting track, properly selected screws or mounting adhesive
- easy assembly and disassembly by snapping in and out

ADDITIONAL INFORMATION

- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ
- NCS Premium paint option - minimum order quantity 30pcs - available immediately

TECHNICAL DRAWING



TECHNICAL SPECIFICATIONS

Material	aluminum
Possible fixture IP	20, 65
Possible fixture shapes	linear, polygonal, round
Profile cross-section	rectangular
Width	26.2 mm
Height	24.5 mm
LED gluing width A	24 mm
Number of LED strips A (8 mm wide)	3
Width of the glow	22 mm
Max power of a single KLUŚ LED strip	24 W/m
Lighting angle adjustment from	0
Lighting angle adjustment up to	240
Dedicated space for power supply	yes
Closet Rated	yes
Possibility of obtaining a line of light	yes
Possibility of bending	yes
Radius of the light arc	yes
Inward	3000 mm

Color	Length	Ref
■ silver anodized	1000 mm	A05554A_1
	2005 mm	A05554A_2
	3010 mm	A05554A_3
□ white lacquered	1000 mm	A05554L10OD_1
	2005 mm	A05554L10OD_2
	3010 mm	A05554L10OD_3
■ black anodized	1000 mm	A05554A07_1
	2005 mm	A05554A07_2
	3010 mm	A05554A07_3
■ caramel (NCSS3030-Y60R) lacquered	2005 mm	A05554L14OD_2
■ sand (NCSS2010-Y30R) lacquered	2005 mm	A05554L11OD_2
■ pastel blue (NCSS2010-B) lacquered	2005 mm	A05554L13OD_2
■ light sage (NCSS2010-G50Y) lacquered	2005 mm	A05554L12OD_2

Standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)

Profile LIPOD

Ref. A05554

Outdoor	3000 mm
Building type	Commercial, Retail, Entertainment/ Arts, HoReCa object
Facility zone	office, lobby / foyer, decorative, fitness / spa, media rooms / av
Easy assembly and disassembly by snapping in and out	yes
The cover is cut to the length of the profile	yes
Can be easily connected into runs	yes
Mounting to drywall	yes
Wire out back of extrusion	yes

LINE OF LIGHT TABLE

LED tape	LIGER-22 satin	LIGER-22 black	HS-22 frosted	G-22S satin	G-22R satin
K-1275-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
K-0480-24	✓ (1)	X	X	X	X
K-0960-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
K-1440-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
K-HD-0480-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
K-HD-0960-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
K-HD-1440-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
K-0360-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
K-0720-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
K-1080-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
K-0500-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
K-1000-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
K-HD-0430-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
K-1500-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
K-CB-1000-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
K-HD-0830-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
K-HD-1260-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
KWP-0360-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
KWP-0720-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
KWP-1080-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
KWP-0500-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
KWP-1000-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
KWP-1500-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
KWP-CB-1000-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
KWP-GHD-0430-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
KWP-GHD-0830-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)

KWP-HD-0430-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
KWP-HD-0830-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
KWP-HD-1260-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
K-2300-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
K-2400-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
K-CR-1210-24	✓ (1)	X	X	X	X
K-CR-1220-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
K-CR-1275-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
K-CRHD-1820-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
K-CRHD-1910-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
K-CR-0480-24	✓ (1)	X	X	X	X
K-CR-0960-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
K-CR-1440-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
K-HEHD-0480-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
K-HEHD-0960-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
K-HEHD-1440-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
K-HEHD-1920-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
K-VHE-0480-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
K-VHE-0960-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
K-VHE-1440-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
K-RGBW-1530-24	✓ (1)	X	X	X	X
KWP-GRGB-1530-24	✓ (1)	X	X	X	X
K-RGB-1200-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
KWP-RGB-1200-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
K-18D30-0960-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
KWP-18D30-0960-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
K-27T50-1440-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
K-SD-1440-24	✓ (1)	✓ (2)	✓ (2)	✓ (1)	✓ (1)
KWP-RGBW-1530-24	✓ (1)	X	X	X	X

Description


✓ - Line of Light for a number (X) of rows - Pixel free imaging

X - Visible Dotting from Diodes


HL - Centered Line of Light - Concentrated in middle

HL (X) - Centered Line of Light for a number (X) of rows - Concentrated in middle

Line of Light Guide



Clean Line of Light (Pixel free imaging)





Centered Line of Light




Visible Dotting from Diodes

SAMPLE PROJECTS

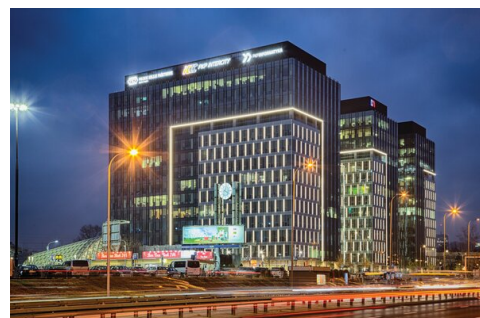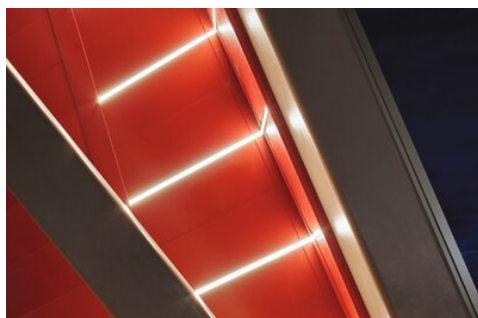


SIMILAR PROFILES



Profile LARKO
A05552



Profile KOZEL
A06454



Profile LOKOM
A05553

RELATED ACCESSORIES > COVERS

NAME	KEY FEATURES	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
					B20L07-ML30-0900-24
					B20L07-ML40-0900-24
					B34L07-ML30-0900-24
					B34L07-ML40-0900-24
				■ black	B48L07-ML30-0900-24
					B48L07-ML40-0900-24



Profile LIPOD

Ref. A05554

Optics DOT-22

NEW

constant voltage version

NAME	KEY FEATURES	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
				☐ white	B20L10-ML30-0900-24 B20L10-ML40-0900-24 B34L10-ML30-0900-24 B34L10-ML40-0900-24 B48L10-ML30-0900-24 B48L10-ML40-0900-24
Cover LIGER-22	 - high light quality - For indoor and outdoor applications - Ease of obtaining a line of light - Perfectly diffusing	PC	22 % 70 %	black satin	B17032B B17032S
Cover HS-22	 - For indoor and outdoor applications - UV resistant	PC	65 % 88 % 90.5 %	frosted clear microprism	B17011F B17011C B17011M
Cover G-22S	 - indoor use - Perfectly diffusing	PMMA	15 % 86 % 89 %	black satin semi-transparent	B17013B B17013S B17013T
Cover G-22R	 - indoor use - Perfectly diffusing	PMMA	20 % 71 % 89 % 94 %	black satin semi-transparent clear	B17006B B17006S B17006T B17006C

RELATED ACCESSORIES > END CAPS

NAME		MATERIAL	COLOR	REF.
End cap LIPOD		PP	 black	C24004C07
			 caramel (NCSS3030-Y60R)	C24004L14
			 gray	C24004C02
			 light sage (NCSS2010-G50Y)	C24004L12
			 pastel blue (NCSS2010-B)	C24004L13
			 sand (NCSS2010-Y30R)	C24004L11
			 silver	C24004L01
			 white	C24004C10
End cap KOMPENSA-L		PET-G	 black	C28286C07
			 gray	C28286C02
			 white	C28286L10
End cap KOMPENSA-L		PP	 black	C24015C07
			 gray	C24015C02
End cap KOMPENSA-K		PP	 black	C24020C07
			 gray	C24020C02

RELATED ACCESSORIES > PROFILE TECHNICZNE

Name	Material	Color	Ref.
Profile TEKNIK-ZM-TK	aluminum	 silver non anodized	A01554
Profile TEKUS	aluminum	 silver non anodized	A06638V
Profile TEKUS-ZM	aluminum	 silver non anodized	A01293
Profile TEKNIK-ZM	aluminum	 silver non anodized	A00399

RELATED ACCESSORIES > RELATED LED > WHITE MONO

Name	Key features	IP protection rating	Power consumption	Ref.
------	--------------	----------------------	-------------------	------

Profile LIPOD

Ref. A05554

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-0360-24 3.6 W/m, IP20 NEW		20	3.6 W/m	K-27-0360-24 K-30-0360-24 K-35-0360-24 K-40-0360-24 K-50-0360-24
LED tape K-HD-0430-24 4.3 W/m, IP20 NEW		20	4.3 W/m	K-HD27-0430-24 K-HD30-0430-24 K-HD35-0430-24 K-HD40-0430-24 K-HD50-0430-24
LED tape K-0480-24	- universal for basic applications	20	4.8 W/m	K-27-0480-24 K-30-0480-24 K-35-0480-24 K-40-0480-24 K-50-0480-24
LED tape K-HD-0480-24	- high LED density - Ease of obtaining a line of light	20	4.8 W/m	K-HD27-0480-24 K-HD30-0480-24 K-HD35-0480-24 K-HD40-0480-24 K-HD50-0480-24
LED tape K-0500-24 5 W/m, IP20 NEW		20	5 W/m	K-30-0500-24 K-40-0500-24
LED tape K-0720-24 7.2 W/m, IP20 NEW		20	7.2 W/m	K-27-0720-24 K-30-0720-24 K-35-0720-24 K-40-0720-24 K-50-0720-24
LED tape K-HD-0830-24 8.3 W/m, IP20 NEW		20	8.3 W/m	K-HD27-0830-24 K-HD30-0830-24 K-HD35-0830-24 K-HD40-0830-24 K-HD50-0830-24
LED tape K-0960-24	- universal for basic applications	20	9.6 W/m	K-27-0960-24 K-30-0960-24 K-30-0960-24-R30 K-35-0960-24 K-40-0960-24 K-40-0960-24-R30 K-50-0960-24 K-65-0960-24
LED tape K-HD-0960-24	- high LED density - Ease of obtaining a line of light	20	9.6 W/m	K-HD27-0960-24 K-HD30-0960-24 K-HD35-0960-24 K-HD40-0960-24 K-HD50-0960-24
LED tape K-1000-24 10 W/m, IP20 NEW		20	10 W/m	K-30-1000-24 K-40-1000-24
LED tape K-CB-1000-24 10 W/m, IP20 NEW		20	10 W/m	K-CB27-1000-24 K-CB30-1000-24 K-CB40-1000-24 K-CB50-1000-24
LED tape K-1080-24 10.8 W/m, IP20 NEW		20	10.8 W/m	K-27-1080-24 K-30-1080-24 K-35-1080-24 K-40-1080-24 K-50-1080-24
LED tape K-HD-1260-24 12.6 W/m, IP20 NEW		20	12.6 W/m	K-HD27-1260-24 K-HD30-1260-24 K-HD35-1260-24 K-HD40-1260-24 K-HD50-1260-24

Profile LIPOD

Ref. A05554

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-1275-24	- universal for basic applications	20	14.4 W/m	K-22-1275-24 K-25-1275-24 K-27-1275-24 K-30-1275-24 K-35-1275-24 K-40-1275-24 K-50-1275-24
LED tape K-1440-24	- universal for basic applications	20	14.4 W/m	K-27-1440-24 K-30-1440-24 K-30-1440-24-R30 K-35-1440-24 K-40-1440-24 K-40-1440-24-R30 K-50-1440-24
LED tape K-HD-1440-24	- high LED density - Ease of obtaining a line of light	20	14.4 W/m	K-HD27-1440-24 K-HD30-1440-24 K-HD35-1440-24 K-HD40-1440-24 K-HD50-1440-24
LED tape K2-1440-24 14.4 W/m, IP20 NEW		20	14.4 W/m	K2-27-1440-24 K2-30-1440-24 K2-35-1440-24 K2-40-1440-24 K2-50-1440-24
LED tape K-1500-24 15 W/m, IP20 NEW		20	15 W/m	K-30-1500-24 K-40-1500-24
LED tape K2-1920-24	- LED double-row strip - quick installation	20	19.2 W/m	K2-27-1920-24 K2-30-1920-24 K2-35-1920-24 K2-40-1920-24 K2-50-1920-24
LED tape K3-2160-24 21.6 W/m, IP20 NEW	- Three-row LED strip - quick installation	20	21.6 W/m	K3-27-2160-24 K3-30-2160-24 K3-35-2160-24 K3-40-2160-24 K3-50-2160-24
LED tape K-2300-24	- high power	20	23 W/m	K-30-2300-24 K-40-2300-24
LED tape K-2400-24	- high power	20	24 W/m	K-27-2400-24 K-30-2400-24 K-35-2400-24 K-40-2400-24 K-50-2400-24
LED tape K3-2880-24	- Three-row LED strip - quick installation	20	28.8 W/m	K3-27-2880-24 K3-30-2880-24 K3-35-2880-24 K3-40-2880-24 K3-50-2880-24
LED tape KWP-0360-24 3.6 W/m, IP65 NEW		65	3.6 W/m	KWP-27-0360-24 KWP-30-0360-24 KWP-35-0360-24 KWP-40-0360-24 KWP-50-0360-24
LED tape KWP-GHD-0430-24 4.3 W/m, IP65 NEW		65	4.3 W/m	KWP-GHD27-0430-24 KWP-GHD30-0430-24 KWP-GHD35-0430-24 KWP-GHD40-0430-24 KWP-GHD50-0430-24
LED tape KWP-HD-0430-24 4.3 W/m, IP65 NEW		65	4.3 W/m	KWP-HD27-0430-24 KWP-HD30-0430-24 KWP-HD35-0430-24 KWP-HD40-0430-24 KWP-HD50-0430-24

Profile LIPOD

Ref. A05554

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape KWP-0480-24	- universal for basic applications	65	4.8 W/m	KWP-27-0480-24 KWP-30-0480-24 KWP-35-0480-24 KWP-40-0480-24 KWP-50-0480-24
LED tape KWP-GHD-0480-24	- high LED density - Ease of obtaining a line of light	65	4.8 W/m	KWP-GHD27-0480-24 KWP-GHD30-0480-24 KWP-GHD35-0480-24 KWP-GHD40-0480-24 KWP-GHD50-0480-24
LED tape KWP-0500-24 5 W/m, IP65 NEW		65	5 W/m	KWP-30-0500-24 KWP-40-0500-24
LED tape KWP-0720-24 7.2 W/m, IP65 NEW		65	7.2 W/m	KWP-27-0720-24 KWP-30-0720-24 KWP-35-0720-24 KWP-40-0720-24 KWP-50-0720-24
LED tape KWP-GHD-0830-24 8.3 W/m, IP65 NEW		65	8.3 W/m	KWP-GHD27-0830-24 KWP-GHD30-0830-24 KWP-GHD35-0830-24 KWP-GHD40-0830-24 KWP-GHD50-0830-24
LED tape KWP-HD-0830-24 8.3 W/m, IP65 NEW		65	8.3 W/m	KWP-HD27-0830-24 KWP-HD30-0830-24 KWP-HD35-0830-24 KWP-HD40-0830-24 KWP-HD50-0830-24
LED tape KWP-0960-24	- universal for basic applications	65	9.6 W/m	KWP-27-0960-24 KWP-30-0960-24 KWP-35-0960-24 KWP-40-0960-24 KWP-50-0960-24 KWP-65-0960-24
LED tape KWP-GHD-0960-24	- high LED density - Ease of obtaining a line of light	65	9.6 W/m	KWP-GHD27-0960-24 KWP-GHD30-0960-24 KWP-GHD35-0960-24 KWP-GHD40-0960-24 KWP-GHD50-0960-24
LED tape KWP-1000-24 10 W/m, IP65 NEW		65	10 W/m	KWP-30-1000-24 KWP-40-1000-24
LED tape KWP-CB-1000-24 10 W/m, IP65 NEW		65	10 W/m	KWP-CB27-1000-24 KWP-CB30-1000-24 KWP-CB40-1000-24 KWP-CB50-1000-24
LED tape KWP-1080-24 10.8 W/m, IP65 NEW		65	10.8 W/m	KWP-27-1080-24 KWP-30-1080-24 KWP-35-1080-24 KWP-40-1080-24 KWP-50-1080-24
LED tape KWP-GHD-1260-24 12.6 W/m, IP65		65	12.6 W/m	KWP-GHD27-1260-24 KWP-GHD30-1260-24 KWP-GHD35-1260-24 KWP-GHD40-1260-24 KWP-GHD50-1260-24
LED tape KWP-HD-1260-24 12.6 W/m, IP65 NEW		65	12.6 W/m	KWP-HD27-1260-24 KWP-HD30-1260-24 KWP-HD35-1260-24 KWP-HD40-1260-24 KWP-HD50-1260-24

Profile LIPOD

Ref. A05554

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape KWP-1440-24	- universal for basic applications	65	14.4 W/m	KWP-27-1440-24 KWP-30-1440-24 KWP-35-1440-24 KWP-40-1440-24 KWP-50-1440-24
LED tape KWP-GHD-1440-24	- high LED density - Ease of obtaining a line of light	65	14.4 W/m	KWP-GHD27-1440-24 KWP-GHD30-1440-24 KWP-GHD35-1440-24 KWP-GHD40-1440-24 KWP-GHD50-1440-24
LED tape KWP-1500-24 15 W/m, IP65 NEW		65	15 W/m	KWP-30-1500-24 KWP-40-1500-24

RELATED ACCESSORIES > RELATED LED > HIGH EFFICACY

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-HEHD-0480-24	- CRI over 95 - High Efficacy	20	4.8 W/m	K-HEHD22-0480-24 K-HEHD25-0480-24 K-HEHD27-0480-24 K-HEHD30-0480-24 K-HEHD35-0480-24 K-HEHD40-0480-24 K-HEHD50-0480-24
LED tape K-VHE-0480-24	- universal for basic applications - high efficacy - High Efficacy	20	4.8 W/m	K-VHE27-0480-24 K-VHE30-0480-24 K-VHE35-0480-24 K-VHE40-0480-24 K-VHE50-0480-24
LED tape K-HEHD-0960-24	- CRI over 95 - High Efficacy	20	9.6 W/m	K-HEHD22-0960-24 K-HEHD25-0960-24 K-HEHD27-0960-24 K-HEHD30-0960-24 K-HEHD35-0960-24 K-HEHD40-0960-24 K-HEHD50-0960-24
LED tape K-VHE-0960-24	- universal for basic applications - high efficacy - High Efficacy	20	9.6 W/m	K-VHE27-0960-24 K-VHE30-0960-24 K-VHE35-0960-24 K-VHE40-0960-24 K-VHE50-0960-24
LED tape K-HEHD-1440-24	- CRI over 95 - High Efficacy	20	14.4 W/m	K-HEHD22-1440-24 K-HEHD25-1440-24 K-HEHD27-1440-24 K-HEHD30-1440-24 K-HEHD35-1440-24 K-HEHD40-1440-24 K-HEHD50-1440-24
LED tape K-VHE-1440-24	- universal for basic applications - high efficacy - High Efficacy	20	14.4 W/m	K-VHE27-1440-24 K-VHE30-1440-24 K-VHE35-1440-24 K-VHE40-1440-24 K-VHE50-1440-24
LED tape K-HEHD-1920-24	- CRI over 95 - High Efficacy	20	19.2 W/m	K-HEHD22-1920-24 K-HEHD25-1920-24 K-HEHD27-1920-24 K-HEHD30-1920-24 K-HEHD35-1920-24 K-HEHD40-1920-24 K-HEHD50-1920-24

RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CCT

Profile LIPOD

Ref. A05554

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-RGB-0700-24V	- RGB	20	7 W/m	K-RGB-0700-24V
LED tape K-RGB-1200-24	- RGB	20	12 W/m	K-RGB-1200-24
LED tape K-RGB27T65-1200-24	- RGB+Tunable White	20	12 W/m	K-RGB27T65-1200-24
LED tape KWP-RGB-0700-24	- RGB	65	7 W/m	KWP-RGB-0700-24
LED tape KWP-RGB-1200-24	- RGB	65	12 W/m	KWP-RGB-1200-24
LED tape KWP-GRGB-1530-24 15.3 W/m, IP65 NEW	- RGBW - high LED density	65	15.3 W/m	KWP-GRGB30-1530-24 KWP-GRGB40-1530-24

RELATED ACCESSORIES > RELATED LED > CRI 95+

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-CR-0480-24	- universal for basic applications - CRI over 95	20	4.8 W/m	K-CR27-0480-24 K-CR30-0480-24 K-CR35-0480-24 K-CR40-0480-24 K-CR50-0480-24
LED tape K-CR-1210-24	- CRI over 95	20	4.8 W/m	K-CR22-1210-24 K-CR25-1210-24 K-CR27-1210-24 K-CR30-1210-24 K-CR35-1210-24 K-CR40-1210-24 K-CR50-1210-24
LED tape K-CRHD-1910-24	- CRI over 95 - high LED density	20	9.1 W/m	K-CRHD22-1910-24 K-CRHD25-1910-24 K-CRHD27-1910-24 K-CRHD30-1910-24 K-CRHD35-1910-24 K-CRHD40-1910-24 K-CRHD50-1910-24
LED tape K-CR-0960-24	- universal for basic applications - CRI over 95	20	9.6 W/m	K-CR27-0960-24 K-CR30-0960-24 K-CR35-0960-24 K-CR40-0960-24 K-CR50-0960-24
LED tape K-CR-1220-24	- CRI over 95	20	9.6 W/m	K-CR22-1220-24 K-CR25-1220-24 K-CR27-1220-24 K-CR30-1220-24 K-CR35-1220-24 K-CR40-1220-24 K-CR50-1220-24
LED tape K-CR-1275-24	- CRI over 95	20	14.4 W/m	K-CR22-1275-24 K-CR25-1275-24 K-CR27-1275-24 K-CR30-1275-24 K-CR35-1275-24 K-CR40-1275-24 K-CR50-1275-24
LED tape K-CR-1440-24	- universal for basic applications - CRI over 95	20	14.4 W/m	K-CR27-1440-24 K-CR30-1440-24 K-CR35-1440-24 K-CR40-1440-24 K-CR50-1440-24

Profile LIPOD

Ref. A05554

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-CRHD-1820-24	- CRI over 95 - high LED density	20	18.25 W/m	K-CRHD22-1820-24 K-CRHD25-1820-24 K-CRHD27-1820-24 K-CRHD30-1820-24 K-CRHD35-1820-24 K-CRHD40-1820-24 K-CRHD50-1820-24
LED tape KWP-CR-0480-24	- universal for basic applications - CRI over 95	65	4.8 W/m	KWP-CR27-0480-24 KWP-CR30-0480-24 KWP-CR35-0480-24 KWP-CR40-0480-24 KWP-CR50-0480-24
LED tape KWP-CR-0960-24	- universal for basic applications - CRI over 95	65	9.6 W/m	KWP-CR27-0960-24 KWP-CR30-0960-24 KWP-CR35-0960-24 KWP-CR40-0960-24 KWP-CR50-0960-24

RELATED ACCESSORIES > RELATED LED > BENDABLE

Name	IP protection rating	Power consumption	Ref.
LED tape K-BTRGB40-1510-24	20	15.1 W/m	K-BTRGB40-1510-24

RELATED ACCESSORIES > RELATED LED

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-SD-1440-24		20	14.4 W/m	K-SD27-1440-24 K-SD30-1440-24 K-SD35-1440-24 K-SD40-1440-24
LED tape KWP-RGB27T50-1200-24, 2700K, 390 lm/m, 12 W/m, IP65		65	12 W/m	KWP-RGB27T50-1200-24
LED tape KWP-RGBW-1530-24 15.3 W/m, IP65 NEW	- RGBW - high LED density	65	15.3 W/m	KWP-RGB30-1530-24 KWP-RGB40-1530-24

RELATED ACCESSORIES > RELATED LED > ADJUSTABLE WHITE / DIM TO WARM

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-18D30-0960-24	- Dim To Warm LED Tape	20	9.6 W/m	K-18D30-0960-24
LED tape K-27T50-1440-24	- RGB+Tunable White	20	14.4 W/m	K-27T50-1440-24
LED tape KWP-18D30-0960-24		65	9.6 W/m	KWP-18D30-0960-24

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > MOUNTING BRACKETS

Name	Key features	Material	Color	Ref.
Mounting bracket REGIP-EXT NEW	- Mounting with angle adjustment function	aluminum, stainless steel	 black  white  gray	C28304C07 C28304C10 C28304N00
Mounting bracket GIP-STN	- For indoor and outdoor applications	stainless steel	 silver	C24447N00

Profile LIPOD

Ref. A05554

Name	Key features	Material	Color	Ref.
Mounting bracket AM-24	- Compatible with Armstrong Prelude 24 system	steel	 silver	C24235N00
Mounting bracket GIP	- Aesthetic installation of linear fixtures	PP	 gray	C24332C02
Mounting bracket REGIP	- Mounting with angle adjustment function	ABS	 gray	C28057C02
Mounting bracket GIP	- Aesthetic installation of linear fixtures	ASA	 gray  black	C24310C02 C24328C07
Fastener set NEO-ZM-3	- 3 pieces for heavy fixtures	magnet	 silver	C28105N00
Fastener set NEO-ZM-4	- 4 pieces for light fixtures	magnet	 silver	C28106N00
Fastener set NEO-ZM-PLUS-3	- 3 pieces for heavy fixtures	magnet	 silver	C28107N00
Fastener set NEO-ZM-PLUS-4	- 4 pieces for heavy fixtures	magnet	 silver	C28108N00
Mounting bracket GIP-STN-90D	- For indoor and outdoor applications	stainless steel	 silver  white  black	C20002N00 C20002L10 C20002L07
Mounting bracket GIP-STN-90G	- For indoor and outdoor applications	stainless steel	 silver  white  black	C20001N00 C20001L10 C20001L07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > SURFACE SPRINGS

Name	Material	Color	Ref.
Spring GP	stainless steel	 silver	C24500N00

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > LATCHES

Name	Material	Color	Ref.
Latch TEKNIK	PP	 white	C24003C10

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > PROFILE MASKING COVERS

Name	Key features	Material	Color	Ref.
Masking cover MP-22	- Lightproof	PC	 gray metalized  gray metalized  white lacquered  white lacquered  black lacquered  black lacquered	C28261L01_1 C28261L01_0.25 C28261L10_1 C28261L10_0.25 C28261L07_1 C28261L07_0.25

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > ISOLATING BASES

Name	Material	Color	Ref.
Isolating bases FI-6	nylon	 white	C28109C00
Isolating bases FI-5	nylon	 white	42204
Isolating bases FI-3	nylon	 white	42203

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONDUCTIVE FASTENERS AND HEADS FOR PROFILES

Profile LIPOD

Ref. A05554

Name	Key features	Material	Color	Ref.
Head BZP-ZO		stainless steel	 silver	42214
Head BZP-ZZ		stainless steel	 gray	42215
Fastener PUSZ-LIN-ZM	- Power supply cable - mounting in the ZM system	stainless steel, brass, nylon, aluminum aluminum, brass, nylon aluminum, brass, nylon	 silver  white lacquered  black lacquered	C28160N00 C28160L10 C28160L07
Fastener PUSZ-PRET-ZM	- Power supply cable - mounting in the ZM system	stainless steel, brass, nylon aluminum, brass, nylon aluminum, brass, nylon	 silver  white  black	C28161N00 C28161L10 C28161L07
Fastener FI-8-LIN-ZMZ	- Power supply - mounting in the ZM system	stainless steel, steel, PA, EPDM aluminum, PA, EPDM aluminum, PA, EPDM	 silver  white  black	C28171N00 C28171L10 C28171L07
Fastener DP-ZZ, silver		stainless steel	 silver	00651
Fastener OS22-PRET-Z	- Power supply rod	PA, stainless steel	 white  black	C28186L10 C28186L07
Fastener OS22-DUO-PRET-Z	- Power supply cable, two poles	stainless steel, PA	 white  black	C28185L10 C28185L07
Fastener OS22-LIN-Z	- Power supply cable	stainless steel, PA	 white  black	C28184L10 C28184L07
Fastener OS22-DUO-LIN-Z	- Power supply cable, two poles	stainless steel, PA	 white  black	C28183L10 C28183L07
Fastener PUSZ-ZM	- Power supply - mounting in the ZM system	stainless steel aluminum aluminum	 silver  white lacquered  black lacquered	C20010N00 C20010L10 C20010L07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > FASTENERS AND HEADS FOR PROFILES

Name	Key features	Material	Color	Ref.
Fastener FI-8-LIN-ZM	- Installation in the ZM system	stainless steel, PA	 silver  white  black	C28170N00 C28170L10 C28170L07
Fastener FI-10-ZM-P, silver	- Cross mounting	stainless steel	 silver	C28117N00
Fastener FI-10-ZM-W, silver		stainless steel	 silver	C28116N00
Fastener DP, silver		stainless steel	 silver	00644
Fastener UCHO-ZM	- Convenient mounting in the ZM system	aluminum	 silver anodized  black anodized	C28192N00 C28192L07
Fastener FI-8-PRET-ZM	- Installation in the ZM system	stainless steel aluminum aluminum	 silver  white  black	C28189N00 C28189L10 C28189L07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > SUSPENSION AND MOUNTING SETS

Name	Key features	Material	Color	Ref.
Fastener set W1		brass, stainless steel	 silver	C28203N00
Fastener set W6		stainless steel, brass	 silver	C28205N00
Fastener set W7		brass, stainless steel	 silver	42605
Fastener set RD-1	- Smooth cable adjustment, cable included	brass	 silver glossy  silver satin  white lacquered  black lacquered	C28231P00 C28231P01 C28231L10 C28231L07

Profile LIPOD

Ref. A05554

Name	Key features	Material	Color	Ref.
Fastener set RG-1	- Cable adjustment at the ceiling, cable included	brass	 silver glossy	C28230P00
			 silver satin	C28230P01
			 white colored	C28230L10
			 black colored	C28230L07
Fastener set RD-2	- Smooth cable adjustment, angled mounting, cable included	brass	 silver glossy	C28232P00
			 silver satin	C28232P01
			 white lacquered	C28232L10
			 black lacquered	C28232L07
Fastener set RD-3	- Smooth cable adjustment	brass	 silver glossy	C28233P00
			 silver satin	C28233P01
			 white lacquered	C28233L10
			 black lacquered	C28233L07
Fastener set RD-4	- Smooth cable adjustment, angled mounting	brass	 silver glossy	C28234P00
			 silver satin	C28234P01
			 white lacquered	C28234L10
			 black lacquered	C28234L07
Fastener set FI-8-ZM-1	- Power supply, for wall and drywall, in the ZM system	stainless steel, aluminum	 silver	C28134N00
			 white lacquered	C28134L10
			 black lacquered	C28134L07
Fastener set FI-8-ZM-2	- Convenient cable length adjustment, in the ZM system	stainless steel, aluminum	 silver	C28135N00
			 white lacquered	C28135L10
			 black lacquered	C28135L07
Fastener set PUSZ-ZM-1	- Power supply, for wall and drywall, in the ZM system	stainless steel, aluminum	 silver	C28130N00
			 white lacquered	C28130L10
			 black lacquered	C28130L07
Fastener set PUSZ-ZM-2	- Convenient cable length adjustment, in the ZM system	stainless steel, aluminum	 silver	C28131N00
			 white lacquered	C28131L10
			 black lacquered	C28131L07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > SECURITY AND BLOCKS

Name	Key features	Material	Color	Ref.
Block ZM, gray	- Accessory locking in the ZM system	silicon	 gray	C28194N00

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CANOPIES

Name	Key features	Material	Color	Ref.
Canopy Fi-60mm	- Convenient cable length adjustment, in the ZM system	steel	 gray lacquered	C24540L01
			 white lacquered	C24540L10
			 black lacquered	C24540L07
Canopy BOX-M70		aluminum	 silver anodized	C24541A
			 white lacquered	C24541L10
			 black anodized	C24541A07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > OTHER

Name	Key features	Material	Color	Ref.
Gland 9x1,5		Material, Material, multiselect		C42295C07
Gland 11x1,5		rubber		C42296C07
Gland 6,4x1,6		rubber		C24518C07
Gland M10x1	- metal housing - with M10x1 thread	mosiądz niklowany		C28275N00

Profile LIPOD

Ref. A05554

Name	Key features	Material	Color	Ref.
Hermetic coupler THB.391.A4A, 4 pin	- 4 power terminals - compact dimensions	PA		C42268C10
Hermetic coupler THB.381, 2pin	- 2 power terminals - compact dimensions	PA		C28125C07
Hermetic coupler THB.391.A5A, 5 pin	- 5 power terminals - compact dimensions	PA		C28156C07
Joint connector THB.200.E5E, 5 pin	- 5 power terminals - 3-line branch	Material, Material, multiselect		C28157C07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONNECTORS

Name	Material	Color	Ref.
Connector ZM	stainless steel	 silver	42716
		 silver	42717
		 silver	42720
		 silver	42728
		 black colored	C24797C07
		colorless non colored	C24797N00
		 black colored	C28070C07
		 silver	C28070N00
		 black colored	C28071C07
		 silver	C28071N00
		 black colored	C28072C07
		 silver	C28072N00
		 black colored	C28073C07
		 silver	C28073N00
		 black colored	C28074C07
		 silver	C28074N00
Connector ZM-NA	stainless steel	 black colored	C28075C07
		 silver	C28075N00
		 silver	C28243N00
			42305
			42339
Connector ZM-Y	stainless steel	 silver	42723
			42724
			42725
			C28242N00
Connector ZM-X	stainless steel	 black colored	C28082C07
		 silver	C28082N00
Connector ZM-T	stainless steel	 black colored	C28079C07
		 silver	C28079N00
		 black colored	C28080C07
		 silver	C28080N00
		 black colored	C28081C07
		 silver	C28081N00
Connector ZM-X	stainless steel	 black colored	C28076C07
		 silver	C28076N00
		 black colored	C28077C07
		 silver	C28077N00
		 black colored	C28078C07
		 silver	C28078N00

Profile LIPOD

Ref. A05554

Name	Material	Color	Ref.
Connector ZM-PION	stainless steel	 silver	42314
		 silver	42316
		 silver	42320
		 silver	42718
		 silver	42719
		 black colored	C28084C07
		 silver	C28084N00
		 black colored	C28085C07
		 silver	C28085N00
		 black colored	C28086C07
		 silver	C28086N00
		 black colored	C28087C07
		 silver	C28087N00
		 black colored	C28088C07
		 silver	C28088N00
Connector ZM-NA-PION	stainless steel	 silver	42315
			42317
			42321
			42726
			42727
Connector ZM-MINI	stainless steel	 silver	44501
			C28083N00

RELATED ACCESSORIES > ELECTRONICS > SWITCHES

Name	Key features	IP protection rating	Ref.
Proximity switch UNI-11 	- touchless switch - width 11mm	20	E61603
Proximity switch UNI-11P 	- touchless switch - width 11mm - factory pre-soldered wires	20	E61604
Proximity switch UNI-P	- touchless switch - width only 7mm - factory pre-soldered wires	20	E61580
Proximity switch UNI	- touchless switch - width only 7mm	20	E61579