


Profile PAC-ALU

Ref. A04370

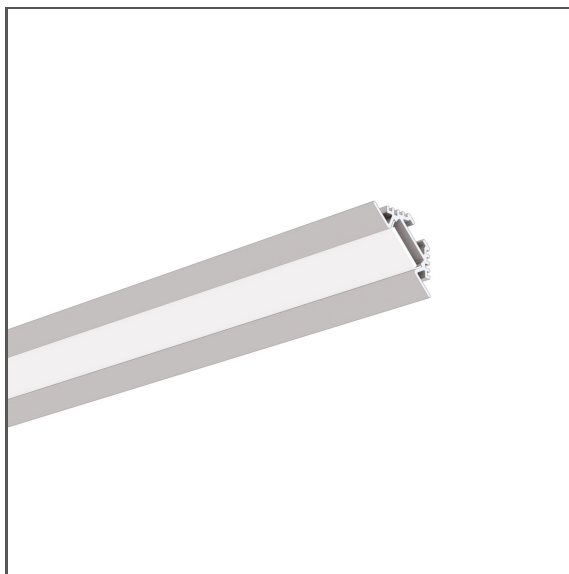

- Installation in corners
- Corner masking
- Lighting at a 45° angle

APPLICATION

- furniture, under-cabinet and decorative lighting


MOUNTING

- to the surface, using dedicated accessories, mounting adhesive or properly selected screws

ADDITIONAL INFORMATION

- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING



TECHNICAL SPECIFICATIONS

Material	aluminum
Color	 silver anodized
Possible fixture IP	20, 65
Possible fixture shapes	linear, polygonal
Profile cross-section	angled
Width	30.4 mm
Height	10.5 mm
LED gluing width A	13.1 mm
Number of LED strips A (8 mm wide)	1
Width of the glow	13.2 mm
Max power of a single KLUŚ LED strip	24 W/m
Lighting at an angle	45
Building type	Residential, Retail, HoReCa object
Facility zone	office, kitchen, bathroom, under- cabinet / furniture, cove / perimeter, exhibition / tradeshow / display
Wire out back of extrusion	yes

Length	Ref
1000 mm	A04370A_1
2005 mm	A04370A_2
3010 mm	A04370A_3

Standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)

LINE OF LIGHT TABLE

LED tape	HS-12 frosted
K-0360-24	X
K-0720-24	X
K-1080-24	X
K-HD-0430-24	X
K-HD-0830-24	X
K-HD-1260-24	X
KWP-0360-24	X
KWP-0720-24	X
KWP-1080-24	X
KWP-GHD-0430-24	X
KWP-GHD-0830-24	X
KWP-HD-0430-24	X
KWP-HD-0830-24	X
KWP-HD-1260-24	X
K-2400-24	X
K-RGBW-1530-24	X
K-18D30-0960-24	X

Description


✓ - Line of Light for a number (X) of rows - Pixel free imaging

X - Visible Dotting from Diodes


HL - Centered Line of Light - Concentrated in middle

HL (X) - Centered Line of Light for a number (X) of rows - Concentrated in middle

Line of Light Guide



Clean Line of Light (Pixel free imaging)





Centered Line of Light



Visible Dotting from Diodes

SAMPLE PROJECTS

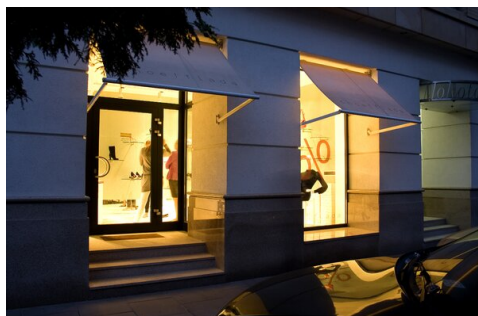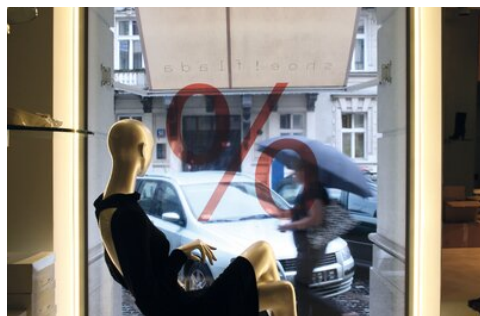

Profile PAC-ALU

Ref. A04370

RELATED ACCESSORIES > COVERS

NAME		KEY FEATURES	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
Cover KA-13		- maximum brightness - high durability - high light quality - indoor use - basic - universal	PC	72 %	frosted	B17066F
				91 %	clear	B17066C
Cover HS-12		- maximum brightness - high durability - high light quality	PC	73 %	frosted	B17201M
				94 %	clear	B17201T

RELATED ACCESSORIES > END CAPS

NAME		MATERIAL	COLOR	REF.
End cap PAC-ALU		PP	 gray	C20107C02

RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CCT

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-RGBW-1530-24	- RGBW (3000K) - high LED density	20	15.3 W/m	K-RGBW-1530-24
LED tape K-RGB-0700-24V	- RGB	20	7 W/m	K-RGB-0700-24V
LED tape KWP-RGBW-1530-24	- RGBW (3000K)	65	15.3 W/m	KWP-RGBW-1530-24
LED tape KWP-GRGBW-1530-24	- RGBW (3000K)	65	15.3 W/m	KWP-GRGBW-1530-24
LED tape KWP-RGB-0700-24	- RGB	65	7 W/m	KWP-RGB-0700-24
LED tape K-RGB-1200-24	- RGB	20	12 W/m	K-RGB-1200-24

RELATED ACCESSORIES > RELATED LED > WHITE MONO

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-0360-24 3.6 W/m, IP20 NEW		20	3.6 W/m	K-27-0360-24
				K-30-0360-24
				K-35-0360-24
				K-40-0360-24
				K-50-0360-24
LED tape K-0720-24 7.2 W/m, IP20 NEW		20	7.2 W/m	K-27-0720-24
				K-30-0720-24
				K-35-0720-24
				K-40-0720-24
				K-50-0720-24
LED tape K-1080-24 10.8 W/m, IP20 NEW		20	10.8 W/m	K-27-1080-24
				K-30-1080-24
				K-35-1080-24
				K-40-1080-24
				K-50-1080-24

Profile PAC-ALU

Ref. A04370

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape KWP-0360-24 3.6 W/m, IP65 NEW		65	3.6 W/m	KWP-27-0360-24 KWP-30-0360-24 KWP-35-0360-24 KWP-40-0360-24 KWP-50-0360-24
LED tape KWP-0720-24 7.2 W/m, IP65 NEW		65	7.2 W/m	KWP-27-0720-24 KWP-30-0720-24 KWP-35-0720-24 KWP-40-0720-24 KWP-50-0720-24
LED tape KWP-1080-24 10.8 W/m, IP65 NEW		65	10.8 W/m	KWP-27-1080-24 KWP-30-1080-24 KWP-35-1080-24 KWP-40-1080-24 KWP-50-1080-24
LED tape KWP-GHD-0430-24 4.3 W/m, IP65 NEW		65	4.3 W/m	KWP-GHD27-0430-24 KWP-GHD30-0430-24 KWP-GHD35-0430-24 KWP-GHD40-0430-24 KWP-GHD50-0430-24
LED tape KWP-GHD-0830-24 8.3 W/m, IP65 NEW		65	8.3 W/m	KWP-GHD27-0830-24 KWP-GHD30-0830-24 KWP-GHD35-0830-24 KWP-GHD40-0830-24 KWP-GHD50-0830-24
LED tape KWP-HD-0430-24 4.3 W/m, IP65 NEW		65	4.3 W/m	KWP-HD27-0430-24 KWP-HD30-0430-24 KWP-HD35-0430-24 KWP-HD40-0430-24 KWP-HD50-0430-24
LED tape KWP-HD-0830-24 8.3 W/m, IP65 NEW		65	8.3 W/m	KWP-HD27-0830-24 KWP-HD30-0830-24 KWP-HD35-0830-24 KWP-HD40-0830-24 KWP-HD50-0830-24
LED tape KWP-HD-1260-24 12.6 W/m, IP65 NEW		65	12.6 W/m	KWP-HD27-1260-24 KWP-HD30-1260-24 KWP-HD35-1260-24 KWP-HD40-1260-24 KWP-HD50-1260-24
LED tape K-HD-0430-24 4.3 W/m, IP20 NEW		20	4.3 W/m	K-HD27-0430-24 K-HD30-0430-24 K-HD35-0430-24 K-HD40-0430-24 K-HD50-0430-24
LED tape K-HD-0830-24 8.3 W/m, IP20 NEW		20	8.3 W/m	K-HD27-0830-24 K-HD30-0830-24 K-HD35-0830-24 K-HD40-0830-24 K-HD50-0830-24
LED tape K-HD-1260-24 12.6 W/m, IP20 NEW		20	12.6 W/m	K-HD27-1260-24 K-HD30-1260-24 K-HD35-1260-24 K-HD40-1260-24 K-HD50-1260-24
LED tape K-0960-24	- universal for basic applications	20	9.6 W/m	K-27-0960-24 K-30-0960-24 K-30-0960-24-R30 K-35-0960-24 K-40-0960-24 K-40-0960-24-R30 K-50-0960-24 K-65-0960-24

Profile PAC-ALU

Ref. A04370

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-0480-24	- universal for basic applications	20	4.8 W/m	K-27-0480-24 K-30-0480-24 K-35-0480-24 K-40-0480-24 K-50-0480-24
LED tape K-1440-24	- universal for basic applications	20	14.4 W/m	K-27-1440-24 K-30-1440-24 K-30-1440-24-R30 K-35-1440-24 K-40-1440-24 K-40-1440-24-R30 K-50-1440-24
LED tape K-HD-0480-24	- high LED density - Ease of obtaining a line of light	20	4.8 W/m	K-HD27-0480-24 K-HD30-0480-24 K-HD35-0480-24 K-HD40-0480-24 K-HD50-0480-24
LED tape K-HD-0960-24	- high LED density - Ease of obtaining a line of light	20	9.6 W/m	K-HD27-0960-24 K-HD30-0960-24 K-HD35-0960-24 K-HD40-0960-24 K-HD50-0960-24
LED tape K-HD-1440-24	- high LED density - Ease of obtaining a line of light	20	14.4 W/m	K-HD27-1440-24 K-HD30-1440-24 K-HD35-1440-24 K-HD40-1440-24 K-HD50-1440-24
LED tape KWP-1440-24	- universal for basic applications	65	14.4 W/m	KWP-27-1440-24 KWP-30-1440-24 KWP-35-1440-24 KWP-40-1440-24 KWP-50-1440-24
LED tape KWP-0480-24	- universal for basic applications	65	4.8 W/m	KWP-27-0480-24 KWP-30-0480-24 KWP-35-0480-24 KWP-40-0480-24 KWP-50-0480-24
LED tape KWP-0960-24	- universal for basic applications	65	9.6 W/m	KWP-27-0960-24 KWP-30-0960-24 KWP-35-0960-24 KWP-40-0960-24 KWP-50-0960-24 KWP-65-0960-24
LED tape KWP-GHD-0480-24	- high LED density - Ease of obtaining a line of light	65	4.8 W/m	KWP-GHD27-0480-24 KWP-GHD30-0480-24 KWP-GHD35-0480-24 KWP-GHD40-0480-24 KWP-GHD50-0480-24
LED tape KWP-GHD-1260-24 12.6 W/m, IP65		65	12.6 W/m	KWP-GHD27-1260-24 KWP-GHD30-1260-24 KWP-GHD35-1260-24 KWP-GHD40-1260-24 KWP-GHD50-1260-24
LED tape K-2300-24	- high power	20	23 W/m	K-30-2300-24 K-40-2300-24
LED tape K-2400-24	- high power	20	24 W/m	K-27-2400-24 K-30-2400-24 K-35-2400-24 K-40-2400-24 K-50-2400-24

RELATED ACCESSORIES > RELATED LED > CRI 95+

Profile PAC-ALU

Ref. A04370

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-CR-0480-24	- universal for basic applications - CRI over 95	20	4.8 W/m	K-CR27-0480-24 K-CR30-0480-24 K-CR35-0480-24 K-CR40-0480-24 K-CR50-0480-24
LED tape K-CR-0960-24	- universal for basic applications - CRI over 95	20	9.6 W/m	K-CR27-0960-24 K-CR30-0960-24 K-CR35-0960-24 K-CR40-0960-24 K-CR50-0960-24
LED tape K-CR-1440-24	- universal for basic applications - CRI over 95	20	14.4 W/m	K-CR27-1440-24 K-CR30-1440-24 K-CR35-1440-24 K-CR40-1440-24 K-CR50-1440-24
LED tape KWP-CR-0960-24	- universal for basic applications - CRI over 95	65	9.6 W/m	KWP-CR27-0960-24 KWP-CR30-0960-24 KWP-CR35-0960-24 KWP-CR40-0960-24 KWP-CR50-0960-24
LED tape KWP-CR-0480-24	- universal for basic applications - CRI over 95	65	4.8 W/m	KWP-CR27-0480-24 KWP-CR30-0480-24 KWP-CR35-0480-24 KWP-CR40-0480-24 KWP-CR50-0480-24

RELATED ACCESSORIES > RELATED LED > HIGH EFFICACY

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-VHE-0480-24	- universal for basic applications - high efficacy - High Efficacy	20	4.8 W/m	K-VHE27-0480-24 K-VHE30-0480-24 K-VHE35-0480-24 K-VHE40-0480-24 K-VHE50-0480-24
LED tape K-VHE-0960-24	- universal for basic applications - high efficacy - High Efficacy	20	9.6 W/m	K-VHE27-0960-24 K-VHE30-0960-24 K-VHE35-0960-24 K-VHE40-0960-24 K-VHE50-0960-24
LED tape K-VHE-1440-24	- universal for basic applications - high efficacy - High Efficacy	20	14.4 W/m	K-VHE27-1440-24 K-VHE30-1440-24 K-VHE35-1440-24 K-VHE40-1440-24 K-VHE50-1440-24

RELATED ACCESSORIES > RELATED LED > ADJUSTABLE WHITE / DIM TO WARM

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-27T50-1440-24	- RGB+Tunable White	20	14.4 W/m	K-27T50-1440-24
LED tape K-18D30-0960-24	- Dim To Warm LED Tape	20	9.6 W/m	K-18D30-0960-24

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > OTHER

Name	Key features	Material	Color	Ref.
Gland 6,4x1,6		rubber		C24518C07
Gland 9x1,5		Material, Material, multiselect		C42295C07

Profile PAC-ALU

Ref. A04370

Name	Key features	Material	Color	Ref.
Gland 11x1,5		rubber		C42296C07
Hermetic coupler THB.391.A4A, 4 pin	- 4 power terminals - compact dimensions	PA		C42268C10
Hermetic coupler THB.381, 2pin	- 2 power terminals - compact dimensions	PA		C28125C07
Hermetic coupler THB.391.A5A, 5 pin	- 5 power terminals - compact dimensions	PA		C28156C07
Joint connector THB.200.E5E, 5 pin	- 5 power terminals - 3-line branch	Material, Material, multiselect		C28157C07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONNECTORS

Name	Material	Color	Ref.
Connector ZM	stainless steel	 silver	42716
		 silver	42717
		 silver	42720
		 silver	42728
		 black colored	C24797C07
		colorless non colored	C24797N00
		 black colored	C28070C07
		 silver	C28070N00
		 black colored	C28071C07
		 silver	C28071N00
		 black colored	C28072C07
		 silver	C28072N00
		 black colored	C28073C07
		 silver	C28073N00
		 black colored	C28074C07
		 silver	C28074N00
		 black colored	C28075C07
Connector ZM-NA	stainless steel	 silver	C28075N00
		 silver	C28243N00
			42305
			42339
		 silver	42723
			42724
			42725
			C28242N00

RELATED ACCESSORIES > ELECTRONICS > SWITCHES

Name	Key features	IP protection rating	Ref.
Proximity switch UNI-11 NEW	- touchless switch - width 11mm	20	E61603
Proximity switch UNI-11P NEW	- touchless switch - width 11mm - factory pre-soldered wires	20	E61604
Magnetic switch UNI-M11 NEW	- magnetic switch with magnet included - width 11mm	20	E62157
Magnetic switch UNI-M11P NEW	- magnetic switch with magnet included - width 11mm - factory pre-soldered wires	20	E62158
Magnetic switch UNI-M07 NEW	- magnetic switch with magnet included - width only 7mm	20	E62153
Magnetic switch UNI-M07P NEW	- magnetic switch with magnet included - width only 7mm - factory pre-soldered wires	20	E62154

Profile PAC-ALU

Ref. A04370

Name	Key features	IP protection rating	Ref.
Proximity switch UNI-P	- touchless switch - width only 7mm - factory pre-soldered wires	20	E61580
Proximity switch UNI	- touchless switch - width only 7mm	20	E61579