


Profile PDS-ZM-PLUS

Ref. A02056

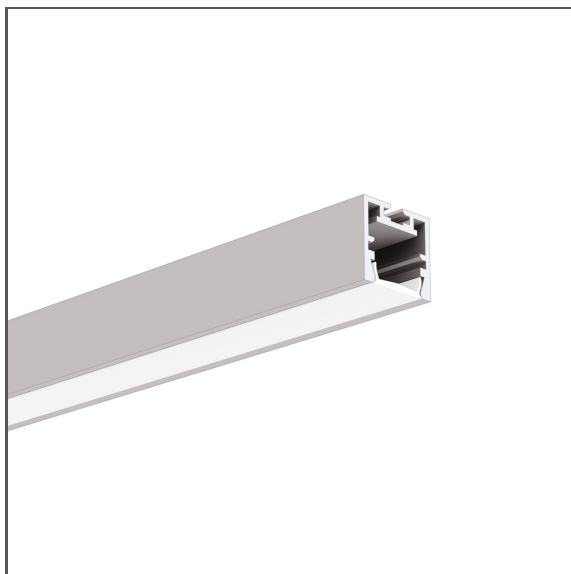

- Possibility of mounting sealed LED strips of the 8K series
- Wide range of accessories
- Smooth profile walls
- Small bending radius

APPLICATION

- main and decorative lighting


MOUNTING

- to the surface or suspended, using dedicated accessories, mounting adhesive or properly selected screws

ADDITIONAL INFORMATION

- possibility of smooth transition from an in-ground into a facade lighting fixture

TECHNICAL DRAWING



TECHNICAL SPECIFICATIONS

Material	aluminum
Possible fixture IP	20, 67
Possible fixture shapes	linear, round, polygonal
Profile cross-section	rectangular
Width	16.2 mm
Height	15 mm
LED gluing width A	14 mm
Number of LED strips A (8 mm wide)	1
Width of the glow	11.2 mm
Max power of a single KLUŚ LED strip	24 W/m
Possibility of obtaining a line of light	yes
Possibility of bending	yes
Radius of the light arc	yes
Inward	400 mm
Outdoor	400 mm
Building type	Commercial, HoReCa object, Retail, Residential, Entertainment/ Arts, Outdoor

Color	Length	Ref
■ silver anodized	1000 mm	A02056A_1
	2005 mm	A02056A_2
	3010 mm	A02056A_3
■ black anodized	1000 mm	A02056A07_1
	2005 mm	A02056A07_2
	3010 mm	A02056A07_3
□ white lacquered	1000 mm	A02056L10OD_1
	2005 mm	A02056L10OD_2
	3010 mm	A02056L10OD_3

Standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)

Profile PDS-ZM-PLUS

Ref. A02056

Facility zone	office, kitchen, under-cabinet / furniture, bathroom, decorative, fitness / spa, media rooms / av
The cover is cut to the length of the profile	yes
Can be easily connected into runs	yes
Wire out back of extrusion	yes

LINE OF LIGHT TABLE

LED tape	LIGER-11 satin	HS-11 frosted	KA-11R frosted	LIGER-11 black
KWP-8K-1220-24	✓ (1)	X	X	X
KWP-8K-1275-24	✓ (1)	X	X	X
KWP-8K-1440-24	✓ (1)	✓ (1)	✓ (1)	X
K-0360-24	✓ (1)	✓ (1)	✓ (1)	X
K-0720-24	✓ (1)	✓ (1)	✓ (1)	X
K-1080-24	✓ (1)	✓ (1)	✓ (1)	X
K-HD-0430-24	✓ (1)	✓ (1)	✓ (1)	✓ (1)
K-HD-0830-24	✓ (1)	✓ (1)	✓ (1)	✓ (1)
K-HD-1260-24	✓ (1)	✓ (1)	✓ (1)	✓ (1)
KWP-8K-0360-24	✓ (1)	✓ (1)	✓ (1)	X
KWP-8K-0720-24	✓ (1)	✓ (1)	✓ (1)	X
KWP-8K-1080-24	✓ (1)	✓ (1)	✓ (1)	X
KWP-GHD-0430-24	✓ (1)	✓ (1)	✓ (1)	✓ (1)
KWP-GHD-0830-24	✓ (1)	✓ (1)	✓ (1)	✓ (1)
K-2400-24	✓ (1)	✓ (1)	✓ (1)	X
K-RGBW-1530-24	✓ (1)	✓ (1)	✓ (1)	✓ (1)
K-RGB-0700-24V	✓ (1)	X	X	X
KWP-8KRGB-0700-24	✓ (1)	X	X	X
K-RGB-1200-24	✓ (1)	X	X	X
K-18D30-0960-24	✓ (1)	✓ (1)	✓ (1)	✓ (1)

Description


✓ - Line of Light for a number (X) of rows - Pixel free imaging

X - Visible Dotting from Diodes


HL - Centered Line of Light - Concentrated in middle

HL (X) - Centered Line of Light for a number (X) of rows - Concentrated in middle

Line of Light Guide



Clean Line of Light (Pixel free imaging)



Centered Line of Light





Visible Dotting from Diodes

Profile PDS-ZM-PLUS

Ref. A02056

SAMPLE PROJECTS

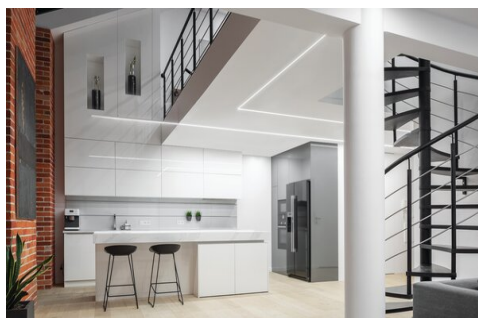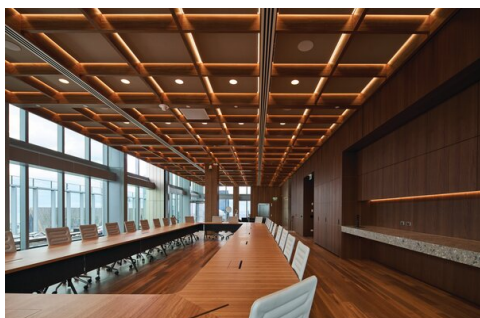

SIMILAR PROFILES



Profile PDS-H
A09204



Profile PDS-NK
A01588



Profile KOZMA
A18040



Profile PDS-UST
A02725



Profile PDS-T
A02057



Profile PDS-ZMG
A01418



Profile PDS-4-PLUS
A01263

Profile PDS-ZM-PLUS

Ref. A02056

RELATED ACCESSORIES > COVERS

NAME		KEY FEATURES	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
Cover BENCO-11		- For indoor and outdoor applications - UV resistant	silicon	50 %	frosted	B17215F
Focusing cover LENSQ-11-30°DEG		- indoor use - focusing	PC	80 %	semi-transparent	B17112T
Cover LIGER-11		- high light quality - Ease of obtaining a line of light - Perfectly diffusing - For indoor and outdoor applications	PC	21 %	black	B17037B
				59 %	satin	B17037S
Cover HS-11		- For indoor and outdoor applications - UV resistant - high durability	PC	59 %	frosted	B17208F
				88 %	clear	B17208C
Cover KA-11		- maximum brightness - indoor use - basic - universal	PC	67 %	frosted	B17064F
				89 %	clear	B17064C
Cover KA-T-11		- maximum brightness - indoor use - economic - universal for basic applications	PVC	54 %	frosted	B17179F
				86 %	clear	B17179C

RELATED ACCESSORIES > END CAPS

NAME		MATERIAL	COLOR	REF.
			 black	C24364C07
			 gray	C24364C02
			 silver	C24364L01
			 white	C24364C10
End cap PDS-ZM-PLUS		ABS		

RELATED ACCESSORIES > RELATED LED > BENDABLE

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-VBT-0720-24	- LED tape for bent profiles	20	7.2 W/m	K-VBT27-0720-24 K-VBT30-0720-24 K-VBT35-0720-24 K-VBT40-0720-24 K-VBT50-0720-24
LED tape K-BTRGB40-1510-24		20	15.1 W/m	K-BTRGB40-1510-24

RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CCT

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape KWP-8KRGB-0700-24	- RGB - easy snap-in installation	65	7 W/m	KWP-8KRGB-0700-24
LED tape K-RGBW-1530-24	- RGBW (3000K) - high LED density	20	15.3 W/m	K-RGBW-1530-24
LED tape K-RGB-0700-24V	- RGB	20	7 W/m	K-RGB-0700-24V
LED tape K-RGB-1200-24	- RGB	20	12 W/m	K-RGB-1200-24

RELATED ACCESSORIES > RELATED LED > WHITE MONO

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape KWP-8K-0360-24 3.6 W/m, IP65 NEW		65	3.6 W/m	KWP-8K27-0360-24 KWP-8K30-0360-24 KWP-8K35-0360-24 KWP-8K40-0360-24 KWP-8K50-0360-24
LED tape KWP-8K-0720-24 7.2 W/m, IP65 NEW		65	7.2 W/m	KWP-8K27-0720-24 KWP-8K30-0720-24 KWP-8K35-0720-24 KWP-8K40-0720-24 KWP-8K50-0720-24
LED tape KWP-8K-1080-24 10.8 W/m, IP65 NEW		65	10.8 W/m	KWP-8K27-1080-24 KWP-8K30-1080-24 KWP-8K35-1080-24 KWP-8K40-1080-24 KWP-8K50-1080-24
LED tape KWP-GHD-0430-24 4.3 W/m, IP65 NEW		65	4.3 W/m	KWP-GHD27-0430-24 KWP-GHD30-0430-24 KWP-GHD35-0430-24 KWP-GHD40-0430-24 KWP-GHD50-0430-24
LED tape KWP-GHD-0830-24 8.3 W/m, IP65 NEW		65	8.3 W/m	KWP-GHD27-0830-24 KWP-GHD30-0830-24 KWP-GHD35-0830-24 KWP-GHD40-0830-24 KWP-GHD50-0830-24
LED tape K-0360-24 3.6 W/m, IP20 NEW		20	3.6 W/m	K-27-0360-24 K-30-0360-24 K-35-0360-24 K-40-0360-24 K-50-0360-24
LED tape K-0720-24 7.2 W/m, IP20 NEW		20	7.2 W/m	K-27-0720-24 K-30-0720-24 K-35-0720-24 K-40-0720-24 K-50-0720-24
LED tape K-1080-24 10.8 W/m, IP20 NEW		20	10.8 W/m	K-27-1080-24 K-30-1080-24 K-35-1080-24 K-40-1080-24 K-50-1080-24
LED tape K-HD-0430-24 4.3 W/m, IP20 NEW		20	4.3 W/m	K-HD27-0430-24 K-HD30-0430-24 K-HD35-0430-24 K-HD40-0430-24 K-HD50-0430-24

Profile PDS-ZM-PLUS

Ref. A02056

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-HD-0830-24 8.3 W/m, IP20 NEW		20	8.3 W/m	K-HD27-0830-24 K-HD30-0830-24 K-HD35-0830-24 K-HD40-0830-24 K-HD50-0830-24
LED tape K-HD-1260-24 12.6 W/m, IP20 NEW		20	12.6 W/m	K-HD27-1260-24 K-HD30-1260-24 K-HD35-1260-24 K-HD40-1260-24 K-HD50-1260-24
LED tape K-0480-24	- universal for basic applications	20	4.8 W/m	K-27-0480-24 K-30-0480-24 K-35-0480-24 K-40-0480-24 K-50-0480-24
LED tape K-0960-24	- universal for basic applications	20	9.6 W/m	K-27-0960-24 K-30-0960-24 K-30-0960-24-R30 K-35-0960-24 K-40-0960-24 K-40-0960-24-R30 K-50-0960-24 K-65-0960-24
LED tape K-1440-24	- universal for basic applications	20	14.4 W/m	K-27-1440-24 K-30-1440-24 K-30-1440-24-R30 K-35-1440-24 K-40-1440-24 K-40-1440-24-R30 K-50-1440-24
LED tape K-HD-0480-24	- high LED density - Ease of obtaining a line of light	20	4.8 W/m	K-HD27-0480-24 K-HD30-0480-24 K-HD35-0480-24 K-HD40-0480-24 K-HD50-0480-24
LED tape K-HD-0960-24	- high LED density - Ease of obtaining a line of light	20	9.6 W/m	K-HD27-0960-24 K-HD30-0960-24 K-HD35-0960-24 K-HD40-0960-24 K-HD50-0960-24
LED tape K-HD-1440-24	- high LED density - Ease of obtaining a line of light	20	14.4 W/m	K-HD27-1440-24 K-HD30-1440-24 K-HD35-1440-24 K-HD40-1440-24 K-HD50-1440-24
LED tape KWP-8K-0480-24	- universal for basic applications - easy snap-in installation	65	4.8 W/m	KWP-8K27-0480-24 KWP-8K30-0480-24 KWP-8K35-0480-24 KWP-8K40-0480-24 KWP-8K50-0480-24
LED tape KWP-8K-0960-24	- universal for basic applications - easy snap-in installation	65	9.6 W/m	KWP-8K27-0960-24 KWP-8K30-0960-24 KWP-8K35-0960-24 KWP-8K40-0960-24 KWP-8K50-0960-24
LED tape KWP-GHD-0480-24	- high LED density - Ease of obtaining a line of light	65	4.8 W/m	KWP-GHD27-0480-24 KWP-GHD30-0480-24 KWP-GHD35-0480-24 KWP-GHD40-0480-24 KWP-GHD50-0480-24

Profile PDS-ZM-PLUS

Ref. A02056

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape KWP-GHD-1260-24 12.6 W/m, IP65		65	12.6 W/m	KWP-GHD27-1260-24 KWP-GHD30-1260-24 KWP-GHD35-1260-24 KWP-GHD40-1260-24 KWP-GHD50-1260-24
LED tape K-2300-24	- high power	20	23 W/m	K-30-2300-24 K-40-2300-24
LED tape K-2400-24	- high power	20	24 W/m	K-27-2400-24 K-30-2400-24 K-35-2400-24 K-40-2400-24 K-50-2400-24

RELATED ACCESSORIES > RELATED LED > CRI 95+

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-CR-0480-24	- universal for basic applications - CRI over 95	20	4.8 W/m	K-CR27-0480-24 K-CR30-0480-24 K-CR35-0480-24 K-CR40-0480-24 K-CR50-0480-24
LED tape K-CR-0960-24	- universal for basic applications - CRI over 95	20	9.6 W/m	K-CR27-0960-24 K-CR30-0960-24 K-CR35-0960-24 K-CR40-0960-24 K-CR50-0960-24
LED tape K-CR-1440-24	- universal for basic applications - CRI over 95	20	14.4 W/m	K-CR27-1440-24 K-CR30-1440-24 K-CR35-1440-24 K-CR40-1440-24 K-CR50-1440-24
LED tape KWP-8KCR-0480-24	- universal for basic applications - easy snap-in installation - CRI over 95	65	4.8 W/m	KWP-8KCR27-0480-24 KWP-8KCR30-0480-24 KWP-8KCR35-0480-24 KWP-8KCR40-0480-24 KWP-8KCR50-0480-24
LED tape KWP-8KCR-0960-24	- universal for basic applications - easy snap-in installation	65	9.6 W/m	KWP-8KCR27-0960-24 KWP-8KCR30-0960-24 KWP-8KCR35-0960-24 KWP-8KCR40-0960-24 KWP-8KCR50-0960-24

RELATED ACCESSORIES > RELATED LED > HIGH EFFICACY

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-VHE-0480-24	- universal for basic applications - high efficacy - High Efficacy	20	4.8 W/m	K-VHE27-0480-24 K-VHE30-0480-24 K-VHE35-0480-24 K-VHE40-0480-24 K-VHE50-0480-24
LED tape K-VHE-0960-24	- universal for basic applications - high efficacy - High Efficacy	20	9.6 W/m	K-VHE27-0960-24 K-VHE30-0960-24 K-VHE35-0960-24 K-VHE40-0960-24 K-VHE50-0960-24
LED tape K-VHE-1440-24	- universal for basic applications - high efficacy - High Efficacy	20	14.4 W/m	K-VHE27-1440-24 K-VHE30-1440-24 K-VHE35-1440-24 K-VHE40-1440-24 K-VHE50-1440-24

RELATED ACCESSORIES > RELATED LED > ADJUSTABLE WHITE / DIM TO WARM

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-27T50-1440-24	- RGB+Tunable White	20	14.4 W/m	K-27T50-1440-24
LED tape K-18D30-0960-24	- Dim To Warm LED Tape	20	9.6 W/m	K-18D30-0960-24

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > MOUNTING BRACKETS

Name	Key features	Material	Color	Ref.
Fastener set NEO-ZM-3	- 3 pieces for heavy fixtures	magnet	 silver	C28105N00
Fastener set NEO-ZM-4	- 4 pieces for light fixtures	magnet	 silver	C28106N00
Mounting bracket DS	- For indoor and outdoor applications	stainless steel	 silver	C28096N00
			 black	C28096L07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > SURFACE SPRINGS

Name	Material	Color	Ref.
Spring GP	stainless steel	 silver	C24500N00

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONDUCTIVE FASTENERS AND HEADS FOR PROFILES

Name	Key features	Material	Color	Ref.
Head BZP-ZO		stainless steel	 silver	42214
Fastener PUSZ-LIN-MR	- Power supply cable - mounting in thin walls (from 1mm)	stainless steel, brass, nylon aluminum, brass, nylon aluminum, brass, nylon	 silver	C28163N00
			 white lacquered	C28163L10
			 black lacquered	C28163L07
Fastener FI-8-LIN-ZMZ	- Power supply - mounting in the ZM system	stainless steel, steel, PA, EPDM aluminum, PA, EPDM aluminum, PA, EPDM	 silver	C28171N00
			 white	C28171L10
			 black	C28171L07
Fastener PUSZ-LIN-ZM	- Power supply cable - mounting in the ZM system	stainless steel, brass, nylon, aluminum aluminum, brass, nylon aluminum, brass, nylon	 silver	C28160N00
			 white lacquered	C28160L10
			 black lacquered	C28160L07
Fastener PUSZ-PRET-ZM	- Power supply cable - mounting in the ZM system	stainless steel, brass, nylon aluminum, brass, nylon aluminum, brass, nylon	 silver	C28161N00
			 white	C28161L10
			 black	C28161L07
Fastener DP-ZZ, silver		stainless steel	 silver	00651
Fastener PUSZ-ZM	- Power supply - mounting in the ZM system	stainless steel aluminum aluminum	 silver	C20010N00
			 white lacquered	C20010L10
			 black lacquered	C20010L07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > FASTENERS AND HEADS FOR PROFILES

Name	Key features	Material	Color	Ref.
Fastener FI-8-LIN-ZM	- Installation in the ZM system	stainless steel, PA	 silver	C28170N00
			 white	C28170L10
			 black	C28170L07
Fastener FI-10-ZM-P, silver	- Cross mounting	stainless steel	 silver	C28117N00

Profile PDS-ZM-PLUS

Ref. A02056

Name	Key features	Material	Color	Ref.
Fastener UCHO-ZM	- Convenient mounting in the ZM system	aluminum	silver anodized black anodized	C28192N00 C28192L07
Fastener FI-8-PRET-ZM	- Installation in the ZM system	stainless steel aluminum aluminum	silver white black	C28189N00 C28189L10 C28189L07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > SUSPENSION AND MOUNTING SETS

Name	Key features	Material	Color	Ref.
Fastener set FI-8-ZM-1 NEW	- Power supply, for wall and drywall, in the ZM system	stainless steel, aluminum	silver white lacquered black lacquered	C28134N00 C28134L10 C28134L07
Fastener set FI-8-ZM-2 NEW	- Convenient cable length adjustment, in the ZM system	stainless steel, aluminum	silver white lacquered black lacquered	C28135N00 C28135L10 C28135L07
Fastener set PUSZ-ZM-1 NEW	- Power supply, for wall and drywall, in the ZM system	stainless steel, aluminum	silver white lacquered black lacquered	C28130N00 C28130L10 C28130L07
Fastener set PUSZ-ZM-2 NEW	- Convenient cable length adjustment, in the ZM system	stainless steel, aluminum	silver white lacquered black lacquered	C28131N00 C28131L10 C28131L07
Fastener set W1		brass, stainless steel	silver	C28203N00
Fastener set W6		stainless steel, brass	silver	C28205N00
Fastener set W7		brass, stainless steel	silver	42605
Fastener set RD-1	- Smooth cable adjustment, cable included	brass	silver glossy silver satin white lacquered black lacquered	C28231P00 C28231P01 C28231L10 C28231L07
Fastener set RG-1	- Cable adjustment at the ceiling, cable included	brass	silver glossy silver satin white colored black colored	C28230P00 C28230P01 C28230L10 C28230L07
Fastener set RD-2	- Smooth cable adjustment, angled mounting, cable included	brass	silver glossy silver satin white lacquered black lacquered	C28232P00 C28232P01 C28232L10 C28232L07
Fastener set RD-3	- Smooth cable adjustment	brass	silver glossy silver satin white lacquered black lacquered	C28233P00 C28233P01 C28233L10 C28233L07
Fastener set RD-4	- Smooth cable adjustment, angled mounting	brass	silver glossy silver satin white lacquered black lacquered	C28234P00 C28234P01 C28234L10 C28234L07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CANOPIES

Name	Key features	Material	Color	Ref.
Canopy BOX-M70 NEW		aluminum	silver anodized white lacquered black anodized	C24541A C24541L10 C24541A07
Canopy BOX-M600 NEW		aluminum	silver anodized white lacquered black anodized	C24542A C24542L10 C24542A07

Profile PDS-ZM-PLUS

Ref. A02056

Name	Key features	Material	Color	Ref.
Canopy Fi-60mm	- Convenient cable length adjustment, in the ZM system	steel	 gray lacquered  white lacquered  black lacquered	C24540L01 C24540L10 C24540L07
Canopy BOX-KR600		aluminum	 black lacquered  white lacquered	C24667L07 C24667L10
Canopy BOX-KS600		aluminum	 black lacquered  white lacquered	C24669L07 C24669L10
BOX-KR90		aluminum	 black lacquered  white lacquered	C24666L07 C24666L10
Canopy BOX-KS90		aluminum	 black lacquered  white lacquered	C24668L07 C24668L10

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > OTHER

Name	Key features	Material	Color	Ref.
Gland 9x1,5		Material, Material, multiselect		C42295C07
Gland 11x1,5		rubber		C42296C07
Gland 6,4x1,6		rubber		C24518C07
Gland M10x1	- metal housing - with M10x1 thread	mosiądz niklowany		C28275N00
Hermetic coupler THB.391.A4A, 4 pin	- 4 power terminals - compact dimensions	PA		C42268C10
Hermetic coupler THB.381, 2pin	- 2 power terminals - compact dimensions	PA		C28125C07
Hermetic coupler THB.391.A5A, 5 pin	- 5 power terminals - compact dimensions	PA		C28156C07
Joint connector THB.200.E5E, 5 pin	- 5 power terminals - 3-line branch	Material, Material, multiselect		C28157C07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > ADDITIONAL ITEMS

Name	Key features	Material	Color	Ref.
Adapter LENSO	- Necessary when using the DILENSO cover	PC	 transparent glossy	E62146

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > LATCHES

Name	Key features	Material	Color	Ref.
Adapters set ZM-16	- Connection of the ZM system with the 45-STN mount	PC	 transparent	C29001C00

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONNECTORS

Name	Material	Color	Ref.
Connector ZM-MINI	stainless steel	 silver	44501 C28083N00

Profile PDS-ZM-PLUS

Ref. A02056

Name	Material	Color	Ref.
Connector ZM	stainless steel	 silver	42716
		 silver	42717
		 silver	42720
		 silver	42728
		 black colored	C24797C07
		colorless non colored	C24797N00
		 black colored	C28070C07
		 silver	C28070N00
		 black colored	C28071C07
		 silver	C28071N00
		 black colored	C28072C07
		 silver	C28072N00
		 black colored	C28073C07
		 silver	C28073N00
		 black colored	C28074C07
		 silver	C28074N00
		 black colored	C28075C07
		 silver	C28075N00
		 silver	C28243N00
Connector ZM-Y	stainless steel	 black colored	C28082C07
		 silver	C28082N00
Connector ZM-X	stainless steel	 black colored	C28079C07
		 silver	C28079N00
		 black colored	C28080C07
		 silver	C28080N00
		 black colored	C28081C07
		 silver	C28081N00
Connector ZM-T	stainless steel	 black colored	C28076C07
		 silver	C28076N00
		 black colored	C28077C07
		 silver	C28077N00
		 black colored	C28078C07
		 silver	C28078N00
Connector ZM-PION	stainless steel	 silver	42314
		 silver	42316
		 silver	42320
		 silver	42718
		 silver	42719
		 black colored	C28084C07
		 silver	C28084N00
		 black colored	C28085C07
		 silver	C28085N00
		 black colored	C28086C07
		 silver	C28086N00
		 black colored	C28087C07
		 silver	C28087N00
		 black colored	C28088C07
		 silver	C28088N00

RELATED ACCESSORIES > ELECTRONICS > SWITCHES

Name	Key features	IP protection rating	Ref.
Proximity switch UNI-11 	- touchless switch - width 11mm	20	E61603
Proximity switch UNI-11P 	- touchless switch - width 11mm - factory pre-soldered wires	20	E61604
Proximity switch UNI-P	- touchless switch - width only 7mm - factory pre-soldered wires	20	E61580
Switch MICRO 96W IP20	- push button switch - factory pre-soldered wires	20	1491

Profile PDS-ZM-PLUS

Ref. A02056

Name	Key features	IP protection rating	Ref.
Switch MICRO 96W IP20	- push button switch - factory pre-soldered wires - version with logo	20	1491LOGO
Proximity switch UNI	- touchless switch - width only 7mm	20	E61579