



Profile PIKO-ZM

Ref. A01168

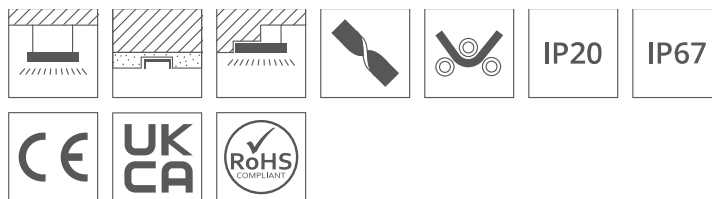

TECHNICAL DRAWING



- Minimum width and height
- Possibility of installing sealed 5K series LED strips
- Easy maintenance
- Wide range of accessories
- Small bending radius
- Possibility of bending in the light plane

APPLICATION

- furniture and decorative lighting

MOUNTING

- to the surface, suspended or recessed, using a dedicated mounting track, dedicated accessories, or mounting adhesive

ADDITIONAL INFORMATION

- for suspending small-size profiles, it is recommended to use a wire with a diameter of 0.5 mm
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ
- NCS Premium paint option - minimum order quantity 30pcs - available immediately

TECHNICAL SPECIFICATIONS

Material	aluminum
Possible fixture IP	20, 67
Possible fixture shapes	linear, polygonal, round
Profile cross-section	rectangular
Width	10 mm
Height	9.7 mm
LED gluing width A	7 mm
Width of the glow	7.2 mm
Max power of a single KLUŚ LED strip	9.6 W/m
Possibility of twisting	yes
Possibility of obtaining a line of light	yes
Possibility of bending	yes
Radius of the light arc	yes
Inward	220 mm
Outdoor	120 mm
Downward light arc radius	yes
Down	250 mm

Color	Length	Ref
■ silver anodized	1000 mm	A01168A_1
	2005 mm	A01168A_2
	3010 mm	A01168A_3
□ white lacquered	2005 mm	A01168L10OD_2
	1000 mm	A01168A07_1
	2005 mm	A01168A07_2
■ black anodized	3010 mm	A01168A07_3
	2005 mm	A01168L14OD_2
	2005 mm	A01168L11OD_2
■ caramel (NCSS3030-Y60R) lacquered	2005 mm	A01168L12OD_2
■ sand (NCSS2010-Y30R) lacquered	2005 mm	A01168L13OD_2
■ light sage (NCSS2010-G50Y) lacquered	2005 mm	A01168L13OD_2
■ pastel blue (NCSS2010-B) lacquered	2005 mm	A01168L13OD_2

Standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance ± 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance ± 5 mm)

Profile PIKO-ZM

Ref. A01168

Building type	Commercial, Retail, Entertainment/ Arts, HoReCa object
Facility zone	under-cabinet / furniture, bathroom, kitchen, office, exhibition / tradeshow / display, decorative, media rooms / av
The cover is cut to the length of the profile	yes
Can be easily connected into runs	yes
Wire out end cap	yes
Wire out back of extrusion	yes
Possibility of bending in the light plane	yes

LINE OF LIGHT TABLE

LED tape	Cover BENCO-7 frosted
K-1490-24	✓ (1)
K-BT-1490-24	✓ (1)
K-BT27T50-0910-24	✓ (1)
K-0910-24	✓ (1)
K-BT-0910-24	✓ (1)
K-0450-24	✓ (1)
K-BT-0450-24	✓ (1)
K-SHD-0960-24	✓ (1)

Description


✓ - Line of Light for a number (X) of rows - Pixel free imaging

X - Visible Dotting from Diodes

HL - Centered Line of Light - Concentrated in middle

HL (X) - Centered Line of Light for a number (X) of rows - Concentrated in middle

Line of Light Guide



Clean Line of Light (Pixel free imaging)



Centered Line of Light



Visible Dotting from Diodes

SAMPLE PROJECTS



Profile PIKO-ZM

Ref. A01168

SIMILAR PROFILES



PIKO-45 Profile
A00014



Profile PIKO
A08288



Profile PIKO-O
A01167



Profile KOZEL-10
A01575

RELATED ACCESSORIES > COVERS

NAME		KEY FEATURES	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
Cover PIKO-7		- For indoor and outdoor applications - Perfectly diffusing - UV resistant - Thin line of light	PMMA	17 %	black	B17001B
				43 %	satin	B17001S
Cover BENCO-7		- indoor use - perfect for bent profiles	silicon	53 %	frosted	B17069F

RELATED ACCESSORIES > END CAPS

NAME		MATERIAL	COLOR	REF.
End cap PIKO-ZM		ABS	black	C24307C07
			caramel (NCSS3030-Y60R)	C24307L14
			gray	C24307C02
			light sage (NCSS2010-G50Y)	C24307L12
			pastel blue (NCSS2010-B)	C24307L13
			sand (NCSS2010-Y30R)	C24307L11
			white	C24307C10
PIKO-ZM-OTW		ABS	black	C24307C07TW
			gray	C24307C02TW
			white	C24307C10TW

RELATED ACCESSORIES > PROFILE TECHNICZNE

Profile PIKO-ZM

Ref. A01168

Name	Material	Color	Ref.
Profile TEPIKO	aluminum	 silver non anodized	A18046

RELATED ACCESSORIES > RELATED LED > ULTRATHIN

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-0450-24	- Thin line of light	20	4.5 W/m	K-27-0450-24 K-30-0450-24 K-35-0450-24 K-40-0450-24 K-50-0450-24
LED tape K-0910-24 9.1 W/m, IP20 NEW		20	9.1 W/m	K-27-0910-24 K-30-0910-24 K-35-0910-24 K-40-0910-24 K-50-0910-24
LED tape K-SHD-0960-24	- ideal for use with black covers - high LED density	20	9.6 W/m	K-SHD22-0960-24 K-SHD25-0960-24 K-SHD27-0960-24 K-SHD30-0960-24 K-SHD35-0960-24 K-SHD40-0960-24 K-SHD50-0960-24
LED tape KWP-5K-0450-24	- Thin line of light - easy snap-in installation	65	4.5 W/m	KWP-5K27-0450-24 KWP-5K30-0450-24 KWP-5K35-0450-24 KWP-5K40-0450-24 KWP-5K50-0450-24
LED tape KWP-5K-0910-24 9.1 W/m, IP65 NEW		65	9.1 W/m	KWP-5K27-0910-24 KWP-5K30-0910-24 KWP-5K35-0910-24 KWP-5K40-0910-24 KWP-5K50-0910-24
LED tape KWP-5KSHD-0960-24	- easy snap-in installation - high LED density - ideal for use with black covers	65	9.6 W/m	KWP-5KSHD27-0960-24 KWP-5KSHD30-0960-24 KWP-5KSHD35-0960-24 KWP-5KSHD40-0960-24 KWP-5KSHD50-0960-24

RELATED ACCESSORIES > RELATED LED > WHITE MONO

Name	IP protection rating	Power consumption	Ref.
LED tape K-1490-24 14.9 W/m, IP20 NEW	20	14.9 W/m	K-27-1490-24 K-30-1490-24 K-35-1490-24 K-40-1490-24 K-50-1490-24
LED tape K-BT-1490-24 14.9 W/m, IP20 NEW	20	14.9 W/m	K-BT27-1490-24 K-BT30-1490-24 K-BT35-1490-24 K-BT40-1490-24 K-BT50-1490-24

RELATED ACCESSORIES > RELATED LED > BENDABLE

Name	Key features	IP protection rating	Power consumption	Ref.

Profile PIKO-ZM

Ref. A01168

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-BT-0450-24	- Thin line of light - LED tape for bent profiles	20	4.5 W/m	K-BT27-0450-24 K-BT30-0450-24 K-BT35-0450-24 K-BT40-0450-24 K-BT50-0450-24
LED tape K-BT-0910-24	- LED tape for bent profiles	20	9.1 W/m	K-BT27-0910-24 K-BT30-0910-24 K-BT35-0910-24 K-BT40-0910-24 K-BT50-0910-24

RELATED ACCESSORIES > RELATED LED > ADJUSTABLE WHITE / DIM TO WARM

Name	IP protection rating	Power consumption	Ref.
LED tape K-BT27T50-0910-24	20	9.1 W/m	K-BT27T50-0910-24

RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CCT

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-RGB-1560-24	- RGB	20	15.7 W/m	K-RGB-1560-24

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > MOUNTING BRACKETS

Name	Key features	Material	Color	Ref.
Mounting bracket K-10	- Transparent – aesthetic installation of minimalist linear fixtures	PC	 transparent non colored	C24340C00
Fastener set NEO-ZM-3	- 3 pieces for heavy fixtures	magnet	 silver	C28105N00
Fastener set NEO-ZM-4	- 4 pieces for light fixtures	magnet	 silver	C28106N00
Mounting bracket DS	- For indoor and outdoor applications	stainless steel	 silver  black	C28096N00 C28096L07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONDUCTIVE FASTENERS AND HEADS FOR PROFILES

Name	Key features	Material	Color	Ref.
Fastener FI-8-LIN-ZMZ	- Power supply - mounting in the ZM system	stainless steel, steel, PA, EPDM aluminum, PA, EPDM aluminum, PA, EPDM	 silver  white  black	C28171N00 C28171L10 C28171L07
Fastener PUSZ-ZM	- Power supply - mounting in the ZM system	stainless steel aluminum aluminum	 silver  white lacquered  black lacquered	C20010N00 C20010L10 C20010L07
Fastener FI-8-PRET-ZMZ, silver	- Power supply - mounting in the ZM system	stainless steel	 silver anodized	C28190N00

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > FASTENERS AND HEADS FOR PROFILES

Name	Key features	Material	Color	Ref.
Fastener K-10-PP, silver	- Cross mounting	stainless steel, PC	 silver	C28235N00

Profile PIKO-ZM

Ref. A01168

Name	Key features	Material	Color	Ref.
Fastener FI-8-LIN-ZM	- Installation in the ZM system	stainless steel, PA	 silver  white  black	C28170N00 C28170L10 C28170L07
Fastener FI-10-ZM-P, silver	- Cross mounting	stainless steel	 silver	C28117N00
Fastener UCHO-ZM	- Convenient mounting in the ZM system	aluminum	 silver anodized  black anodized	C28192N00 C28192L07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > LATCHES

Name	Material	Color	Ref.
Latch TEKNIK	PP	 white	C24003C10
Adapters set ZM-10	PC	 transparent	C29000C00

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > SUSPENSION AND MOUNTING SETS

Name	Key features	Material	Color	Ref.
Fastener set RD-1	- Smooth cable adjustment, cable included	brass	 silver glossy  silver satin  white lacquered  black lacquered	C28231P00 C28231P01 C28231L10 C28231L07
Fastener set RG-1	- Cable adjustment at the ceiling, cable included	brass	 silver glossy  silver satin  white colored  black colored	C28230P00 C28230P01 C28230L10 C28230L07
Fastener set RD-2	- Smooth cable adjustment, angled mounting, cable included	brass	 silver glossy  silver satin  white lacquered  black lacquered	C28232P00 C28232P01 C28232L10 C28232L07
Fastener set RD-3	- Smooth cable adjustment	brass	 silver glossy  silver satin  white lacquered  black lacquered	C28233P00 C28233P01 C28233L10 C28233L07
Fastener set RD-4	- Smooth cable adjustment, angled mounting	brass	 silver glossy  silver satin  white lacquered  black lacquered	C28234P00 C28234P01 C28234L10 C28234L07
Fastener set FI-8-ZM-1	- Power supply, for wall and drywall, in the ZM system	stainless steel, aluminum	 silver  white lacquered  black lacquered	C28134N00 C28134L10 C28134L07
Fastener set FI-8-ZM-2	- Convenient cable length adjustment, in the ZM system	stainless steel, aluminum	 silver  white lacquered  black lacquered	C28135N00 C28135L10 C28135L07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CANOPIES

Name	Key features	Material	Color	Ref.
Canopy BOX-M600 NEW		aluminum	 silver anodized  white lacquered  black anodized	C24542A C24542L10 C24542A07
Canopy Fi-60mm	- Convenient cable length adjustment, in the ZM system	steel	 gray lacquered  white lacquered  black lacquered	C24540L01 C24540L10 C24540L07

Profile PIKO-ZM

Ref. A01168

Name	Key features	Material	Color	Ref.
Canopy BOX-M70		aluminum	silver anodized white lacquered black anodized	C24541A C24541L10 C24541A07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > OTHER

Name	Key features	Material	Color	Ref.
Gland 6,4x1,6		rubber		C24518C07
Hermetic coupler THB.391.A4A, 4 pin	- 4 power terminals - compact dimensions	PA		C42268C10
Hermetic coupler THB.381, 2pin	- 2 power terminals - compact dimensions	PA		C28125C07
Hermetic coupler THB.391.A5A, 5 pin	- 5 power terminals - compact dimensions	PA		C28156C07
Joint connector THB.200.E5E, 5 pin	- 5 power terminals - 3-line branch	Materiał, Material, multiselect		C28157C07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONNECTORS

Name	Material	Color	Ref.
Connector ZM-MINI	stainless steel	silver	44501 C28083N00
Connector ZM	stainless steel	silver	42716
		silver	42717
		silver	42720
		silver	42728
		black colored	C24797C07
		colorless non colored	C24797N00
		black colored	C28070C07
		silver	C28070N00
		black colored	C28071C07
		silver	C28071N00
		black colored	C28072C07
		silver	C28072N00
		black colored	C28073C07
		silver	C28073N00
		black colored	C28074C07
		silver	C28074N00
Connector ZM-Y	stainless steel	black colored	C28082C07
		silver	C28082N00
Connector ZM-X	stainless steel	black colored	C28079C07
		silver	C28079N00
		black colored	C28080C07
		silver	C28080N00
		black colored	C28081C07
Connector ZM-T	stainless steel	silver	C28081N00
		black colored	C28076C07
		silver	C28076N00
		black colored	C28077C07
		silver	C28077N00
		black colored	C28078C07
		silver	C28078N00

Profile PIKO-ZM

Ref. A01168

Name	Material	Color	Ref.
Connector ZM-PION	stainless steel	 silver	42314
		 silver	42316
		 silver	42320
		 silver	42718
		 silver	42719
		 black colored	C28084C07
		 silver	C28084N00
		 black colored	C28085C07
		 silver	C28085N00
		 black colored	C28086C07
		 silver	C28086N00
		 black colored	C28087C07
		 silver	C28087N00
		 black colored	C28088C07
		 silver	C28088N00

RELATED ACCESSORIES > ELECTRONICS > SWITCHES

Name	Key features	IP protection rating	Ref.
Proximity switch UNI	- touchless switch - width only 7mm	20	E61579
Proximity switch UNI-P	- touchless switch - width only 7mm - factory pre-soldered wires	20	E61580