


Profile PIKO

Ref. A08288

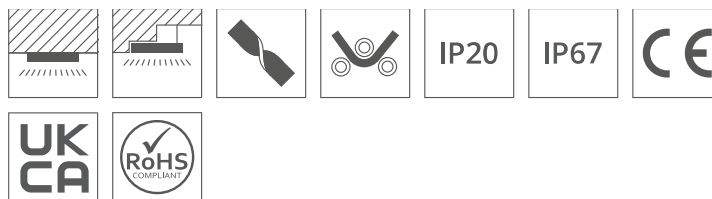

- Possibility of installing sealed 5K series LED strips
- Minimum width and height
- Small bending radius

APPLICATION

- furniture and decorative lighting


MOUNTING

- to the surface, suspended or recessed, using dedicated accessories, with double-sided adhesive tape or mounting adhesive
- easy assembly and disassembly by snapping in and out

ADDITIONAL INFORMATION

- for suspending small-size profiles, it is recommended to use a wire with a diameter of 0.5 mm
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING



TECHNICAL SPECIFICATIONS

Material	aluminum
Possible fixture IP	20, 67
Possible fixture shapes	linear, round
Profile cross-section	rectangular
Width	10 mm
Height	7 mm
LED gluing width A	7 mm
Width of the glow	7.2 mm
Max power of a single KLUŚ LED strip	9.6 W/m
Closet Rated	yes
Possibility of twisting	yes
Possibility of obtaining a line of light	yes
Possibility of bending	yes
Radius of the light arc	yes
Inward	150 mm
Outdoor	150 mm
Building type	Retail, Entertainment/ Arts, HoReCa object

Color	Length	Ref
■ silver anodized	1000 mm	A08288A_1
	2005 mm	A08288A_2
	3010 mm	A08288A_3
■ black anodized	1000 mm	A08288A07_1
	2005 mm	A08288A07_2
	3010 mm	A08288A07_3

Standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)

Profile PIKO

Ref. A08288

Facility zone	under-cabinet / furniture, bathroom, kitchen, office, exhibition / tradeshow / display, decorative, fitness / spa, media rooms / av
Easy assembly and disassembly by snapping in and out	yes
The cover is cut to the length of the profile	yes
Wire out end cap	yes
Wire out back of extrusion	yes

LINE OF LIGHT TABLE

LED tape	Cover BENCO-7 frosted	osłona
K-1490-24	✓ (1)	✓ (1)
K-BT-1490-24	✓ (1)	✓ (1)
K-BT27T50-0910-24	✓ (1)	✓ (1)
K-0910-24	✓ (1)	✓ (1)
K-BT-0910-24	✓ (1)	✓ (1)
K-0450-24	✓ (1)	✓ (1)
K-BT-0450-24	✓ (1)	✓ (1)
K-SHD-0960-24	✓ (1)	✓ (1)

Description


✓ - Line of Light for a number (X) of rows - Pixel free imaging

X - Visible Dotting from Diodes


HL - Centered Line of Light - Concentrated in middle

HL (X) - Centered Line of Light for a number (X) of rows - Concentrated in middle

Line of Light Guide



Clean Line of Light (Pixel free imaging)






Centered Line of Light



Visible Dotting from Diodes

SAMPLE PROJECTS

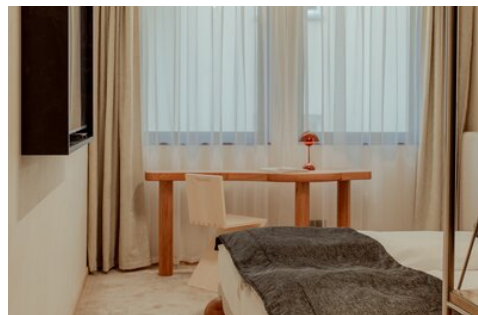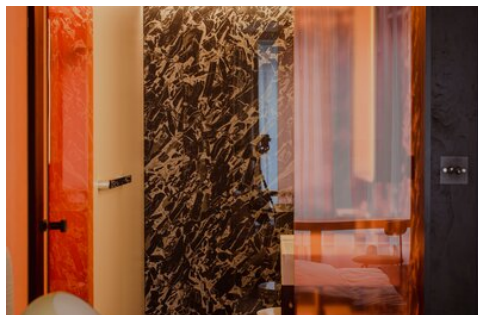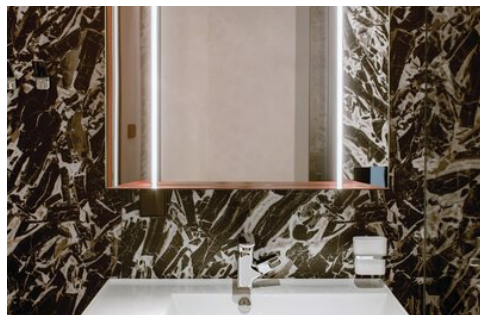

Profile PIKO

Ref. A08288

SIMILAR PROFILES



PIKO-45 Profile
A00014



Profile PIKO-ZM
A01168



Profile PIKO-O
A01167



Profile KOZEL-10
A01575

RELATED ACCESSORIES > COVERS

NAME		KEY FEATURES	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
Cover BENCO-7		- indoor use - perfect for bent profiles	silicon	53 %	frosted	B17069F
Cover PIKO-7		- For indoor and outdoor applications - Perfectly diffusing - UV resistant - Thin line of light	PMMA	17 %	black	B17001B
				43 %	satin	B17001S

RELATED ACCESSORIES > END CAPS

NAME		MATERIAL	COLOR	REF.
End cap PIKO		ABS	■ black	C24202C07
			■ gray	C24202C02
PIKO-OTW		ABS	■ black	C24202C07TW
			■ gray	C24202C02TW

RELATED ACCESSORIES > PROFILE TECHNICZNE

Name	Material	Color	Ref.
Profile TEPIKO	aluminum	■ silver non anodized	A18046

RELATED ACCESSORIES > RELATED LED > ULTRATHIN

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-0450-24	- Thin line of light	20	4.5 W/m	K-27-0450-24 K-30-0450-24 K-35-0450-24 K-40-0450-24 K-50-0450-24

Profile PIKO

Ref. A08288

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-0910-24 9.1 W/m, IP20 NEW		20	9.1 W/m	K-27-0910-24 K-30-0910-24 K-35-0910-24 K-40-0910-24 K-50-0910-24
LED tape K-SHD-0960-24	- ideal for use with black covers - high LED density	20	9.6 W/m	K-SHD22-0960-24 K-SHD25-0960-24 K-SHD27-0960-24 K-SHD30-0960-24 K-SHD35-0960-24 K-SHD40-0960-24 K-SHD50-0960-24
LED tape KWP-5K-0450-24	- Thin line of light - easy snap-in installation	65	4.5 W/m	KWP-5K27-0450-24 KWP-5K30-0450-24 KWP-5K35-0450-24 KWP-5K40-0450-24 KWP-5K50-0450-24
LED tape KWP-5K-0910-24 9.1 W/m, IP65 NEW		65	9.1 W/m	KWP-5K27-0910-24 KWP-5K30-0910-24 KWP-5K35-0910-24 KWP-5K40-0910-24 KWP-5K50-0910-24
LED tape KWP-5KSHD-0960-24	- easy snap-in installation - high LED density - ideal for use with black covers	65	9.6 W/m	KWP-5KSHD27-0960-24 KWP-5KSHD30-0960-24 KWP-5KSHD35-0960-24 KWP-5KSHD40-0960-24 KWP-5KSHD50-0960-24

RELATED ACCESSORIES > RELATED LED > WHITE MONO

Name	IP protection rating	Power consumption	Ref.
LED tape K-1490-24 14.9 W/m, IP20 NEW	20	14.9 W/m	K-27-1490-24 K-30-1490-24 K-35-1490-24 K-40-1490-24 K-50-1490-24
LED tape K-BT-1490-24 14.9 W/m, IP20 NEW	20	14.9 W/m	K-BT27-1490-24 K-BT30-1490-24 K-BT35-1490-24 K-BT40-1490-24 K-BT50-1490-24

RELATED ACCESSORIES > RELATED LED > BENDABLE

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-BT-0450-24	- Thin line of light - LED tape for bent profiles	20	4.5 W/m	K-BT27-0450-24 K-BT30-0450-24 K-BT35-0450-24 K-BT40-0450-24 K-BT50-0450-24
LED tape K-BT-0910-24	- LED tape for bent profiles	20	9.1 W/m	K-BT27-0910-24 K-BT30-0910-24 K-BT35-0910-24 K-BT40-0910-24 K-BT50-0910-24

RELATED ACCESSORIES > RELATED LED > ADJUSTABLE WHITE / DIM TO WARM

Profile PIKO

Ref. A08288

Name	IP protection rating	Power consumption	Ref.
LED tape K-BT27T50-0910-24	20	9.1 W/m	K-BT27T50-0910-24

RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CCT

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-RGB-1560-24	- RGB	20	15.7 W/m	K-RGB-1560-24

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > MOUNTING BRACKETS

Name	Key features	Material	Color	Ref.
Mounting bracket K-10	- Transparent – aesthetic installation of minimalist linear fixtures	PC	 transparent non colored	C24340C00

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > FASTENERS AND HEADS FOR PROFILES

Name	Key features	Material	Color	Ref.
Fastener FI-8-PRET-MR	- Mounting in thin walls (from 1mm)	stainless steel aluminum aluminum	 silver	C28187N00
			 white	C28187L10
			 black	C28187L07
Fastener K-10-PP, silver	- Cross mounting	stainless steel, PC	 silver	C28235N00

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONDUCTIVE FASTENERS AND HEADS FOR PROFILES

Name	Key features	Material	Color	Ref.
Fastener FI-8-LIN-MR	- Power supply cable - mounting in thin walls (from 1mm)	stainless steel, PA aluminum, PA aluminum, PA	 silver	C28172N00
			 white	C28172L10
			 black	C28172L07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CANOPIES

Name	Key features	Material	Color	Ref.
Canopy Fi-60mm	- Convenient cable length adjustment, in the ZM system	steel	 gray lacquered	C24540L01
			 white lacquered	C24540L10
			 black lacquered	C24540L07
Canopy BOX-M70		aluminum	 silver anodized	C24541A
			 white lacquered	C24541L10
			 black anodized	C24541A07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > OTHER

Name	Key features	Material	Color	Ref.
Gland 6,4x1,6		rubber		C24518C07
Hermetic coupler THB.391.A4A, 4 pin	- 4 power terminals - compact dimensions	PA		C42268C10
Hermetic coupler THB.381, 2pin	- 2 power terminals - compact dimensions	PA		C28125C07

Profile PIKO

Ref. A08288

Name	Key features	Material	Color	Ref.
Hermetic coupler THB.391.A5A, 5 pin	- 5 power terminals - compact dimensions	PA		C28156C07
Joint connector THB.200.E5E, 5 pin	- 5 power terminals - 3-line branch	Materiał, Material, multiselect		C28157C07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > SUSPENSION AND MOUNTING SETS

Name	Key features	Material	Color	Ref.
Fastener set FI-8-MR-1	- Power supply, for wall and drywall, mounting in thin walls (from 1mm)	stainless steel, aluminum	 silver	C28136N00
			 white lacquered	C28136L10
			 black lacquered	C28136L07
Fastener set FI-8-MR-2	- Convenient cable length adjustment, mounting in thin walls (from 1mm)	stainless steel, aluminum	 silver	C28137N00
			 white lacquered	C28137L10
			 black lacquered	C28137L07

RELATED ACCESSORIES > ELECTRONICS > SWITCHES

Name	Key features	IP protection rating	Ref.
Proximity switch UNI	- touchless switch - width only 7mm	20	E61579
Proximity switch UNI-P	- touchless switch - width only 7mm - factory pre-soldered wires	20	E61580