


Profile STOS-ALU

Ref. A04369

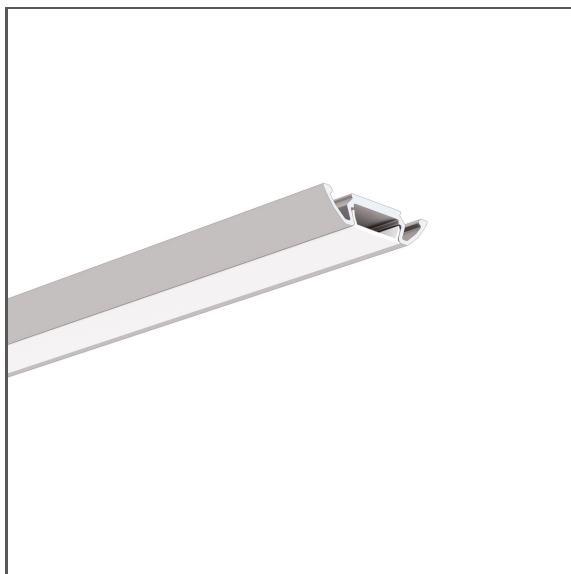

- Minimum height
- Smooth profile walls
- Small bending radius

APPLICATION

- furniture, under-cabinet and decorative lighting


MOUNTING

- to the surface, using a dedicated mounting track, mounting adhesive, properly selected screws or double-sided adhesive tape

ADDITIONAL INFORMATION

- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING



TECHNICAL SPECIFICATIONS

Material	aluminum
Color	 silver anodized
Possible fixture IP	20, 67
Possible fixture shapes	linear
Width	31 mm
Height	7 mm
LED gluing width A	13.1 mm
Number of LED strips A (8 mm wide)	1
Width of the glow	13.2 mm
Max power of a single KLUŚ LED strip	24 W/m
Closet Rated	yes
Possibility of bending	yes
Radius of the light arc	yes
Inward	200 mm
Outdoor	250 mm
Building type	Residential, HoReCa object
Facility zone	kitchen, under-cabinet / furniture

Length	Ref
1000 mm	A04369A_1
2005 mm	A04369A_2
3010 mm	A04369A_3


Standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)

Profile STOS-ALU

Ref. A04369

Wire out back of extrusion	yes
----------------------------	-----

SAMPLE PROJECTS

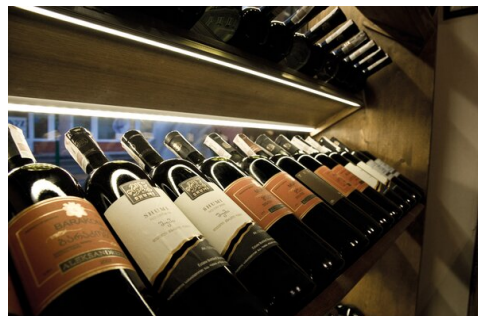

RELATED ACCESSORIES > COVERS

NAME		KEY FEATURES	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
Cover HS-12		- maximum brightness - high durability - high light quality	PC	73 %	frosted	B17201M
				94 %	clear	B17201T
Cover KA-13		- maximum brightness - high durability - high light quality - indoor use - basic - universal	PC	72 %	frosted	B17066F
				91 %	clear	B17066C

RELATED ACCESSORIES > END CAPS

NAME		MATERIAL	COLOR	REF.
End cap STOS-ALU		PP	gray	C20108C02
			silver	C20108L01

RELATED ACCESSORIES > PROFILE TECHNICZNE

Name	Material	Color	Ref.
Profile TEST-36	aluminum	silver anodized	A06639
Profile TEST-74	aluminum	silver anodized	A04507

RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CCT

Name	Key features	IP protection rating	Power consumption	Ref.
------	--------------	----------------------	-------------------	------

Profile STOS-ALU

Ref. A04369

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-RGBW-1530-24	- RGBW (3000K) - high LED density	20	15.3 W/m	K-RGBW-1530-24
LED tape KWP-RGBW-1530-24	- RGBW (3000K)	65	15.3 W/m	KWP-RGBW-1530-24
LED tape KWP-GRGBW-1530-24	- RGBW (3000K)	65	15.3 W/m	KWP-GRGBW-1530-24
LED tape K-RGB-0700-24V	- RGB	20	7 W/m	K-RGB-0700-24V
LED tape KWP-RGB-0700-24	- RGB	65	7 W/m	KWP-RGB-0700-24
LED tape K-RGB-1200-24	- RGB	20	12 W/m	K-RGB-1200-24

RELATED ACCESSORIES > RELATED LED > WHITE MONO

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-0360-24 3.6 W/m, IP20 NEW		20	3.6 W/m	K-27-0360-24 K-30-0360-24 K-35-0360-24 K-40-0360-24 K-50-0360-24
LED tape K-0720-24 7.2 W/m, IP20 NEW		20	7.2 W/m	K-27-0720-24 K-30-0720-24 K-35-0720-24 K-40-0720-24 K-50-0720-24
LED tape K-1080-24 10.8 W/m, IP20 NEW		20	10.8 W/m	K-27-1080-24 K-30-1080-24 K-35-1080-24 K-40-1080-24 K-50-1080-24
LED tape K-HD-0430-24 4.3 W/m, IP20 NEW		20	4.3 W/m	K-HD27-0430-24 K-HD30-0430-24 K-HD35-0430-24 K-HD40-0430-24 K-HD50-0430-24
LED tape K-HD-0830-24 8.3 W/m, IP20 NEW		20	8.3 W/m	K-HD27-0830-24 K-HD30-0830-24 K-HD35-0830-24 K-HD40-0830-24 K-HD50-0830-24
LED tape K-HD-1260-24 12.6 W/m, IP20 NEW		20	12.6 W/m	K-HD27-1260-24 K-HD30-1260-24 K-HD35-1260-24 K-HD40-1260-24 K-HD50-1260-24
LED tape KWP-0360-24 3.6 W/m, IP65 NEW		65	3.6 W/m	KWP-27-0360-24 KWP-30-0360-24 KWP-35-0360-24 KWP-40-0360-24 KWP-50-0360-24
LED tape KWP-0720-24 7.2 W/m, IP65 NEW		65	7.2 W/m	KWP-27-0720-24 KWP-30-0720-24 KWP-35-0720-24 KWP-40-0720-24 KWP-50-0720-24
LED tape KWP-1080-24 10.8 W/m, IP65 NEW		65	10.8 W/m	KWP-27-1080-24 KWP-30-1080-24 KWP-35-1080-24 KWP-40-1080-24 KWP-50-1080-24

Profile STOS-ALU

Ref. A04369

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape KWP-GHD-0430-24 4.3 W/m, IP65 NEW		65	4.3 W/m	KWP-GHD27-0430-24 KWP-GHD30-0430-24 KWP-GHD35-0430-24 KWP-GHD40-0430-24 KWP-GHD50-0430-24
LED tape KWP-GHD-0830-24 8.3 W/m, IP65 NEW		65	8.3 W/m	KWP-GHD27-0830-24 KWP-GHD30-0830-24 KWP-GHD35-0830-24 KWP-GHD40-0830-24 KWP-GHD50-0830-24
LED tape KWP-HD-0430-24 4.3 W/m, IP65 NEW		65	4.3 W/m	KWP-HD27-0430-24 KWP-HD30-0430-24 KWP-HD35-0430-24 KWP-HD40-0430-24 KWP-HD50-0430-24
LED tape KWP-HD-0830-24 8.3 W/m, IP65 NEW		65	8.3 W/m	KWP-HD27-0830-24 KWP-HD30-0830-24 KWP-HD35-0830-24 KWP-HD40-0830-24 KWP-HD50-0830-24
LED tape KWP-HD-1260-24 12.6 W/m, IP65 NEW		65	12.6 W/m	KWP-HD27-1260-24 KWP-HD30-1260-24 KWP-HD35-1260-24 KWP-HD40-1260-24 KWP-HD50-1260-24
LED tape K-0480-24	- universal for basic applications	20	4.8 W/m	K-27-0480-24 K-30-0480-24 K-35-0480-24 K-40-0480-24 K-50-0480-24
LED tape K-0960-24	- universal for basic applications	20	9.6 W/m	K-27-0960-24 K-30-0960-24 K-30-0960-24-R30 K-35-0960-24 K-40-0960-24 K-40-0960-24-R30 K-50-0960-24 K-65-0960-24
LED tape K-1440-24	- universal for basic applications	20	14.4 W/m	K-27-1440-24 K-30-1440-24 K-30-1440-24-R30 K-35-1440-24 K-40-1440-24 K-40-1440-24-R30 K-50-1440-24
LED tape K-HD-0480-24	- high LED density - Ease of obtaining a line of light	20	4.8 W/m	K-HD27-0480-24 K-HD30-0480-24 K-HD35-0480-24 K-HD40-0480-24 K-HD50-0480-24
LED tape K-HD-0960-24	- high LED density - Ease of obtaining a line of light	20	9.6 W/m	K-HD27-0960-24 K-HD30-0960-24 K-HD35-0960-24 K-HD40-0960-24 K-HD50-0960-24
LED tape K-HD-1440-24	- high LED density - Ease of obtaining a line of light	20	14.4 W/m	K-HD27-1440-24 K-HD30-1440-24 K-HD35-1440-24 K-HD40-1440-24 K-HD50-1440-24

Profile STOS-ALU

Ref. A04369

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape KWP-1440-24	- universal for basic applications	65	14.4 W/m	KWP-27-1440-24 KWP-30-1440-24 KWP-35-1440-24 KWP-40-1440-24 KWP-50-1440-24
LED tape KWP-0480-24	- universal for basic applications	65	4.8 W/m	KWP-27-0480-24 KWP-30-0480-24 KWP-35-0480-24 KWP-40-0480-24 KWP-50-0480-24
LED tape KWP-0960-24	- universal for basic applications	65	9.6 W/m	KWP-27-0960-24 KWP-30-0960-24 KWP-35-0960-24 KWP-40-0960-24 KWP-50-0960-24 KWP-65-0960-24
LED tape KWP-GHD-0480-24	- high LED density - Ease of obtaining a line of light	65	4.8 W/m	KWP-GHD27-0480-24 KWP-GHD30-0480-24 KWP-GHD35-0480-24 KWP-GHD40-0480-24 KWP-GHD50-0480-24
LED tape KWP-GHD-1260-24 12.6 W/m, IP65		65	12.6 W/m	KWP-GHD27-1260-24 KWP-GHD30-1260-24 KWP-GHD35-1260-24 KWP-GHD40-1260-24 KWP-GHD50-1260-24

RELATED ACCESSORIES > RELATED LED > CRI 95+

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-CR-0480-24	- universal for basic applications - CRI over 95	20	4.8 W/m	K-CR27-0480-24 K-CR30-0480-24 K-CR35-0480-24 K-CR40-0480-24 K-CR50-0480-24
LED tape K-CR-0960-24	- universal for basic applications - CRI over 95	20	9.6 W/m	K-CR27-0960-24 K-CR30-0960-24 K-CR35-0960-24 K-CR40-0960-24 K-CR50-0960-24
LED tape K-CR-1440-24	- universal for basic applications - CRI over 95	20	14.4 W/m	K-CR27-1440-24 K-CR30-1440-24 K-CR35-1440-24 K-CR40-1440-24 K-CR50-1440-24
LED tape KWP-CR-0480-24	- universal for basic applications - CRI over 95	65	4.8 W/m	KWP-CR27-0480-24 KWP-CR30-0480-24 KWP-CR35-0480-24 KWP-CR40-0480-24 KWP-CR50-0480-24
LED tape KWP-CR-0960-24	- universal for basic applications - CRI over 95	65	9.6 W/m	KWP-CR27-0960-24 KWP-CR30-0960-24 KWP-CR35-0960-24 KWP-CR40-0960-24 KWP-CR50-0960-24

RELATED ACCESSORIES > RELATED LED > HIGH EFFICACY

Name	Key features	IP protection rating	Power consumption	Ref.

Profile STOS-ALU

Ref. A04369

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-VHE-0480-24	- universal for basic applications - high efficacy - High Efficacy	20	4.8 W/m	K-VHE27-0480-24 K-VHE30-0480-24 K-VHE35-0480-24 K-VHE40-0480-24 K-VHE50-0480-24
LED tape K-VHE-0960-24	- universal for basic applications - high efficacy - High Efficacy	20	9.6 W/m	K-VHE27-0960-24 K-VHE30-0960-24 K-VHE35-0960-24 K-VHE40-0960-24 K-VHE50-0960-24
LED tape K-VHE-1440-24	- universal for basic applications - high efficacy - High Efficacy	20	14.4 W/m	K-VHE27-1440-24 K-VHE30-1440-24 K-VHE35-1440-24 K-VHE40-1440-24 K-VHE50-1440-24

RELATED ACCESSORIES > RELATED LED > BENDABLE

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-VBT-0720-24	- LED tape for bent profiles	20	7.2 W/m	K-VBT27-0720-24 K-VBT30-0720-24 K-VBT35-0720-24 K-VBT40-0720-24 K-VBT50-0720-24
LED tape K-BTRGB40-1510-24		20	15.1 W/m	K-BTRGB40-1510-24

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > REGULAR END CAPS

Name	Material	Color	Ref.
End cap STOS-ALU	PP	 gray  silver	C20108C02 C20108L01

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > SURFACE SPRINGS

Name	Material	Color	Ref.
Spring PDS	stainless steel	 silver	C24501N00

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > LATCHES

Name	Material	Color	Ref.
Latch TEKNIK	PP	 white	C24003C10

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > OTHER

Name	Key features	Material	Color	Ref.
Hermetic coupler THB.391.A4A, 4 pin	- 4 power terminals - compact dimensions	PA		C42268C10
Hermetic coupler THB.381, 2pin	- 2 power terminals - compact dimensions	PA		C28125C07
Hermetic coupler THB.391.A5A, 5 pin	- 5 power terminals - compact dimensions	PA		C28156C07

Profile STOS-ALU

Ref. A04369

Name	Key features	Material	Color	Ref.
Joint connector THB.200.E5E, 5 pin	- 5 power terminals - 3-line branch	Material, Material, multiselect		C28157C07

RELATED ACCESSORIES > ELECTRONICS > SWITCHES

Name	Key features	IP protection rating	Ref.
Proximity switch UNI-11 NEW	- touchless switch - width 11mm	20	E61603
Proximity switch UNI-11P NEW	- touchless switch - width 11mm - factory pre-soldered wires	20	E61604
Proximity switch UNI-P	- touchless switch - width only 7mm - factory pre-soldered wires	20	E61580
Proximity switch UNI	- touchless switch - width only 7mm	20	E61579