

# Profile TAMI

Ref. A05390



IP20



- Simplified design
- Minimum height

## APPLICATION

- furniture and functional lighting


## MOUNTING

- to the surface or recessed, using dedicated accessories, properly selected screws, with double-sided adhesive tape or mounting adhesive
- easy assembly and disassembly by snapping in and out

## ADDITIONAL INFORMATION

- cover with a simplified structure
- not recommended to be used with LEDs exceeding 15 W/m
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

## TECHNICAL DRAWING



## TECHNICAL SPECIFICATIONS

|                                                      |                                                                                                  |
|------------------------------------------------------|--------------------------------------------------------------------------------------------------|
| Material                                             | aluminum                                                                                         |
| Possible fixture IP                                  | 20                                                                                               |
| Possible fixture shapes                              | linear, polygonal                                                                                |
| Profile cross-section                                | rectangular                                                                                      |
| Width                                                | 15.9 mm                                                                                          |
| Height                                               | 7 mm                                                                                             |
| LED gluing width A                                   | 13 mm                                                                                            |
| Number of LED strips A (8 mm wide)                   | 1                                                                                                |
| Width of the glow                                    | 12.5 mm                                                                                          |
| Max power of a single KLUŚ LED strip                 | 15 W/m                                                                                           |
| Building type                                        | Residential, Retail, HoReCa object                                                               |
| Facility zone                                        | kitchen, bathroom, under-cabinet / furniture, exhibition / tradeshow / display, cove / perimeter |
| Easy assembly and disassembly by snapping in and out | yes                                                                                              |
| The cover is cut to the length of the profile        | yes                                                                                              |

| Color                 | Length  | Ref       |
|-----------------------|---------|-----------|
| ■ silver non anodized | 1000 mm | A05390N_1 |
|                       | 2005 mm | A05390N_2 |
| ■ silver anodized     | 1000 mm | A05390A_1 |
|                       | 2005 mm | A05390A_2 |




Standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance  $\pm 1.5$  mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)

# Profile TAMI

Ref. A05390

|                            |     |
|----------------------------|-----|
| Wire out end cap           | yes |
| Wire out back of extrusion | yes |

## SAMPLE PROJECTS

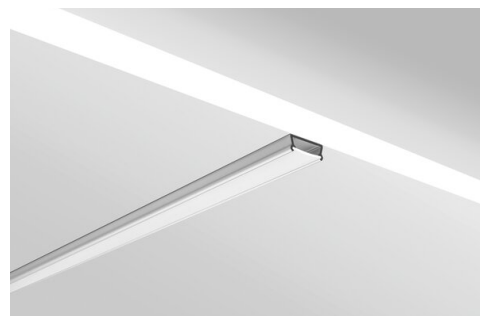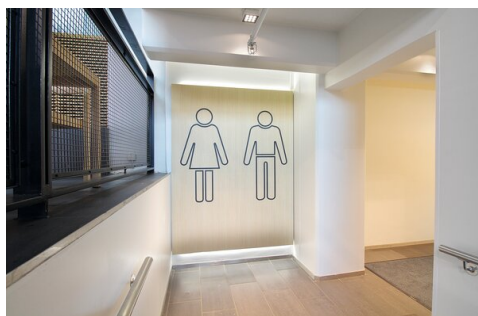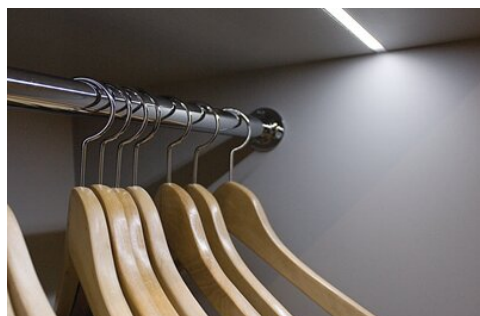

## SIMILAR PROFILES



**Profile TAKO**  
A05392

## RELATED ACCESSORIES > COVERS

| NAME       | KEY FEATURES                                                                                                                                                                      | MATERIAL | MATERIAL TRANSMITTANCE | COLOR            | REF.    |
|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|------------------------|------------------|---------|
| Cover T-13 |  <ul style="list-style-type: none"><li>- indoor use</li><li>- for basic applications</li></ul> | PMMA     | 85 %                   | semi-transparent | B17015T |

## RELATED ACCESSORIES > END CAPS

| NAME             |                                                                                     | MATERIAL | COLOR                          | REF.      |
|------------------|-------------------------------------------------------------------------------------|----------|--------------------------------|-----------|
| End cap TAMI EKO |  | PP       | <input type="checkbox"/> white | C20051C10 |

## RELATED ACCESSORIES > PROFILE TECHNICZNE

# Profile TAMI

Ref. A05390

| Name            | Material | Color                                                                                             | Ref.   |
|-----------------|----------|---------------------------------------------------------------------------------------------------|--------|
| Profile TEST-36 | aluminum |  silver anodized | A06639 |

## RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CCT

| Name                    | Key features                         | IP protection rating | Power consumption | Ref.           |
|-------------------------|--------------------------------------|----------------------|-------------------|----------------|
| LED tape K-RGBW-1530-24 | - RGBW (3000K)<br>- high LED density | 20                   | 15.3 W/m          | K-RGBW-1530-24 |
| LED tape K-RGB-0700-24V | - RGB                                | 20                   | 7 W/m             | K-RGB-0700-24V |
| LED tape K-RGB-1200-24  | - RGB                                | 20                   | 12 W/m            | K-RGB-1200-24  |

## RELATED ACCESSORIES > RELATED LED > WHITE MONO

| Name                                               | Key features                       | IP protection rating | Power consumption | Ref.                                                                                                                                 |
|----------------------------------------------------|------------------------------------|----------------------|-------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| LED tape K-0360-24 3.6 W/m,<br>IP20 <b>NEW</b>     |                                    | 20                   | 3.6 W/m           | K-27-0360-24<br>K-30-0360-24<br>K-35-0360-24<br>K-40-0360-24<br>K-50-0360-24                                                         |
| LED tape K-0720-24 7.2 W/m,<br>IP20 <b>NEW</b>     |                                    | 20                   | 7.2 W/m           | K-27-0720-24<br>K-30-0720-24<br>K-35-0720-24<br>K-40-0720-24<br>K-50-0720-24                                                         |
| LED tape K-1080-24 10.8 W/m,<br>IP20 <b>NEW</b>    |                                    | 20                   | 10.8 W/m          | K-27-1080-24<br>K-30-1080-24<br>K-35-1080-24<br>K-40-1080-24<br>K-50-1080-24                                                         |
| LED tape K-HD-0430-24 4.3 W/m,<br>IP20 <b>NEW</b>  |                                    | 20                   | 4.3 W/m           | K-HD27-0430-24<br>K-HD30-0430-24<br>K-HD35-0430-24<br>K-HD40-0430-24<br>K-HD50-0430-24                                               |
| LED tape K-HD-0830-24 8.3 W/m,<br>IP20 <b>NEW</b>  |                                    | 20                   | 8.3 W/m           | K-HD27-0830-24<br>K-HD30-0830-24<br>K-HD35-0830-24<br>K-HD40-0830-24<br>K-HD50-0830-24                                               |
| LED tape K-HD-1260-24 12.6<br>W/m, IP20 <b>NEW</b> |                                    | 20                   | 12.6 W/m          | K-HD27-1260-24<br>K-HD30-1260-24<br>K-HD35-1260-24<br>K-HD40-1260-24<br>K-HD50-1260-24                                               |
| LED tape K-0480-24                                 | - universal for basic applications | 20                   | 4.8 W/m           | K-27-0480-24<br>K-30-0480-24<br>K-35-0480-24<br>K-40-0480-24<br>K-50-0480-24                                                         |
| LED tape K-0960-24                                 | - universal for basic applications | 20                   | 9.6 W/m           | K-27-0960-24<br>K-30-0960-24<br>K-30-0960-24-R30<br>K-35-0960-24<br>K-40-0960-24<br>K-40-0960-24-R30<br>K-50-0960-24<br>K-65-0960-24 |

| Name                  | Key features                                              | IP protection rating | Power consumption | Ref.                                                                                                                 |
|-----------------------|-----------------------------------------------------------|----------------------|-------------------|----------------------------------------------------------------------------------------------------------------------|
| LED tape K-1440-24    | - universal for basic applications                        | 20                   | 14.4 W/m          | K-27-1440-24<br>K-30-1440-24<br>K-30-1440-24-R30<br>K-35-1440-24<br>K-40-1440-24<br>K-40-1440-24-R30<br>K-50-1440-24 |
| LED tape K-HD-0480-24 | - high LED density<br>- Ease of obtaining a line of light | 20                   | 4.8 W/m           | K-HD27-0480-24<br>K-HD30-0480-24<br>K-HD35-0480-24<br>K-HD40-0480-24<br>K-HD50-0480-24                               |
| LED tape K-HD-0960-24 | - high LED density<br>- Ease of obtaining a line of light | 20                   | 9.6 W/m           | K-HD27-0960-24<br>K-HD30-0960-24<br>K-HD35-0960-24<br>K-HD40-0960-24<br>K-HD50-0960-24                               |
| LED tape K-HD-1440-24 | - high LED density<br>- Ease of obtaining a line of light | 20                   | 14.4 W/m          | K-HD27-1440-24<br>K-HD30-1440-24<br>K-HD35-1440-24<br>K-HD40-1440-24<br>K-HD50-1440-24                               |

## RELATED ACCESSORIES > RELATED LED > CRI 95+

| Name                  | Key features                                        | IP protection rating | Power consumption | Ref.                                                                                   |
|-----------------------|-----------------------------------------------------|----------------------|-------------------|----------------------------------------------------------------------------------------|
| LED tape K-CR-0480-24 | - universal for basic applications<br>- CRI over 95 | 20                   | 4.8 W/m           | K-CR27-0480-24<br>K-CR30-0480-24<br>K-CR35-0480-24<br>K-CR40-0480-24<br>K-CR50-0480-24 |
| LED tape K-CR-0960-24 | - universal for basic applications<br>- CRI over 95 | 20                   | 9.6 W/m           | K-CR27-0960-24<br>K-CR30-0960-24<br>K-CR35-0960-24<br>K-CR40-0960-24<br>K-CR50-0960-24 |
| LED tape K-CR-1440-24 | - universal for basic applications<br>- CRI over 95 | 20                   | 14.4 W/m          | K-CR27-1440-24<br>K-CR30-1440-24<br>K-CR35-1440-24<br>K-CR40-1440-24<br>K-CR50-1440-24 |

## RELATED ACCESSORIES > RELATED LED > HIGH EFFICACY

| Name                   | Key features                                                             | IP protection rating | Power consumption | Ref.                                                                                        |
|------------------------|--------------------------------------------------------------------------|----------------------|-------------------|---------------------------------------------------------------------------------------------|
| LED tape K-VHE-0480-24 | - universal for basic applications<br>- high efficacy<br>- High Efficacy | 20                   | 4.8 W/m           | K-VHE27-0480-24<br>K-VHE30-0480-24<br>K-VHE35-0480-24<br>K-VHE40-0480-24<br>K-VHE50-0480-24 |
| LED tape K-VHE-0960-24 | - universal for basic applications<br>- high efficacy<br>- High Efficacy | 20                   | 9.6 W/m           | K-VHE27-0960-24<br>K-VHE30-0960-24<br>K-VHE35-0960-24<br>K-VHE40-0960-24<br>K-VHE50-0960-24 |
| LED tape K-VHE-1440-24 | - universal for basic applications<br>- high efficacy<br>- High Efficacy | 20                   | 14.4 W/m          | K-VHE27-1440-24<br>K-VHE30-1440-24<br>K-VHE35-1440-24<br>K-VHE40-1440-24<br>K-VHE50-1440-24 |

## RELATED ACCESSORIES > RELATED LED > ADJUSTABLE WHITE / DIM TO WARM

| Name                     | Key features           | IP protection rating | Power consumption | Ref.            |
|--------------------------|------------------------|----------------------|-------------------|-----------------|
| LED tape K-27T50-1440-24 | - RGB+Tunable White    | 20                   | 14.4 W/m          | K-27T50-1440-24 |
| LED tape K-18D30-0960-24 | - Dim To Warm LED Tape | 20                   | 9.6 W/m           | K-18D30-0960-24 |

## RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > MOUNTING BRACKETS

| Name                               | Key features                                        | Material                  | Color                                                        | Ref.                                |
|------------------------------------|-----------------------------------------------------|---------------------------|--------------------------------------------------------------|-------------------------------------|
| NEW<br>Mounting bracket REG-PD-EXT | - Mounting with angle adjustment function           | aluminum, stainless steel | <div></div> black<br><div></div> white<br><div></div> gray   | C28303C07<br>C28303C10<br>C28303N00 |
| Mounting bracket PDS-STN           | - For indoor and outdoor applications               | stainless steel           | <div></div> silver                                           | C24190N00                           |
| Mounting bracket PDS               | - For indoor and outdoor applications               | stainless steel           | <div></div> silver<br><div></div> white<br><div></div> black | C24189C02<br>C24223C10<br>C24189C07 |
| Mounting bracket PDS-STN-90G       | - Angular mount for indoor and outdoor applications | stainless steel           | <div></div> silver<br><div></div> white<br><div></div> black | C24370N00<br>C24370L10<br>C24370L07 |
| Mounting bracket PDS-STN-90D       | - Angular mount for indoor and outdoor applications | stainless steel           | <div></div> silver<br><div></div> white<br><div></div> black | C24367N00<br>C24367L10<br>C24367L07 |
| Mounting bracket PDS-STN-ALFA      |                                                     | stainless steel           | <div></div> silver                                           | C28060N00                           |
| Mounting bracket PDS-STN-60D       | - Angular mount for indoor and outdoor applications | stainless steel           | <div></div> silver                                           | C24457N00                           |
| Mounting bracket PDS-STN-45D       | - Angular mount for indoor and outdoor applications | stainless steel           | <div></div> silver                                           | C24456N00                           |

## RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > SURFACE SPRINGS

| Name       | Material        | Color              | Ref.      |
|------------|-----------------|--------------------|-----------|
| Spring PDS | stainless steel | <div></div> silver | C24501N00 |

## RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONDUCTIVE FASTENERS AND HEADS FOR PROFILES

| Name                          | Key features                                             | Material                                                                          | Color                                                                            | Ref.                                |
|-------------------------------|----------------------------------------------------------|-----------------------------------------------------------------------------------|----------------------------------------------------------------------------------|-------------------------------------|
| Head ZO                       |                                                          | stainless steel                                                                   | <div></div> silver                                                               | C28115N00                           |
| Head BZP-ZO                   |                                                          | stainless steel                                                                   | <div></div> silver                                                               | 42214                               |
| Fastener PUSZ-LIN-MR          | - Power supply cable - mounting in thin walls (from 1mm) | stainless steel, brass, nylon<br>aluminum, brass, nylon<br>aluminum, brass, nylon | <div></div> silver<br><div></div> white lacquered<br><div></div> black lacquered | C28163N00<br>C28163L10<br>C28163L07 |
| Fastener PUSZ-PRET-MR, silver |                                                          | stainless steel                                                                   | <div></div> silver                                                               | C28119N00                           |
| Fastener FI-8-LIN-MR          | - Power supply cable - mounting in thin walls (from 1mm) | stainless steel, PA<br>aluminum, PA<br>aluminum, PA                               | <div></div> silver<br><div></div> white<br><div></div> black                     | C28172N00<br>C28172L10<br>C28172L07 |
| Fastener PUSZ-LIN-MR, silver  |                                                          | stainless steel                                                                   | <div></div> silver                                                               | C28122N00                           |
| Fastener DP-ZZ, silver        |                                                          | stainless steel                                                                   | <div></div> silver                                                               | 00651                               |

| Name                       | Key features                                             | Material                                | Color                                                                                                                                                                                                                                                                                              | Ref.                                |
|----------------------------|----------------------------------------------------------|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| Fastener DP-MOC-ZO, silver |                                                          | stainless steel                         |  silver                                                                                                                                                                                                           | 00646                               |
| Fastener DP-MOC-ZZ, silver |                                                          | stainless steel                         |  silver                                                                                                                                                                                                           | 00647                               |
| Fastener PUSZ-MR           | - Power supply cable - mounting in thin walls (from 1mm) | stainless steel<br>aluminum<br>aluminum |  silver<br> white lacquered<br> black lacquered | C20011N00<br>C20011L10<br>C20011L07 |

## RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > FASTENERS AND HEADS FOR PROFILES

| Name                  | Key features                        | Material                                | Color                                                                                                                                                                                                                                                                          | Ref.                                |
|-----------------------|-------------------------------------|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| Head ST               |                                     | stainless steel                         |  silver                                                                                                                                                                                       | C28114N00                           |
| Fastener DP, silver   |                                     | stainless steel                         |  silver                                                                                                                                                                                       | 00644                               |
| Fastener FI-8-PRET-MR | - Mounting in thin walls (from 1mm) | stainless steel<br>aluminum<br>aluminum |  silver<br> white<br> black | C28187N00<br>C28187L10<br>C28187L07 |

## RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONNECTORS

| Name               | Material        | Color                                                                                    | Ref.      |
|--------------------|-----------------|------------------------------------------------------------------------------------------|-----------|
| Connector PD-MICRO | stainless steel |  silver | C42150N00 |

## RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > SUSPENSION AND MOUNTING SETS

| Name                              | Key features                                                            | Material                  | Color                                                                                                                                                                                                                                                                                                                                                                                                           | Ref.                                             |
|-----------------------------------|-------------------------------------------------------------------------|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------|
| Fastener set PUSZ-MR-1 <b>NEW</b> | - Power supply, for wall and drywall, mounting in thin walls (from 1mm) | stainless steel, aluminum |  silver<br> white lacquered<br> black lacquered                                                                                                        | C28132N00<br>C28132L10<br>C28132L07              |
| Fastener set PUSZ-MR-2 <b>NEW</b> | - Convenient cable length adjustment, mounting in thin walls (from 1mm) | stainless steel, aluminum |  silver<br> white lacquered<br> black lacquered                                                                                                        | C28133N00<br>C28133L10<br>C28133L07              |
| Fastener set FI-8-MR-1 <b>NEW</b> | - Power supply, for wall and drywall, mounting in thin walls (from 1mm) | stainless steel, aluminum |  silver<br> white lacquered<br> black lacquered                                                                                                        | C28136N00<br>C28136L10<br>C28136L07              |
| Fastener set FI-8-MR-2 <b>NEW</b> | - Convenient cable length adjustment, mounting in thin walls (from 1mm) | stainless steel, aluminum |  silver<br> white lacquered<br> black lacquered                                                                                                        | C28137N00<br>C28137L10<br>C28137L07              |
| Fastener set W1                   |                                                                         | brass, stainless steel    |  silver                                                                                                                                                                                                                                                                                                                      | C28203N00                                        |
| Fastener set W6                   |                                                                         | stainless steel, brass    |  silver                                                                                                                                                                                                                                                                                                                      | C28205N00                                        |
| Fastener set W7                   |                                                                         | brass, stainless steel    |  silver                                                                                                                                                                                                                                                                                                                      | 42605                                            |
| Fastener set W9                   |                                                                         | stainless steel           |  silver                                                                                                                                                                                                                                                                                                                      | C28207N00                                        |
| Fastener set W10                  |                                                                         | stainless steel           |  silver                                                                                                                                                                                                                                                                                                                      | C28208N00                                        |
| Fastener set RG-1                 | - Cable adjustment at the ceiling, cable included                       | brass                     |  silver glossy<br> silver satin<br> white colored<br> black colored | C28230P00<br>C28230P01<br>C28230L10<br>C28230L07 |

## RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CANOPIES

| Name | Key features | Material | Color | Ref. |
|------|--------------|----------|-------|------|
|------|--------------|----------|-------|------|

| Name                      | Key features                                           | Material | Color                                                                                                                       | Ref.                                |
|---------------------------|--------------------------------------------------------|----------|-----------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| Canopy BOX-M70 <b>NEW</b> |                                                        | aluminum | <div> <div></div> silver anodized           <div></div> white lacquered           <div></div> black anodized         </div> | C24541A<br>C24541L10<br>C24541A07   |
| Canopy Fi-60mm            | - Convenient cable length adjustment, in the ZM system | steel    | <div> <div></div> gray lacquered           <div></div> white lacquered           <div></div> black lacquered         </div> | C24540L01<br>C24540L10<br>C24540L07 |
| BOX-KR90                  |                                                        | aluminum | <div> <div></div> black lacquered           <div></div> white lacquered         </div>                                      | C24666L07<br>C24666L10              |
| Canopy BOX-KS90           |                                                        | aluminum | <div> <div></div> black lacquered           <div></div> white lacquered         </div>                                      | C24668L07<br>C24668L10              |

## RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > OTHER

| Name          | Key features                           | Material                        | Ref.      |
|---------------|----------------------------------------|---------------------------------|-----------|
| Gland 9x1,5   |                                        | Materiał, Material, multiselect | C42295C07 |
| Gland 11x1,5  |                                        | rubber                          | C42296C07 |
| Gland 6,4x1,6 |                                        | rubber                          | C24518C07 |
| Gland M10x1   | - metal housing<br>- with M10x1 thread | mosiądz niklowany               | C28275N00 |

## RELATED ACCESSORIES > ELECTRONICS > SWITCHES

| Name                               | Key features                                                           | IP protection rating | Ref.   |
|------------------------------------|------------------------------------------------------------------------|----------------------|--------|
| Proximity switch UNI-11 <b>NEW</b> | - touchless switch<br>- width 11mm                                     | 20                   | E61603 |
| Proximity switch UNI-P             | - touchless switch<br>- width only 7mm<br>- factory pre-soldered wires | 20                   | E61580 |