


# Mounting bracket HR-OPTI-60

Ref. C28090N00

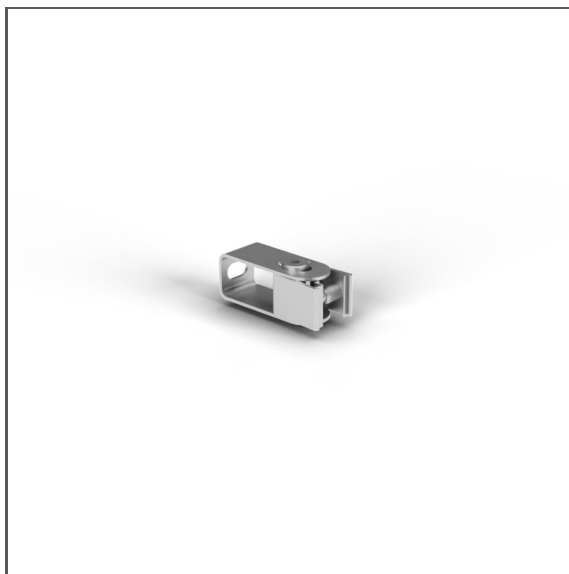

- Strong attachment of facade profiles
- Distance of the fixture from the mounting surface: 60 mm
- Correcting the position of the lighting fixture on an uneven surface
- Possibility to fasten the luminaire at the back or side
- Adjustable lighting angle of the lighting fixture
- High mechanical and weather resistance


## APPLICATION

- for fixing LED lighting fixtures in facade systems
- for embedding power supplies and electronics in LED lighting fixtures

## MOUNTING

- to the surface, using properly selected screws
- to the lighting fixture, with hooks

## TECHNICAL DRAWING

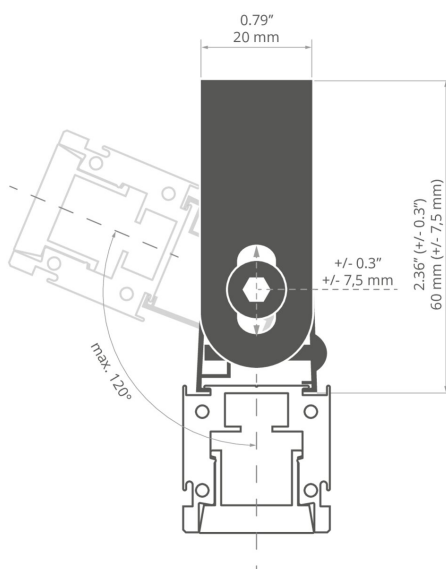

## TECHNICAL SPECIFICATIONS


|                      |                                                                                           |
|----------------------|-------------------------------------------------------------------------------------------|
| Material             | stainless steel                                                                           |
| Color                |  steel |
| Length               | 60 mm                                                                                     |
| Width                | 20 mm                                                                                     |
| Corrosion resistance | yes                                                                                       |

|                                 |       |
|---------------------------------|-------|
| UV radiation resistance         | yes   |
| Lifting capacity                | 20 kg |
| Lighting angle adjustment from  | 0     |
| Lighting angle adjustment up to | 120°  |

# Mounting bracket HR-OPTI-60

Ref. C28090N00

## SAMPLE PROJECTS

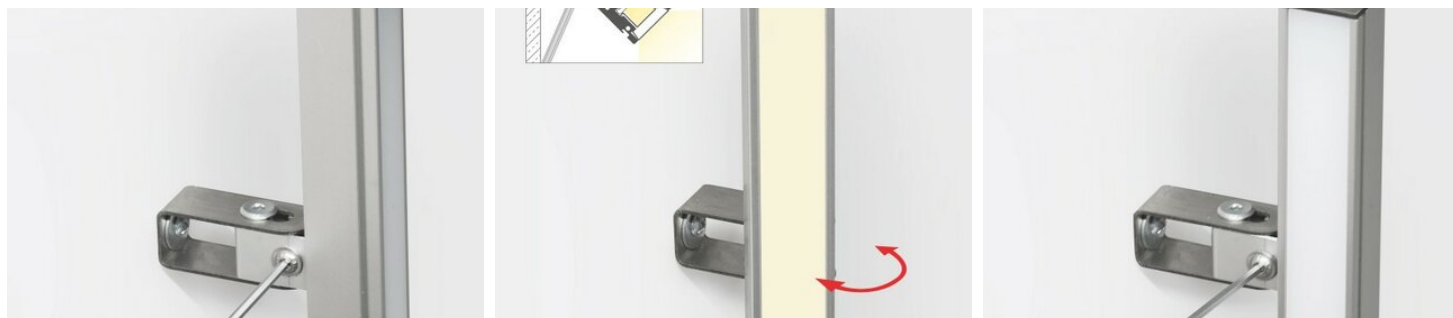

## PROFILE PODOBNE



**HR-OPTI**  
A01844