


Mounting bracket DS

Ref. C28096

NEW

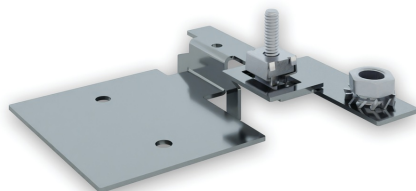

- Facilitates mounting of sealed LED profiles
- Simple assembly
- Corrosion resistance


APPLICATION

- for mounting luminaires based on PIKO-ZM, PDS-ZM-PLUS, GIZA-LL profiles, in the gaps between the panels of ventilated facades

MOUNTING

- to the facade using adhesive, tapes or screws dedicated to a given type of panel
- to the lighting fixture, using a small lock

TECHNICAL DRAWING

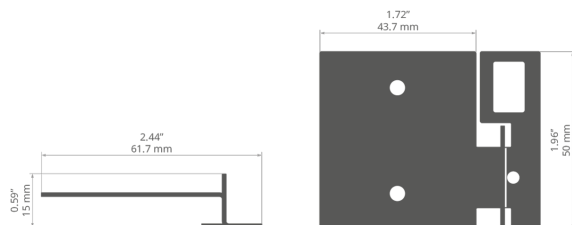

TECHNICAL SPECIFICATIONS

Material	stainless steel
Corrosion resistance	yes
Lifting capacity	10 kg

Color	Ref
■ black	C28096L07
■ silver	C28096N00

SAMPLE PROJECTS



Mounting bracket DS

Ref. C28096

RELATED PROFILES > ARCHITECTURAL



GIZA-LL
A00758

RELATED PROFILES > MINIMALISTIC



PIKO-ZM
A01168

RELATED PROFILES > UNIVERSAL



PDS-ZM-PLUS
A02056