

Mounting bracket HR-OPTI-75

Ref. C28092N00



- Strong attachment of facade profiles
- Distance of the fixture from the mounting surface: 75 mm
- Correcting the position of the lighting fixture on an uneven surface
- Possibility to fasten the luminaire at the back or side
- Adjustable lighting angle of the lighting fixture
- High mechanical and weather resistance


APPLICATION

- for fixing LED lighting fixtures in facade systems

MOUNTING

- to the surface, using properly selected screws
- to the lighting fixture, with hooks

TECHNICAL DRAWING

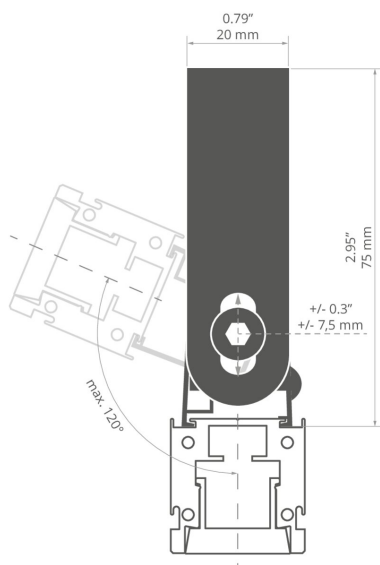

TECHNICAL SPECIFICATIONS

Material	stainless steel
Color	 steel
Length	75 mm
Width	20 mm

Corrosion resistance	yes
Lifting capacity	20 kg
Lighting angle adjustment from	0
Lighting angle adjustment up to	120°

Mounting bracket HR-OPTI-75

Ref. C28092N00

SAMPLE PROJECTS



PROFILE PODOBNE



HR-OPTI
A01844