


Fastener set FI-8-ZM-1

Ref. C28134

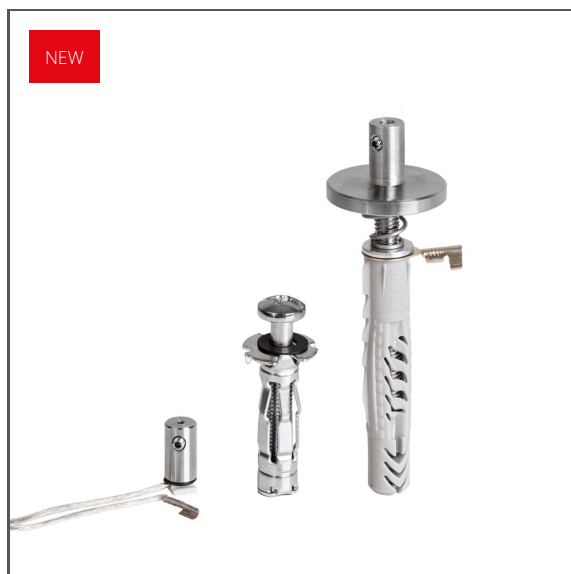

IP20

- Completed set of items
- Lengthwise suspension on a wire
- Single pole conductivity possible
- Minimum dimensions


APPLICATION

- for suspending LED lighting fixtures

MOUNTING

- to the surface, using the included accessory kit
- to the lighting fixture, using a small lock
- to the wire with a pressure screw

TECHNICAL DRAWING

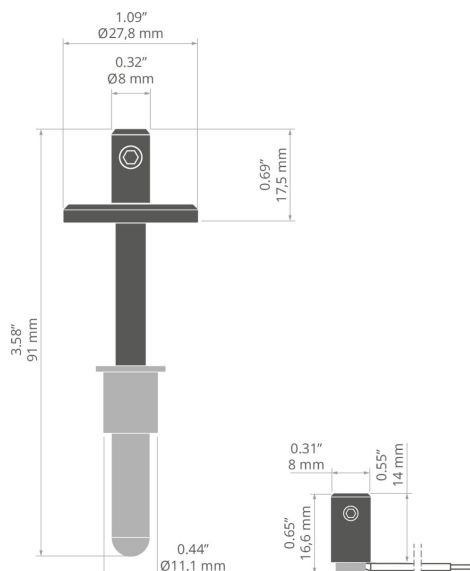

TECHNICAL SPECIFICATIONS

Material	stainless steel, aluminum
IP protection rating	20
Corrosion resistance	yes
Conducting electricity	yes
UV radiation resistance	yes
Working temperature	54°C
Lifting capacity	20 kg
Maximum current	10 A
Voltage drop	0.1 V

Color	Ref
■ silver	C28134N00
□ white lacquered	C28134L10
■ black lacquered	C28134L07

Fastener set FI-8-ZM-1

Ref. C28134


RELATED PROFILES > ARCHITECTURAL



3035
A18039




3035-O
A08441



4050
A18050



4050-W
A18051




GIZA-DUO-LL
A02162



GIZA-LL
A00758



JAZ
A08547




LIPOD
A05554



OPK-4
A00370

RELATED PROFILES > FOR MAIN LIGHTING



LIPOD-50
A02609

RELATED PROFILES > MINIMALISTIC



PIKO-ZM
A01168

Fastener set FI-8-ZM-1

Ref. C28134

RELATED PROFILES > UNIVERSAL



OLEK
A08505



PDS-ZM-PLUS
A02056



PDS-ZMG
A01418

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > WIRES AND RODS



WIRE
CU FI 0,95 mm
Z70240