

# Mounting bracket HR-OPTI-90

Ref. C28093N00

Ref. arch 42170

NEW



- Strong attachment of facade profiles
- Distance of the fixture from the mounting surface: 90 mm
- Correcting the position of the lighting fixture on an uneven surface
- Possibility to fasten the luminaire at the back or side
- Adjustable lighting angle of the lighting fixture
- High mechanical and weather resistance


## APPLICATION

- for fixing LED lighting fixtures in facade systems

## MOUNTING

- to the surface, using properly selected screws
- to the lighting fixture, with hooks

## TECHNICAL DRAWING

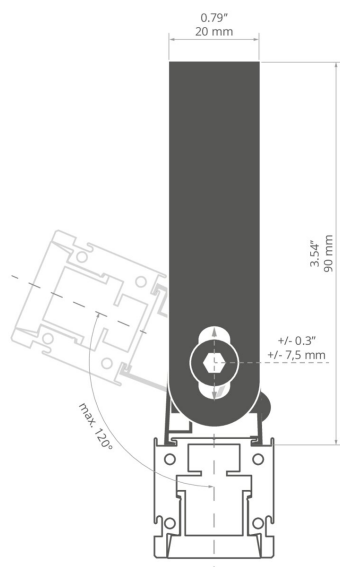

## TECHNICAL SPECIFICATIONS

|          |                 |                                 |       |
|----------|-----------------|---------------------------------|-------|
| Material | stainless steel | Corrosion resistance            | yes   |
| Color    | steel           | Lifting capacity                | 20 kg |
| Width    | 20 mm           | Lighting angle adjustment up to | 120°  |

# Mounting bracket HR-OPTI-90

Ref. C28093N00

Ref. arch 42170

**KLUŚ** Inspiring  
Solutions

## SAMPLE PROJECTS

