

Fastener FI-8-PRET-MR

Ref. C28187

Ref. arch 42345

- Lengthwise suspension on a rod
- Fixing screw flush with the profile surface
- Minimum dimensions

APPLICATION


- for suspending LED lighting fixtures

MOUNTING

- to the lighting fixture, using a small lock
- to the rod with a pressure screw



TECHNICAL DRAWING

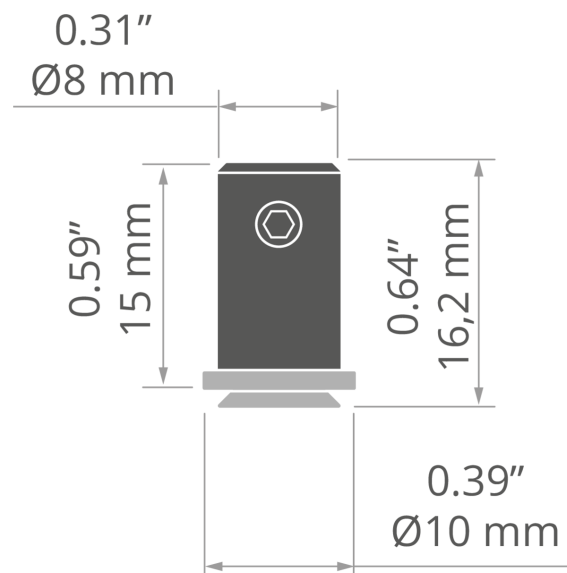

TECHNICAL SPECIFICATIONS

Height	16.2 mm
Diameter	10 mm
Lifting capacity	10 kg

Color	Ref
■ silver	C28187N00 42345
■ black	C28187L07 42345L9005
□ white	C28187L10 42345L9010

Fastener FI-8-PRET-MR

Ref. C28187

Ref. arch 42345

KLUŚ Inspiring
Solutions

SAMPLE PROJECTS



RELATED PROFILES > ARCHITECTURAL



REGULATOR

A18068

Ref. arch B468+43



GLAZA-LL

A02627

Ref. arch C2627

RELATED PROFILES > MOUNTING TRACKS



TESPO

A18020

Ref. arch 18020

RELATED PROFILES > UNIVERSAL



SILER

A09325

Ref. arch B9325



MICRO-ALU

A01888

Ref. arch B1888



TAMI

A05390


Ref. arch B5390



PDS-4-PLUS

A01263

Ref. arch C1263



MICRO-HG

A01419

Ref. arch C1419

Fastener FI-8-PRET-MR

Ref. C28187

Ref. arch 42345



TAPO

A01919

Ref. arch C1919



MICRO-PLUS

A02966

Ref. arch C2966

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > WIRES AND RODS



ROD

FI-3-ALU

C28196A01, C28196A07

Ref. arch 42526, 42527, 42528, 42529