


Profile KOZEL-10-BD

Ref. A18079

NEW



- Profile designed for bending in the lighting plane
- Bending requires the use of specialized equipment – KLUŚ offers a professional bending service using dedicated machines
- Mounting to drywall
- Possibility of installing sealed 5K series LED strips
- Minimum height
- No collision with the ceiling structure
- Line of light flush with the surface
- Non visible aluminum elements

APPLICATION

- the profile is used for creating curves
- decorative lighting


MOUNTING

- in drywall, with mounting adhesive

ADDITIONAL INFORMATION

- in order to protect the lighting fixture during installation, a TECH-10 protective insert should be used
- smooth transition from a recessed into a suspended fixture
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING

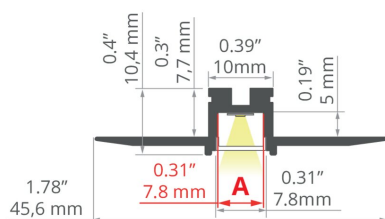

TECHNICAL SPECIFICATIONS

Material	aluminum
Color	 silver non anodized
Possible fixture IP	20
Possible fixture shapes	linear, polygonal
Profile cross-section	rectangular
Width	45.6 mm
Height	10.4 mm
LED gluing width A	7.8 mm
Width of the glow	7.2 mm
Max power of a single KLUŚ LED strip	9.6 W/m
Possibility of obtaining a line of light	yes
Possibility of bending	yes
Downward light arc radius	yes
Down	500 mm
Building type	Commercial, Residential, Retail, HoReCa object, Entertainment/ Arts

Length	Ref
2005 mm	A18079N_2
3010 mm	A18079N_3

Standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)

Profile KOZEL-10-BD

Ref. A18079

Facility zone	communication routes and corridors, lobby / foyer, bathroom, office, decorative, media rooms / av
The cover is cut to the length of the profile	yes
Can be easily connected into runs	yes
Mounting to drywall	yes
To cover with plaster	yes
Wire out back of extrusion	yes
Possibility of bending in the light plane	yes

LINE OF LIGHT TABLE

LED tape	Cover BENCO-7 frosted
K-1490-24	✓ (1)
K-BT-1490-24	✓ (1)
K-0910-24	✓ (1)
K-BT-0910-24	✓ (1)
K-0450-24	✓ (1)
K-BT-0450-24	✓ (1)
K-SHD-0960-24	✓ (1)

Description


✓ - Line of Light for a number (X) of rows - Pixel free imaging

X - Visible Dotting from Diodes


HL - Centered Line of Light - Concentrated in middle

HL (X) - Centered Line of Light for a number (X) of rows - Concentrated in middle

Line of Light Guide



Clean Line of Light (Pixel free imaging)




Centered Line of Light



Visible Dotting from Diodes

SAMPLE PROJECTS

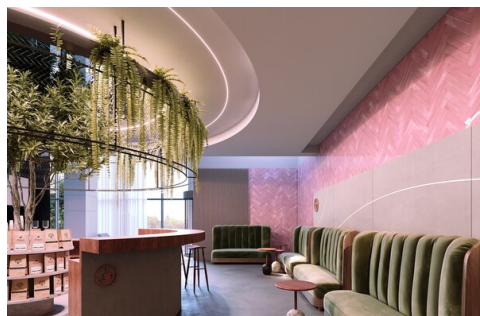

Profile KOZEL-10-BD

Ref. A18079

RELATED PROFILES > TRIMLESS



Profile KOZEL-10
A01575

RELATED ACCESSORIES > COVERS

NAME		KEY FEATURES	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
Cover BENCO-7		- indoor use - perfect for bent profiles	silicon	53 %	frosted	B17069F

RELATED ACCESSORIES > END CAPS

NAME		MATERIAL	COLOR	REF.
End cap PIKO-ZM		ABS	black	C24307C07
			caramel (NCSS3030-Y60R)	C24307L14
			gray	C24307C02
			light sage (NCSS2010-G50Y)	C24307L12
			pastel blue (NCSS2010-B)	C24307L13
			sand (NCSS2010-Y30R)	C24307L11
			white	C24307C10
End cap with hole PIKO-ZM-OTW		ABS	black	C24307C07TW
			gray	C24307C02TW
			white	C24307C10TW

RELATED ACCESSORIES > RELATED LED > ULTRATHIN

Profile KOZEL-10-BD

Ref. A18079

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-0910-24 9.1 W/m, IP20 NEW		20	9.1 W/m	K-27-0910-24 K-30-0910-24 K-35-0910-24 K-40-0910-24 K-50-0910-24
LED tape K-0450-24	- Thin line of light	20	4.5 W/m	K-27-0450-24 K-30-0450-24 K-35-0450-24 K-40-0450-24 K-50-0450-24
LED tape K-SHD-0960-24	- ideal for use with black covers - high LED density	20	9.6 W/m	K-SHD22-0960-24 K-SHD25-0960-24 K-SHD27-0960-24 K-SHD30-0960-24 K-SHD35-0960-24 K-SHD40-0960-24 K-SHD50-0960-24

RELATED ACCESSORIES > RELATED LED > WHITE MONO

Name	IP protection rating	Power consumption	Ref.
LED tape K-1490-24 14.9 W/m, IP20 NEW	20	14.9 W/m	K-27-1490-24 K-30-1490-24 K-35-1490-24 K-40-1490-24 K-50-1490-24
LED tape K-BT-1490-24 14.9 W/m, IP20 NEW	20	14.9 W/m	K-BT27-1490-24 K-BT30-1490-24 K-BT35-1490-24 K-BT40-1490-24 K-BT50-1490-24

RELATED ACCESSORIES > RELATED LED > BENDABLE

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-BT-0450-24	- Thin line of light - LED tape for bent profiles	20	4.5 W/m	K-BT27-0450-24 K-BT30-0450-24 K-BT35-0450-24 K-BT40-0450-24 K-BT50-0450-24
LED tape K-BT-0910-24	- LED tape for bent profiles	20	9.1 W/m	K-BT27-0910-24 K-BT30-0910-24 K-BT35-0910-24 K-BT40-0910-24 K-BT50-0910-24

RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CCT

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-RGB-1560-24	- RGB	20	15.6 W/m	K-RGB-1560-24

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > TECHNICAL AND PROTECTIVE INSERTS

Name	Key features	Material	Color	Ref.

Profile KOZEL-10-BD

Ref. A18079

Name	Key features	Material	Color	Ref.
Protective insert TECH-10	- Protection of the fixture interior during installation	PVC	 gray satin	C24533C02_1 C24533C02_2 C24533C02_3

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > OTHER

Name	Material	Ref.
Gland 6,4x1,6	rubber	C24518C07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONNECTORS

Name	Material	Color	Ref.
Connector ZM-T	stainless steel	 black colored	C28076C07
		 silver	C28076N00
		 black colored	C28077C07
		 silver	C28077N00
		 black colored	C28078C07
		 silver	C28078N00
Connector ZM-X	stainless steel	 black colored	C28079C07
		 silver	C28079N00
		 black colored	C28080C07
		 silver	C28080N00
		 black colored	C28081C07
		 silver	C28081N00
Connector ZM-Y	stainless steel	 black colored	C28082C07
		 silver	C28082N00
Connector ZM	stainless steel	 silver	42716
		 silver	42717
		 silver	42720
		 silver	42728
		 black colored	C24797C07
		colorless non colored	C24797N00
		 black colored	C28070C07
		 silver	C28070N00
		 black colored	C28071C07
		 silver	C28071N00
		 black colored	C28072C07
		 silver	C28072N00
		 black colored	C28073C07
		 silver	C28073N00
		 black colored	C28074C07
		 silver	C28074N00
		 black colored	C28075C07
		 silver	C28075N00
		 silver	C28243N00
Connector ZM-NA	stainless steel		42305
			42339
		 silver	42723
			42724
			42725
			C28242N00

Profile KOZEL-10-BD

Ref. A18079

Name	Material	Color	Ref.
Connector ZM-PION	stainless steel	silver	42314
		silver	42316
		silver	42320
		silver	42718
		silver	42719
		black colored	C28084C07
		silver	C28084N00
		black colored	C28085C07
		silver	C28085N00
		black colored	C28086C07
		silver	C28086N00
		black colored	C28087C07
		silver	C28087N00
		black colored	C28088C07
		silver	C28088N00
Connector ZM-MINI	stainless steel	silver	44501
			C28083N00

RELATED ACCESSORIES > ELECTRONICS > SWITCHES

Name	Key features	IP protection rating	Ref.
Proximity switch UNI-P	- touchless switch - width only 7mm - factory pre-soldered wires	20	E61580
Proximity switch UNI	- touchless switch - width only 7mm	20	E61579