


Profile LIPOD-50

Ref. A02609

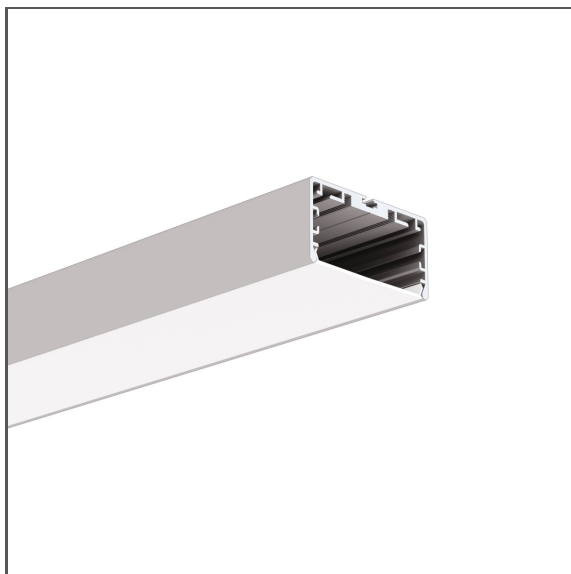

IP20

IP65



- Minimalistic form
- Smooth profile walls
- High lumen output
- Wide range of accessories
- Possibility to mount the power supply in the luminous part of the luminaire
- Possibility to use current modules with efficiency up to 190lm/W and CRI>90. Available upon request.

APPLICATION

- main, decorative and functional lighting

MOUNTING


- suspended or to the surface, using dedicated accessories or properly selected screws

ADDITIONAL INFORMATION

- both LED strips and LED current modules can be used
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ
- NCS Premium paint option - minimum order quantity 30pcs - available on order within 14 days

TECHNICAL DRAWING

1:2



TECHNICAL SPECIFICATIONS

Material	aluminum
Possible fixture IP	20, 65
Possible fixture shapes	linear, polygonal
Profile cross-section	rectangular
Width	50 mm
Height	26 mm
LED gluing width A	44 mm
Number of LED strips A (8 mm wide)	5
Width of the glow	44.6 mm
Max power of a single KLUŚ LED strip	24 W/m
Dedicated space for power supply	yes
Possibility of obtaining a line of light	yes
Possibility of bending	yes
Radius of the light arc	yes
Inward	600 mm
Outdoor	600 mm

Color	Length	Ref
silver anodized	1000 mm	A02609A_1
	2005 mm	A02609A_2
	3010 mm	A02609A_3
white lacquered	2005 mm	A02609L10OD_2
	3010 mm	A02609A07_3
	2005 mm	A02609A07_2
black anodized	1000 mm	A02609A07_1
	2005 mm	A02609L14OD_2
	2005 mm	A02609L11OD_2
caramel (NCSS3030-Y60R) lacquered	2005 mm	A02609L12OD_2
sand (NCSS2010-Y30R) lacquered	2005 mm	A02609L13OD_2
light sage (NCSS2010-G50Y) lacquered	2005 mm	A02609L13OD_2
pastel blue (NCSS2010-B) lacquered	2005 mm	A02609L13OD_2

Standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)

Profile LIPOD-50

Ref. A02609

Building type	Commercial, Retail, Entertainment/ Arts, HoReCa object
Facility zone	office, lobby / foyer
The cover is cut to the length of the profile	yes
Can be easily connected into runs	yes
Wire out back of extrusion	yes

LINE OF LIGHT TABLE

LED tape	LIGER-45 satin	LIGER-45 black
K-1275-24	✓ (3)	X
K-0960-24	✓ (3)	✓ (4)
K-1440-24	✓ (3)	✓ (4)
K-HD-0480-24	✓ (3)	✓ (4)
K-HD-0960-24	✓ (3)	✓ (4)
K-HD-1440-24	✓ (3)	✓ (4)
K-0360-24	✓ (3)	✓ (4)
K-0720-24	✓ (3)	✓ (4)
K-1080-24	✓ (3)	✓ (4)
K-0500-24	✓ (3)	✓ (4)
K-1000-24	✓ (3)	✓ (4)
K-HD-0430-24	✓ (3)	✓ (4)
K-1500-24	✓ (3)	✓ (4)
K-CB-1000-24	✓ (3)	✓ (4)
K-HD-0830-24	✓ (3)	✓ (4)
K-HD-1260-24	✓ (3)	✓ (4)
KWP-0360-24	✓ (3)	✓ (4)
KWP-0720-24	✓ (3)	✓ (4)
KWP-1080-24	✓ (3)	✓ (4)
KWP-0500-24	✓ (3)	✓ (4)
KWP-1000-24	✓ (3)	✓ (4)
KWP-1500-24	✓ (3)	✓ (4)
KWP-CB-1000-24	✓ (3)	✓ (4)
KWP-GHD-0430-24	✓ (3)	✓ (4)
KWP-GHD-0830-24	✓ (3)	✓ (4)
KWP-HD-0430-24	✓ (3)	✓ (4)
KWP-HD-0830-24	✓ (3)	✓ (4)
KWP-HD-1260-24	✓ (3)	✓ (4)
K-2300-24	✓ (3)	X
K-2400-24	✓ (3)	✓ (4)

K-CR-1220-24	✓ (3)	X
K-CR-1275-24	✓ (3)	X
K-CRHD-1820-24	✓ (3)	✓ (4)
K-CRHD-1910-24	✓ (3)	✓ (4)
K-CR-0960-24	✓ (3)	✓ (4)
K-CR-1440-24	✓ (3)	✓ (4)
K-HEHD-0480-24	✓ (3)	✓ (4)
K-HEHD-0960-24	✓ (3)	✓ (4)
K-HEHD-1440-24	✓ (3)	✓ (4)
K-HEHD-1920-24	✓ (3)	✓ (4)
K-VHE-0480-24	✓ (3)	✓ (4)
K-VHE-0960-24	✓ (3)	✓ (4)
K-VHE-1440-24	✓ (3)	✓ (4)
K-BLUE-1220-24	✓ (3)	X
K-RGB-1200-24	✓ (3)	X
KWP-RGB-1200-24	✓ (3)	X
K-18D30-0960-24	✓ (3)	✓ (4)
KWP-18D30-0960-24	✓ (3)	✓ (4)
KWP-27T50-1440-24	✓ (3)	✓ (4)
K-27T50-1440-24	✓ (3)	✓ (4)
K-SD-1440-24	✓ (3)	✓ (4)

Description


✓ - Line of Light for a number (X) of rows - Pixel free imaging

X - Visible Dotting from Diodes


HL - Centered Line of Light - Concentrated in middle

HL (X) - Centered Line of Light for a number (X) of rows - Concentrated in middle

Line of Light Guide



Clean Line of Light (Pixel free imaging)



Centered Line of Light




Visible Dotting from Diodes

Profile LIPOD-50

Ref. A02609

SAMPLE PROJECTS

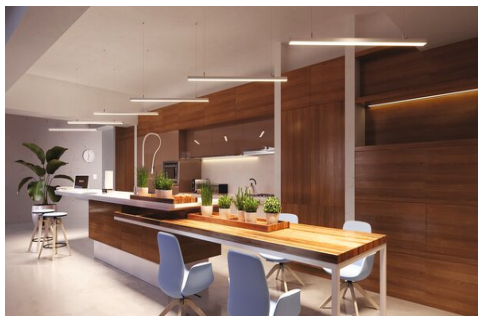

SIMILAR PROFILES



Profile KOZUS-50
A00958



Profile LARKO-50
A00756

RELATED ACCESSORIES > COVERS

NAME		KEY FEATURES	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
Cover G-50S			PC	13 %	black	B17214B
				69 %	satin	B17214S
Cover LIGER-45			PC	22 %	black	B17086B
				64 %	satin	B17086S

Profile LIPOD-50

Ref. A02609

RELATED ACCESSORIES > END CAPS

NAME		MATERIAL	COLOR	REF.
End cap LIPOD-50		ABS	 black	C28028C07
			 caramel (NCSS3030-Y60R)	C28028L14
			 gray	C28028C02
			 light sage (NCSS2010-G50Y)	C28028L12
			 pastel blue (NCSS2010-B)	C28028L13
			 sand (NCSS2010-Y30R)	C28028L11
			 silver	C28028L01
			 white	C28028L10
End cap LIPOD-50-NHQ		aluminum, PET-G	 silver	C28146AS
End cap LIPOD-50S		ASA	 black	C24575C07
			 gray	C24575C02
			 white	C24575L10

RELATED ACCESSORIES > RELATED LED > WHITE MONO

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-0360-24 3.6 W/m, IP20 NEW		20	3.6 W/m	K-27-0360-24 K-30-0360-24 K-35-0360-24 K-40-0360-24 K-50-0360-24
LED tape K-HD-0430-24 4.3 W/m, IP20 NEW		20	4.3 W/m	K-HD27-0430-24 K-HD30-0430-24 K-HD35-0430-24 K-HD40-0430-24 K-HD50-0430-24
LED tape K-0480-24	- universal for basic applications	20	4.8 W/m	K-27-0480-24 K-30-0480-24 K-35-0480-24 K-40-0480-24 K-50-0480-24
LED tape K-HD-0480-24	- high LED density - Ease of obtaining a line of light	20	4.8 W/m	K-HD27-0480-24 K-HD30-0480-24 K-HD35-0480-24 K-HD40-0480-24 K-HD50-0480-24

Profile LIPOD-50

Ref. A02609

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-0500-24 5 W/m, IP20 NEW		20	5 W/m	K-30-0500-24 K-40-0500-24
LED tape K-0720-24 7.2 W/m, IP20 NEW		20	7.2 W/m	K-27-0720-24 K-30-0720-24 K-35-0720-24 K-40-0720-24 K-50-0720-24
LED tape K-HD-0830-24 8.3 W/m, IP20 NEW		20	8.3 W/m	K-HD27-0830-24 K-HD30-0830-24 K-HD35-0830-24 K-HD40-0830-24 K-HD50-0830-24
LED tape K-0960-24	- universal for basic applications	20	9.6 W/m	K-27-0960-24 K-30-0960-24 K-30-0960-24-R30 K-35-0960-24 K-40-0960-24 K-40-0960-24-R30 K-50-0960-24 K-65-0960-24
LED tape K-HD-0960-24	- high LED density - Ease of obtaining a line of light	20	9.6 W/m	K-HD27-0960-24 K-HD30-0960-24 K-HD35-0960-24 K-HD40-0960-24 K-HD50-0960-24
LED tape K-1000-24 10 W/m, IP20 NEW		20	10 W/m	K-30-1000-24 K-40-1000-24
LED tape K-CB-1000-24 10 W/m, IP20 NEW		20	10 W/m	K-CB27-1000-24 K-CB30-1000-24 K-CB40-1000-24 K-CB50-1000-24
LED tape K-1080-24 10.8 W/m, IP20 NEW		20	10.8 W/m	K-27-1080-24 K-30-1080-24 K-35-1080-24 K-40-1080-24 K-50-1080-24
LED tape K-HD-1260-24 12.6 W/m, IP20 NEW		20	12.6 W/m	K-HD27-1260-24 K-HD30-1260-24 K-HD35-1260-24 K-HD40-1260-24 K-HD50-1260-24
LED tape K-1275-24	- universal for basic applications	20	14.4 W/m	K-22-1275-24 K-25-1275-24 K-27-1275-24 K-30-1275-24 K-35-1275-24 K-40-1275-24 K-50-1275-24
LED tape K-1440-24	- universal for basic applications	20	14.4 W/m	K-27-1440-24 K-30-1440-24 K-30-1440-24-R30 K-35-1440-24 K-40-1440-24 K-40-1440-24-R30 K-50-1440-24
LED tape K-HD-1440-24	- high LED density - Ease of obtaining a line of light	20	14.4 W/m	K-HD27-1440-24 K-HD30-1440-24 K-HD35-1440-24 K-HD40-1440-24 K-HD50-1440-24

Profile LIPOD-50

Ref. A02609

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K2-1440-24 14.4 W/m, IP20 NEW		20	14.4 W/m	K2-27-1440-24 K2-30-1440-24 K2-35-1440-24 K2-40-1440-24 K2-50-1440-24
LED tape K-1500-24 15 W/m, IP20 NEW		20	15 W/m	K-30-1500-24 K-40-1500-24
LED tape K2-1920-24	- LED double-row strip - quick installation	20	19.2 W/m	K2-27-1920-24 K2-30-1920-24 K2-35-1920-24 K2-40-1920-24 K2-50-1920-24
LED tape K3-2160-24 21.6 W/m, IP20 NEW	- Three-row LED strip - quick installation	20	21.6 W/m	K3-27-2160-24 K3-30-2160-24 K3-35-2160-24 K3-40-2160-24 K3-50-2160-24
LED tape K-2300-24	- high power	20	23 W/m	K-30-2300-24 K-40-2300-24
LED tape K-2400-24	- high power	20	24 W/m	K-27-2400-24 K-30-2400-24 K-35-2400-24 K-40-2400-24 K-50-2400-24
LED tape K3-2880-24	- Three-row LED strip - quick installation	20	28.8 W/m	K3-27-2880-24 K3-30-2880-24 K3-35-2880-24 K3-40-2880-24 K3-50-2880-24
LED tape KWP-0360-24 3.6 W/m, IP65 NEW		65	3.6 W/m	KWP-27-0360-24 KWP-30-0360-24 KWP-35-0360-24 KWP-40-0360-24 KWP-50-0360-24
LED tape KWP-GHD-0430-24 4.3 W/m, IP65 NEW		65	4.3 W/m	KWP-GHD27-0430-24 KWP-GHD30-0430-24 KWP-GHD35-0430-24 KWP-GHD40-0430-24 KWP-GHD50-0430-24
LED tape KWP-HD-0430-24 4.3 W/m, IP65 NEW		65	4.3 W/m	KWP-HD27-0430-24 KWP-HD30-0430-24 KWP-HD35-0430-24 KWP-HD40-0430-24 KWP-HD50-0430-24
LED tape KWP-0480-24	- universal for basic applications	65	4.8 W/m	KWP-27-0480-24 KWP-30-0480-24 KWP-35-0480-24 KWP-40-0480-24 KWP-50-0480-24
LED tape KWP-GHD-0480-24	- high LED density - Ease of obtaining a line of light	65	4.8 W/m	KWP-GHD27-0480-24 KWP-GHD30-0480-24 KWP-GHD35-0480-24 KWP-GHD40-0480-24 KWP-GHD50-0480-24
LED tape KWP-0500-24 5 W/m, IP65 NEW		65	5 W/m	KWP-30-0500-24 KWP-40-0500-24
LED tape KWP-0720-24 7.2 W/m, IP65 NEW		65	7.2 W/m	KWP-27-0720-24 KWP-30-0720-24 KWP-35-0720-24 KWP-40-0720-24 KWP-50-0720-24

Profile LIPOD-50

Ref. A02609

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape KWP-GHD-0830-24 8.3 W/m, IP65 NEW		65	8.3 W/m	KWP-GHD27-0830-24 KWP-GHD30-0830-24 KWP-GHD35-0830-24 KWP-GHD40-0830-24 KWP-GHD50-0830-24
LED tape KWP-HD-0830-24 8.3 W/m, IP65 NEW		65	8.3 W/m	KWP-HD27-0830-24 KWP-HD30-0830-24 KWP-HD35-0830-24 KWP-HD40-0830-24 KWP-HD50-0830-24
LED tape KWP-0960-24	- universal for basic applications	65	9.6 W/m	KWP-27-0960-24 KWP-30-0960-24 KWP-35-0960-24 KWP-40-0960-24 KWP-50-0960-24 KWP-65-0960-24
LED tape KWP-GHD-0960-24	- high LED density - Ease of obtaining a line of light	65	9.6 W/m	KWP-GHD27-0960-24 KWP-GHD30-0960-24 KWP-GHD35-0960-24 KWP-GHD40-0960-24 KWP-GHD50-0960-24
LED tape KWP-1000-24 10 W/m, IP65 NEW		65	10 W/m	KWP-30-1000-24 KWP-40-1000-24
LED tape KWP-CB-1000-24 10 W/m, IP65 NEW		65	10 W/m	KWP-CB27-1000-24 KWP-CB30-1000-24 KWP-CB40-1000-24 KWP-CB50-1000-24
LED tape KWP-1080-24 10.8 W/m, IP65 NEW		65	10.8 W/m	KWP-27-1080-24 KWP-30-1080-24 KWP-35-1080-24 KWP-40-1080-24 KWP-50-1080-24
LED tape KWP-GHD-1260-24 12.6 W/m, IP65		65	12.6 W/m	KWP-GHD27-1260-24 KWP-GHD30-1260-24 KWP-GHD35-1260-24 KWP-GHD40-1260-24 KWP-GHD50-1260-24
LED tape KWP-HD-1260-24 12.6 W/m, IP65 NEW		65	12.6 W/m	KWP-HD27-1260-24 KWP-HD30-1260-24 KWP-HD35-1260-24 KWP-HD40-1260-24 KWP-HD50-1260-24
LED tape KWP-1440-24	- universal for basic applications	65	14.4 W/m	KWP-27-1440-24 KWP-30-1440-24 KWP-35-1440-24 KWP-40-1440-24 KWP-50-1440-24
LED tape KWP-GHD-1440-24	- high LED density - Ease of obtaining a line of light	65	14.4 W/m	KWP-GHD27-1440-24 KWP-GHD30-1440-24 KWP-GHD35-1440-24 KWP-GHD40-1440-24 KWP-GHD50-1440-24
LED tape KWP-1500-24 15 W/m, IP65 NEW		65	15 W/m	KWP-30-1500-24 KWP-40-1500-24

RELATED ACCESSORIES > RELATED LED > CRI 95+

Name	Key features	IP protection rating	Power consumption	Ref.

Profile LIPOD-50

Ref. A02609

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-CR-0480-24	- universal for basic applications - CRI over 95	20	4.8 W/m	K-CR27-0480-24 K-CR30-0480-24 K-CR35-0480-24 K-CR40-0480-24 K-CR50-0480-24
LED tape K-CR-1210-24	- CRI over 95	20	4.8 W/m	K-CR22-1210-24 K-CR25-1210-24 K-CR27-1210-24 K-CR30-1210-24 K-CR35-1210-24 K-CR40-1210-24 K-CR50-1210-24
LED tape K-CRHD-1910-24	- CRI over 95 - high LED density	20	9.1 W/m	K-CRHD22-1910-24 K-CRHD25-1910-24 K-CRHD27-1910-24 K-CRHD30-1910-24 K-CRHD35-1910-24 K-CRHD40-1910-24 K-CRHD50-1910-24
LED tape K-CR-0960-24	- universal for basic applications - CRI over 95	20	9.6 W/m	K-CR27-0960-24 K-CR30-0960-24 K-CR35-0960-24 K-CR40-0960-24 K-CR50-0960-24
LED tape K-CR-1220-24	- CRI over 95	20	9.6 W/m	K-CR22-1220-24 K-CR25-1220-24 K-CR27-1220-24 K-CR30-1220-24 K-CR35-1220-24 K-CR40-1220-24 K-CR50-1220-24
LED tape K-CR-1275-24	- CRI over 95	20	14.4 W/m	K-CR22-1275-24 K-CR25-1275-24 K-CR27-1275-24 K-CR30-1275-24 K-CR35-1275-24 K-CR40-1275-24 K-CR50-1275-24
LED tape K-CR-1440-24	- universal for basic applications - CRI over 95	20	14.4 W/m	K-CR27-1440-24 K-CR30-1440-24 K-CR35-1440-24 K-CR40-1440-24 K-CR50-1440-24
LED tape K-CRHD-1820-24	- CRI over 95 - high LED density	20	18.25 W/m	K-CRHD22-1820-24 K-CRHD25-1820-24 K-CRHD27-1820-24 K-CRHD30-1820-24 K-CRHD35-1820-24 K-CRHD40-1820-24 K-CRHD50-1820-24
LED tape KWP-CR-0480-24	- universal for basic applications - CRI over 95	65	4.8 W/m	KWP-CR27-0480-24 KWP-CR30-0480-24 KWP-CR35-0480-24 KWP-CR40-0480-24 KWP-CR50-0480-24
LED tape KWP-CR-0960-24	- universal for basic applications - CRI over 95	65	9.6 W/m	KWP-CR27-0960-24 KWP-CR30-0960-24 KWP-CR35-0960-24 KWP-CR40-0960-24 KWP-CR50-0960-24

RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CCT

Profile LIPOD-50

Ref. A02609

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-RGB-1200-24	- RGB	20	12 W/m	K-RGB-1200-24
LED tape K-RGB27T65-1200-24	- RGB+Tunable White	20	12 W/m	K-RGB27T65-1200-24
LED tape KWP-RGB-1200-24	- RGB	65	12 W/m	KWP-RGB-1200-24
LED tape KWP-GRGB-1530-24 15.3 W/m, IP65 NEW	- RGBW - high LED density	65	15.3 W/m	KWP-GRGB30-1530-24 KWP-GRGB40-1530-24

RELATED ACCESSORIES > RELATED LED > COLOR MONO

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-BLUE-1210-24	- blue LED tape	20	4.8 W/m	K-BLUE-1210-24
LED tape K-BLUE-1220-24	- blue LED tape	20	9.6 W/m	K-BLUE-1220-24
LED tape KWP-BLUE-1210-24	- blue LED tape	65	4.8 W/m	KWP-BLUE-1210-24
LED tape KWP-GREEN-1210-24	- green LED tape	65	4.8 W/m	KWP-GREEN-1210-24
LED tape KWP-RED-1210-24	- red LED tape	65	4.8 W/m	KWP-RED-1210-24
LED tape KWP-BLUE-1220-24	- blue LED tape	65	9.6 W/m	KWP-BLUE-1220-24

RELATED ACCESSORIES > RELATED LED > HIGH EFFICACY

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-HEHD-0480-24	- CRI over 95 - High Efficacy	20	4.8 W/m	K-HEHD22-0480-24 K-HEHD25-0480-24 K-HEHD27-0480-24 K-HEHD30-0480-24 K-HEHD35-0480-24 K-HEHD40-0480-24 K-HEHD50-0480-24
LED tape K-VHE-0480-24	- universal for basic applications - high efficacy - High Efficacy	20	4.8 W/m	K-VHE27-0480-24 K-VHE30-0480-24 K-VHE35-0480-24 K-VHE40-0480-24 K-VHE50-0480-24
LED tape K-HEHD-0960-24	- CRI over 95 - High Efficacy	20	9.6 W/m	K-HEHD22-0960-24 K-HEHD25-0960-24 K-HEHD27-0960-24 K-HEHD30-0960-24 K-HEHD35-0960-24 K-HEHD40-0960-24 K-HEHD50-0960-24
LED tape K-VHE-0960-24	- universal for basic applications - high efficacy - High Efficacy	20	9.6 W/m	K-VHE27-0960-24 K-VHE30-0960-24 K-VHE35-0960-24 K-VHE40-0960-24 K-VHE50-0960-24
LED tape K-HEHD-1440-24	- CRI over 95 - High Efficacy	20	14.4 W/m	K-HEHD22-1440-24 K-HEHD25-1440-24 K-HEHD27-1440-24 K-HEHD30-1440-24 K-HEHD35-1440-24 K-HEHD40-1440-24 K-HEHD50-1440-24
LED tape K-VHE-1440-24	- universal for basic applications - high efficacy - High Efficacy	20	14.4 W/m	K-VHE27-1440-24 K-VHE30-1440-24 K-VHE35-1440-24 K-VHE40-1440-24 K-VHE50-1440-24

Profile LIPOD-50

Ref. A02609

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-HEHD-1920-24	- CRI over 95 - High Efficacy	20	19.2 W/m	K-HEHD22-1920-24 K-HEHD25-1920-24 K-HEHD27-1920-24 K-HEHD30-1920-24 K-HEHD35-1920-24 K-HEHD40-1920-24 K-HEHD50-1920-24

RELATED ACCESSORIES > RELATED LED

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-SD-1440-24		20	14.4 W/m	K-SD27-1440-24 K-SD30-1440-24 K-SD35-1440-24 K-SD40-1440-24
LED tape KWP-RGB27T50-1200-24, 2700K, 390 lm/m, 12 W/m, IP65		65	12 W/m	KWP-RGB27T50-1200-24
LED tape KWP-RGBW-1530-24 15.3 W/m, IP65 NEW	- RGBW - high LED density	65	15.3 W/m	KWP-RGB30-1530-24 KWP-RGB40-1530-24

RELATED ACCESSORIES > RELATED LED > ADJUSTABLE WHITE / DIM TO WARM

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-18D30-0960-24	- Dim To Warm LED Tape	20	9.6 W/m	K-18D30-0960-24
LED tape K-27T50-1440-24	- RGB+Tunable White	20	14.4 W/m	K-27T50-1440-24
LED tape KWP-18D30-0960-24		65	9.6 W/m	KWP-18D30-0960-24
LED tape KWP-27T50-1440-24		65	14.4 W/m	KWP-27T50-1440-24

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > MOUNTING BRACKETS

Name	Key features	Material	Color	Ref.
Fastener set NEO-ZM-PLUS-3	- 3 pieces for heavy fixtures	magnet	 silver	C28107N00
Fastener set NEO-ZM-PLUS-4	- 4 pieces for heavy fixtures	magnet	 silver	C28108N00

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONDUCTIVE FASTENERS AND HEADS FOR PROFILES

Name	Key features	Material	Color	Ref.
Head BZP-ZO		stainless steel	 silver	42214
Head BZP-ZZ		stainless steel	 gray	42215
Fastener PUSZ-PRET-ZM	- Power supply cable - mounting in the ZM system	stainless steel, brass, nylon aluminum, brass, nylon aluminum, brass, nylon	 silver  white  black	C28161N00 C28161L10 C28161L07
Fastener DP-ZZ, silver		stainless steel	 silver	00651
Fastener PUSZ-ZM	- Power supply - mounting in the ZM system	stainless steel aluminum aluminum	 silver  white lacquered  black lacquered	C20010N00 C20010L10 C20010L07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > FASTENERS AND HEADS FOR PROFILES

Profile LIPOD-50

Ref. A02609

Name	Key features	Material	Color	Ref.
Fastener FI-10-ZM-W, silver		stainless steel	 silver	C28116N00
Fastener FI-10-ZM-P, silver	- Cross mounting	stainless steel	 silver	C28117N00
Fastener UCHO-ZM	- Convenient mounting in the ZM system	aluminum	 silver anodized	C28192N00
			 black anodized	C28192L07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > SUSPENSION AND MOUNTING SETS

Name	Key features	Material	Color	Ref.
Fastener set W1		brass, stainless steel	 silver	C28203N00
Fastener set W6		stainless steel, brass	 silver	C28205N00
Fastener set W7		brass, stainless steel	 silver	42605
Fastener set RD-1	- Smooth cable adjustment, cable included	brass	 silver glossy	C28231P00
			 silver satin	C28231P01
			 white lacquered	C28231L10
			 black lacquered	C28231L07
Fastener set RG-1	- Cable adjustment at the ceiling, cable included	brass	 silver glossy	C28230P00
			 silver satin	C28230P01
			 white colored	C28230L10
			 black colored	C28230L07
Fastener set RD-2	- Smooth cable adjustment, angled mounting, cable included	brass	 silver glossy	C28232P00
			 silver satin	C28232P01
			 white lacquered	C28232L10
			 black lacquered	C28232L07
Fastener set RD-3	- Smooth cable adjustment	brass	 silver glossy	C28233P00
			 silver satin	C28233P01
			 white lacquered	C28233L10
			 black lacquered	C28233L07
Fastener set RD-4	- Smooth cable adjustment, angled mounting	brass	 silver glossy	C28234P00
			 silver satin	C28234P01
			 white lacquered	C28234L10
			 black lacquered	C28234L07
Fastener set FI-8-ZM-1	- Power supply, for wall and drywall, in the ZM system	stainless steel, aluminum	 silver	C28134N00
			 white lacquered	C28134L10
			 black lacquered	C28134L07
Fastener set FI-8-ZM-2	- Convenient cable length adjustment, in the ZM system	stainless steel, aluminum	 silver	C28135N00
			 white lacquered	C28135L10
			 black lacquered	C28135L07
Fastener set PUSZ-ZM-1	- Power supply, for wall and drywall, in the ZM system	stainless steel, aluminum	 silver	C28130N00
			 white lacquered	C28130L10
			 black lacquered	C28130L07
Fastener set PUSZ-ZM-2	- Convenient cable length adjustment, in the ZM system	stainless steel, aluminum	 silver	C28131N00
			 white lacquered	C28131L10
			 black lacquered	C28131L07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > SECURITY AND BLOCKS

Name	Key features	Material	Color	Ref.
Block ZM, gray	- Accessory locking in the ZM system	silicon	 gray	C28194N00

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > PROFILE MASKING COVERS

Profile LIPOD-50

Ref. A02609

Name	Key features	Material	Color	Ref.
Masking cover MP-50	- Lightproof	PC	 gray metalized	C28263L01_1
			 gray metalized	C28263L01_0.5
			 white lacquered	C28263L10_1
			 white lacquered	C28263L10_0.5
			 black lacquered	C28263L07_1
			 black lacquered	C28263L07_0.5

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CANOPIES

Name	Key features	Material	Color	Ref.
Canopy Fi-60mm	- Convenient cable length adjustment, in the ZM system	steel	 gray lacquered	C24540L01
			 white lacquered	C24540L10
			 black lacquered	C24540L07
Canopy BOX-M70		aluminum	 silver anodized	C24541A
			 white lacquered	C24541L10
			 black anodized	C24541A07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > OTHER

Name	Key features	Material	Color	Ref.
Gland M10x1	- metal housing - with M10x1 thread	mosiądz niklowany		C28275N00
Hermetic coupler THB.391.A4A, 4 pin	- 4 power terminals - compact dimensions	PA		C42268C10
Hermetic coupler THB.381, 2pin	- 2 power terminals - compact dimensions	PA		C28125C07
Hermetic coupler THB.391.A5A, 5 pin	- 5 power terminals - compact dimensions	PA		C28156C07
Joint connector THB.200.E5E, 5 pin	- 5 power terminals - 3-line branch	Materiał, Material, multiselect		C28157C07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > LATCHES

Name	Key features	Material	Color	Ref.
Adapters set ZM-16	- Connection of the ZM system with the 45-STN mount	PC	 transparent	C29001C00

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONNECTORS

Name	Material	Color	Ref.
------	----------	-------	------

Profile LIPOD-50

Ref. A02609

Name	Material	Color	Ref.
Connector ZM	stainless steel	 silver	42716
		 silver	42717
		 silver	42720
		 silver	42728
		 black colored	C24797C07
		colorless non colored	C24797N00
		 black colored	C28070C07
		 silver	C28070N00
		 black colored	C28071C07
		 silver	C28071N00
		 black colored	C28072C07
		 silver	C28072N00
		 black colored	C28073C07
		 silver	C28073N00
		 black colored	C28074C07
		 silver	C28074N00
		 black colored	C28075C07
		 silver	C28075N00
		 silver	C28243N00
Connector ZM-G	stainless steel		42304
			42306
			42308
			42310
			42324
		 silver	42326
			42328
			42330
			42332
			42334
Connector ZM-Y	stainless steel	 black colored	C28082C07
		 silver	C28082N00
Connector ZM-X	stainless steel	 black colored	C28079C07
		 silver	C28079N00
		 black colored	C28080C07
		 silver	C28080N00
		 black colored	C28081C07
Connector ZM-T	stainless steel	 silver	C28081N00
		 black colored	C28076C07
		 silver	C28076N00
		 black colored	C28077C07
		 silver	C28077N00
Connector ZM-PION	stainless steel	 black colored	C28078C07
		 silver	C28078N00
		 silver	42314
		 silver	42316
		 silver	42320
Connector ZM-PION	stainless steel	 silver	42718
		 silver	42719
		 black colored	C28084C07
		 silver	C28084N00
		 black colored	C28085C07
		 silver	C28085N00
		 black colored	C28086C07
		 silver	C28086N00
		 black colored	C28087C07
		 silver	C28087N00
		 black colored	C28088C07
		 silver	C28088N00

RELATED ACCESSORIES > ELECTRONICS > CASAMBI CONTROL SYSTEM

Name	IP protection rating	Ref.

Profile LIPOD-50

Ref. A02609

Name	IP protection rating	Ref.
Controller LED Casambi CBU-PWM4	20	E62148

RELATED ACCESSORIES > ELECTRONICS > SWITCHES

Name	Key features	IP protection rating	Ref.
Proximity switch UNI-11 NEW	- touchless switch - width 11mm	20	E61603
Proximity switch UNI-11P NEW	- touchless switch - width 11mm - factory pre-soldered wires	20	E61604
Proximity switch UNI-P	- touchless switch - width only 7mm - factory pre-soldered wires	20	E61580
Proximity switch UNI	- touchless switch - width only 7mm	20	E61579