

Profile HR-MAX

Ref. A01829

NEW



- For indoor | outdoor ground installation
- Designed for IP68 and IK10 protection ratings
- Corrosion resistance at high salinity
- Corresponds to the width of the HR-OPTI facade system

APPLICATION

- warning and decorative lighting

MOUNTING


- in the ground, with mounting adhesive and a dedicated mounting track

ADDITIONAL INFORMATION

- possibility of smooth transition from an in-ground into a facade lighting fixture
- use of clips facilitates the assembly of the lighting fixture
- compatible with a dedicated HR-MAX-T and HR-MAX-TW mounting tracks
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING

1:2



TECHNICAL SPECIFICATIONS

Material	aluminum
Color	 silver anodized
Possible fixture IP	20, 66, 67, 68
Possible fixture shapes	linear
Profile cross-section	rectangular
Width	30.5 mm
Height	27.2 mm
LED gluing width A	17 mm
Number of LED strips A (8 mm wide)	1
Width of the glow	22 mm
Max power of a single KLUŚ LED strip	15.3 W/m
Corrosion resistance at high salinity	yes
Impact protection IK10	yes
Possibility of obtaining a line of light	yes
Building type	Outdoor, Commercial, Retail, HoReCa object
Facility zone	outdoor spaces, fascade lighting
The cover is cut to the length of the profile	yes

Length	Ref
1000 mm	A01829A_1
2005 mm	A01829A_2
3010 mm	A01829A_3

Standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)

Profile HR-MAX

Ref. A01829

Wire out back of extrusion

yes

LINE OF LIGHT TABLE

LED tape	HR-21 frosted
KWP-14K-0360-24	✓ (2)
KWP-14K-0720-24	✓ (2)
KWP-14K-1080-24	✓ (2)
KWP-14KHD-0430-24	✓ (2)
KWP-14KHD-0830-24	✓ (2)
KWP-14KHD-1260-24	✓ (2)

Description


✓ - Line of Light for a number (X) of rows - Pixel free imaging

X - Visible Dotting from Diodes


HL - Centered Line of Light - Concentrated in middle

HL (X) - Centered Line of Light for a number (X) of rows - Concentrated in middle

Line of Light Guide



Clean Line of Light (Pixel free imaging)




Centered Line of Light



Visible Dotting from Diodes

SAMPLE PROJECTS

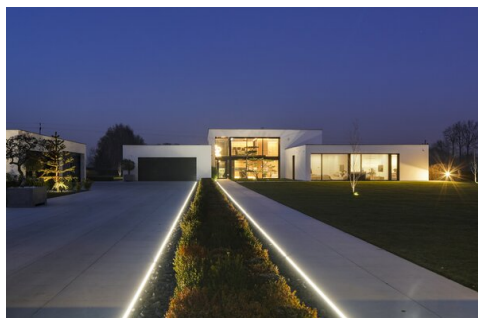

SIMILAR PROFILES



Profile HR-OPTI
A01844

Profile HR-MAX

Ref. A01829

RELATED ACCESSORIES > COVERS

NAME		KEY FEATURES	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
Cover HR-21		- For indoor and outdoor applications - UV resistant	PMMA	55 %	frosted	B17152F
				92 %	semi-transparent	B17152T

RELATED ACCESSORIES > END CAPS

NAME		MATERIAL	COLOR	REF.
End cap HR-MAX-STN		stainless steel	 silver	C28020N00

RELATED ACCESSORIES > PROFILE TECHNICZNE

Name	Material	Color	Ref.
Profile HR-MAX-T	aluminum	 silver non anodized	A01827
Profile HR-MAX-TW	aluminum	 silver non anodized	A01828

RELATED ACCESSORIES > RELATED LED > WHITE MONO

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape KWP-14K-0360-24 3.6 W/m, IP65 		65	3.6 W/m	KWP-14K27-0360-24 KWP-14K30-0360-24 KWP-14K35-0360-24 KWP-14K40-0360-24 KWP-14K50-0360-24
LED tape KWP-14K-0720-24 7.2 W/m, IP65 		65	7.2 W/m	KWP-14K27-0720-24 KWP-14K30-0720-24 KWP-14K35-0720-24 KWP-14K40-0720-24 KWP-14K50-0720-24
LED tape KWP-14K-1080-24 10.8 W/m, IP65 		65	10.8 W/m	KWP-14K27-1080-24 KWP-14K30-1080-24 KWP-14K35-1080-24 KWP-14K40-1080-24 KWP-14K50-1080-24
LED tape KWP-14KHD-0430-24 4.3 W/m, IP65 		65	4.3 W/m	KWP-14KHD27-0430-24 KWP-14KHD30-0430-24 KWP-14KHD35-0430-24 KWP-14KHD40-0430-24 KWP-14KHD50-0430-24
LED tape KWP-14KHD-0830-24 8.3 W/m, IP65 		65	8.3 W/m	KWP-14KHD27-0830-24 KWP-14KHD30-0830-24 KWP-14KHD35-0830-24 KWP-14KHD40-0830-24 KWP-14KHD50-0830-24
LED tape KWP-14KHD-1260-24 12.6 W/m, IP65 		65	12.6 W/m	KWP-14KHD27-1260-24 KWP-14KHD30-1260-24 KWP-14KHD35-1260-24 KWP-14KHD40-1260-24 KWP-14KHD50-1260-24

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape KWP-14K-0480-24	- universal for basic applications - easy snap-in installation	65	4.8 W/m	KWP-14K27-0480-24 KWP-14K30-0480-24 KWP-14K35-0480-24 KWP-14K40-0480-24 KWP-14K50-0480-24
LED tape KWP-14K-0960-24	- universal for basic applications - easy snap-in installation	65	9.6 W/m	KWP-14K27-0960-24 KWP-14K30-0960-24 KWP-14K35-0960-24 KWP-14K40-0960-24 KWP-14K50-0960-24
LED tape KWP-14K-1440-24	- universal for basic applications - easy snap-in installation	65	14.4 W/m	KWP-14K27-1440-24 KWP-14K30-1440-24 KWP-14K35-1440-24 KWP-14K40-1440-24 KWP-14K50-1440-24
LED tape KWP-14KHD-0480-24	- universal for basic applications - easy snap-in installation - high LED density	65	4.8 W/m	KWP-14KHD27-0480-24 KWP-14KHD30-0480-24 KWP-14KHD35-0480-24 KWP-14KHD40-0480-24 KWP-14KHD50-0480-24
LED tape KWP-14KHD-0960-24	- universal for basic applications - easy snap-in installation - high LED density	65	9.6 W/m	KWP-14KHD27-0960-24 KWP-14KHD30-0960-24 KWP-14KHD35-0960-24 KWP-14KHD40-0960-24 KWP-14KHD50-0960-24

RELATED ACCESSORIES > RELATED LED > COLOR MONO

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape KWP-14KBLUE-1220-24	- blue LED tape	65	9.6 W/m	KWP-14KBLUE-1220-24
LED tape KWP-14KBLUE-1210-24	- blue LED tape	65	4.8 W/m	KWP-14KBLUE-1210-24

RELATED ACCESSORIES > RELATED LED > HIGH EFFICACY

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape KWP-14KVHE-0480-24	- universal for basic applications - easy snap-in installation - high efficacy - High Efficacy	65	4.8 W/m	KWP-14KVHE27-0480-24 KWP-14KVHE30-0480-24 KWP-14KVHE35-0480-24 KWP-14KVHE40-0480-24 KWP-14KVHE50-0480-24
LED tape KWP-14KVHE-0960-24	- universal for basic applications - easy snap-in installation - high efficacy - High Efficacy	65	9.6 W/m	KWP-14KVHE27-0960-24 KWP-14KVHE30-0960-24 KWP-14KVHE35-0960-24 KWP-14KVHE40-0960-24 KWP-14KVHE50-0960-24

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > IN-GROUND

Name	Key features	Material	Color	Ref.
Clip HR-MAX	- Facilitates installation of the HR-MAX fixture	PLA	red colored	C28059C00
Pad HR-MAX		PS	blue	Z70547

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > OTHER

Profile HR-MAX

Ref. A01829

Name	Material	Color	Ref.
Hermetic coupler 3pin 16A 1,5mm2 NEW	ABS	 gray	C24661

RELATED ACCESSORIES > ELECTRONICS > OTHER

Name	Key features	IP protection rating	Ref.
Gland M16x1,5	- with M16x1.5 thread - plastic housing	68	C42271C02
Angular gland M16x1,5-L90	- with M16x1.5 thread - plastic housing	68	C28158C02
Gland M10x1	- metal housing - with M10x1 thread	66	C28275N00
Joint connector	- 2 power terminals - 3-line branch	67	C28240C02
Hermetic coupler	- 3 power terminals - plastic housing	67	C28239C02
Hermetic coupler THB.391.A4A, 4 pin	- 4 power terminals - compact dimensions	68	C42268C10
Hermetic coupler THB.381, 2pin	- 2 power terminals - compact dimensions	68	C28125C07
Hermetic coupler THB.391.A5A, 5 pin	- 5 power terminals - compact dimensions	68	C28156C07
Joint connector THB.200.E5E, 5 pin	- 5 power terminals - 3-line branch	67	C28157C07