
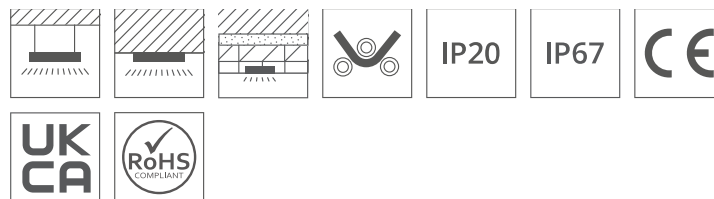


Profile GIZA-LL

Ref. A00758

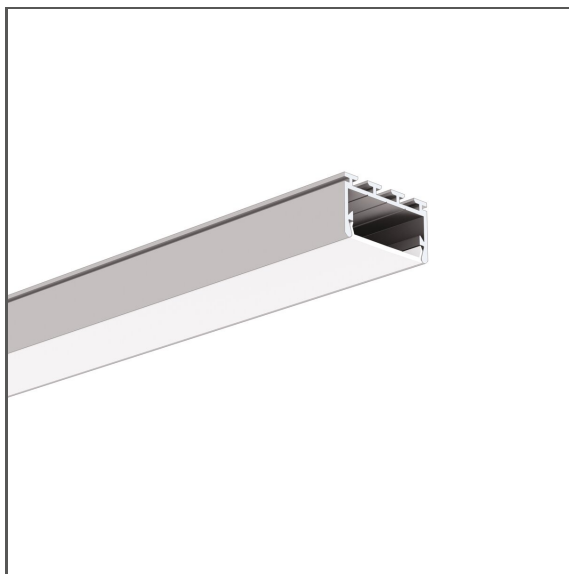

- Small bending radius
- Wide range of accessories
- Luminaire direction adjustment
- Possibility to use current modules with efficiency up to 190lm/W and CRI>90. Available upon request.

APPLICATION

- main, decorative and functional lighting


MOUNTING

- suspended, to the surface or recessed, using dedicated accessories, properly selected screws or a dedicated mounting track
- easy assembly and disassembly by snapping in and out

ADDITIONAL INFORMATION

- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ
- NCS Premium paint option - minimum order quantity 30pcs - available immediately

TECHNICAL DRAWING



TECHNICAL SPECIFICATIONS

Material	aluminum
Possible fixture IP	20, 67
Possible fixture shapes	linear, polygonal, round
Profile cross-section	rectangular
Width	26.2 mm
Height	14.5 mm
LED gluing width A	24 mm
Number of LED strips A (8 mm wide)	2
Width of the glow	22 mm
Max power of a single KLUŚ LED strip	24 W/m
Lighting angle adjustment from	0
Lighting angle adjustment up to	150
Possibility of obtaining a line of light	yes
Possibility of bending	yes
Radius of the light arc	yes
Inward	240 mm
Outdoor	240 mm
Downward light arc radius	yes

Color	Length	Ref
■ silver anodized	1000 mm	A00758A_1
	2005 mm	A00758A_2
	3010 mm	A00758A_3
□ white lacquered	1000 mm	A00758L10OD_1
	2005 mm	A00758L10OD_2
■ black anodized	1000 mm	A00758A07_1
	2005 mm	A00758A07_2
	3010 mm	A00758A07_3
■ caramel (NCSS3030-Y60R) lacquered	2005 mm	A00758L14OD_2
■ sand (NCSS2010-Y30R) lacquered	2005 mm	A00758L11OD_2
■ pastel blue (NCSS2010-B) lacquered	2005 mm	A00758L13OD_2
■ light sage (NCSS2010-G50Y) lacquered	2005 mm	A00758L12OD_2

Standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance ± 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance ± 5 mm)

Profile GIZA-LL

Ref. A00758

Down	1000 mm
Building type	Entertainment/ Arts, HoReCa object, Commercial, Retail
Facility zone	office, lobby / foyer, decorative, fitness / spa, media rooms / av
Easy assembly and disassembly by snapping in and out	yes
The cover is cut to the length of the profile	yes
Can be easily connected into runs	yes
Wire out back of extrusion	yes

LINE OF LIGHT TABLE

LED tape	LIGER-22 satin	LIGER-22 black	HS-22 frosted	G-22S satin	G-22R satin	BENCO-22 frosted
K-0960-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-1440-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-HD-0480-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-HD-0960-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-HD-1440-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-0360-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-0720-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-1080-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-0500-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-1000-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-HD-0430-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-1500-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-CB-1000-24	✓ (2)	HL (2)	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-HD-0830-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-HD-1260-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
KWP-0360-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
KWP-0720-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
KWP-1080-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
KWP-0500-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
KWP-1000-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
KWP-1500-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
KWP-CB-1000-24	✓ (2)	HL (2)	✓ (2)	✓ (1)	✓ (1)	✓ (2)
KWP-GHD-0430-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
KWP-GHD-0830-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
KWP-HD-0430-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
KWP-HD-0830-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)

KWP-HD-1260-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-2300-24	✓ (2)	X	X	✓ (1)	✓ (1)	✓ (2)
K-2400-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
KWP-GDL-1229-24	✓ (2)	X	X	✓ (1)	✓ (1)	✓ (2)
K-CRHD-1820-24	✓ (2)	HL (2)	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-CRHD-1910-24	✓ (2)	HL (2)	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-CR-0960-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-CR-1440-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-HEHD-0480-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-HEHD-0960-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-HEHD-1440-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-HEHD-1920-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-VHE-0480-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-VHE-0960-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-VHE-1440-24	✓ (2)	HL (2)	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-RGB-1200-24	✓ (2)	X	X	✓ (1)	✓ (1)	✓ (2)
K-18D30-0960-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
KWP-18D30-0960-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
KWP-27T50-1440-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-27T50-1440-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-SD-1440-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)

Description


✓ - Line of Light for a number (X) of rows - Pixel free imaging

X - Visible Dotting from Diodes


HL - Centered Line of Light - Concentrated in middle

HL (X) - Centered Line of Light for a number (X) of rows - Concentrated in middle

Line of Light Guide



Clean Line of Light (Pixel free imaging)



Centered Line of Light





Visible Dotting from Diodes

Profile GIZA-LL

Ref. A00758

SAMPLE PROJECTS

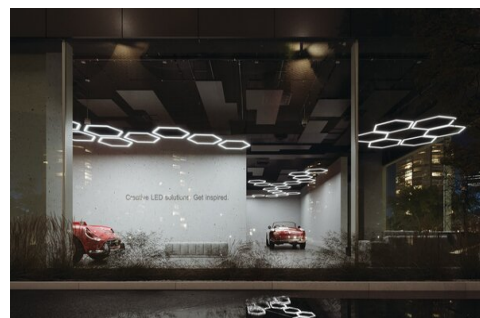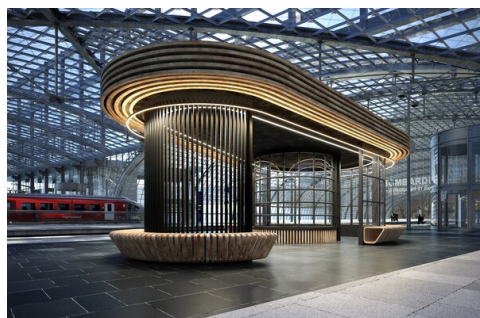

SIMILAR PROFILES




Profile GIZA-DUO-LL
A02162



Profile GIZA-LL-T
A02479



Profile GIZA-LL-UST
A02724



Profile KOZUS
A07823



Profile KOZUS-CR
A00600

Profile GIZA-LL

Ref. A00758

RELATED ACCESSORIES > COVERS

NAME		KEY FEATURES	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
Focusing cover DILENSO-22 30°DEG		- indoor use - focusing	PC	63 %	semi-transparent	B17173T
Cover HS-22		- For indoor and outdoor applications - UV resistant	PC	65 %	frosted	B17011F
				88 %	clear	B17011C
				90.5 %	microprism	B17011M
Cover LIGER-22		- high light quality - For indoor and outdoor applications - Ease of obtaining a line of light - Perfectly diffusing	PC	22 %	black	B17032B
				70 %	satin	B17032S
Cover G-22R		- indoor use - Perfectly diffusing	PMMA	20 %	black	B17006B
				71 %	satin	B17006S
				89 %	semi-transparent	B17006T
				94 %	clear	B17006C
Cover G-22S		- indoor use - Perfectly diffusing	PMMA	15 %	black	B17013B
				86 %	satin	B17013S
				89 %	semi-transparent	B17013T
Cover BENCO-22		- For indoor and outdoor applications - UV resistant	Silikon	62 %	frosted	B17209F

RELATED ACCESSORIES > END CAPS

NAME		MATERIAL	COLOR	REF.
End cap GIZA-LL		ABS	■ black	C24281C07
			■ caramel (NCSS3030-Y60R)	C24281L14
			■ gray	C24281C02
			■ light sage (NCSS2010-G50Y)	C24281L12
				C24281L13
			■ sand (NCSS2010-Y30R)	C24281L11
			□ white	C24281C10

RELATED ACCESSORIES > PROFILE TECHNICZNE

Name	Material	Color	Ref.
Profile TEKNIK-ZM-TK	aluminum	 silver non anodized	A01554
Profile TEKUS	aluminum	 silver non anodized	A06638V
Profile TEKUS-ZM	aluminum	 silver non anodized	A01293
Profile TEKNIK-ZM	aluminum	 silver non anodized	A00399

RELATED ACCESSORIES > RELATED LED > HIGH EFFICACY

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-HEHD-0480-24	- CRI over 95 - High Efficacy	20	4.8 W/m	K-HEHD22-0480-24 K-HEHD25-0480-24 K-HEHD27-0480-24 K-HEHD30-0480-24 K-HEHD35-0480-24 K-HEHD40-0480-24 K-HEHD50-0480-24
LED tape K-VHE-0480-24	- universal for basic applications - high efficacy - High Efficacy	20	4.8 W/m	K-VHE27-0480-24 K-VHE30-0480-24 K-VHE35-0480-24 K-VHE40-0480-24 K-VHE50-0480-24
LED tape K-HEHD-0960-24	- CRI over 95 - High Efficacy	20	9.6 W/m	K-HEHD22-0960-24 K-HEHD25-0960-24 K-HEHD27-0960-24 K-HEHD30-0960-24 K-HEHD35-0960-24 K-HEHD40-0960-24 K-HEHD50-0960-24
LED tape K-VHE-0960-24	- universal for basic applications - high efficacy - High Efficacy	20	9.6 W/m	K-VHE27-0960-24 K-VHE30-0960-24 K-VHE35-0960-24 K-VHE40-0960-24 K-VHE50-0960-24
LED tape K-HEHD-1440-24	- CRI over 95 - High Efficacy	20	14.4 W/m	K-HEHD22-1440-24 K-HEHD25-1440-24 K-HEHD27-1440-24 K-HEHD30-1440-24 K-HEHD35-1440-24 K-HEHD40-1440-24 K-HEHD50-1440-24
LED tape K-VHE-1440-24	- universal for basic applications - high efficacy - High Efficacy	20	14.4 W/m	K-VHE27-1440-24 K-VHE30-1440-24 K-VHE35-1440-24 K-VHE40-1440-24 K-VHE50-1440-24
LED tape K-HEHD-1920-24	- CRI over 95 - High Efficacy	20	19.2 W/m	K-HEHD22-1920-24 K-HEHD25-1920-24 K-HEHD27-1920-24 K-HEHD30-1920-24 K-HEHD35-1920-24 K-HEHD40-1920-24 K-HEHD50-1920-24

RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CCT

Profile GIZA-LL

Ref. A00758

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-RGB-0700-24V	- RGB	20	7 W/m	K-RGB-0700-24V
LED tape K-RGB-1200-24	- RGB	20	12 W/m	K-RGB-1200-24
LED tape K-RGB27T65-1200-24	- RGB+Tunable White	20	12 W/m	K-RGB27T65-1200-24
LED tape KWP-GRGB-1530-24 15.3 W/m, IP65 NEW	- RGBW - high LED density	65	15.3 W/m	KWP-GRGB30-1530-24 KWP-GRGB40-1530-24

RELATED ACCESSORIES > RELATED LED > BENDABLE

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-VBT-0720-24	- LED tape for bent profiles	20	7.2 W/m	K-VBT27-0720-24 K-VBT30-0720-24 K-VBT35-0720-24 K-VBT40-0720-24 K-VBT50-0720-24
LED tape K-BTRGB40-1510-24		20	15.1 W/m	K-BTRGB40-1510-24

RELATED ACCESSORIES > RELATED LED > CRI 95+

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-CR-0480-24	- universal for basic applications - CRI over 95	20	4.8 W/m	K-CR27-0480-24 K-CR30-0480-24 K-CR35-0480-24 K-CR40-0480-24 K-CR50-0480-24
LED tape K-CR-1210-24	- CRI over 95	20	4.8 W/m	K-CR22-1210-24 K-CR25-1210-24 K-CR27-1210-24 K-CR30-1210-24 K-CR35-1210-24 K-CR40-1210-24 K-CR50-1210-24
LED tape K-CRHD-1910-24	- CRI over 95 - high LED density	20	9.1 W/m	K-CRHD22-1910-24 K-CRHD25-1910-24 K-CRHD27-1910-24 K-CRHD30-1910-24 K-CRHD35-1910-24 K-CRHD40-1910-24 K-CRHD50-1910-24
LED tape K-CR-0960-24	- universal for basic applications - CRI over 95	20	9.6 W/m	K-CR27-0960-24 K-CR30-0960-24 K-CR35-0960-24 K-CR40-0960-24 K-CR50-0960-24
LED tape K-CR-1220-24	- CRI over 95	20	9.6 W/m	K-CR22-1220-24 K-CR25-1220-24 K-CR27-1220-24 K-CR30-1220-24 K-CR35-1220-24 K-CR40-1220-24 K-CR50-1220-24
LED tape K-CR-1275-24	- CRI over 95	20	14.4 W/m	K-CR22-1275-24 K-CR25-1275-24 K-CR27-1275-24 K-CR30-1275-24 K-CR35-1275-24 K-CR40-1275-24 K-CR50-1275-24

Profile GIZA-LL

Ref. A00758

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-CR-1440-24	- universal for basic applications - CRI over 95	20	14.4 W/m	K-CR27-1440-24 K-CR30-1440-24 K-CR35-1440-24 K-CR40-1440-24 K-CR50-1440-24
LED tape K-CRHD-1820-24	- CRI over 95 - high LED density	20	18.25 W/m	K-CRHD22-1820-24 K-CRHD25-1820-24 K-CRHD27-1820-24 K-CRHD30-1820-24 K-CRHD35-1820-24 K-CRHD40-1820-24 K-CRHD50-1820-24
LED tape KWP-CR-0480-24	- universal for basic applications - CRI over 95	65	4.8 W/m	KWP-CR27-0480-24 KWP-CR30-0480-24 KWP-CR35-0480-24 KWP-CR40-0480-24 KWP-CR50-0480-24
LED tape KWP-CR-0960-24	- universal for basic applications - CRI over 95	65	9.6 W/m	KWP-CR27-0960-24 KWP-CR30-0960-24 KWP-CR35-0960-24 KWP-CR40-0960-24 KWP-CR50-0960-24

RELATED ACCESSORIES > RELATED LED > WHITE MONO

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-0360-24 3.6 W/m, IP20 NEW		20	3.6 W/m	K-27-0360-24 K-30-0360-24 K-35-0360-24 K-40-0360-24 K-50-0360-24
LED tape K-HD-0430-24 4.3 W/m, IP20 NEW		20	4.3 W/m	K-HD27-0430-24 K-HD30-0430-24 K-HD35-0430-24 K-HD40-0430-24 K-HD50-0430-24
LED tape K-0480-24	- universal for basic applications	20	4.8 W/m	K-27-0480-24 K-30-0480-24 K-35-0480-24 K-40-0480-24 K-50-0480-24
LED tape K-HD-0480-24	- high LED density - Ease of obtaining a line of light	20	4.8 W/m	K-HD27-0480-24 K-HD30-0480-24 K-HD35-0480-24 K-HD40-0480-24 K-HD50-0480-24
LED tape K-0500-24 5 W/m, IP20 NEW		20	5 W/m	K-30-0500-24 K-40-0500-24
LED tape K-0720-24 7.2 W/m, IP20 NEW		20	7.2 W/m	K-27-0720-24 K-30-0720-24 K-35-0720-24 K-40-0720-24 K-50-0720-24
LED tape K-HD-0830-24 8.3 W/m, IP20 NEW		20	8.3 W/m	K-HD27-0830-24 K-HD30-0830-24 K-HD35-0830-24 K-HD40-0830-24 K-HD50-0830-24

Profile GIZA-LL

Ref. A00758

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-0960-24	- universal for basic applications	20	9.6 W/m	K-27-0960-24 K-30-0960-24 K-30-0960-24-R30 K-35-0960-24 K-40-0960-24 K-40-0960-24-R30 K-50-0960-24 K-65-0960-24
LED tape K-HD-0960-24	- high LED density - Ease of obtaining a line of light	20	9.6 W/m	K-HD27-0960-24 K-HD30-0960-24 K-HD35-0960-24 K-HD40-0960-24 K-HD50-0960-24
LED tape K-1000-24 10 W/m, IP20 NEW		20	10 W/m	K-30-1000-24 K-40-1000-24
LED tape K-CB-1000-24 10 W/m, IP20 NEW		20	10 W/m	K-CB27-1000-24 K-CB30-1000-24 K-CB40-1000-24 K-CB50-1000-24
LED tape K-1080-24 10.8 W/m, IP20 NEW		20	10.8 W/m	K-27-1080-24 K-30-1080-24 K-35-1080-24 K-40-1080-24 K-50-1080-24
LED tape K-HD-1260-24 12.6 W/m, IP20 NEW		20	12.6 W/m	K-HD27-1260-24 K-HD30-1260-24 K-HD35-1260-24 K-HD40-1260-24 K-HD50-1260-24
LED tape K-1275-24	- universal for basic applications	20	14.4 W/m	K-22-1275-24 K-25-1275-24 K-27-1275-24 K-30-1275-24 K-35-1275-24 K-40-1275-24 K-50-1275-24
LED tape K-1440-24	- universal for basic applications	20	14.4 W/m	K-27-1440-24 K-30-1440-24 K-30-1440-24-R30 K-35-1440-24 K-40-1440-24 K-40-1440-24-R30 K-50-1440-24
LED tape K-HD-1440-24	- high LED density - Ease of obtaining a line of light	20	14.4 W/m	K-HD27-1440-24 K-HD30-1440-24 K-HD35-1440-24 K-HD40-1440-24 K-HD50-1440-24
LED tape K2-1440-24 14.4 W/m, IP20 NEW		20	14.4 W/m	K2-27-1440-24 K2-30-1440-24 K2-35-1440-24 K2-40-1440-24 K2-50-1440-24
LED tape K-1500-24 15 W/m, IP20 NEW		20	15 W/m	K-30-1500-24 K-40-1500-24
LED tape K2-1920-24	- LED double-row strip - quick installation	20	19.2 W/m	K2-27-1920-24 K2-30-1920-24 K2-35-1920-24 K2-40-1920-24 K2-50-1920-24

Profile GIZA-LL

Ref. A00758

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K3-2160-24 21.6 W/m, IP20 NEW	- Three-row LED strip - quick installation	20	21.6 W/m	K3-27-2160-24 K3-30-2160-24 K3-35-2160-24 K3-40-2160-24 K3-50-2160-24
LED tape K-2300-24	- high power	20	23 W/m	K-30-2300-24 K-40-2300-24
LED tape K-2400-24	- high power	20	24 W/m	K-27-2400-24 K-30-2400-24 K-35-2400-24 K-40-2400-24 K-50-2400-24
LED tape K3-2880-24	- Three-row LED strip - quick installation	20	28.8 W/m	K3-27-2880-24 K3-30-2880-24 K3-35-2880-24 K3-40-2880-24 K3-50-2880-24
LED tape KWP-0360-24 3.6 W/m, IP65 NEW		65	3.6 W/m	KWP-27-0360-24 KWP-30-0360-24 KWP-35-0360-24 KWP-40-0360-24 KWP-50-0360-24
LED tape KWP-GHD-0430-24 4.3 W/m, IP65 NEW		65	4.3 W/m	KWP-GHD27-0430-24 KWP-GHD30-0430-24 KWP-GHD35-0430-24 KWP-GHD40-0430-24 KWP-GHD50-0430-24
LED tape KWP-HD-0430-24 4.3 W/m, IP65 NEW		65	4.3 W/m	KWP-HD27-0430-24 KWP-HD30-0430-24 KWP-HD35-0430-24 KWP-HD40-0430-24 KWP-HD50-0430-24
LED tape KWP-0480-24	- universal for basic applications	65	4.8 W/m	KWP-27-0480-24 KWP-30-0480-24 KWP-35-0480-24 KWP-40-0480-24 KWP-50-0480-24
LED tape KWP-GHD-0480-24	- high LED density - Ease of obtaining a line of light	65	4.8 W/m	KWP-GHD27-0480-24 KWP-GHD30-0480-24 KWP-GHD35-0480-24 KWP-GHD40-0480-24 KWP-GHD50-0480-24
LED tape KWP-0500-24 5 W/m, IP65 NEW		65	5 W/m	KWP-30-0500-24 KWP-40-0500-24
LED tape KWP-0720-24 7.2 W/m, IP65 NEW		65	7.2 W/m	KWP-27-0720-24 KWP-30-0720-24 KWP-35-0720-24 KWP-40-0720-24 KWP-50-0720-24
LED tape KWP-GHD-0830-24 8.3 W/m, IP65 NEW		65	8.3 W/m	KWP-GHD27-0830-24 KWP-GHD30-0830-24 KWP-GHD35-0830-24 KWP-GHD40-0830-24 KWP-GHD50-0830-24
LED tape KWP-HD-0830-24 8.3 W/m, IP65 NEW		65	8.3 W/m	KWP-HD27-0830-24 KWP-HD30-0830-24 KWP-HD35-0830-24 KWP-HD40-0830-24 KWP-HD50-0830-24

Profile GIZA-LL

Ref. A00758

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape KWP-0960-24	- universal for basic applications	65	9.6 W/m	KWP-27-0960-24 KWP-30-0960-24 KWP-35-0960-24 KWP-40-0960-24 KWP-50-0960-24 KWP-65-0960-24
LED tape KWP-GHD-0960-24	- high LED density - Ease of obtaining a line of light	65	9.6 W/m	KWP-GHD27-0960-24 KWP-GHD30-0960-24 KWP-GHD35-0960-24 KWP-GHD40-0960-24 KWP-GHD50-0960-24
LED tape KWP-1000-24 10 W/m, IP65 NEW		65	10 W/m	KWP-30-1000-24 KWP-40-1000-24
LED tape KWP-CB-1000-24 10 W/m, IP65 NEW		65	10 W/m	KWP-CB27-1000-24 KWP-CB30-1000-24 KWP-CB40-1000-24 KWP-CB50-1000-24
LED tape KWP-1080-24 10.8 W/m, IP65 NEW		65	10.8 W/m	KWP-27-1080-24 KWP-30-1080-24 KWP-35-1080-24 KWP-40-1080-24 KWP-50-1080-24
LED tape KWP-GHD-1260-24 12.6 W/m, IP65		65	12.6 W/m	KWP-GHD27-1260-24 KWP-GHD30-1260-24 KWP-GHD35-1260-24 KWP-GHD40-1260-24 KWP-GHD50-1260-24
LED tape KWP-HD-1260-24 12.6 W/m, IP65 NEW		65	12.6 W/m	KWP-HD27-1260-24 KWP-HD30-1260-24 KWP-HD35-1260-24 KWP-HD40-1260-24 KWP-HD50-1260-24
LED tape KWP-1440-24	- universal for basic applications	65	14.4 W/m	KWP-27-1440-24 KWP-30-1440-24 KWP-35-1440-24 KWP-40-1440-24 KWP-50-1440-24
LED tape KWP-GHD-1440-24	- high LED density - Ease of obtaining a line of light	65	14.4 W/m	KWP-GHD27-1440-24 KWP-GHD30-1440-24 KWP-GHD35-1440-24 KWP-GHD40-1440-24 KWP-GHD50-1440-24
LED tape KWP-1500-24 15 W/m, IP65 NEW		65	15 W/m	KWP-30-1500-24 KWP-40-1500-24

RELATED ACCESSORIES > RELATED LED

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-SD-1440-24		20	14.4 W/m	K-SD27-1440-24 K-SD30-1440-24 K-SD35-1440-24 K-SD40-1440-24
LED tape K-BTRGB-1510-24 15.1 W/m, IP20 NEW	- RGBW - Possibility of bending in the light plane	20	15.1 W/m	K-BTRGB30-1510-24 K-BTRGB40-1510-24
LED tape KWP-RGB27T50-1200-24, 2700K, 390 lm/m, 12 W/m, IP65		65	12 W/m	KWP-RGB27T50-1200-24

Profile GIZA-LL

Ref. A00758

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape KWP-RGBW-1530-24 15.3 W/m, IP65 NEW	- RGBW - high LED density	65	15.3 W/m	KWP-RGB30-1530-24 KWP-RGB40-1530-24

RELATED ACCESSORIES > RELATED LED > ADJUSTABLE WHITE / DIM TO WARM

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-18D30-0960-24	- Dim To Warm LED Tape	20	9.6 W/m	K-18D30-0960-24
LED tape K-27T50-1440-24	- RGB+Tunable White	20	14.4 W/m	K-27T50-1440-24
LED tape KWP-18D30-0960-24		65	9.6 W/m	KWP-18D30-0960-24
LED tape KWP-27T50-1440-24		65	14.4 W/m	KWP-27T50-1440-24

RELATED ACCESSORIES > RELATED LED > DIGITAL

Name	Key features	IP protection rating	Power consumption	Ref.
Digital LED strip K-DL-1229-24	- Digital tape	20	12.29 W/m	K-DL30-1229-24 K-DL40-1229-24
Digital LED strip KWP-GDL-1229-24	- Digital tape	65	12.29 W/m	KWP-GDL30-1229-24 KWP-GDL40-1229-24

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > MOUNTING BRACKETS

Name	Key features	Material	Color	Ref.
Mounting bracket REGIP-EXT NEW	- Mounting with angle adjustment function	aluminum, stainless steel	 black  white  gray	C28304C07 C28304C10 C28304N00
Mounting bracket GIP-STN	- For indoor and outdoor applications	stainless steel	 silver	C24447N00
Mounting bracket GIP	- Aesthetic installation of linear fixtures	ASA	 gray  black	C24310C02 C24328C07
Mounting bracket GIP	- Aesthetic installation of linear fixtures	pp	 gray	C24332C02
Mounting bracket REGIP	- Mounting with angle adjustment function	ABS	 gray	C28057C02
Mounting bracket AM-24	- Compatible with Armstrong Prelude 24 system	steel	 silver	C24235N00
Fastener set NEO-ZM-3	- 3 pieces for heavy fixtures	magnet	 silver	C28105N00
Fastener set NEO-ZM-PLUS-3	- 3 pieces for heavy fixtures	magnet	 silver	C28107N00
Fastener set NEO-ZM-4	- 4 pieces for light fixtures	magnet	 silver	C28106N00
Fastener set NEO-ZM-PLUS-4	- 4 pieces for heavy fixtures	magnet	 silver	C28108N00
Mounting bracket GIP-STN-90D	- For indoor and outdoor applications	stainless steel	 silver  white  black	C20002N00 C20002L10 C20002L07
Mounting bracket GIP-STN-90G	- For indoor and outdoor applications	stainless steel	 silver  white  black	C20001N00 C20001L10 C20001L07
Mounting bracket DS	- For indoor and outdoor applications	stainless steel	 silver  black	C28096N00 C28096L07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > SURFACE SPRINGS

Name	Material	Color	Ref.
Spring GP	stainless steel	 silver	C24500N00

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > LATCHES

Name	Material	Color	Ref.
Latch TEKNIK	PP	 white	C24003C10

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > PROFILE MASKING COVERS

Name	Key features	Material	Color	Ref.
Masking cover MP-22	- Lightproof	PC	 gray metalized	C28261L01_1
			 gray metalized	C28261L01_0.25
			 white lacquered	C28261L10_1
			 white lacquered	C28261L10_0.25
			 black lacquered	C28261L07_1
			 black lacquered	C28261L07_0.25

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONDUCTIVE FASTENERS AND HEADS FOR PROFILES

Name	Key features	Material	Color	Ref.
Head BZP-ZO		stainless steel	 silver	42214
Head BZP-ZZ		stainless steel	 gray	42215
Fastener DP-ZZ, silver		stainless steel	 silver	00651
Fastener OS22-LIN-Z	- Power supply cable	stainless steel, PA	 white	C28184L10
			 black	C28184L07
Fastener OS22-DUO-LIN-Z	- Power supply cable, two poles	stainless steel, PA	 white	C28183L10
			 black	C28183L07
Fastener OS22-PRET-Z	- Power supply rod	PA, stainless steel	 white	C28186L10
			 black	C28186L07
Fastener OS22-DUO-PRET-Z	- Power supply cable, two poles	stainless steel, PA	 white	C28185L10
			 black	C28185L07
Fastener FI-8-LIN-ZMZ	- Power supply - mounting in the ZM system	stainless steel, steel, PA, EPDM	 silver	C28171N00
		aluminum, PA, EPDM	 white	C28171L10
		aluminum, PA, EPDM	 black	C28171L07
Fastener PUSZ-LIN-MR	- Power supply cable - mounting in thin walls (from 1mm)	stainless steel, brass, nylon	 silver	C28163N00
		aluminum, brass, nylon	 white lacquered	C28163L10
		aluminum, brass, nylon	 black lacquered	C28163L07
Fastener PUSZ-LIN-ZD		stainless steel, brass, nylon	 silver	C28164N00
		aluminum, brass, nylon	 white lacquered	C28164L10
		aluminum, brass, nylon	 black lacquered	C28164L07
Fastener PUSZ-LIN-ZM	- Power supply cable - mounting in the ZM system	stainless steel, brass, nylon	 silver	C28160N00
		aluminum	 white lacquered	C28160L10
		aluminum, brass, nylon	 black lacquered	C28160L07
Fastener PUSZ-PRET-ZM	- Power supply cable - mounting in the ZM system	stainless steel, brass, nylon	 silver	C28161N00
		aluminum, brass, nylon	 white	C28161L10
		aluminum, brass, nylon	 black	C28161L07

Profile GIZA-LL

Ref. A00758

Name	Key features	Material	Color	Ref.
Fastener PUSZ-PRET-MR	- Power supply cable - mounting in thin walls (from 1mm)	stainless steel, brass, nylon aluminum, brass, nylon aluminum, brass, nylon	silver white lacquered black lacquered	C28166N00 C28166L10 C28166L07
Fastener PUSZ-ZM	- Power supply - mounting in the ZM system	stainless steel aluminum aluminum	silver white lacquered black lacquered	C20010N00 C20010L10 C20010L07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > FASTENERS AND HEADS FOR PROFILES

Name	Key features	Material	Color	Ref.
Fastener DP, silver		stainless steel	silver	00644
Fastener FI-8-LIN-ZM	- Installation in the ZM system	stainless steel, PA	silver white black	C28170N00 C28170L10 C28170L07
Fastener FI-10-ZM-W, silver		stainless steel	silver	C28116N00
Fastener FI-10-ZM-P, silver	- Cross mounting	stainless steel	silver	C28117N00
Fastener UCHO-ZM	- Convenient mounting in the ZM system	aluminum	silver anodized black anodized	C28192N00 C28192L07
Fastener FI-8-PRET-ZM	- Installation in the ZM system	stainless steel aluminum aluminum	silver white black	C28189N00 C28189L10 C28189L07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > SUSPENSION AND MOUNTING SETS

Name	Key features	Material	Color	Ref.
Fastener set RD-1	- Smooth cable adjustment, cable included	brass	silver glossy silver satin white lacquered black lacquered	C28231P00 C28231P01 C28231L10 C28231L07
Fastener set RG-1	- Cable adjustment at the ceiling, cable included	brass	silver glossy silver satin white colored black colored	C28230P00 C28230P01 C28230L10 C28230L07
Fastener set RD-2	- Smooth cable adjustment, angled mounting, cable included	brass	silver glossy silver satin white lacquered black lacquered	C28232P00 C28232P01 C28232L10 C28232L07
Fastener set RD-3	- Smooth cable adjustment	brass	silver glossy silver satin white lacquered black lacquered	C28233P00 C28233P01 C28233L10 C28233L07
Fastener set RD-4	- Smooth cable adjustment, angled mounting	brass	silver glossy silver satin white lacquered black lacquered	C28234P00 C28234P01 C28234L10 C28234L07
Fastener set W1		brass, stainless steel	silver	C28203N00
Fastener set W6		stainless steel, brass	silver	C28205N00
Fastener set W7		brass, stainless steel	silver	42605
Fastener set FI-8-ZM-1	- Power supply, for wall and drywall, in the ZM system	stainless steel, aluminum	silver white lacquered black lacquered	C28134N00 C28134L10 C28134L07
Fastener set FI-8-ZM-2	- Convenient cable length adjustment, in the ZM system	stainless steel, aluminum	silver white lacquered black lacquered	C28135N00 C28135L10 C28135L07

Profile GIZA-LL

Ref. A00758

Name	Key features	Material	Color	Ref.
Fastener set PUSZ-ZM-1	- Power supply, for wall and drywall, in the ZM system	stainless steel, aluminum	 silver  white lacquered  black lacquered	C28130N00 C28130L10 C28130L07
Fastener set PUSZ-ZM-2	- Convenient cable length adjustment, in the ZM system	stainless steel, aluminum	 silver  white lacquered  black lacquered	C28131N00 C28131L10 C28131L07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > SECURITY AND BLOCKS

Name	Key features	Material	Color	Ref.
Block ZM, gray	- Accessory locking in the ZM system	silicon	 gray	C28194N00

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CANOPIES

Name	Key features	Material	Color	Ref.
Canopy BOX-M600 		aluminum	 silver anodized  white lacquered  black anodized	C24542A C24542L10 C24542A07
Canopy Fi-60mm	- Convenient cable length adjustment, in the ZM system	steel	 gray lacquered  white lacquered  black lacquered	C24540L01 C24540L10 C24540L07
Canopy BOX-M70		aluminum	 silver anodized  white lacquered  black anodized	C24541A C24541L10 C24541A07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > OTHER

Name	Key features	Material	Color	Ref.
Gland 9x1,5		Materiał, Material, multiselect		C42295C07
Gland 11x1,5		rubber		C42296C07
Gland 6,4x1,6		rubber		C24518C07
Gland M10x1	- metal housing - with M10x1 thread	mosiądz niklowany		C28275N00
Hermetic coupler THB.391.A4A, 4 pin	- 4 power terminals - compact dimensions	PA		C42268C10
Hermetic coupler THB.381, 2pin	- 2 power terminals - compact dimensions	PA		C28125C07
Hermetic coupler THB.391.A5A, 5 pin	- 5 power terminals - compact dimensions	PA		C28156C07
Joint connector THB.200.E5E, 5 pin	- 5 power terminals - 3-line branch	Materiał, Material, multiselect		C28157C07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > ADDITIONAL ITEMS

Name	Key features	Material	Color	Ref.
Adapter DILENSO	- Necessary when using the LENS cover	PC	 transparent glossy	E62145

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONNECTORS

Name	Material	Color	Ref.
Connector ZM-MINI	stainless steel	 silver	44501 C28083N00
Connector ZM	stainless steel	 silver	42716
		 silver	42717
		 silver	42720
		 silver	42728
		 black colored	C24797C07
		colorless non colored	C24797N00
		 black colored	C28070C07
		 silver	C28070N00
		 black colored	C28071C07
		 silver	C28071N00
		 black colored	C28072C07
		 silver	C28072N00
		 black colored	C28073C07
		 silver	C28073N00
		 black colored	C28074C07
		 silver	C28074N00
		 black colored	C28075C07
		 silver	C28075N00
		 silver	C28243N00
Connector ZM-G	stainless steel	 silver	42304
			42306
			42308
			42310
			42324
			42326
			42328
			42330
			42332
			42334
Connector ZM-Y	stainless steel	 black colored	C28082C07
		 silver	C28082N00
Connector ZM-X	stainless steel	 black colored	C28079C07
		 silver	C28079N00
		 black colored	C28080C07
		 silver	C28080N00
		 black colored	C28081C07
Connector ZM-T	stainless steel	 silver	C28081N00
		 black colored	C28076C07
		 silver	C28076N00
		 black colored	C28077C07
		 silver	C28077N00
Connector ZM-PION	stainless steel	 black colored	C28078C07
		 silver	C28078N00
		 silver	42314
		 silver	42316
		 silver	42320
Connector ZM-PION	stainless steel	 silver	42718
		 silver	42719
		 black colored	C28084C07
		 silver	C28084N00
		 black colored	C28085C07
		 silver	C28085N00
		 black colored	C28086C07
		 silver	C28086N00
		 black colored	C28087C07
		 silver	C28087N00
		 black colored	C28088C07
		 silver	C28088N00

RELATED ACCESSORIES > ELECTRONICS > SWITCHES

Name	Key features	IP protection rating	Ref.
Proximity switch UNI-11 	- touchless switch - width 11mm	20	E61603
Proximity switch UNI-11P 	- touchless switch - width 11mm - factory pre-soldered wires	20	E61604
Proximity switch UNI-P	- touchless switch - width only 7mm - factory pre-soldered wires	20	E61580
Proximity switch UNI	- touchless switch - width only 7mm	20	E61579