


# Profile GIZA-LL-T

Ref. A02479



IP20

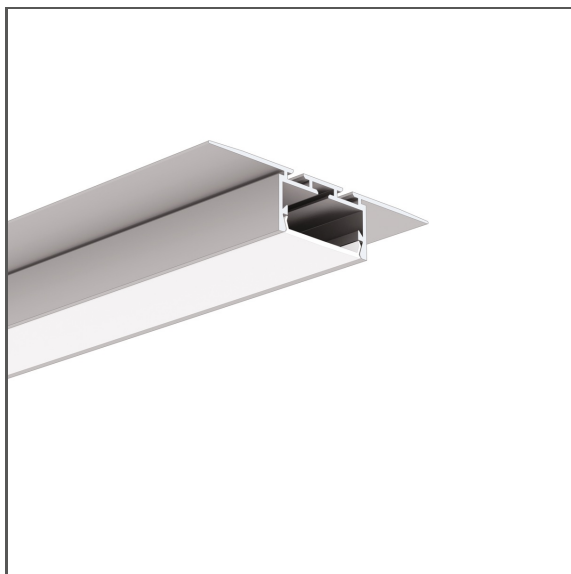

- Mounting to 12,5 mm - 0.50" drywall
- No collision with the ceiling structure
- Stable mounting to a suspended ceiling
- Non visible aluminum elements
- Possibility to use current modules with efficiency up to 190lm/W and CRI>90. Available upon request.

## APPLICATION

- main, decorative and functional lighting


## MOUNTING

- in drywall, with screws

## ADDITIONAL INFORMATION

- smooth transition from a recessed into a suspended fixture
- in order to protect the lighting fixture during installation, a TECH-22 protective insert should be used
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

## TECHNICAL DRAWING

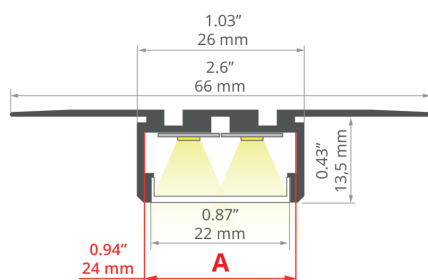

## TECHNICAL SPECIFICATIONS

|                                               |                                                                                                         |
|-----------------------------------------------|---------------------------------------------------------------------------------------------------------|
| Material                                      | aluminum                                                                                                |
| Color                                         |  silver non anodized |
| Possible fixture IP                           | 20                                                                                                      |
| Possible fixture shapes                       | linear, polygonal                                                                                       |
| Profile cross-section                         | rectangular                                                                                             |
| Width                                         | 66 mm                                                                                                   |
| Height                                        | 14.5 mm                                                                                                 |
| LED gluing width A                            | 24 mm                                                                                                   |
| Number of LED strips A (8 mm wide)            | 3                                                                                                       |
| Width of the glow                             | 22 mm                                                                                                   |
| Max power of a single KLUŚ LED strip          | 24 W/m                                                                                                  |
| Possibility of obtaining a line of light      | yes                                                                                                     |
| Building type                                 | Commercial, Retail, Entertainment/ Arts                                                                 |
| Facility zone                                 | office, lobby / foyer, decorative, fitness / spa, media rooms / av                                      |
| The cover is cut to the length of the profile | yes                                                                                                     |
| Can be easily connected into runs             | yes                                                                                                     |

| Length  | Ref       |
|---------|-----------|
| 1000 mm | A02479N_1 |
| 2005 mm | A02479N_2 |
| 3010 mm | A02479N_3 |

Standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance  $\pm 1.5$  mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)

# Profile GIZA-LL-T

## Ref. A02479

Wire out back of extrusion

yes

### LINE OF LIGHT TABLE

| LED tape        | LIGER-22 satin | LIGER-22 black | HS-22 frosted | G-22S satin | G-22R satin | BENCO-22 frosted |
|-----------------|----------------|----------------|---------------|-------------|-------------|------------------|
| K-1275-24       | ✓ (2)          | X              | X             | ✓ (1)       | ✓ (1)       | ✓ (2)            |
| K-0960-24       | ✓ (2)          | X              | ✓ (2)         | ✓ (1)       | ✓ (1)       | ✓ (2)            |
| K-1440-24       | ✓ (2)          | X              | ✓ (2)         | ✓ (1)       | ✓ (1)       | ✓ (2)            |
| K-HD-0480-24    | ✓ (2)          | X              | ✓ (2)         | ✓ (1)       | ✓ (1)       | ✓ (2)            |
| K-HD-0960-24    | ✓ (2)          | X              | ✓ (2)         | ✓ (1)       | ✓ (1)       | ✓ (2)            |
| K-HD-1440-24    | ✓ (2)          | X              | ✓ (2)         | ✓ (1)       | ✓ (1)       | ✓ (2)            |
| K-0360-24       | ✓ (2)          | X              | ✓ (2)         | ✓ (1)       | ✓ (1)       | ✓ (2)            |
| K-0720-24       | ✓ (2)          | X              | ✓ (2)         | ✓ (1)       | ✓ (1)       | ✓ (2)            |
| K-1080-24       | ✓ (2)          | X              | ✓ (2)         | ✓ (1)       | ✓ (1)       | ✓ (2)            |
| K-0500-24       | ✓ (2)          | X              | ✓ (2)         | ✓ (1)       | ✓ (1)       | ✓ (2)            |
| K-1000-24       | ✓ (2)          | X              | ✓ (2)         | ✓ (1)       | ✓ (1)       | ✓ (2)            |
| K-HD-0430-24    | ✓ (2)          | X              | ✓ (2)         | ✓ (1)       | ✓ (1)       | ✓ (2)            |
| K-1500-24       | ✓ (2)          | X              | ✓ (2)         | ✓ (1)       | ✓ (1)       | ✓ (2)            |
| K-CB-1000-24    | ✓ (2)          | HL (2)         | ✓ (2)         | ✓ (1)       | ✓ (1)       | ✓ (2)            |
| K-HD-0830-24    | ✓ (2)          | X              | ✓ (2)         | ✓ (1)       | ✓ (1)       | ✓ (2)            |
| K-HD-1260-24    | ✓ (2)          | X              | ✓ (2)         | ✓ (1)       | ✓ (1)       | ✓ (2)            |
| K-2300-24       | ✓ (2)          | X              | X             | ✓ (1)       | ✓ (1)       | ✓ (2)            |
| K-2400-24       | ✓ (2)          | X              | ✓ (2)         | ✓ (1)       | ✓ (1)       | ✓ (2)            |
| K-CR-1220-24    | ✓ (2)          | X              | X             | ✓ (1)       | ✓ (1)       | ✓ (2)            |
| K-CR-1275-24    | ✓ (2)          | X              | X             | ✓ (1)       | ✓ (1)       | ✓ (2)            |
| K-CRHD-1820-24  | ✓ (2)          | HL (2)         | ✓ (2)         | ✓ (1)       | ✓ (1)       | ✓ (2)            |
| K-CRHD-1910-24  | ✓ (2)          | HL (2)         | ✓ (2)         | ✓ (1)       | ✓ (1)       | ✓ (2)            |
| K-CR-0960-24    | ✓ (2)          | X              | ✓ (2)         | ✓ (1)       | ✓ (1)       | ✓ (2)            |
| K-CR-1440-24    | ✓ (2)          | X              | ✓ (2)         | ✓ (1)       | ✓ (1)       | ✓ (2)            |
| K-HEHD-0480-24  | ✓ (2)          | X              | ✓ (2)         | ✓ (1)       | ✓ (1)       | ✓ (2)            |
| K-HEHD-0960-24  | ✓ (2)          | X              | ✓ (2)         | ✓ (1)       | ✓ (1)       | ✓ (2)            |
| K-HEHD-1440-24  | ✓ (2)          | X              | ✓ (2)         | ✓ (1)       | ✓ (1)       | ✓ (2)            |
| K-HEHD-1920-24  | ✓ (2)          | X              | ✓ (2)         | ✓ (1)       | ✓ (1)       | ✓ (2)            |
| K-VHE-0480-24   | ✓ (2)          | X              | ✓ (2)         | ✓ (1)       | ✓ (1)       | ✓ (2)            |
| K-VHE-0960-24   | ✓ (2)          | X              | ✓ (2)         | ✓ (1)       | ✓ (1)       | ✓ (2)            |
| K-VHE-1440-24   | ✓ (2)          | HL (2)         | ✓ (2)         | ✓ (1)       | ✓ (1)       | ✓ (2)            |
| K-RGB-1200-24   | ✓ (2)          | X              | X             | ✓ (1)       | ✓ (1)       | ✓ (2)            |
| K-18D30-0960-24 | ✓ (2)          | X              | ✓ (2)         | ✓ (1)       | ✓ (1)       | ✓ (2)            |
| K-27T50-1440-24 | ✓ (2)          | X              | ✓ (2)         | ✓ (1)       | ✓ (1)       | ✓ (2)            |

# Profile GIZA-LL-T

Ref. A02479

|              |       |   |       |       |       |       |
|--------------|-------|---|-------|-------|-------|-------|
| K-SD-1440-24 | ✓ (2) | X | ✓ (2) | ✓ (1) | ✓ (1) | ✓ (2) |
|--------------|-------|---|-------|-------|-------|-------|

## Description


✓ - Line of Light for a number (X) of rows - Pixel free imaging

X - Visible Dotting from Diodes


HL - Centered Line of Light - Concentrated in middle

HL (X) - Centered Line of Light for a number (X) of rows - Concentrated in middle

## Line of Light Guide



Clean Line of Light (Pixel free imaging)





Centered Line of Light



Visible Dotting from Diodes

## SAMPLE PROJECTS

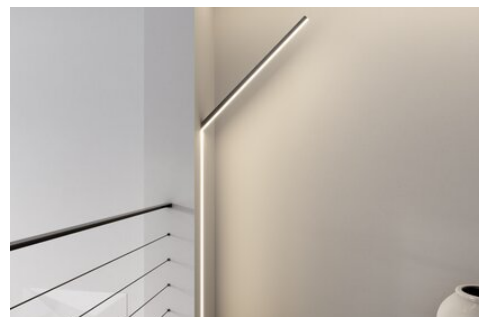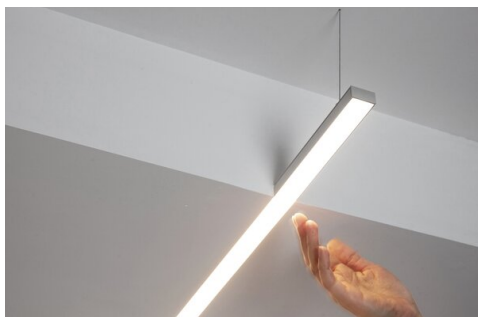

## SIMILAR PROFILES



**Profile GIZA-DUO-LL**  
A02162



**Profile GIZA-LL**  
A00758



**Profile GIZA-LL-UST**  
A02724



**Profile KOZUS**  
A07823



**Profile KOZUS-CR**  
A00600

# Profile GIZA-LL-T

Ref. A02479

## RELATED ACCESSORIES > COVERS

| NAME                                |                                                                                     | KEY FEATURES                                                                                                                  | MATERIAL | MATERIAL TRANSMITTANCE | COLOR            | REF.    |
|-------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|----------|------------------------|------------------|---------|
| Focusing cover<br>DILENSO-22 30°DEG |    | - indoor use<br>- focusing                                                                                                    | PC       | 63 %                   | semi-transparent | B17173T |
| Cover G-22R                         |    | - indoor use<br>- Perfectly diffusing                                                                                         | PMMA     | 20 %                   | black            | B17006B |
|                                     |                                                                                     |                                                                                                                               |          | 71 %                   | satın            | B17006S |
|                                     |                                                                                     |                                                                                                                               |          | 89 %                   | semi-transparent | B17006T |
|                                     |                                                                                     |                                                                                                                               |          | 94 %                   | clear            | B17006C |
| Cover G-22S                         |    | - indoor use<br>- Perfectly diffusing                                                                                         | PMMA     | 15 %                   | black            | B17013B |
|                                     |                                                                                     |                                                                                                                               |          | 86 %                   | satın            | B17013S |
|                                     |                                                                                     |                                                                                                                               |          | 89 %                   | semi-transparent | B17013T |
| Cover HS-22                         |  | - For indoor and outdoor applications<br>- UV resistant                                                                       | PC       | 65 %                   | frosted          | B17011F |
|                                     |                                                                                     |                                                                                                                               |          | 88 %                   | clear            | B17011C |
|                                     |                                                                                     |                                                                                                                               |          | 90.5 %                 | microprism       | B17011M |
| Cover LIGER-22                      |  | - high light quality<br>- For indoor and outdoor applications<br>- Ease of obtaining a line of light<br>- Perfectly diffusing | PC       | 22 %                   | black            | B17032B |
|                                     |                                                                                     |                                                                                                                               |          | 70 %                   | satın            | B17032S |
| Cover BENCO-22                      |  | - For indoor and outdoor applications<br>- UV resistant                                                                       | Silikon  | 62 %                   | frosted          | B17209F |

# Profile GIZA-LL-T

Ref. A02479

## RELATED ACCESSORIES > END CAPS

| NAME               |                                                                                    | MATERIAL | COLOR                                                                                                          | REF.      |
|--------------------|------------------------------------------------------------------------------------|----------|----------------------------------------------------------------------------------------------------------------|-----------|
| End cap GIZA-LL    |   | ABS      |  black                      | C24281C07 |
|                    |                                                                                    |          |  caramel (NCSS3030-Y60R)    | C24281L14 |
|                    |                                                                                    |          |  gray                       | C24281C02 |
|                    |                                                                                    |          |  light sage (NCSS2010-G50Y) | C24281L12 |
|                    |                                                                                    |          |                                                                                                                | C24281L13 |
|                    |                                                                                    |          |  sand (NCSS2010-Y30R)       | C24281L11 |
| End cap KOMPENSA-K |   | PP       |  black                      | C24020C07 |
|                    |                                                                                    |          |  gray                       | C24020C02 |
| End cap KOMPENSA-L |  | PP       |  black                      | C24015C07 |
|                    |                                                                                    |          |  gray                     | C24015C02 |

## RELATED ACCESSORIES > RELATED LED > WHITE MONO

| Name                                           | Key features                                              | IP protection rating | Power consumption | Ref.                                                                                   |
|------------------------------------------------|-----------------------------------------------------------|----------------------|-------------------|----------------------------------------------------------------------------------------|
| LED tape K-0360-24 3.6 W/m, IP20 <b>NEW</b>    |                                                           | 20                   | 3.6 W/m           | K-27-0360-24<br>K-30-0360-24<br>K-35-0360-24<br>K-40-0360-24<br>K-50-0360-24           |
| LED tape K-HD-0430-24 4.3 W/m, IP20 <b>NEW</b> |                                                           | 20                   | 4.3 W/m           | K-HD27-0430-24<br>K-HD30-0430-24<br>K-HD35-0430-24<br>K-HD40-0430-24<br>K-HD50-0430-24 |
| LED tape K-0480-24                             | - universal for basic applications                        | 20                   | 4.8 W/m           | K-27-0480-24<br>K-30-0480-24<br>K-35-0480-24<br>K-40-0480-24<br>K-50-0480-24           |
| LED tape K-HD-0480-24                          | - high LED density<br>- Ease of obtaining a line of light | 20                   | 4.8 W/m           | K-HD27-0480-24<br>K-HD30-0480-24<br>K-HD35-0480-24<br>K-HD40-0480-24<br>K-HD50-0480-24 |
| LED tape K-0500-24 5 W/m, IP20 <b>NEW</b>      |                                                           | 20                   | 5 W/m             | K-30-0500-24<br>K-40-0500-24                                                           |

# Profile GIZA-LL-T

## Ref. A02479

| Name                                               | Key features                                              | IP protection rating | Power consumption | Ref.                                                                                                                                 |
|----------------------------------------------------|-----------------------------------------------------------|----------------------|-------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| LED tape K-0720-24 7.2 W/m,<br>IP20 <b>NEW</b>     |                                                           | 20                   | 7.2 W/m           | K-27-0720-24<br>K-30-0720-24<br>K-35-0720-24<br>K-40-0720-24<br>K-50-0720-24                                                         |
| LED tape K-HD-0830-24 8.3 W/m,<br>IP20 <b>NEW</b>  |                                                           | 20                   | 8.3 W/m           | K-HD27-0830-24<br>K-HD30-0830-24<br>K-HD35-0830-24<br>K-HD40-0830-24<br>K-HD50-0830-24                                               |
| LED tape K-0960-24                                 | - universal for basic applications                        | 20                   | 9.6 W/m           | K-27-0960-24<br>K-30-0960-24<br>K-30-0960-24-R30<br>K-35-0960-24<br>K-40-0960-24<br>K-40-0960-24-R30<br>K-50-0960-24<br>K-65-0960-24 |
| LED tape K-HD-0960-24                              | - high LED density<br>- Ease of obtaining a line of light | 20                   | 9.6 W/m           | K-HD27-0960-24<br>K-HD30-0960-24<br>K-HD35-0960-24<br>K-HD40-0960-24<br>K-HD50-0960-24                                               |
| LED tape K-1000-24 10 W/m,<br>IP20 <b>NEW</b>      |                                                           | 20                   | 10 W/m            | K-30-1000-24<br>K-40-1000-24                                                                                                         |
| LED tape K-CB-1000-24 10 W/m,<br>IP20 <b>NEW</b>   |                                                           | 20                   | 10 W/m            | K-CB27-1000-24<br>K-CB30-1000-24<br>K-CB40-1000-24<br>K-CB50-1000-24                                                                 |
| LED tape K-1080-24 10.8 W/m,<br>IP20 <b>NEW</b>    |                                                           | 20                   | 10.8 W/m          | K-27-1080-24<br>K-30-1080-24<br>K-35-1080-24<br>K-40-1080-24<br>K-50-1080-24                                                         |
| LED tape K-HD-1260-24 12.6<br>W/m, IP20 <b>NEW</b> |                                                           | 20                   | 12.6 W/m          | K-HD27-1260-24<br>K-HD30-1260-24<br>K-HD35-1260-24<br>K-HD40-1260-24<br>K-HD50-1260-24                                               |
| LED tape K-1275-24                                 | - universal for basic applications                        | 20                   | 14.4 W/m          | K-22-1275-24<br>K-25-1275-24<br>K-27-1275-24<br>K-30-1275-24<br>K-35-1275-24<br>K-40-1275-24<br>K-50-1275-24                         |
| LED tape K-1440-24                                 | - universal for basic applications                        | 20                   | 14.4 W/m          | K-27-1440-24<br>K-30-1440-24<br>K-30-1440-24-R30<br>K-35-1440-24<br>K-40-1440-24<br>K-40-1440-24-R30<br>K-50-1440-24                 |
| LED tape K-HD-1440-24                              | - high LED density<br>- Ease of obtaining a line of light | 20                   | 14.4 W/m          | K-HD27-1440-24<br>K-HD30-1440-24<br>K-HD35-1440-24<br>K-HD40-1440-24<br>K-HD50-1440-24                                               |
| LED tape K2-1440-24 14.4 W/m,<br>IP20 <b>NEW</b>   |                                                           | 20                   | 14.4 W/m          | K2-27-1440-24<br>K2-30-1440-24<br>K2-35-1440-24<br>K2-40-1440-24<br>K2-50-1440-24                                                    |

# Profile GIZA-LL-T

## Ref. A02479

| Name                                             | Key features                                   | IP protection rating | Power consumption | Ref.                                                                              |
|--------------------------------------------------|------------------------------------------------|----------------------|-------------------|-----------------------------------------------------------------------------------|
| LED tape K-1500-24 15 W/m,<br>IP20 <b>NEW</b>    |                                                | 20                   | 15 W/m            | K-30-1500-24<br>K-40-1500-24                                                      |
| LED tape K2-1920-24                              | - LED double-row strip<br>- quick installation | 20                   | 19.2 W/m          | K2-27-1920-24<br>K2-30-1920-24<br>K2-35-1920-24<br>K2-40-1920-24<br>K2-50-1920-24 |
| LED tape K3-2160-24 21.6 W/m,<br>IP20 <b>NEW</b> | - Three-row LED strip<br>- quick installation  | 20                   | 21.6 W/m          | K3-27-2160-24<br>K3-30-2160-24<br>K3-35-2160-24<br>K3-40-2160-24<br>K3-50-2160-24 |
| LED tape K-2300-24                               | - high power                                   | 20                   | 23 W/m            | K-30-2300-24<br>K-40-2300-24                                                      |
| LED tape K-2400-24                               | - high power                                   | 20                   | 24 W/m            | K-27-2400-24<br>K-30-2400-24<br>K-35-2400-24<br>K-40-2400-24<br>K-50-2400-24      |
| LED tape K3-2880-24                              | - Three-row LED strip<br>- quick installation  | 20                   | 28.8 W/m          | K3-27-2880-24<br>K3-30-2880-24<br>K3-35-2880-24<br>K3-40-2880-24<br>K3-50-2880-24 |

### RELATED ACCESSORIES > RELATED LED > HIGH EFFICACY

| Name                    | Key features                                                             | IP protection rating | Power consumption | Ref.                                                                                                                                     |
|-------------------------|--------------------------------------------------------------------------|----------------------|-------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| LED tape K-HEHD-0480-24 | - CRI over 95<br>- High Efficacy                                         | 20                   | 4.8 W/m           | K-HEHD22-0480-24<br>K-HEHD25-0480-24<br>K-HEHD27-0480-24<br>K-HEHD30-0480-24<br>K-HEHD35-0480-24<br>K-HEHD40-0480-24<br>K-HEHD50-0480-24 |
| LED tape K-VHE-0480-24  | - universal for basic applications<br>- high efficacy<br>- High Efficacy | 20                   | 4.8 W/m           | K-VHE27-0480-24<br>K-VHE30-0480-24<br>K-VHE35-0480-24<br>K-VHE40-0480-24<br>K-VHE50-0480-24                                              |
| LED tape K-HEHD-0960-24 | - CRI over 95<br>- High Efficacy                                         | 20                   | 9.6 W/m           | K-HEHD22-0960-24<br>K-HEHD25-0960-24<br>K-HEHD27-0960-24<br>K-HEHD30-0960-24<br>K-HEHD35-0960-24<br>K-HEHD40-0960-24<br>K-HEHD50-0960-24 |
| LED tape K-VHE-0960-24  | - universal for basic applications<br>- high efficacy<br>- High Efficacy | 20                   | 9.6 W/m           | K-VHE27-0960-24<br>K-VHE30-0960-24<br>K-VHE35-0960-24<br>K-VHE40-0960-24<br>K-VHE50-0960-24                                              |
| LED tape K-HEHD-1440-24 | - CRI over 95<br>- High Efficacy                                         | 20                   | 14.4 W/m          | K-HEHD22-1440-24<br>K-HEHD25-1440-24<br>K-HEHD27-1440-24<br>K-HEHD30-1440-24<br>K-HEHD35-1440-24<br>K-HEHD40-1440-24<br>K-HEHD50-1440-24 |

# Profile GIZA-LL-T

Ref. A02479

| Name                    | Key features                                                             | IP protection rating | Power consumption | Ref.                                                                                                                                     |
|-------------------------|--------------------------------------------------------------------------|----------------------|-------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| LED tape K-VHE-1440-24  | - universal for basic applications<br>- high efficacy<br>- High Efficacy | 20                   | 14.4 W/m          | K-VHE27-1440-24<br>K-VHE30-1440-24<br>K-VHE35-1440-24<br>K-VHE40-1440-24<br>K-VHE50-1440-24                                              |
| LED tape K-HEHD-1920-24 | - CRI over 95<br>- High Efficacy                                         | 20                   | 19.2 W/m          | K-HEHD22-1920-24<br>K-HEHD25-1920-24<br>K-HEHD27-1920-24<br>K-HEHD30-1920-24<br>K-HEHD35-1920-24<br>K-HEHD40-1920-24<br>K-HEHD50-1920-24 |

## RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CCT

| Name                        | Key features        | IP protection rating | Power consumption | Ref.               |
|-----------------------------|---------------------|----------------------|-------------------|--------------------|
| LED tape K-RGB-0700-24V     | - RGB               | 20                   | 7 W/m             | K-RGB-0700-24V     |
| LED tape K-RGB-1200-24      | - RGB               | 20                   | 12 W/m            | K-RGB-1200-24      |
| LED tape K-RGB27T65-1200-24 | - RGB+Tunable White | 20                   | 12 W/m            | K-RGB27T65-1200-24 |

## RELATED ACCESSORIES > RELATED LED > BENDABLE

| Name                       | IP protection rating | Power consumption | Ref.              |
|----------------------------|----------------------|-------------------|-------------------|
| LED tape K-BTRGB40-1510-24 | 20                   | 15.1 W/m          | K-BTRGB40-1510-24 |

## RELATED ACCESSORIES > RELATED LED > CRI 95+

| Name                    | Key features                                        | IP protection rating | Power consumption | Ref.                                                                                                                                     |
|-------------------------|-----------------------------------------------------|----------------------|-------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| LED tape K-CR-0480-24   | - universal for basic applications<br>- CRI over 95 | 20                   | 4.8 W/m           | K-CR27-0480-24<br>K-CR30-0480-24<br>K-CR35-0480-24<br>K-CR40-0480-24<br>K-CR50-0480-24                                                   |
| LED tape K-CR-1210-24   | - CRI over 95                                       | 20                   | 4.8 W/m           | K-CR22-1210-24<br>K-CR25-1210-24<br>K-CR27-1210-24<br>K-CR30-1210-24<br>K-CR35-1210-24<br>K-CR40-1210-24<br>K-CR50-1210-24               |
| LED tape K-CRHD-1910-24 | - CRI over 95<br>- high LED density                 | 20                   | 9.1 W/m           | K-CRHD22-1910-24<br>K-CRHD25-1910-24<br>K-CRHD27-1910-24<br>K-CRHD30-1910-24<br>K-CRHD35-1910-24<br>K-CRHD40-1910-24<br>K-CRHD50-1910-24 |
| LED tape K-CR-0960-24   | - universal for basic applications<br>- CRI over 95 | 20                   | 9.6 W/m           | K-CR27-0960-24<br>K-CR30-0960-24<br>K-CR35-0960-24<br>K-CR40-0960-24<br>K-CR50-0960-24                                                   |

# Profile GIZA-LL-T

Ref. A02479

| Name                    | Key features                                        | IP protection rating | Power consumption | Ref.                                                                                                                                     |
|-------------------------|-----------------------------------------------------|----------------------|-------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| LED tape K-CR-1220-24   | - CRI over 95                                       | 20                   | 9.6 W/m           | K-CR22-1220-24<br>K-CR25-1220-24<br>K-CR27-1220-24<br>K-CR30-1220-24<br>K-CR35-1220-24<br>K-CR40-1220-24<br>K-CR50-1220-24               |
| LED tape K-CR-1275-24   | - CRI over 95                                       | 20                   | 14.4 W/m          | K-CR22-1275-24<br>K-CR25-1275-24<br>K-CR27-1275-24<br>K-CR30-1275-24<br>K-CR35-1275-24<br>K-CR40-1275-24<br>K-CR50-1275-24               |
| LED tape K-CR-1440-24   | - universal for basic applications<br>- CRI over 95 | 20                   | 14.4 W/m          | K-CR27-1440-24<br>K-CR30-1440-24<br>K-CR35-1440-24<br>K-CR40-1440-24<br>K-CR50-1440-24                                                   |
| LED tape K-CRHD-1820-24 | - CRI over 95<br>- high LED density                 | 20                   | 18.25 W/m         | K-CRHD22-1820-24<br>K-CRHD25-1820-24<br>K-CRHD27-1820-24<br>K-CRHD30-1820-24<br>K-CRHD35-1820-24<br>K-CRHD40-1820-24<br>K-CRHD50-1820-24 |

## RELATED ACCESSORIES > RELATED LED > ADJUSTABLE WHITE / DIM TO WARM

| Name                     | Key features           | IP protection rating | Power consumption | Ref.            |
|--------------------------|------------------------|----------------------|-------------------|-----------------|
| LED tape K-18D30-0960-24 | - Dim To Warm LED Tape | 20                   | 9.6 W/m           | K-18D30-0960-24 |
| LED tape K-27T50-1440-24 | - RGB+Tunable White    | 20                   | 14.4 W/m          | K-27T50-1440-24 |

## RELATED ACCESSORIES > RELATED LED

| Name                  | IP protection rating | Power consumption | Ref.                                                                 |
|-----------------------|----------------------|-------------------|----------------------------------------------------------------------|
| LED tape K-SD-1440-24 | 20                   | 14.4 W/m          | K-SD27-1440-24<br>K-SD30-1440-24<br>K-SD35-1440-24<br>K-SD40-1440-24 |

## RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > PROFILE MASKING COVERS

| Name                | Key features | Material | Color                                                                                                                                                                                                                                   | Ref.                                                                                            |
|---------------------|--------------|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
| Masking cover MP-22 | - Lightproof | PC       | <div><div></div> gray metalized</div> <div><div></div> gray metalized</div> <div><div></div> white lacquered</div> <div><div></div> white lacquered</div> <div><div></div> black lacquered</div> <div><div></div> black lacquered</div> | C28261L01_1<br>C28261L01_0.25<br>C28261L10_1<br>C28261L10_0.25<br>C28261L07_1<br>C28261L07_0.25 |

## RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > TECHNICAL AND PROTECTIVE INSERTS

| Name | Key features | Material | Color | Ref. |
|------|--------------|----------|-------|------|
|------|--------------|----------|-------|------|

# Profile GIZA-LL-T

## Ref. A02479

| Name                      | Key features                                             | Material | Color                                                                                        | Ref.                                      |
|---------------------------|----------------------------------------------------------|----------|----------------------------------------------------------------------------------------------|-------------------------------------------|
| Protective insert TECH-22 | - Protection of the fixture interior during installation | PVC      |  gray satin | C24531C02_1<br>C24531C02_2<br>C24531C02_3 |

### RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONDUCTIVE FASTENERS AND HEADS FOR PROFILES

| Name                     | Key features                    | Material            | Color                                                                                                                                                                              | Ref.                   |
|--------------------------|---------------------------------|---------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|
| Fastener OS22-LIN-Z      | - Power supply cable            | stainless steel, PA |  white<br> black | C28184L10<br>C28184L07 |
| Fastener OS22-PRET-Z     | - Power supply rod              | PA, stainless steel |  white<br> black | C28186L10<br>C28186L07 |
| Fastener OS22-DUO-LIN-Z  | - Power supply cable, two poles | stainless steel, PA |  white<br> black | C28183L10<br>C28183L07 |
| Fastener OS22-DUO-PRET-Z | - Power supply cable, two poles | stainless steel, PA |  white<br> black | C28185L10<br>C28185L07 |

### RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > OTHER

| Name          | Key features                           | Material                        | Ref.      |
|---------------|----------------------------------------|---------------------------------|-----------|
| Gland 9x1,5   |                                        | Material, Material, multiselect | C42295C07 |
| Gland 11x1,5  |                                        | rubber                          | C42296C07 |
| Gland 6,4x1,6 |                                        | rubber                          | C24518C07 |
| Gland M10x1   | - metal housing<br>- with M10x1 thread | mosiądz niklowany               | C28275N00 |

### RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > ADDITIONAL ITEMS

| Name            | Key features                          | Material | Color                                                                                                  | Ref.   |
|-----------------|---------------------------------------|----------|--------------------------------------------------------------------------------------------------------|--------|
| Adapter DILENSO | - Necessary when using the LENS cover | PC       |  transparent glossy | E62145 |

### RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONNECTORS

| Name         | Material        | Color                                                                                             | Ref.      |
|--------------|-----------------|---------------------------------------------------------------------------------------------------|-----------|
| Connector ZM | stainless steel |  silver        | 42716     |
|              |                 |  silver        | 42717     |
|              |                 |  silver        | 42720     |
|              |                 |  silver        | 42728     |
|              |                 |  black colored | C24797C07 |
|              |                 | colorless non colored                                                                             | C24797N00 |
|              |                 |  black colored | C28070C07 |
|              |                 |  silver        | C28070N00 |
|              |                 |  black colored | C28071C07 |
|              |                 |  silver        | C28071N00 |
|              |                 |  black colored | C28072C07 |
|              |                 |  silver        | C28072N00 |
|              |                 |  black colored | C28073C07 |
|              |                 |  silver        | C28073N00 |
|              |                 |  black colored | C28074C07 |
|              |                 |  silver        | C28074N00 |
|              |                 |  black colored | C28075C07 |
|              |                 |  silver        | C28075N00 |
|              |                 |  silver        | C28243N00 |

# Profile GIZA-LL-T

## Ref. A02479

| Name                 | Material        | Color                                                                                             | Ref.      |
|----------------------|-----------------|---------------------------------------------------------------------------------------------------|-----------|
| Connector ZM-NA      | stainless steel |  silver          | 42305     |
|                      |                 |                                                                                                   | 42339     |
|                      |                 |                                                                                                   | 42723     |
|                      |                 |                                                                                                   | 42724     |
|                      |                 |                                                                                                   | 42725     |
| Connector ZM-Y       | stainless steel |  black colored   | C28082C07 |
|                      |                 |  silver          | C28082N00 |
| Connector ZM-X       | stainless steel |  black colored   | C28079C07 |
|                      |                 |  silver          | C28079N00 |
|                      |                 |  black colored   | C28080C07 |
|                      |                 |  silver          | C28080N00 |
|                      |                 |  black colored   | C28081C07 |
| Connector ZM-T       | stainless steel |  silver          | C28081N00 |
|                      |                 |  black colored   | C28076C07 |
|                      |                 |  silver          | C28076N00 |
|                      |                 |  black colored   | C28077C07 |
|                      |                 |  silver          | C28077N00 |
| Connector ZM-PION    | stainless steel |  black colored   | C28078C07 |
|                      |                 |  silver          | C28078N00 |
|                      |                 |  silver          | 42314     |
|                      |                 |  silver          | 42316     |
|                      |                 |  silver          | 42320     |
|                      |                 |  silver          | 42718     |
|                      |                 |  silver          | 42719     |
|                      |                 |  black colored   | C28084C07 |
|                      |                 |  silver         | C28084N00 |
|                      |                 |  black colored | C28085C07 |
|                      |                 |  silver        | C28085N00 |
|                      |                 |  black colored | C28086C07 |
|                      |                 |  silver        | C28086N00 |
|                      |                 |  black colored | C28087C07 |
|                      |                 |  silver        | C28087N00 |
| Connector ZM-NA-PION | stainless steel |  black colored | C28088C07 |
|                      |                 |  silver        | C28088N00 |
|                      |                 |  silver        | 42315     |
|                      |                 |                                                                                                   | 42317     |
|                      |                 |  silver        | 42321     |
|                      |                 |                                                                                                   | 42726     |
|                      |                 |                                                                                                   | 42727     |
|                      |                 |                                                                                                   |           |

### RELATED ACCESSORIES > ELECTRONICS > SWITCHES

| Name                                                                                                         | Key features                                                           | IP protection rating | Ref.   |
|--------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------|----------------------|--------|
| Proximity switch UNI-11   | - touchless switch<br>- width 11mm                                     | 20                   | E61603 |
| Proximity switch UNI-11P  | - touchless switch<br>- width 11mm<br>- factory pre-soldered wires     | 20                   | E61604 |
| Proximity switch UNI-P                                                                                       | - touchless switch<br>- width only 7mm<br>- factory pre-soldered wires | 20                   | E61580 |
| Proximity switch UNI                                                                                         | - touchless switch<br>- width only 7mm                                 | 20                   | E61579 |