


Profile GIZA-LL-UST

Ref. A02724



IP20

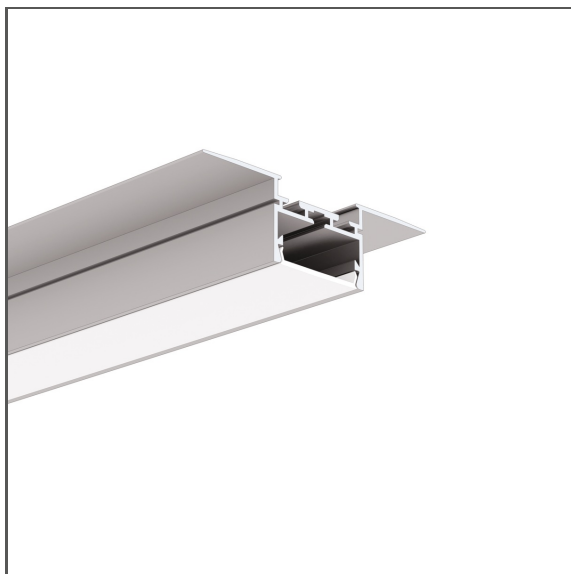

- Mounting to 16 mm | 0.63" drywall
- No collision with the ceiling structure
- Stable mounting to a suspended ceiling
- Non visible aluminum elements
- Possibility to use current modules with efficiency up to 190lm/W and CRI>90. Available upon request.

APPLICATION

- main, decorative and functional lighting


MOUNTING

- in drywall, with screws

ADDITIONAL INFORMATION

- smooth transition from a recessed into a suspended fixture
- in order to protect the lighting fixture during installation, a TECH-22 protective insert should be used
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING

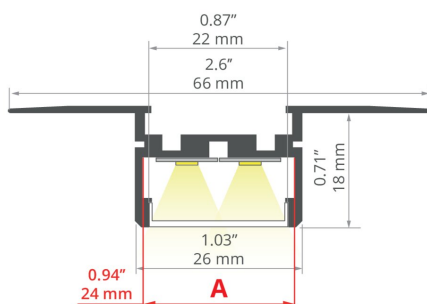

TECHNICAL SPECIFICATIONS

Material	aluminum
Color	 silver non anodized
Possible fixture IP	20
Possible fixture shapes	linear, polygonal
Profile cross-section	rectangular
Width	66 mm
Height	19 mm
LED gluing width A	24 mm
Number of LED strips A (8 mm wide)	3
Width of the glow	22 mm
Max power of a single KLUŚ LED strip	24 W/m
Possibility of obtaining a line of light	yes
Building type	Commercial, Retail, Entertainment/ Arts
Facility zone	office, lobby / foyer, decorative, fitness / spa, media rooms / av
The cover is cut to the length of the profile	yes
Can be easily connected into runs	yes

Length	Ref
1000 mm	A02724N_1
2005 mm	A02724N_2
3010 mm	A02724N_3

Standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)

Profile GIZA-LL-UST

Ref. A02724

Wire out back of extrusion

yes

LINE OF LIGHT TABLE

LED tape	LIGER-22 satin	LIGER-22 black	HS-22 frosted	G-22S satin	G-22R satin	BENCO-22 frosted
K-1275-24	✓ (2)	X	X	✓ (1)	✓ (1)	✓ (2)
K-0960-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-1440-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-HD-0480-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-HD-0960-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-HD-1440-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-0360-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-0720-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-1080-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-0500-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-1000-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-HD-0430-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-1500-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-CB-1000-24	✓ (2)	HL (2)	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-HD-0830-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-HD-1260-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-2300-24	✓ (2)	X	X	✓ (1)	✓ (1)	✓ (2)
K-2400-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-CR-1220-24	✓ (2)	X	X	✓ (1)	✓ (1)	✓ (2)
K-CR-1275-24	✓ (2)	X	X	✓ (1)	✓ (1)	✓ (2)
K-CRHD-1820-24	✓ (2)	HL (2)	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-CRHD-1910-24	✓ (2)	HL (2)	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-CR-0960-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-CR-1440-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-HEHD-0480-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-HEHD-0960-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-HEHD-1440-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-HEHD-1920-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-VHE-0480-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-VHE-0960-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-VHE-1440-24	✓ (2)	HL (2)	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-RGB-1200-24	✓ (2)	X	X	✓ (1)	✓ (1)	✓ (2)
K-18D30-0960-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-27T50-1440-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)

Profile GIZA-LL-UST

Ref. A02724

K-SD-1440-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
--------------	-------	---	-------	-------	-------	-------

Description




- Line of Light for a number (X) of rows - Pixel free imaging

X - Visible Dotting from Diodes

HL - Centered Line of Light - Concentrated in middle

HL (X) - Centered Line of Light for a number (X) of rows - Concentrated in middle

Line of Light Guide



Clean Line of Light (Pixel free imaging)





Centered Line of Light



Visible Dotting from Diodes

SAMPLE PROJECTS

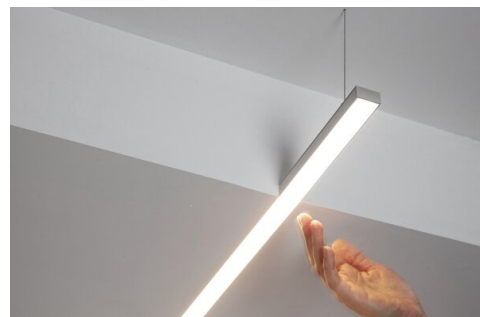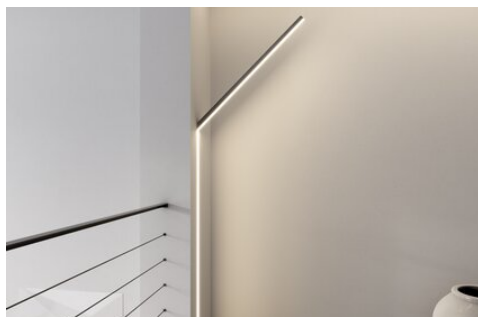


SIMILAR PROFILES



Profile GIZA-LL
A00758



Profile GIZA-LL-T
A02479

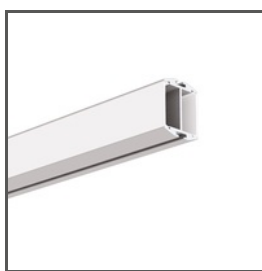

Profile GIZA-DUO-LL
A02162



Profile KOZUS
A07823



Profile KOZUS-CR
A00600

Profile GIZA-LL-UST

Ref. A02724

RELATED ACCESSORIES > COVERS

NAME		KEY FEATURES	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
Focusing cover DILENSO-22 30°DEG		- indoor use - focusing	PC	63 %	semi-transparent	B17173T
Cover G-22R		- indoor use - Perfectly diffusing	PMMA	20 %	black	B17006B
				71 %	satin	B17006S
				89 %	semi-transparent	B17006T
				94 %	clear	B17006C
Cover G-22S		- indoor use - Perfectly diffusing	PMMA	15 %	black	B17013B
				86 %	satin	B17013S
				89 %	semi-transparent	B17013T
Cover HS-22		- For indoor and outdoor applications - UV resistant	PC	65 %	frosted	B17011F
				88 %	clear	B17011C
				90.5 %	microprism	B17011M
Cover LIGER-22		- high light quality - For indoor and outdoor applications - Ease of obtaining a line of light - Perfectly diffusing	PC	22 %	black	B17032B
				70 %	satin	B17032S
Cover BENCO-22		- For indoor and outdoor applications - UV resistant	Silikon	62 %	frosted	B17209F

Profile GIZA-LL-UST

Ref. A02724

RELATED ACCESSORIES > END CAPS

NAME		MATERIAL	COLOR	REF.
End cap GIZA-LL		ABS	black	C24281C07
			caramel (NCSS3030-Y60R)	C24281L14
			gray	C24281C02
			light sage (NCSS2010-G50Y)	C24281L12
				C24281L13
			sand (NCSS2010-Y30R)	C24281L11
End cap KOMPENSA-K		PP	black	C24020C07
			gray	C24020C02
End cap KOMPENSA-L		PP	black	C24015C07
			gray	C24015C02

RELATED ACCESSORIES > RELATED LED > WHITE MONO

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-0360-24 3.6 W/m, IP20 NEW		20	3.6 W/m	K-27-0360-24 K-30-0360-24 K-35-0360-24 K-40-0360-24 K-50-0360-24
LED tape K-HD-0430-24 4.3 W/m, IP20 NEW		20	4.3 W/m	K-HD27-0430-24 K-HD30-0430-24 K-HD35-0430-24 K-HD40-0430-24 K-HD50-0430-24
LED tape K-0480-24	- universal for basic applications	20	4.8 W/m	K-27-0480-24 K-30-0480-24 K-35-0480-24 K-40-0480-24 K-50-0480-24
LED tape K-HD-0480-24	- high LED density - Ease of obtaining a line of light	20	4.8 W/m	K-HD27-0480-24 K-HD30-0480-24 K-HD35-0480-24 K-HD40-0480-24 K-HD50-0480-24
LED tape K-0500-24 5 W/m, IP20 NEW		20	5 W/m	K-30-0500-24 K-40-0500-24

Profile GIZA-LL-UST

Ref. A02724

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-0720-24 7.2 W/m, IP20 NEW		20	7.2 W/m	K-27-0720-24 K-30-0720-24 K-35-0720-24 K-40-0720-24 K-50-0720-24
LED tape K-HD-0830-24 8.3 W/m, IP20 NEW		20	8.3 W/m	K-HD27-0830-24 K-HD30-0830-24 K-HD35-0830-24 K-HD40-0830-24 K-HD50-0830-24
LED tape K-0960-24	- universal for basic applications	20	9.6 W/m	K-27-0960-24 K-30-0960-24 K-30-0960-24-R30 K-35-0960-24 K-40-0960-24 K-40-0960-24-R30 K-50-0960-24 K-65-0960-24
LED tape K-HD-0960-24	- high LED density - Ease of obtaining a line of light	20	9.6 W/m	K-HD27-0960-24 K-HD30-0960-24 K-HD35-0960-24 K-HD40-0960-24 K-HD50-0960-24
LED tape K-1000-24 10 W/m, IP20 NEW		20	10 W/m	K-30-1000-24 K-40-1000-24
LED tape K-CB-1000-24 10 W/m, IP20 NEW		20	10 W/m	K-CB27-1000-24 K-CB30-1000-24 K-CB40-1000-24 K-CB50-1000-24
LED tape K-1080-24 10.8 W/m, IP20 NEW		20	10.8 W/m	K-27-1080-24 K-30-1080-24 K-35-1080-24 K-40-1080-24 K-50-1080-24
LED tape K-HD-1260-24 12.6 W/m, IP20 NEW		20	12.6 W/m	K-HD27-1260-24 K-HD30-1260-24 K-HD35-1260-24 K-HD40-1260-24 K-HD50-1260-24
LED tape K-1275-24	- universal for basic applications	20	14.4 W/m	K-22-1275-24 K-25-1275-24 K-27-1275-24 K-30-1275-24 K-35-1275-24 K-40-1275-24 K-50-1275-24
LED tape K-1440-24	- universal for basic applications	20	14.4 W/m	K-27-1440-24 K-30-1440-24 K-30-1440-24-R30 K-35-1440-24 K-40-1440-24 K-40-1440-24-R30 K-50-1440-24
LED tape K-HD-1440-24	- high LED density - Ease of obtaining a line of light	20	14.4 W/m	K-HD27-1440-24 K-HD30-1440-24 K-HD35-1440-24 K-HD40-1440-24 K-HD50-1440-24
LED tape K-1500-24 15 W/m, IP20 NEW		20	15 W/m	K-30-1500-24 K-40-1500-24

Profile GIZA-LL-UST

Ref. A02724

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K2-1920-24	- LED double-row strip - quick installation	20	19.2 W/m	K2-27-1920-24 K2-30-1920-24 K2-35-1920-24 K2-40-1920-24 K2-50-1920-24
LED tape K-2300-24	- high power	20	23 W/m	K-30-2300-24 K-40-2300-24
LED tape K-2400-24	- high power	20	24 W/m	K-27-2400-24 K-30-2400-24 K-35-2400-24 K-40-2400-24 K-50-2400-24
LED tape K3-2880-24	- Three-row LED strip - quick installation	20	28.8 W/m	K3-27-2880-24 K3-30-2880-24 K3-35-2880-24 K3-40-2880-24 K3-50-2880-24

RELATED ACCESSORIES > RELATED LED > HIGH EFFICACY

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-HEHD-0480-24	- CRI over 95 - High Efficacy	20	4.8 W/m	K-HEHD22-0480-24 K-HEHD25-0480-24 K-HEHD27-0480-24 K-HEHD30-0480-24 K-HEHD35-0480-24 K-HEHD40-0480-24 K-HEHD50-0480-24
LED tape K-VHE-0480-24	- universal for basic applications - high efficacy - High Efficacy	20	4.8 W/m	K-VHE27-0480-24 K-VHE30-0480-24 K-VHE35-0480-24 K-VHE40-0480-24 K-VHE50-0480-24
LED tape K-HEHD-0960-24	- CRI over 95 - High Efficacy	20	9.6 W/m	K-HEHD22-0960-24 K-HEHD25-0960-24 K-HEHD27-0960-24 K-HEHD30-0960-24 K-HEHD35-0960-24 K-HEHD40-0960-24 K-HEHD50-0960-24
LED tape K-VHE-0960-24	- universal for basic applications - high efficacy - High Efficacy	20	9.6 W/m	K-VHE27-0960-24 K-VHE30-0960-24 K-VHE35-0960-24 K-VHE40-0960-24 K-VHE50-0960-24
LED tape K-HEHD-1440-24	- CRI over 95 - High Efficacy	20	14.4 W/m	K-HEHD22-1440-24 K-HEHD25-1440-24 K-HEHD27-1440-24 K-HEHD30-1440-24 K-HEHD35-1440-24 K-HEHD40-1440-24 K-HEHD50-1440-24
LED tape K-VHE-1440-24	- universal for basic applications - high efficacy - High Efficacy	20	14.4 W/m	K-VHE27-1440-24 K-VHE30-1440-24 K-VHE35-1440-24 K-VHE40-1440-24 K-VHE50-1440-24

Profile GIZA-LL-UST

Ref. A02724

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-HEHD-1920-24	- CRI over 95 - High Efficacy	20	19.2 W/m	K-HEHD22-1920-24 K-HEHD25-1920-24 K-HEHD27-1920-24 K-HEHD30-1920-24 K-HEHD35-1920-24 K-HEHD40-1920-24 K-HEHD50-1920-24

RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CCT

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-RGB-0700-24V	- RGB	20	7 W/m	K-RGB-0700-24V
LED tape K-RGB-1200-24	- RGB	20	12 W/m	K-RGB-1200-24
LED tape K-RGB27T65-1200-24	- RGB+Tunable White	20	12 W/m	K-RGB27T65-1200-24

RELATED ACCESSORIES > RELATED LED > BENDABLE

Name	IP protection rating	Power consumption	Ref.
LED tape K-BTRGB40-1510-24	20	15.1 W/m	K-BTRGB40-1510-24

RELATED ACCESSORIES > RELATED LED > CRI 95+

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-CR-0480-24	- universal for basic applications - CRI over 95	20	4.8 W/m	K-CR27-0480-24 K-CR30-0480-24 K-CR35-0480-24 K-CR40-0480-24 K-CR50-0480-24
LED tape K-CR-1210-24	- CRI over 95	20	4.8 W/m	K-CR22-1210-24 K-CR25-1210-24 K-CR27-1210-24 K-CR30-1210-24 K-CR35-1210-24 K-CR40-1210-24 K-CR50-1210-24
LED tape K-CRHD-1910-24	- CRI over 95 - high LED density	20	9.1 W/m	K-CRHD22-1910-24 K-CRHD25-1910-24 K-CRHD27-1910-24 K-CRHD30-1910-24 K-CRHD35-1910-24 K-CRHD40-1910-24 K-CRHD50-1910-24
LED tape K-CR-0960-24	- universal for basic applications - CRI over 95	20	9.6 W/m	K-CR27-0960-24 K-CR30-0960-24 K-CR35-0960-24 K-CR40-0960-24 K-CR50-0960-24
LED tape K-CR-1220-24	- CRI over 95	20	9.6 W/m	K-CR22-1220-24 K-CR25-1220-24 K-CR27-1220-24 K-CR30-1220-24 K-CR35-1220-24 K-CR40-1220-24 K-CR50-1220-24

Profile GIZA-LL-UST

Ref. A02724

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-CR-1275-24	- CRI over 95	20	14.4 W/m	K-CR22-1275-24 K-CR25-1275-24 K-CR27-1275-24 K-CR30-1275-24 K-CR35-1275-24 K-CR40-1275-24 K-CR50-1275-24
LED tape K-CR-1440-24	- universal for basic applications - CRI over 95	20	14.4 W/m	K-CR27-1440-24 K-CR30-1440-24 K-CR35-1440-24 K-CR40-1440-24 K-CR50-1440-24
LED tape K-CRHD-1820-24	- CRI over 95 - high LED density	20	18.25 W/m	K-CRHD22-1820-24 K-CRHD25-1820-24 K-CRHD27-1820-24 K-CRHD30-1820-24 K-CRHD35-1820-24 K-CRHD40-1820-24 K-CRHD50-1820-24

RELATED ACCESSORIES > RELATED LED > ADJUSTABLE WHITE / DIM TO WARM

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-18D30-0960-24	- Dim To Warm LED Tape	20	9.6 W/m	K-18D30-0960-24
LED tape K-27T50-1440-24	- RGB+Tunable White	20	14.4 W/m	K-27T50-1440-24

RELATED ACCESSORIES > RELATED LED > DIGITAL

Name	Key features	IP protection rating	Power consumption	Ref.
Digital LED strip K-DL-1229-24	- Digital tape	20	12.29 W/m	K-DL30-1229-24 K-DL40-1229-24

RELATED ACCESSORIES > RELATED LED

Name	IP protection rating	Power consumption	Ref.
LED tape K-SD-1440-24	20	14.4 W/m	K-SD27-1440-24 K-SD30-1440-24 K-SD35-1440-24 K-SD40-1440-24

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > PROFILE MASKING COVERS

Name	Key features	Material	Color	Ref.
Masking cover MP-22	- Lightproof	PC	 gray metalized  gray metalized  white lacquered  white lacquered  black lacquered  black lacquered	C28261L01_1 C28261L01_0,25 C28261L10_1 C28261L10_0,25 C28261L07_1 C28261L07_0,25

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > TECHNICAL AND PROTECTIVE INSERTS

Name	Key features	Material	Color	Ref.
------	--------------	----------	-------	------

Profile GIZA-LL-UST

Ref. A02724

Name	Key features	Material	Color	Ref.
Protective insert TECH-22	- Protection of the fixture interior during installation	PVC	 gray satin	C24531C02_1 C24531C02_2 C24531C02_3

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONDUCTIVE FASTENERS AND HEADS FOR PROFILES

Name	Key features	Material	Color	Ref.
Fastener OS22-LIN-Z	- Power supply cable	stainless steel, PA	 white  black	C28184L10 C28184L07
Fastener OS22-PRET-Z	- Power supply rod	PA, stainless steel	 white  black	C28186L10 C28186L07
Fastener OS22-DUO-LIN-Z	- Power supply cable, two poles	stainless steel, PA	 white  black	C28183L10 C28183L07
Fastener OS22-DUO-PRET-Z	- Power supply cable, two poles	stainless steel, PA	 white  black	C28185L10 C28185L07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > OTHER

Name	Key features	Material	Ref.
Gland 9x1,5		Materiał, Material, multiselect	C42295C07
Gland 11x1,5		rubber	C42296C07
Gland 6,4x1,6		rubber	C24518C07
Gland M10x1	- metal housing - with M10x1 thread	mosiądz niklowany	C28275N00

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > ADDITIONAL ITEMS

Name	Key features	Material	Color	Ref.
Adapter DILENSO	- Necessary when using the LENS cover	PC	 transparent glossy	E62145

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONNECTORS

Name	Material	Color	Ref.
Connector ZM	stainless steel	 silver	42716
		 silver	42717
		 silver	42720
		 silver	42728
		 black colored	C24797C07
		colorless non colored	C24797N00
		 black colored	C28070C07
		 silver	C28070N00
		 black colored	C28071C07
		 silver	C28071N00
		 black colored	C28072C07
		 silver	C28072N00
		 black colored	C28073C07
		 silver	C28073N00
		 black colored	C28074C07
		 silver	C28074N00
		 black colored	C28075C07
		 silver	C28075N00
		 silver	C28243N00

Profile GIZA-LL-UST

Ref. A02724

Name	Material	Color	Ref.
Connector ZM-NA	stainless steel	 silver	42305
			42339
			42723
			42724
			42725
			C28242N00
Connector ZM-Y	stainless steel	 black colored	C28082C07
		 silver	C28082N00
Connector ZM-X	stainless steel	 black colored	C28079C07
		 silver	C28079N00
		 black colored	C28080C07
		 silver	C28080N00
		 black colored	C28081C07
		 silver	C28081N00
Connector ZM-T	stainless steel	 black colored	C28076C07
		 silver	C28076N00
		 black colored	C28077C07
		 silver	C28077N00
		 black colored	C28078C07
		 silver	C28078N00
Connector ZM-PION	stainless steel	 silver	42314
		 silver	42316
		 silver	42320
		 silver	42718
		 silver	42719
		 black colored	C28084C07
		 silver	C28084N00
		 black colored	C28085C07
		 silver	C28085N00
		 black colored	C28086C07
		 silver	C28086N00
		 black colored	C28087C07
		 silver	C28087N00
		 black colored	C28088C07
		 silver	C28088N00
Connector ZM-NA-PION	stainless steel	 silver	42315
			42317
			42321
			42726
			42727

RELATED ACCESSORIES > ELECTRONICS > SWITCHES

Name	Key features	IP protection rating	Ref.
Proximity switch UNI-11	- touchless switch - width 11mm	20	E61603
Proximity switch UNI-P	- touchless switch - width only 7mm - factory pre-soldered wires	20	E61580
Proximity switch UNI	- touchless switch - width only 7mm	20	E61579
Proximity switch UNI-11P	- touchless switch - width 11mm - factory pre-soldered wires	20	E61604