

Profile GLAZA-LL

Ref. A02627



- Minimalistic form
- Smooth profile surfaces
- Small bending radius
- Possibility to use current modules with efficiency up to 190lm/W and CRI>90. Available upon request.

APPLICATION

- main, decorative and functional lighting


MOUNTING

- suspended, using dedicated accessories

ADDITIONAL INFORMATION

- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ
- NCS Premium paint option - minimum order quantity 30pcs - available on order within 14 days

TECHNICAL DRAWING



TECHNICAL SPECIFICATIONS

Material	aluminum
Possible fixture IP	20
Possible fixture shapes	linear, polygonal, round
Profile cross-section	rectangular
Width	26.2 mm
Height	16.2 mm
LED gluing width A	24 mm
Number of LED strips A (8 mm wide)	2
Width of the glow	22 mm
Max power of a single KLUŚ LED strip	24 W/m
Possibility of twisting	yes
Possibility of obtaining a line of light	yes
Possibility of bending	yes
Radius of the light arc	yes
Inward	400 mm
Outdoor	300 mm
Building type	Entertainment/ Arts, HoReCa object, Commercial, Retail

Color	Length	Ref
■ silver anodized	1000 mm	A02627A_1
	2005 mm	A02627A_2
	3010 mm	A02627A_3
□ white lacquered	1000 mm	A02627L10_1
	2005 mm	A02627L10_2
	3010 mm	A02627L10_3
■ black anodized	1000 mm	A02627A07_1
	2005 mm	A02627A07_2
	3010 mm	A02627A07_3
■ caramel (NCSS3030-Y60R) lacquered	2005 mm	A02627L14OD_2
■ sand (NCSS2010-Y30R) lacquered	2005 mm	A02627L11OD_2
■ pastel blue (NCSS2010-B) lacquered	2005 mm	A02627L13OD_2
■ light sage (NCSS2010-G50Y) lacquered	2005 mm	A02627L12OD_2

Standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)

Profile GLAZA-LL

Ref. A02627

Facility zone	office, lobby / foyer, decorative, fitness / spa, media rooms / av
The cover is cut to the length of the profile	yes
Can be easily connected into runs	yes
Wire out back of extrusion	yes

LINE OF LIGHT TABLE

LED tape	LIGER-22 satin	LIGER-22 black	HS-22 frosted	G-22S satin	G-22R satin	BENCO-22 frosted
K-1275-24	✓ (2)	X	X	✓ (1)	✓ (1)	✓ (2)
K-0960-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-1440-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-HD-0480-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-HD-0960-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-HD-1440-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-0360-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-0720-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-1080-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-0500-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-1000-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-HD-0430-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-1500-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-CB-1000-24	✓ (2)	HL (2)	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-HD-0830-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-HD-1260-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-2300-24	✓ (2)	X	X	✓ (1)	✓ (1)	✓ (2)
K-2400-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-CR-1220-24	✓ (2)	X	X	✓ (1)	✓ (1)	✓ (2)
K-CR-1275-24	✓ (2)	X	X	✓ (1)	✓ (1)	✓ (2)
K-CRHD-1820-24	✓ (2)	HL (2)	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-CRHD-1910-24	✓ (2)	HL (2)	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-CR-0960-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-CR-1440-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-HEHD-0480-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-HEHD-0960-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-HEHD-1440-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-HEHD-1920-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-VHE-0480-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-VHE-0960-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-VHE-1440-24	✓ (2)	HL (2)	✓ (2)	✓ (1)	✓ (1)	✓ (2)

Profile GLAZA-LL

Ref. A02627

K-RGB-0700-24V	✓ (2)	X	X	✓ (1)	✓ (1)	✓ (2)
K-RGB-1200-24	✓ (2)	X	X	✓ (1)	✓ (1)	✓ (2)
K-18D30-0960-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-27T50-1440-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)
K-SD-1440-24	✓ (2)	X	✓ (2)	✓ (1)	✓ (1)	✓ (2)

Description


✓ - Line of Light for a number (X) of rows - Pixel free imaging

X - Visible Dotting from Diodes


HL - Centered Line of Light - Concentrated in middle

HL (X) - Centered Line of Light for a number (X) of rows - Concentrated in middle

Line of Light Guide



Clean Line of Light (Pixel free imaging)





Centered Line of Light



Visible Dotting from Diodes

SAMPLE PROJECTS

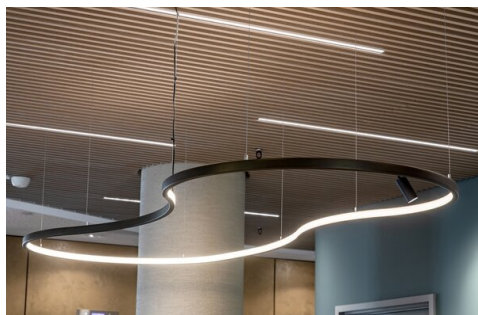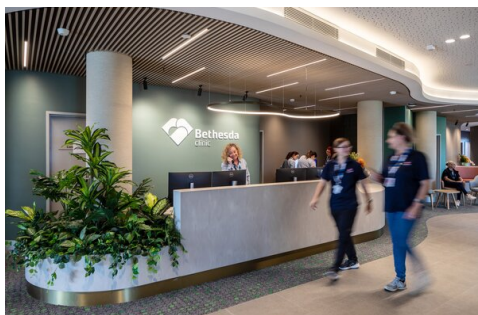

SIMILAR PROFILES



Profile GLAZA-DUO
A03059

Profile GLAZA-LL

Ref. A02627

RELATED ACCESSORIES > COVERS

NAME		KEY FEATURES	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
Cover LIGER-22		- high light quality - For indoor and outdoor applications - Ease of obtaining a line of light - Perfectly diffusing	PC	22 %	black	B17032B
				70 %	satın	B17032S
Cover G-22S		- indoor use - Perfectly diffusing	PMMA	15 %	black	B17013B
				86 %	satın	B17013S
				89 %	semi-transparent	B17013T
Cover G-22R		- indoor use - Perfectly diffusing	PMMA	20 %	black	B17006B
				71 %	satın	B17006S
				89 %	semi-transparent	B17006T
				94 %	clear	B17006C
Cover BENCO-22		- For indoor and outdoor applications - UV resistant	Silikon	62 %	frosted	B17209F

RELATED ACCESSORIES > END CAPS

NAME		MATERIAL	COLOR	REF.
End cap GLAZA-LL		ABS	 caramel (NCSS3030-Y60R)	C24368L14
			 gray	C24368C02
			 light sage (NCSS2010-G50Y)	C24368L12
			 pastel blue (NCSS2010-B)	C24368L13
			 sand (NCSS2010-Y30R)	C24368L11
		PP	 black	C24368C07
			 silver	C24368L01
		aluminum, PET-G	 silver	C28142AS

RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CCT

Profile GLAZA-LL

Ref. A02627

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-RGB-0700-24V	- RGB	20	7 W/m	K-RGB-0700-24V
LED tape K-RGB-1200-24	- RGB	20	12 W/m	K-RGB-1200-24
LED tape K-RGB27T65-1200-24	- RGB+Tunable White	20	12 W/m	K-RGB27T65-1200-24

RELATED ACCESSORIES > RELATED LED > HIGH EFFICACY

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-HEHD-0480-24	- CRI over 95 - High Efficacy	20	4.8 W/m	K-HEHD22-0480-24 K-HEHD25-0480-24 K-HEHD27-0480-24 K-HEHD30-0480-24 K-HEHD35-0480-24 K-HEHD40-0480-24 K-HEHD50-0480-24
LED tape K-VHE-0480-24	- universal for basic applications - high efficacy - High Efficacy	20	4.8 W/m	K-VHE27-0480-24 K-VHE30-0480-24 K-VHE35-0480-24 K-VHE40-0480-24 K-VHE50-0480-24
LED tape K-HEHD-0960-24	- CRI over 95 - High Efficacy	20	9.6 W/m	K-HEHD22-0960-24 K-HEHD25-0960-24 K-HEHD27-0960-24 K-HEHD30-0960-24 K-HEHD35-0960-24 K-HEHD40-0960-24 K-HEHD50-0960-24
LED tape K-VHE-0960-24	- universal for basic applications - high efficacy - High Efficacy	20	9.6 W/m	K-VHE27-0960-24 K-VHE30-0960-24 K-VHE35-0960-24 K-VHE40-0960-24 K-VHE50-0960-24
LED tape K-HEHD-1440-24	- CRI over 95 - High Efficacy	20	14.4 W/m	K-HEHD22-1440-24 K-HEHD25-1440-24 K-HEHD27-1440-24 K-HEHD30-1440-24 K-HEHD35-1440-24 K-HEHD40-1440-24 K-HEHD50-1440-24
LED tape K-VHE-1440-24	- universal for basic applications - high efficacy - High Efficacy	20	14.4 W/m	K-VHE27-1440-24 K-VHE30-1440-24 K-VHE35-1440-24 K-VHE40-1440-24 K-VHE50-1440-24
LED tape K-HEHD-1920-24	- CRI over 95 - High Efficacy	20	19.2 W/m	K-HEHD22-1920-24 K-HEHD25-1920-24 K-HEHD27-1920-24 K-HEHD30-1920-24 K-HEHD35-1920-24 K-HEHD40-1920-24 K-HEHD50-1920-24

RELATED ACCESSORIES > RELATED LED > CRI 95+

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-CR-0480-24	- universal for basic applications - CRI over 95	20	4.8 W/m	K-CR27-0480-24 K-CR30-0480-24 K-CR35-0480-24 K-CR40-0480-24 K-CR50-0480-24

Profile GLAZA-LL

Ref. A02627

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-CR-1210-24	- CRI over 95	20	4.8 W/m	K-CR22-1210-24 K-CR25-1210-24 K-CR27-1210-24 K-CR30-1210-24 K-CR35-1210-24 K-CR40-1210-24 K-CR50-1210-24
LED tape K-CRHD-1910-24	- CRI over 95 - high LED density	20	9.1 W/m	K-CRHD22-1910-24 K-CRHD25-1910-24 K-CRHD27-1910-24 K-CRHD30-1910-24 K-CRHD35-1910-24 K-CRHD40-1910-24 K-CRHD50-1910-24
LED tape K-CR-0960-24	- universal for basic applications - CRI over 95	20	9.6 W/m	K-CR27-0960-24 K-CR30-0960-24 K-CR35-0960-24 K-CR40-0960-24 K-CR50-0960-24
LED tape K-CR-1220-24	- CRI over 95	20	9.6 W/m	K-CR22-1220-24 K-CR25-1220-24 K-CR27-1220-24 K-CR30-1220-24 K-CR35-1220-24 K-CR40-1220-24 K-CR50-1220-24
LED tape K-CR-1275-24	- CRI over 95	20	14.4 W/m	K-CR22-1275-24 K-CR25-1275-24 K-CR27-1275-24 K-CR30-1275-24 K-CR35-1275-24 K-CR40-1275-24 K-CR50-1275-24
LED tape K-CR-1440-24	- universal for basic applications - CRI over 95	20	14.4 W/m	K-CR27-1440-24 K-CR30-1440-24 K-CR35-1440-24 K-CR40-1440-24 K-CR50-1440-24
LED tape K-CRHD-1820-24	- CRI over 95 - high LED density	20	18.25 W/m	K-CRHD22-1820-24 K-CRHD25-1820-24 K-CRHD27-1820-24 K-CRHD30-1820-24 K-CRHD35-1820-24 K-CRHD40-1820-24 K-CRHD50-1820-24

RELATED ACCESSORIES > RELATED LED > WHITE MONO

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-0360-24 3.6 W/m, IP20 NEW		20	3.6 W/m	K-27-0360-24 K-30-0360-24 K-35-0360-24 K-40-0360-24 K-50-0360-24
LED tape K-HD-0430-24 4.3 W/m, IP20 NEW		20	4.3 W/m	K-HD27-0430-24 K-HD30-0430-24 K-HD35-0430-24 K-HD40-0430-24 K-HD50-0430-24
LED tape K-0480-24	- universal for basic applications	20	4.8 W/m	K-27-0480-24 K-30-0480-24 K-35-0480-24 K-40-0480-24 K-50-0480-24

Profile GLAZA-LL

Ref. A02627

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-HD-0480-24	- high LED density - Ease of obtaining a line of light	20	4.8 W/m	K-HD27-0480-24 K-HD30-0480-24 K-HD35-0480-24 K-HD40-0480-24 K-HD50-0480-24
LED tape K-0500-24 5 W/m, IP20 NEW		20	5 W/m	K-30-0500-24 K-40-0500-24
LED tape K-0720-24 7.2 W/m, IP20 NEW		20	7.2 W/m	K-27-0720-24 K-30-0720-24 K-35-0720-24 K-40-0720-24 K-50-0720-24
LED tape K-HD-0830-24 8.3 W/m, IP20 NEW		20	8.3 W/m	K-HD27-0830-24 K-HD30-0830-24 K-HD35-0830-24 K-HD40-0830-24 K-HD50-0830-24
LED tape K-0960-24	- universal for basic applications	20	9.6 W/m	K-27-0960-24 K-30-0960-24 K-30-0960-24-R30 K-35-0960-24 K-40-0960-24 K-40-0960-24-R30 K-50-0960-24 K-65-0960-24
LED tape K-HD-0960-24	- high LED density - Ease of obtaining a line of light	20	9.6 W/m	K-HD27-0960-24 K-HD30-0960-24 K-HD35-0960-24 K-HD40-0960-24 K-HD50-0960-24
LED tape K-1000-24 10 W/m, IP20 NEW		20	10 W/m	K-30-1000-24 K-40-1000-24
LED tape K-CB-1000-24 10 W/m, IP20 NEW		20	10 W/m	K-CB27-1000-24 K-CB30-1000-24 K-CB40-1000-24 K-CB50-1000-24
LED tape K-1080-24 10.8 W/m, IP20 NEW		20	10.8 W/m	K-27-1080-24 K-30-1080-24 K-35-1080-24 K-40-1080-24 K-50-1080-24
LED tape K-HD-1260-24 12.6 W/m, IP20 NEW		20	12.6 W/m	K-HD27-1260-24 K-HD30-1260-24 K-HD35-1260-24 K-HD40-1260-24 K-HD50-1260-24
LED tape K-1275-24	- universal for basic applications	20	14.4 W/m	K-22-1275-24 K-25-1275-24 K-27-1275-24 K-30-1275-24 K-35-1275-24 K-40-1275-24 K-50-1275-24
LED tape K-1440-24	- universal for basic applications	20	14.4 W/m	K-27-1440-24 K-30-1440-24 K-30-1440-24-R30 K-35-1440-24 K-40-1440-24 K-40-1440-24-R30 K-50-1440-24

Profile GLAZA-LL

Ref. A02627

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-HD-1440-24	- high LED density - Ease of obtaining a line of light	20	14.4 W/m	K-HD27-1440-24 K-HD30-1440-24 K-HD35-1440-24 K-HD40-1440-24 K-HD50-1440-24
LED tape K2-1440-24 14.4 W/m, IP20 NEW		20	14.4 W/m	K2-27-1440-24 K2-30-1440-24 K2-35-1440-24 K2-40-1440-24 K2-50-1440-24
LED tape K-1500-24 15 W/m, IP20 NEW		20	15 W/m	K-30-1500-24 K-40-1500-24
LED tape K2-1920-24	- LED double-row strip - quick installation	20	19.2 W/m	K2-27-1920-24 K2-30-1920-24 K2-35-1920-24 K2-40-1920-24 K2-50-1920-24
LED tape K3-2160-24 21.6 W/m, IP20 NEW	- Three-row LED strip - quick installation	20	21.6 W/m	K3-27-2160-24 K3-30-2160-24 K3-35-2160-24 K3-40-2160-24 K3-50-2160-24
LED tape K-2300-24	- high power	20	23 W/m	K-30-2300-24 K-40-2300-24
LED tape K-2400-24	- high power	20	24 W/m	K-27-2400-24 K-30-2400-24 K-35-2400-24 K-40-2400-24 K-50-2400-24
LED tape K3-2880-24	- Three-row LED strip - quick installation	20	28.8 W/m	K3-27-2880-24 K3-30-2880-24 K3-35-2880-24 K3-40-2880-24 K3-50-2880-24

RELATED ACCESSORIES > RELATED LED > BENDABLE

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-VBT-0720-24	- LED tape for bent profiles	20	7.2 W/m	K-VBT27-0720-24 K-VBT30-0720-24 K-VBT35-0720-24 K-VBT40-0720-24 K-VBT50-0720-24
LED tape K-BTRGB40-1510-24		20	15.1 W/m	K-BTRGB40-1510-24

RELATED ACCESSORIES > RELATED LED > ADJUSTABLE WHITE / DIM TO WARM

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-18D30-0960-24	- Dim To Warm LED Tape	20	9.6 W/m	K-18D30-0960-24
LED tape K-27T50-1440-24	- RGB+Tunable White	20	14.4 W/m	K-27T50-1440-24

RELATED ACCESSORIES > RELATED LED

Name	IP protection rating	Power consumption	Ref.
------	----------------------	-------------------	------

Profile GLAZA-LL

Ref. A02627

Name	IP protection rating	Power consumption	Ref.
LED tape K-SD-1440-24	20	14.4 W/m	K-SD27-1440-24 K-SD30-1440-24 K-SD35-1440-24 K-SD40-1440-24

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > PROFILE MASKING COVERS

Name	Key features	Material	Color	Ref.
Masking cover MP-22	- Lightproof	PC	 gray metalized  gray metalized  white lacquered  white lacquered  black lacquered  black lacquered	C28261L01_1 C28261L01_0.25 C28261L10_1 C28261L10_0.25 C28261L07_1 C28261L07_0.25

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONDUCTIVE FASTENERS AND HEADS FOR PROFILES

Name	Key features	Material	Color	Ref.
Head BZP-ZO		stainless steel	 silver	42214
Head BZP-ZZ		stainless steel	 gray	42215
Fastener OS22-LIN-Z	- Power supply cable	stainless steel, PA	 white  black	C28184L10 C28184L07
Fastener OS22-PRET-Z	- Power supply rod	PA, stainless steel	 white  black	C28186L10 C28186L07
Fastener OS22-DUO-LIN-Z	- Power supply cable, two poles	stainless steel, PA	 white  black	C28183L10 C28183L07
Fastener OS22-DUO-PRET-Z	- Power supply cable, two poles	stainless steel, PA	 white  black	C28185L10 C28185L07
Fastener FI-8-LIN-MR	- Power supply cable - mounting in thin walls (from 1mm)	stainless steel, PA aluminum, PA aluminum, PA	 silver  white  black	C28172N00 C28172L10 C28172L07
Fastener PUSZ-LIN-MR	- Power supply cable - mounting in thin walls (from 1mm)	stainless steel, brass, nylon aluminum, brass, nylon aluminum, brass, nylon	 silver  white lacquered  black lacquered	C28163N00 C28163L10 C28163L07
Fastener PUSZ-PRET-MR	- Power supply cable - mounting in thin walls (from 1mm)	stainless steel, brass, nylon aluminum, brass, nylon aluminum, brass, nylon	 silver  white lacquered  black lacquered	C28166N00 C28166L10 C28166L07
Fastener PUSZ-LIN-MR, silver		stainless steel	 silver	C28122N00
Fastener PUSZ-PRET-MR, silver		stainless steel	 silver	C28119N00
Fastener DP-ZZ, silver		stainless steel	 silver	00651
Fastener PUSZ-MR	- Power supply cable - mounting in thin walls (from 1mm)	stainless steel aluminum aluminum	 silver  white lacquered  black lacquered	C20011N00 C20011L10 C20011L07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > FASTENERS AND HEADS FOR PROFILES

Name	Material	Color	Ref.
Fastener DP, silver	stainless steel	 silver	00644

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > SUSPENSION AND MOUNTING SETS

Profile GLAZA-LL

Ref. A02627

Name	Key features	Material	Color	Ref.
Fastener set RG-1	- Cable adjustment at the ceiling, cable included	brass	 silver glossy  silver satin  white colored  black colored	C28230P00 C28230P01 C28230L10 C28230L07
Fastener set PUSZ-MR-1	- Power supply, for wall and drywall, mounting in thin walls (from 1mm)	stainless steel, aluminum	 silver  white lacquered  black lacquered	C28132N00 C28132L10 C28132L07
Fastener set PUSZ-MR-2	- Convenient cable length adjustment, mounting in thin walls (from 1mm)	stainless steel, aluminum	 silver  white lacquered  black lacquered	C28133N00 C28133L10 C28133L07
Fastener set FI-8-MR-1	- Power supply, for wall and drywall, mounting in thin walls (from 1mm)	stainless steel, aluminum	 silver  white lacquered  black lacquered	C28136N00 C28136L10 C28136L07
Fastener set FI-8-MR-2	- Convenient cable length adjustment, mounting in thin walls (from 1mm)	stainless steel, aluminum	 silver  white lacquered  black lacquered	C28137N00 C28137L10 C28137L07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > SECURITY AND BLOCKS

Name	Key features	Material	Color	Ref.
Block ZM, gray	- Accessory locking in the ZM system	silicon	 gray	C28194N00

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CANOPIES

Name	Key features	Material	Color	Ref.
Canopy BOX-M600 NEW		aluminum	 silver anodized  white lacquered  black anodized	C24542A C24542L10 C24542A07
Canopy Fi-60mm	- Convenient cable length adjustment, in the ZM system	steel	 gray lacquered  white lacquered  black lacquered	C24540L01 C24540L10 C24540L07
Canopy BOX-M70		aluminum	 silver anodized  white lacquered  black anodized	C24541A C24541L10 C24541A07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > OTHER

Name	Key features	Material	Ref.
Gland 9x1,5		Material, Material, multiselect	C42295C07
Gland 11x1,5		rubber	C42296C07
Gland 6,4x1,6		rubber	C24518C07
Gland M10x1	- metal housing - with M10x1 thread	mosiądz niklowany	C28275N00

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONNECTORS

Name	Material	Color	Ref.
Connector ZM-MINI	stainless steel	 silver	44501 C28083N00

Profile GLAZA-LL

Ref. A02627

Name	Material	Color	Ref.
Connector ZM	stainless steel	 silver	42716
		 silver	42717
		 silver	42720
		 silver	42728
		 black colored	C24797C07
		colorless non colored	C24797N00
		 black colored	C28070C07
		 silver	C28070N00
		 black colored	C28071C07
		 silver	C28071N00
		 black colored	C28072C07
		 silver	C28072N00
		 black colored	C28073C07
		 silver	C28073N00
		 black colored	C28074C07
		 silver	C28074N00
		 black colored	C28075C07
		 silver	C28075N00
		 silver	C28243N00
Connector ZM-G	stainless steel	 silver	42304
			42306
			42308
			42310
			42324
			42326
			42328
			42330
			42332
			42334
Connector ZM-PION	stainless steel	 silver	42314
		 silver	42316
		 silver	42320
		 silver	42718
		 silver	42719
		 black colored	C28084C07
		 silver	C28084N00
		 black colored	C28085C07
		 silver	C28085N00
		 black colored	C28086C07
		 silver	C28086N00
		 black colored	C28087C07
		 silver	C28087N00
		 black colored	C28088C07
		 silver	C28088N00

RELATED ACCESSORIES > ELECTRONICS > SWITCHES

Name	Key features	IP protection rating	Ref.
Proximity switch UNI-11 	- touchless switch - width 11mm	20	E61603
Proximity switch UNI-11P 	- touchless switch - width 11mm - factory pre-soldered wires	20	E61604
Proximity switch UNI-P	- touchless switch - width only 7mm - factory pre-soldered wires	20	E61580
Proximity switch UNI	- touchless switch - width only 7mm	20	E61579