


Profile KOPRO

Ref. A06367



IP20

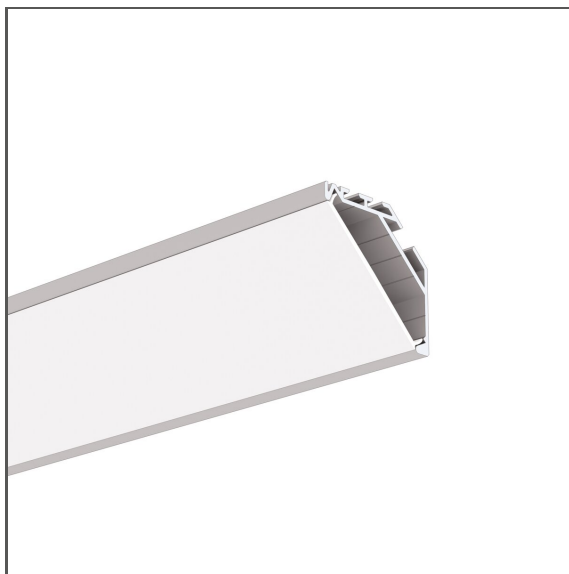

- Installation in corners
- Lighting at a 45° angle
- Wide range of accessories
- Space for cable management

APPLICATION

- under-cabinet and functional lighting


MOUNTING

- to the surface, using dedicated accessories, mounting adhesive or properly selected screws

ADDITIONAL INFORMATION

- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING

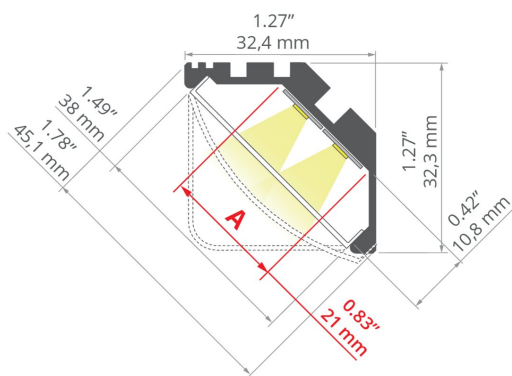

TECHNICAL SPECIFICATIONS

Material	aluminum
Color	 silver anodized
Possible fixture IP	20
Possible fixture shapes	linear, polygonal
Profile cross-section	angled
Width	32.4 mm
Height	32.3 mm
LED gluing width A	21 mm
Number of LED strips A (8 mm wide)	2
Width of the glow	38 mm
Max power of a single KLUŚ LED strip	24 W/m
Lighting at an angle	45
Closet Rated	yes
Possibility of obtaining a line of light	yes
Building type	Commercial, Entertainment/ Arts
Facility zone	kitchen, under-cabinet / furniture, exhibition / tradeshow / display, media rooms / av

Length	Ref
1000 mm	A06367A_1
2005 mm	A06367A_2
3010 mm	A06367A_3

Standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)

The cover is cut to the length of the profile	yes
Can be easily connected into runs	yes
Wire out back of extrusion	yes

LINE OF LIGHT TABLE

LED tape	KOPRO-38R satin	KOPRO-38S satin
K-1275-24	✓ (2)	✓ (2)
K-0960-24	✓ (2)	✓ (2)
K-1440-24	✓ (2)	✓ (2)
K-HD-0480-24	✓ (2)	✓ (2)
K-HD-0960-24	✓ (2)	✓ (2)
K-HD-1440-24	✓ (2)	✓ (2)
K-0360-24	✓ (2)	✓ (2)
K-0720-24	✓ (2)	✓ (2)
K-1080-24	✓ (2)	✓ (2)
K-0500-24	✓ (2)	✓ (2)
K-1000-24	✓ (2)	✓ (2)
K-HD-0430-24	✓ (2)	✓ (2)
K-1500-24	✓ (2)	✓ (2)
K-CB-1000-24	✓ (2)	✓ (2)
K-HD-0830-24	✓ (2)	✓ (2)
K-HD-1260-24	✓ (2)	✓ (2)
K-2300-24	✓ (2)	✓ (2)
K-2400-24	✓ (2)	✓ (2)
K-CR-1220-24	✓ (2)	✓ (2)
K-CR-1275-24	✓ (2)	✓ (2)
K-CRHD-1820-24	✓ (2)	✓ (2)
K-CRHD-1910-24	✓ (2)	✓ (2)
K-CR-0960-24	✓ (2)	✓ (2)
K-CR-1440-24	✓ (2)	✓ (2)
K-HEHD-0480-24	✓ (2)	✓ (2)
K-HEHD-0960-24	✓ (2)	✓ (2)
K-HEHD-1440-24	✓ (2)	✓ (2)
K-HEHD-1920-24	✓ (2)	✓ (2)
K-VHE-0480-24	✓ (2)	✓ (2)
K-VHE-0960-24	✓ (2)	✓ (2)
K-VHE-1440-24	✓ (2)	✓ (2)
K-RGB-0700-24V	✓ (2)	✓ (2)

Profile KOPRO

Ref. A06367

K-RGB-1200-24	✓ (2)	✓ (2)
K-18D30-0960-24	✓ (2)	✓ (2)
K-27T50-1440-24	✓ (2)	✓ (2)
K-SD-1440-24	✓ (2)	✓ (2)

Description


✓ - Line of Light for a number (X) of rows - Pixel free imaging

X - Visible Dotting from Diodes

HL - Centered Line of Light - Concentrated in middle

HL (X) - Centered Line of Light for a number (X) of rows - Concentrated in middle

Line of Light Guide



Clean Line of Light (Pixel free imaging)





Centered Line of Light



Visible Dotting from Diodes

SAMPLE PROJECTS

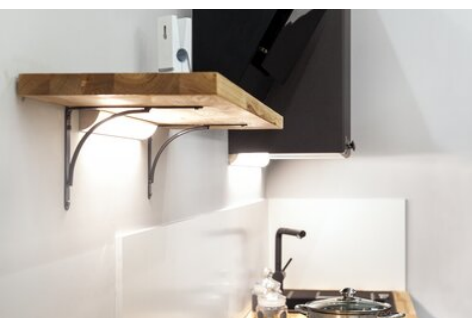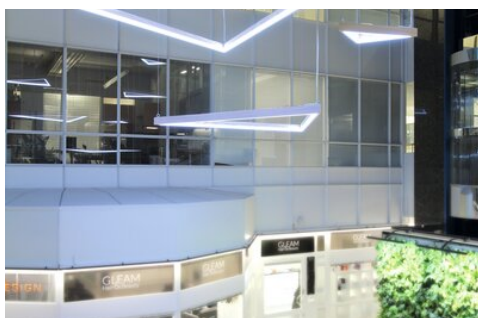

SIMILAR PROFILES



Profile KOPRO-30
A07890

RELATED ACCESSORIES > COVERS

NAME		KEY FEATURES	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
Cover KOPRO-38S		- indoor use - angular	PC	74 %	satin	B17093S
Cover KOPRO-38R		- indoor use - flat - semi-circular	PC	70 %	satin	B17092S
Cover KOPRO-38		- indoor use - flat	PC	69 %	satin	B17091S

RELATED ACCESSORIES > END CAPS

NAME		MATERIAL	COLOR	REF.
End cap KOPRO-P		PP	gray	C24117C02
			silver	C24117L01
End cap KOPRO-K		PP	gray	C24115C02
			silver	C24115L01
End cap KOPRO-L		PP	gray	C24116C02
			silver	C24116L01

RELATED ACCESSORIES > RELATED LED > WHITE MONO

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-0360-24 3.6 W/m, IP20 NEW		20	3.6 W/m	K-27-0360-24 K-30-0360-24 K-35-0360-24 K-40-0360-24 K-50-0360-24
LED tape K-HD-0430-24 4.3 W/m, IP20 NEW		20	4.3 W/m	K-HD27-0430-24 K-HD30-0430-24 K-HD35-0430-24 K-HD40-0430-24 K-HD50-0430-24
LED tape K-0480-24	- universal for basic applications	20	4.8 W/m	K-27-0480-24 K-30-0480-24 K-35-0480-24 K-40-0480-24 K-50-0480-24
LED tape K-HD-0480-24	- high LED density - Ease of obtaining a line of light	20	4.8 W/m	K-HD27-0480-24 K-HD30-0480-24 K-HD35-0480-24 K-HD40-0480-24 K-HD50-0480-24

Profile KOPRO

Ref. A06367

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-0500-24 5 W/m, IP20 NEW		20	5 W/m	K-30-0500-24 K-40-0500-24
LED tape K-0720-24 7.2 W/m, IP20 NEW		20	7.2 W/m	K-27-0720-24 K-30-0720-24 K-35-0720-24 K-40-0720-24 K-50-0720-24
LED tape K-HD-0830-24 8.3 W/m, IP20 NEW		20	8.3 W/m	K-HD27-0830-24 K-HD30-0830-24 K-HD35-0830-24 K-HD40-0830-24 K-HD50-0830-24
LED tape K-0960-24	- universal for basic applications	20	9.6 W/m	K-27-0960-24 K-30-0960-24 K-30-0960-24-R30 K-35-0960-24 K-40-0960-24 K-40-0960-24-R30 K-50-0960-24 K-65-0960-24
LED tape K-HD-0960-24	- high LED density - Ease of obtaining a line of light	20	9.6 W/m	K-HD27-0960-24 K-HD30-0960-24 K-HD35-0960-24 K-HD40-0960-24 K-HD50-0960-24
LED tape K-1000-24 10 W/m, IP20 NEW		20	10 W/m	K-30-1000-24 K-40-1000-24
LED tape K-CB-1000-24 10 W/m, IP20 NEW		20	10 W/m	K-CB27-1000-24 K-CB30-1000-24 K-CB40-1000-24 K-CB50-1000-24
LED tape K-1080-24 10.8 W/m, IP20 NEW		20	10.8 W/m	K-27-1080-24 K-30-1080-24 K-35-1080-24 K-40-1080-24 K-50-1080-24
LED tape K-HD-1260-24 12.6 W/m, IP20 NEW		20	12.6 W/m	K-HD27-1260-24 K-HD30-1260-24 K-HD35-1260-24 K-HD40-1260-24 K-HD50-1260-24
LED tape K-1275-24	- universal for basic applications	20	14.4 W/m	K-22-1275-24 K-25-1275-24 K-27-1275-24 K-30-1275-24 K-35-1275-24 K-40-1275-24 K-50-1275-24
LED tape K-1440-24	- universal for basic applications	20	14.4 W/m	K-27-1440-24 K-30-1440-24 K-30-1440-24-R30 K-35-1440-24 K-40-1440-24 K-40-1440-24-R30 K-50-1440-24

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-HD-1440-24	- high LED density - Ease of obtaining a line of light	20	14.4 W/m	K-HD27-1440-24 K-HD30-1440-24 K-HD35-1440-24 K-HD40-1440-24 K-HD50-1440-24
LED tape K2-1440-24 14.4 W/m, IP20 NEW		20	14.4 W/m	K2-27-1440-24 K2-30-1440-24 K2-35-1440-24 K2-40-1440-24 K2-50-1440-24
LED tape K-1500-24 15 W/m, IP20 NEW		20	15 W/m	K-30-1500-24 K-40-1500-24
LED tape K2-1920-24	- LED double-row strip - quick installation	20	19.2 W/m	K2-27-1920-24 K2-30-1920-24 K2-35-1920-24 K2-40-1920-24 K2-50-1920-24
LED tape K-2300-24	- high power	20	23 W/m	K-30-2300-24 K-40-2300-24
LED tape K-2400-24	- high power	20	24 W/m	K-27-2400-24 K-30-2400-24 K-35-2400-24 K-40-2400-24 K-50-2400-24

RELATED ACCESSORIES > RELATED LED > HIGH EFFICACY

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-HEHD-0480-24	- CRI over 95 - High Efficacy	20	4.8 W/m	K-HEHD22-0480-24 K-HEHD25-0480-24 K-HEHD27-0480-24 K-HEHD30-0480-24 K-HEHD35-0480-24 K-HEHD40-0480-24 K-HEHD50-0480-24
LED tape K-VHE-0480-24	- universal for basic applications - high efficacy - High Efficacy	20	4.8 W/m	K-VHE27-0480-24 K-VHE30-0480-24 K-VHE35-0480-24 K-VHE40-0480-24 K-VHE50-0480-24
LED tape K-HEHD-0960-24	- CRI over 95 - High Efficacy	20	9.6 W/m	K-HEHD22-0960-24 K-HEHD25-0960-24 K-HEHD27-0960-24 K-HEHD30-0960-24 K-HEHD35-0960-24 K-HEHD40-0960-24 K-HEHD50-0960-24
LED tape K-VHE-0960-24	- universal for basic applications - high efficacy - High Efficacy	20	9.6 W/m	K-VHE27-0960-24 K-VHE30-0960-24 K-VHE35-0960-24 K-VHE40-0960-24 K-VHE50-0960-24
LED tape K-HEHD-1440-24	- CRI over 95 - High Efficacy	20	14.4 W/m	K-HEHD22-1440-24 K-HEHD25-1440-24 K-HEHD27-1440-24 K-HEHD30-1440-24 K-HEHD35-1440-24 K-HEHD40-1440-24 K-HEHD50-1440-24

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-VHE-1440-24	- universal for basic applications - high efficacy - High Efficacy	20	14.4 W/m	K-VHE27-1440-24 K-VHE30-1440-24 K-VHE35-1440-24 K-VHE40-1440-24 K-VHE50-1440-24
LED tape K-HEHD-1920-24	- CRI over 95 - High Efficacy	20	19.2 W/m	K-HEHD22-1920-24 K-HEHD25-1920-24 K-HEHD27-1920-24 K-HEHD30-1920-24 K-HEHD35-1920-24 K-HEHD40-1920-24 K-HEHD50-1920-24

RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CCT

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-RGB-0700-24V	- RGB	20	7 W/m	K-RGB-0700-24V
LED tape K-RGB-1200-24	- RGB	20	12 W/m	K-RGB-1200-24
LED tape K-RGB27T65-1200-24	- RGB+Tunable White	20	12 W/m	K-RGB27T65-1200-24
LED tape KWP-RGB-0700-24	- RGB	65	7 W/m	KWP-RGB-0700-24

RELATED ACCESSORIES > RELATED LED > CRI 95+

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-CR-0480-24	- universal for basic applications - CRI over 95	20	4.8 W/m	K-CR27-0480-24 K-CR30-0480-24 K-CR35-0480-24 K-CR40-0480-24 K-CR50-0480-24
LED tape K-CR-1210-24	- CRI over 95	20	4.8 W/m	K-CR22-1210-24 K-CR25-1210-24 K-CR27-1210-24 K-CR30-1210-24 K-CR35-1210-24 K-CR40-1210-24 K-CR50-1210-24
LED tape K-CRHD-1910-24	- CRI over 95 - high LED density	20	9.1 W/m	K-CRHD22-1910-24 K-CRHD25-1910-24 K-CRHD27-1910-24 K-CRHD30-1910-24 K-CRHD35-1910-24 K-CRHD40-1910-24 K-CRHD50-1910-24
LED tape K-CR-0960-24	- universal for basic applications - CRI over 95	20	9.6 W/m	K-CR27-0960-24 K-CR30-0960-24 K-CR35-0960-24 K-CR40-0960-24 K-CR50-0960-24
LED tape K-CR-1220-24	- CRI over 95	20	9.6 W/m	K-CR22-1220-24 K-CR25-1220-24 K-CR27-1220-24 K-CR30-1220-24 K-CR35-1220-24 K-CR40-1220-24 K-CR50-1220-24

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-CR-1275-24	- CRI over 95	20	14.4 W/m	K-CR22-1275-24 K-CR25-1275-24 K-CR27-1275-24 K-CR30-1275-24 K-CR35-1275-24 K-CR40-1275-24 K-CR50-1275-24
LED tape K-CR-1440-24	- universal for basic applications - CRI over 95	20	14.4 W/m	K-CR27-1440-24 K-CR30-1440-24 K-CR35-1440-24 K-CR40-1440-24 K-CR50-1440-24
LED tape K-CRHD-1820-24	- CRI over 95 - high LED density	20	18.25 W/m	K-CRHD22-1820-24 K-CRHD25-1820-24 K-CRHD27-1820-24 K-CRHD30-1820-24 K-CRHD35-1820-24 K-CRHD40-1820-24 K-CRHD50-1820-24

RELATED ACCESSORIES > RELATED LED > ADJUSTABLE WHITE / DIM TO WARM

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-18D30-0960-24	- Dim To Warm LED Tape	20	9.6 W/m	K-18D30-0960-24
LED tape K-27T50-1440-24	- RGB+Tunable White	20	14.4 W/m	K-27T50-1440-24

RELATED ACCESSORIES > RELATED LED

Name	IP protection rating	Power consumption	Ref.
LED tape K-SD-1440-24	20	14.4 W/m	K-SD27-1440-24 K-SD30-1440-24 K-SD35-1440-24 K-SD40-1440-24

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > SURFACE SPRINGS

Name	Material	Color	Ref.
Spring GP	stainless steel	 silver	C24500N00

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > ISOLATING BASES

Name	Material	Color	Ref.
Isolating bases FI-3	nylon	 white	42203
Isolating bases FI-5	nylon	 white	42204
Isolating bases FI-6	nylon	 white	C28109C00

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > OTHER

Name	Key features	Material	Ref.
Gland 9x1,5		Material, Material, multiselect	C42295C07
Gland 11x1,5		rubber	C42296C07

Name	Key features	Material	Ref.
Gland 6,4x1,6		rubber	C24518C07
Gland M10x1	- metal housing - with M10x1 thread	mosiądz niklowany	C28275N00

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONNECTORS

Name	Material	Color	Ref.
Connector ZM	stainless steel	 silver	42716
		 silver	42717
		 silver	42720
		 silver	42728
		 black colored	C24797C07
		colorless non colored	C24797N00
		 black colored	C28070C07
		 silver	C28070N00
		 black colored	C28071C07
		 silver	C28071N00
		 black colored	C28072C07
		 silver	C28072N00
		 black colored	C28073C07
		 silver	C28073N00
		 black colored	C28074C07
		 silver	C28074N00
		 black colored	C28075C07
		 silver	C28075N00
		 silver	C28243N00
Connector ZM-NA	stainless steel	 silver	42305
			42339
			42723
			42724
			42725
Connector ZM-NA-PION	stainless steel	 silver	C28242N00
			42315
			42317
			42321
			42726
			42727

RELATED ACCESSORIES > ELECTRONICS > SWITCHES

Name	Key features	IP protection rating	Ref.
Proximity switch UNI-11 	- touchless switch - width 11mm	20	E61603
Proximity switch UNI-11P 	- touchless switch - width 11mm - factory pre-soldered wires	20	E61604
Proximity switch UNI-P	- touchless switch - width only 7mm - factory pre-soldered wires	20	E61580
Proximity switch UNI	- touchless switch - width only 7mm	20	E61579