


Profile KOZEL-50

Ref. A00757

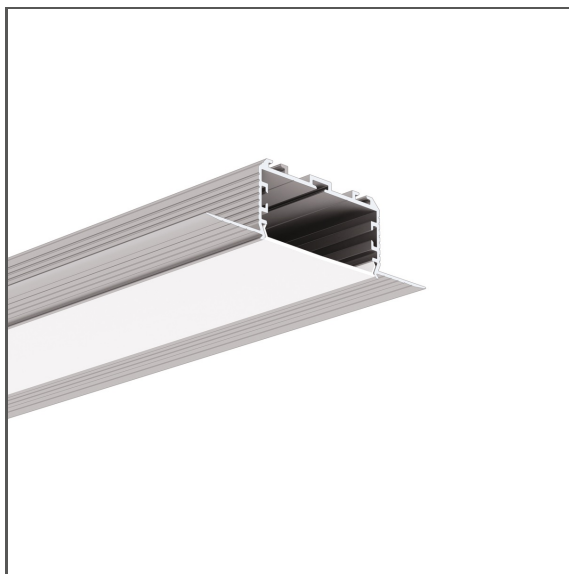

IP20

IP65



- Mounting to drywall
- Line of light flush with the surface
- High lumen output
- Non visible aluminum elements
- Possibility to mount the power supply in the luminous part of the luminaire
- Possibility to use current modules with efficiency up to 190lm/W and CRI>90. Available upon request.

APPLICATION

- main and decorative lighting

MOUNTING


- in drywall, with mounting adhesive

ADDITIONAL INFORMATION

- in order to protect the lighting fixture during installation, a TECH-50 protective insert should be used
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING

1:2



TECHNICAL SPECIFICATIONS

Material	aluminum
Color	 silver non anodized
Possible fixture IP	20, 65
Possible fixture shapes	linear, polygonal
Profile cross-section	rectangular
Width	90 mm
Height	25 mm
LED gluing width A	42 mm
Number of LED strips A (8 mm wide)	5
Width of the glow	44.6 mm
Max power of a single KLUŚ LED strip	24 W/m
Dedicated space for power supply	yes
Possibility of obtaining a line of light	yes
Building type	Commercial, Retail, Residential, HoReCa object, Entertainment/ Arts
Facility zone	bathroom, lobby / foyer, office
The cover is cut to the length of the profile	yes

Length	Ref
1000 mm	A00757N_1
2005 mm	A00757N_2
3010 mm	A00757N_3

Standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)

Profile KOZEL-50

Ref. A00757

Can be easily connected into runs	yes
Mounting to drywall	yes
To cover with plaster	yes
Wire out back of extrusion	yes

LINE OF LIGHT TABLE

LED tape	LIGER-45 satin	LIGER-45 black
K-1275-24	✓ (3)	✓ (4)
K-0960-24	✓ (3)	✓ (4)
K-1440-24	✓ (3)	✓ (4)
K-HD-0480-24	✓ (3)	✓ (4)
K-HD-0960-24	✓ (3)	✓ (4)
K-HD-1440-24	✓ (3)	✓ (4)
K-0360-24	✓ (3)	✓ (4)
K-0720-24	✓ (3)	✓ (4)
K-1080-24	✓ (3)	✓ (4)
K-0500-24	✓ (3)	✓ (4)
K-1000-24	✓ (3)	✓ (4)
K-HD-0430-24	✓ (3)	✓ (4)
K-1500-24	✓ (3)	✓ (4)
K-CB-1000-24	✓ (3)	✓ (4)
K-HD-0830-24	✓ (3)	✓ (4)
K-HD-1260-24	✓ (3)	✓ (4)
KWP-0360-24	✓ (3)	✓ (4)
KWP-0720-24	✓ (3)	✓ (4)
KWP-1080-24	✓ (3)	✓ (4)
KWP-0500-24	✓ (3)	✓ (4)
KWP-1000-24	✓ (3)	✓ (4)
KWP-1500-24	✓ (3)	✓ (4)
KWP-CB-1000-24	✓ (3)	✓ (4)
KWP-GHD-0430-24	✓ (3)	✓ (4)
KWP-GHD-0830-24	✓ (3)	✓ (4)
KWP-HD-0830-24	✓ (3)	✓ (4)
KWP-HD-1260-24	✓ (3)	✓ (4)
KWP-GDL-1229-24	✓ (3)	✓ (4)
K-CR-1220-24	✓ (3)	✓ (4)
K-CR-1275-24	✓ (3)	✓ (4)
K-CRHD-1820-24	✓ (3)	✓ (4)

Profile KOZEL-50

Ref. A00757

K-CRHD-1910-24	✓ (3)	✓ (4)
K-CR-0960-24	✓ (3)	✓ (4)
K-CR-1440-24	✓ (3)	✓ (4)
K-HEHD-0480-24	✓ (3)	✓ (4)
K-HEHD-0960-24	✓ (3)	✓ (4)
K-HEHD-1440-24	✓ (3)	✓ (4)
K-HEHD-1920-24	✓ (3)	✓ (4)
K-VHE-0480-24	✓ (3)	✓ (4)
K-VHE-0960-24	✓ (3)	✓ (4)
K-VHE-1440-24	✓ (3)	✓ (4)
K-RGB-1200-24	✓ (3)	✓ (4)
KWP-RGB-1200-24	✓ (3)	✓ (4)
K-18D30-0960-24	✓ (3)	✓ (4)
KWP-18D30-0960-24	✓ (3)	✓ (4)
KWP-27T50-1440-24	✓ (3)	✓ (4)
K-27T50-1440-24	✓ (3)	✓ (4)

Description


✓ - Line of Light for a number (X) of rows - Pixel free imaging

X - Visible Dotting from Diodes


HL - Centered Line of Light - Concentrated in middle

HL (X) - Centered Line of Light for a number (X) of rows - Concentrated in middle


Line of Light Guide



Clean Line of Light (Pixel free imaging)




Centered Line of Light



Visible Dotting from Diodes

SAMPLE PROJECTS

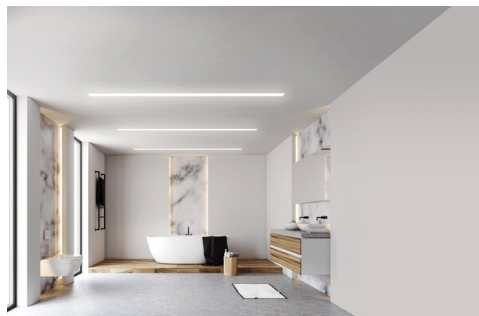

Profile KOZEL-50

Ref. A00757

RELATED ACCESSORIES > COVERS

NAME		KEY FEATURES	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
Cover G-50S		- Compatible with LIPOD-50, KOZEL-50, KOZUS-50, and LARKO-50 profiles - Features three lighting planes, creating an impressive, three-dimensional line of light - Enables the creation of a light structure protruding above the ceiling, giving the installation a unique, architectural character - Thanks to its modular design, it allows for flexible shaping of forms and spatial arrangements - Provides uniform light distribution and high aesthetic finish	PC	13 %	black	B17214B
				69 %	satin	B17214S
Cover LIGER-45		- high light quality - indoor use - Ease of obtaining a line of light - Perfectly diffusing	PC	22 %	black	B17086B
				64 %	satin	B17086S

RELATED ACCESSORIES > END CAPS

NAME		MATERIAL	COLOR	REF.
End cap KOMPENSA-50S		ASA	 black	C24664L07
			 white	C24664L10
End cap KOZEL-50		PP	 gray	C24280C02

RELATED ACCESSORIES > RELATED LED > HIGH EFFICACY

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-HEHD-0480-24	- CRI over 95 - High Efficacy	20	4.8 W/m	K-HEHD22-0480-24 K-HEHD25-0480-24 K-HEHD27-0480-24 K-HEHD30-0480-24 K-HEHD35-0480-24 K-HEHD40-0480-24 K-HEHD50-0480-24
LED tape K-VHE-0480-24	- universal for basic applications - high efficacy - High Efficacy	20	4.8 W/m	K-VHE27-0480-24 K-VHE30-0480-24 K-VHE35-0480-24 K-VHE40-0480-24 K-VHE50-0480-24
LED tape K-HEHD-0960-24	- CRI over 95 - High Efficacy	20	9.6 W/m	K-HEHD22-0960-24 K-HEHD25-0960-24 K-HEHD27-0960-24 K-HEHD30-0960-24 K-HEHD35-0960-24 K-HEHD40-0960-24 K-HEHD50-0960-24

Profile KOZEL-50

Ref. A00757

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-VHE-0960-24	- universal for basic applications - high efficacy - High Efficacy	20	9.6 W/m	K-VHE27-0960-24 K-VHE30-0960-24 K-VHE35-0960-24 K-VHE40-0960-24 K-VHE50-0960-24
LED tape K-HEHD-1440-24	- CRI over 95 - High Efficacy	20	14.4 W/m	K-HEHD22-1440-24 K-HEHD25-1440-24 K-HEHD27-1440-24 K-HEHD30-1440-24 K-HEHD35-1440-24 K-HEHD40-1440-24 K-HEHD50-1440-24
LED tape K-VHE-1440-24	- universal for basic applications - high efficacy - High Efficacy	20	14.4 W/m	K-VHE27-1440-24 K-VHE30-1440-24 K-VHE35-1440-24 K-VHE40-1440-24 K-VHE50-1440-24
LED tape K-HEHD-1920-24	- CRI over 95 - High Efficacy	20	19.2 W/m	K-HEHD22-1920-24 K-HEHD25-1920-24 K-HEHD27-1920-24 K-HEHD30-1920-24 K-HEHD35-1920-24 K-HEHD40-1920-24 K-HEHD50-1920-24

RELATED ACCESSORIES > RELATED LED > CRI 95+

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-CR-0480-24	- universal for basic applications - CRI over 95	20	4.8 W/m	K-CR27-0480-24 K-CR30-0480-24 K-CR35-0480-24 K-CR40-0480-24 K-CR50-0480-24
LED tape K-CR-1210-24	- CRI over 95	20	4.8 W/m	K-CR22-1210-24 K-CR25-1210-24 K-CR27-1210-24 K-CR30-1210-24 K-CR35-1210-24 K-CR40-1210-24 K-CR50-1210-24
LED tape K-CRHD-1910-24	- CRI over 95 - high LED density	20	9.1 W/m	K-CRHD22-1910-24 K-CRHD25-1910-24 K-CRHD27-1910-24 K-CRHD30-1910-24 K-CRHD35-1910-24 K-CRHD40-1910-24 K-CRHD50-1910-24
LED tape K-CR-0960-24	- universal for basic applications - CRI over 95	20	9.6 W/m	K-CR27-0960-24 K-CR30-0960-24 K-CR35-0960-24 K-CR40-0960-24 K-CR50-0960-24
LED tape K-CR-1220-24	- CRI over 95	20	9.6 W/m	K-CR22-1220-24 K-CR25-1220-24 K-CR27-1220-24 K-CR30-1220-24 K-CR35-1220-24 K-CR40-1220-24 K-CR50-1220-24

Profile KOZEL-50

Ref. A00757

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-CR-1275-24	- CRI over 95	20	14.4 W/m	K-CR22-1275-24 K-CR25-1275-24 K-CR27-1275-24 K-CR30-1275-24 K-CR35-1275-24 K-CR40-1275-24 K-CR50-1275-24
LED tape K-CR-1440-24	- universal for basic applications - CRI over 95	20	14.4 W/m	K-CR27-1440-24 K-CR30-1440-24 K-CR35-1440-24 K-CR40-1440-24 K-CR50-1440-24
LED tape K-CRHD-1820-24	- CRI over 95 - high LED density	20	18.25 W/m	K-CRHD22-1820-24 K-CRHD25-1820-24 K-CRHD27-1820-24 K-CRHD30-1820-24 K-CRHD35-1820-24 K-CRHD40-1820-24 K-CRHD50-1820-24
LED tape KWP-CR-0480-24	- universal for basic applications - CRI over 95	65	4.8 W/m	KWP-CR27-0480-24 KWP-CR30-0480-24 KWP-CR35-0480-24 KWP-CR40-0480-24 KWP-CR50-0480-24
LED tape KWP-CR-0960-24	- universal for basic applications - CRI over 95	65	9.6 W/m	KWP-CR27-0960-24 KWP-CR30-0960-24 KWP-CR35-0960-24 KWP-CR40-0960-24 KWP-CR50-0960-24

RELATED ACCESSORIES > RELATED LED > WHITE MONO

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-0360-24 3.6 W/m, IP20 NEW		20	3.6 W/m	K-27-0360-24 K-30-0360-24 K-35-0360-24 K-40-0360-24 K-50-0360-24
LED tape K-HD-0430-24 4.3 W/m, IP20 NEW		20	4.3 W/m	K-HD27-0430-24 K-HD30-0430-24 K-HD35-0430-24 K-HD40-0430-24 K-HD50-0430-24
LED tape K-0480-24	- universal for basic applications	20	4.8 W/m	K-27-0480-24 K-30-0480-24 K-35-0480-24 K-40-0480-24 K-50-0480-24
LED tape K-HD-0480-24	- high LED density - Ease of obtaining a line of light	20	4.8 W/m	K-HD27-0480-24 K-HD30-0480-24 K-HD35-0480-24 K-HD40-0480-24 K-HD50-0480-24
LED tape K-0500-24 5 W/m, IP20 NEW		20	5 W/m	K-30-0500-24 K-40-0500-24
LED tape K-0720-24 7.2 W/m, IP20 NEW		20	7.2 W/m	K-27-0720-24 K-30-0720-24 K-35-0720-24 K-40-0720-24 K-50-0720-24

Profile KOZEL-50

Ref. A00757

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-HD-0830-24 8.3 W/m, IP20 NEW		20	8.3 W/m	K-HD27-0830-24 K-HD30-0830-24 K-HD35-0830-24 K-HD40-0830-24 K-HD50-0830-24
LED tape K-0960-24	- universal for basic applications	20	9.6 W/m	K-27-0960-24 K-30-0960-24 K-30-0960-24-R30 K-35-0960-24 K-40-0960-24 K-40-0960-24-R30 K-50-0960-24 K-65-0960-24
LED tape K-HD-0960-24	- high LED density - Ease of obtaining a line of light	20	9.6 W/m	K-HD27-0960-24 K-HD30-0960-24 K-HD35-0960-24 K-HD40-0960-24 K-HD50-0960-24
LED tape K-1000-24 10 W/m, IP20 NEW		20	10 W/m	K-30-1000-24 K-40-1000-24
LED tape K-CB-1000-24 10 W/m, IP20 NEW		20	10 W/m	K-CB27-1000-24 K-CB30-1000-24 K-CB40-1000-24 K-CB50-1000-24
LED tape K-1080-24 10.8 W/m, IP20 NEW		20	10.8 W/m	K-27-1080-24 K-30-1080-24 K-35-1080-24 K-40-1080-24 K-50-1080-24
LED tape K-HD-1260-24 12.6 W/m, IP20 NEW		20	12.6 W/m	K-HD27-1260-24 K-HD30-1260-24 K-HD35-1260-24 K-HD40-1260-24 K-HD50-1260-24
LED tape K-1275-24	- universal for basic applications	20	14.4 W/m	K-22-1275-24 K-25-1275-24 K-27-1275-24 K-30-1275-24 K-35-1275-24 K-40-1275-24 K-50-1275-24
LED tape K-1440-24	- universal for basic applications	20	14.4 W/m	K-27-1440-24 K-30-1440-24 K-30-1440-24-R30 K-35-1440-24 K-40-1440-24 K-40-1440-24-R30 K-50-1440-24
LED tape K-HD-1440-24	- high LED density - Ease of obtaining a line of light	20	14.4 W/m	K-HD27-1440-24 K-HD30-1440-24 K-HD35-1440-24 K-HD40-1440-24 K-HD50-1440-24
LED tape K2-1440-24 14.4 W/m, IP20 NEW		20	14.4 W/m	K2-27-1440-24 K2-30-1440-24 K2-35-1440-24 K2-40-1440-24 K2-50-1440-24
LED tape K-1500-24 15 W/m, IP20 NEW		20	15 W/m	K-30-1500-24 K-40-1500-24

Profile KOZEL-50

Ref. A00757

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K3-2160-24 21.6 W/m, IP20 NEW	- Three-row LED strip - quick installation	20	21.6 W/m	K3-27-2160-24 K3-30-2160-24 K3-35-2160-24 K3-40-2160-24 K3-50-2160-24
LED tape K-2300-24	- high power	20	23 W/m	K-30-2300-24 K-40-2300-24
LED tape K-2400-24	- high power	20	24 W/m	K-27-2400-24 K-30-2400-24 K-35-2400-24 K-40-2400-24 K-50-2400-24
LED tape KWP-0360-24 3.6 W/m, IP65 NEW		65	3.6 W/m	KWP-27-0360-24 KWP-30-0360-24 KWP-35-0360-24 KWP-40-0360-24 KWP-50-0360-24
LED tape KWP-GHD-0430-24 4.3 W/m, IP65 NEW		65	4.3 W/m	KWP-GHD27-0430-24 KWP-GHD30-0430-24 KWP-GHD35-0430-24 KWP-GHD40-0430-24 KWP-GHD50-0430-24
LED tape KWP-0480-24	- universal for basic applications	65	4.8 W/m	KWP-27-0480-24 KWP-30-0480-24 KWP-35-0480-24 KWP-40-0480-24 KWP-50-0480-24
LED tape KWP-GHD-0480-24	- high LED density - Ease of obtaining a line of light	65	4.8 W/m	KWP-GHD27-0480-24 KWP-GHD30-0480-24 KWP-GHD35-0480-24 KWP-GHD40-0480-24 KWP-GHD50-0480-24
LED tape KWP-0500-24 5 W/m, IP65 NEW		65	5 W/m	KWP-30-0500-24 KWP-40-0500-24
LED tape KWP-0720-24 7.2 W/m, IP65 NEW		65	7.2 W/m	KWP-27-0720-24 KWP-30-0720-24 KWP-35-0720-24 KWP-40-0720-24 KWP-50-0720-24
LED tape KWP-GHD-0830-24 8.3 W/m, IP65 NEW		65	8.3 W/m	KWP-GHD27-0830-24 KWP-GHD30-0830-24 KWP-GHD35-0830-24 KWP-GHD40-0830-24 KWP-GHD50-0830-24
LED tape KWP-HD-0830-24 8.3 W/m, IP65 NEW		65	8.3 W/m	KWP-HD27-0830-24 KWP-HD30-0830-24 KWP-HD35-0830-24 KWP-HD40-0830-24 KWP-HD50-0830-24
LED tape KWP-0960-24	- universal for basic applications	65	9.6 W/m	KWP-27-0960-24 KWP-30-0960-24 KWP-35-0960-24 KWP-40-0960-24 KWP-50-0960-24 KWP-65-0960-24
LED tape KWP-GHD-0960-24	- high LED density - Ease of obtaining a line of light	65	9.6 W/m	KWP-GHD27-0960-24 KWP-GHD30-0960-24 KWP-GHD35-0960-24 KWP-GHD40-0960-24 KWP-GHD50-0960-24
LED tape KWP-1000-24 10 W/m, IP65 NEW		65	10 W/m	KWP-30-1000-24 KWP-40-1000-24

Profile KOZEL-50

Ref. A00757

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape KWP-CB-1000-24 10 W/m, IP65 NEW		65	10 W/m	KWP-CB27-1000-24 KWP-CB30-1000-24 KWP-CB40-1000-24 KWP-CB50-1000-24
LED tape KWP-1080-24 10.8 W/m, IP65 NEW		65	10.8 W/m	KWP-27-1080-24 KWP-30-1080-24 KWP-35-1080-24 KWP-40-1080-24 KWP-50-1080-24
LED tape KWP-GHD-1260-24 12.6 W/m, IP65		65	12.6 W/m	KWP-GHD27-1260-24 KWP-GHD30-1260-24 KWP-GHD35-1260-24 KWP-GHD40-1260-24 KWP-GHD50-1260-24
LED tape KWP-HD-1260-24 12.6 W/m, IP65 NEW		65	12.6 W/m	KWP-HD27-1260-24 KWP-HD30-1260-24 KWP-HD35-1260-24 KWP-HD40-1260-24 KWP-HD50-1260-24
LED tape KWP-1440-24	- universal for basic applications	65	14.4 W/m	KWP-27-1440-24 KWP-30-1440-24 KWP-35-1440-24 KWP-40-1440-24 KWP-50-1440-24
LED tape KWP-GHD-1440-24	- high LED density - Ease of obtaining a line of light	65	14.4 W/m	KWP-GHD27-1440-24 KWP-GHD30-1440-24 KWP-GHD35-1440-24 KWP-GHD40-1440-24 KWP-GHD50-1440-24
LED tape KWP-1500-24 15 W/m, IP65 NEW		65	15 W/m	KWP-30-1500-24 KWP-40-1500-24

RELATED ACCESSORIES > RELATED LED

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape KWP-RGB27T50-1200-24, 2700K, 390 lm/m, 12 W/m, IP65		65	12 W/m	KWP-RGB27T50-1200-24
LED tape KWP-RGBW-1530-24 15.3 W/m, IP65 NEW	- RGBW - high LED density	65	15.3 W/m	KWP-RGB30-1530-24 KWP-RGB40-1530-24

RELATED ACCESSORIES > RELATED LED > DIGITAL

Name	Key features	IP protection rating	Power consumption	Ref.
Digital LED strip K-DL-1229-24	- Digital tape	20	12.29 W/m	K-DL30-1229-24 K-DL40-1229-24
Digital LED strip K-DLRGB-1670-24 NEW	- RGB	20	16.7 W/m	K-DLRGB-1670-24
Digital LED strip K-DLRGB40-2246-24 NEW	- RGBW led strip (4000K)	20	22.46 W/m	K-DLRGB40-2246-24
Digital LED strip KWP-GDL-1229-24	- Digital tape	65	12.29 W/m	KWP-GDL30-1229-24 KWP-GDL40-1229-24
Digital LED strip KWP-GDLRGB-1670-24	- RGB	65	16.7 W/m	KWP-GDLRGB-1670-24
Digital LED strip KWP-GDLRGB40-2246-24		65	22.46 W/m	KWP-GDLRGB40-2246-24

RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CCT

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-RGB-1200-24	- RGB	20	12 W/m	K-RGB-1200-24
LED tape KWP-RGB-1200-24	- RGB	65	12 W/m	KWP-RGB-1200-24

RELATED ACCESSORIES > RELATED LED > ADJUSTABLE WHITE / DIM TO WARM

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-18D30-0960-24	- Dim To Warm LED Tape	20	9.6 W/m	K-18D30-0960-24
LED tape K-27T50-1440-24	- RGB+Tunable White	20	14.4 W/m	K-27T50-1440-24
LED tape KWP-18D30-0960-24		65	9.6 W/m	KWP-18D30-0960-24
LED tape KWP-27T50-1440-24		65	14.4 W/m	KWP-27T50-1440-24

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > TECHNICAL AND PROTECTIVE INSERTS

Name	Key features	Material	Color	Ref.
Protective insert TECH-50	- Protection of the fixture interior during installation	PVC	 gray satin	C24532C02_1 C24532C02_2 C24532C02_3

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > PROFILE MASKING COVERS

Name	Key features	Material	Color	Ref.
Masking cover MP-50	- Lightproof	PC	 gray metalized  gray metalized  white lacquered  white lacquered  black lacquered  black lacquered	C28263L01_1 C28263L01_0.5 C28263L10_1 C28263L10_0.5 C28263L07_1 C28263L07_0.5

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > OTHER

Name	Key features	Material	Color	Ref.
Gland 9x1,5		Materiał, Material, multiselect		C42295C07
Gland 11x1,5		rubber		C42296C07
Gland 6,4x1,6		rubber		C24518C07
Gland M10x1	- metal housing - with M10x1 thread	mosiądz nikielowany		C28275N00
Hermetic coupler THB.391.A4A, 4 pin	- 4 power terminals - compact dimensions	PA		C42268C10
Hermetic coupler THB.381, 2pin	- 2 power terminals - compact dimensions	PA		C28125C07
Hermetic coupler THB.391.A5A, 5 pin	- 5 power terminals - compact dimensions	PA		C28156C07
Joint connector THB.200.E5E, 5 pin	- 5 power terminals - 3-line branch	Materiał, Material, multiselect		C28157C07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONNECTORS

Name	Material	Color	Ref.
Connector ZM	stainless steel	 silver	42716
		 silver	42717
		 silver	42720
		 silver	42728
		 black colored	C24797C07
		colorless non colored	C24797N00
		 black colored	C28070C07
		 silver	C28070N00
		 black colored	C28071C07
		 silver	C28071N00
		 black colored	C28072C07
		 silver	C28072N00
		 black colored	C28073C07
		 silver	C28073N00
		 black colored	C28074C07
		 silver	C28074N00
		 black colored	C28075C07
		 silver	C28075N00
		 silver	C28243N00
Connector ZM-NA	stainless steel		42305
			42339
		 silver	42723
			42724
			42725
Connector ZM-Y	stainless steel		C28082C07
		 silver	C28082N00
Connector ZM-X	stainless steel	 black colored	C28079C07
		 silver	C28079N00
		 black colored	C28080C07
		 silver	C28080N00
		 black colored	C28081C07
Connector ZM-T	stainless steel	 silver	C28081N00
		 black colored	C28076C07
		 silver	C28076N00
		 black colored	C28077C07
		 silver	C28077N00
Connector ZM-PION	stainless steel	 black colored	C28078C07
		 silver	C28078N00
		 silver	42314
		 silver	42316
		 silver	42320
		 silver	42718
		 silver	42719
		 black colored	C28084C07
		 silver	C28084N00
		 black colored	C28085C07
		 silver	C28085N00
		 black colored	C28086C07
		 silver	C28086N00
		 black colored	C28087C07
Connector ZM-NA-PION	stainless steel	 silver	C28087N00
		 black colored	C28088C07
		 silver	C28088N00
			42315
			42317
Connector ZM-NA-PION	stainless steel	 silver	42321
			42726
			42727
			42727

RELATED ACCESSORIES > ELECTRONICS > SWITCHES

Profile KOZEL-50

Ref. A00757

Name	Key features	IP protection rating	Ref.
Proximity switch UNI-11 NEW	- touchless switch - width 11mm	20	E61603
Proximity switch UNI-11P NEW	- touchless switch - width 11mm - factory pre-soldered wires	20	E61604
Proximity switch UNI-P	- touchless switch - width only 7mm - factory pre-soldered wires	20	E61580
Proximity switch UNI	- touchless switch - width only 7mm	20	E61579