


Profile KOZMA

Ref. A18040

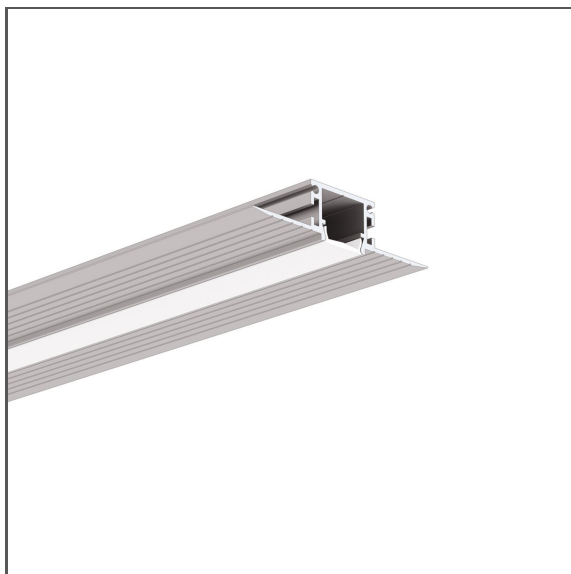

IP20

IP67



- Mounting to drywall
- No collision with the ceiling structure
- Line of light flush with the surface
- Non visible aluminum elements
- Small bending radius

APPLICATION

- main and decorative lighting


MOUNTING

- in drywall, with mounting adhesive

ADDITIONAL INFORMATION

- in order to protect the lighting fixture during installation, a TECH-KA protective insert should be used
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING

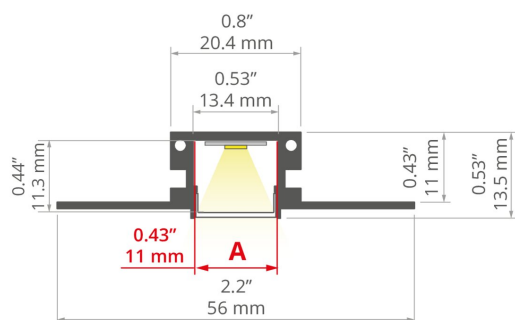

TECHNICAL SPECIFICATIONS

Material	aluminum
Color	 silver non anodized
Possible fixture IP	20, 67
Possible fixture shapes	linear, polygonal
Profile cross-section	rectangular
Width	56 mm
Height	13.5 mm
LED gluing width A	11 mm
Number of LED strips A (8 mm wide)	1
Width of the glow	11.2 mm
Max power of a single KLUŚ LED strip	24 W/m
Possibility of obtaining a line of light	yes
Possibility of bending	yes
Radius of the light arc	yes
Inward	500 mm
Outdoor	500 mm

Length	Ref
1000 mm	A18040N_1
2005 mm	A18040N_2
3010 mm	A18040N_3

Standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)

Building type	Commercial, Retail, Residential, HoReCa object, Entertainment/ Arts
Facility zone	bathroom, lobby / foyer, office, decorative, media rooms / av
The cover is cut to the length of the profile	yes
Can be easily connected into runs	yes
Mounting to drywall	yes
To cover with plaster	yes
Wire out back of extrusion	yes

LINE OF LIGHT TABLE

LED tape	LIGER-11 satin	LIGER-11 black	HS-11 frosted	KA-11 frosted,	KA-T-11R frosted
K-0360-24	✓ (1)	X	✓ (1)	✓ (1)	✓ (1)
K-0720-24	✓ (1)	X	✓ (1)	✓ (1)	✓ (1)
K-1080-24	✓ (1)	X	✓ (1)	✓ (1)	✓ (1)
K-HD-0430-24	✓ (1)	✓ (1)	✓ (1)	✓ (1)	✓ (1)
K-HD-0830-24	✓ (1)	✓ (1)	✓ (1)	✓ (1)	✓ (1)
K-HD-1260-24	✓ (1)	✓ (1)	✓ (1)	✓ (1)	✓ (1)
KWP-GHD-0430-24	✓ (1)	✓ (1)	✓ (1)	✓ (1)	✓ (1)
KWP-GHD-0830-24	✓ (1)	✓ (1)	✓ (1)	✓ (1)	✓ (1)
K-2400-24	✓ (1)	X	✓ (1)	✓ (1)	✓ (1)
KWP-GDL-1229-24	✓ (1)	X	X	✓ (1)	✓ (1)
K-RGBW-1530-24	✓ (1)	✓ (1)	✓ (1)	✓ (1)	✓ (1)
K-RGB-0700-24V	✓ (1)	X	X	✓ (1)	✓ (1)
K-RGB-1200-24	✓ (1)	X	X	✓ (1)	✓ (1)
KWP-RGB-1200-24	✓ (1)	X	X	✓ (1)	✓ (1)
K-18D30-0960-24	✓ (1)	✓ (1)	✓ (1)	✓ (1)	✓ (1)

Description


✓ - Line of Light for a number (X) of rows - Pixel free imaging

X - Visible Dotting from Diodes


HL - Centered Line of Light - Concentrated in middle

HL (X) - Centered Line of Light for a number (X) of rows - Concentrated in middle

Line of Light Guide



Clean Line of Light (Pixel free imaging)



Centered Line of Light



Visible Dotting from Diodes

Profile KOZMA

Ref. A18040

SAMPLE PROJECTS



SIMILAR PROFILES



Profile PDS-H
A09204



Profile PDS-NK
A01588



Profile PDS-UST
A02725



Profile PDS-T
A02057



Profile PDS-ZMG
A01418



Profile PDS-ZM-PLUS
A02056

Profile KOZMA

Ref. A18040

RELATED ACCESSORIES > COVERS

NAME		KEY FEATURES	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
Cover BENCO-11		- For indoor and outdoor applications - UV resistant	silicon	50 %	frosted	B17215F
Cover LIGER-11		- high light quality - Ease of obtaining a line of light - Perfectly diffusing - For indoor and outdoor applications	PC	21 % 59 %	black satin	B17037B B17037S
Focusing cover LENSO-11-30°DEG		- indoor use - focusing	PC	80 %	semi-transparent	B17112T
Cover HS-11		- For indoor and outdoor applications - UV resistant - high durability	PC	59 % 88 %	frosted clear	B17208F B17208C
Cover KA-11		- maximum brightness - indoor use - basic - universal	PC	67 % 89 %	frosted clear	B17064F B17064C
Cover KA-T-11		- maximum brightness - indoor use - economic - universal for basic applications	PVC	54 % 86 %	frosted clear	B17179F B17179C

RELATED ACCESSORIES > END CAPS

NAME		MATERIAL	COLOR	REF.
End cap KOZMA		PP	 gray	C24217C02

RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CCT

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-RGBW-1530-24	- RGBW (3000K) - high LED density	20	15.3 W/m	K-RGBW-1530-24
LED tape KWP-GRGBW-1530-24	- RGBW (3000K)	65	15.3 W/m	KWP-GRGBW-1530-24
LED tape K-RGB-0700-24V	- RGB	20	7 W/m	K-RGB-0700-24V
LED tape KWP-RGB-0700-24	- RGB	65	7 W/m	KWP-RGB-0700-24
LED tape KWP-14KHDRGB-1920-24	- RGB - easy snap-in installation	65	19.2 W/m	KWP-14KHDRGB-1920-24
LED tape K-RGB-1200-24	- RGB	20	12 W/m	K-RGB-1200-24
LED tape KWP-RGB-1200-24	- RGB	65	12 W/m	KWP-RGB-1200-24

RELATED ACCESSORIES > RELATED LED > WHITE MONO

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-0360-24 3.6 W/m, IP20 NEW		20	3.6 W/m	K-27-0360-24 K-30-0360-24 K-35-0360-24 K-40-0360-24 K-50-0360-24
LED tape K-0720-24 7.2 W/m, IP20 NEW		20	7.2 W/m	K-27-0720-24 K-30-0720-24 K-35-0720-24 K-40-0720-24 K-50-0720-24
LED tape K-1080-24 10.8 W/m, IP20 NEW		20	10.8 W/m	K-27-1080-24 K-30-1080-24 K-35-1080-24 K-40-1080-24 K-50-1080-24
LED tape K-HD-0430-24 4.3 W/m, IP20 NEW		20	4.3 W/m	K-HD27-0430-24 K-HD30-0430-24 K-HD35-0430-24 K-HD40-0430-24 K-HD50-0430-24
LED tape K-HD-0830-24 8.3 W/m, IP20 NEW		20	8.3 W/m	K-HD27-0830-24 K-HD30-0830-24 K-HD35-0830-24 K-HD40-0830-24 K-HD50-0830-24
LED tape K-HD-1260-24 12.6 W/m, IP20 NEW		20	12.6 W/m	K-HD27-1260-24 K-HD30-1260-24 K-HD35-1260-24 K-HD40-1260-24 K-HD50-1260-24
LED tape KWP-GHD-0430-24 4.3 W/m, IP65 NEW		65	4.3 W/m	KWP-GHD27-0430-24 KWP-GHD30-0430-24 KWP-GHD35-0430-24 KWP-GHD40-0430-24 KWP-GHD50-0430-24
LED tape KWP-GHD-0830-24 8.3 W/m, IP65 NEW		65	8.3 W/m	KWP-GHD27-0830-24 KWP-GHD30-0830-24 KWP-GHD35-0830-24 KWP-GHD40-0830-24 KWP-GHD50-0830-24
LED tape K-0480-24	- universal for basic applications	20	4.8 W/m	K-27-0480-24 K-30-0480-24 K-35-0480-24 K-40-0480-24 K-50-0480-24
LED tape K-0960-24	- universal for basic applications	20	9.6 W/m	K-27-0960-24 K-30-0960-24 K-30-0960-24-R30 K-35-0960-24 K-40-0960-24 K-40-0960-24-R30 K-50-0960-24 K-65-0960-24
LED tape K-1440-24	- universal for basic applications	20	14.4 W/m	K-27-1440-24 K-30-1440-24 K-30-1440-24-R30 K-35-1440-24 K-40-1440-24 K-40-1440-24-R30 K-50-1440-24

Profile KOZMA

Ref. A18040

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape KWP-1440-24	- universal for basic applications	65	14.4 W/m	KWP-27-1440-24 KWP-30-1440-24 KWP-35-1440-24 KWP-40-1440-24 KWP-50-1440-24
LED tape KWP-0480-24	- universal for basic applications	65	4.8 W/m	KWP-27-0480-24 KWP-30-0480-24 KWP-35-0480-24 KWP-40-0480-24 KWP-50-0480-24
LED tape KWP-0960-24	- universal for basic applications	65	9.6 W/m	KWP-27-0960-24 KWP-30-0960-24 KWP-35-0960-24 KWP-40-0960-24 KWP-50-0960-24 KWP-65-0960-24
LED tape K-HD-0480-24	- high LED density - Ease of obtaining a line of light	20	4.8 W/m	K-HD27-0480-24 K-HD30-0480-24 K-HD35-0480-24 K-HD40-0480-24 K-HD50-0480-24
LED tape K-HD-0960-24	- high LED density - Ease of obtaining a line of light	20	9.6 W/m	K-HD27-0960-24 K-HD30-0960-24 K-HD35-0960-24 K-HD40-0960-24 K-HD50-0960-24
LED tape K-HD-1440-24	- high LED density - Ease of obtaining a line of light	20	14.4 W/m	K-HD27-1440-24 K-HD30-1440-24 K-HD35-1440-24 K-HD40-1440-24 K-HD50-1440-24
LED tape KWP-GHD-0480-24	- high LED density - Ease of obtaining a line of light	65	4.8 W/m	KWP-GHD27-0480-24 KWP-GHD30-0480-24 KWP-GHD35-0480-24 KWP-GHD40-0480-24 KWP-GHD50-0480-24
LED tape KWP-GHD-1260-24 12.6 W/m, IP65		65	12.6 W/m	KWP-GHD27-1260-24 KWP-GHD30-1260-24 KWP-GHD35-1260-24 KWP-GHD40-1260-24 KWP-GHD50-1260-24
LED tape K-2300-24	- high power	20	23 W/m	K-30-2300-24 K-40-2300-24
LED tape K-2400-24	- high power	20	24 W/m	K-27-2400-24 K-30-2400-24 K-35-2400-24 K-40-2400-24 K-50-2400-24

RELATED ACCESSORIES > RELATED LED > CRI 95+

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-CR-0480-24	- universal for basic applications - CRI over 95	20	4.8 W/m	K-CR27-0480-24 K-CR30-0480-24 K-CR35-0480-24 K-CR40-0480-24 K-CR50-0480-24
LED tape K-CR-0960-24	- universal for basic applications - CRI over 95	20	9.6 W/m	K-CR27-0960-24 K-CR30-0960-24 K-CR35-0960-24 K-CR40-0960-24 K-CR50-0960-24

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-CR-1440-24	- universal for basic applications - CRI over 95	20	14.4 W/m	K-CR27-1440-24 K-CR30-1440-24 K-CR35-1440-24 K-CR40-1440-24 K-CR50-1440-24
LED tape KWP-CR-0480-24	- universal for basic applications - CRI over 95	65	4.8 W/m	KWP-CR27-0480-24 KWP-CR30-0480-24 KWP-CR35-0480-24 KWP-CR40-0480-24 KWP-CR50-0480-24
LED tape KWP-CR-0960-24	- universal for basic applications - CRI over 95	65	9.6 W/m	KWP-CR27-0960-24 KWP-CR30-0960-24 KWP-CR35-0960-24 KWP-CR40-0960-24 KWP-CR50-0960-24

RELATED ACCESSORIES > RELATED LED > HIGH EFFICACY

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-VHE-0480-24	- universal for basic applications - high efficacy - High Efficacy	20	4.8 W/m	K-VHE27-0480-24 K-VHE30-0480-24 K-VHE35-0480-24 K-VHE40-0480-24 K-VHE50-0480-24
LED tape K-VHE-0960-24	- universal for basic applications - high efficacy - High Efficacy	20	9.6 W/m	K-VHE27-0960-24 K-VHE30-0960-24 K-VHE35-0960-24 K-VHE40-0960-24 K-VHE50-0960-24
LED tape K-VHE-1440-24	- universal for basic applications - high efficacy - High Efficacy	20	14.4 W/m	K-VHE27-1440-24 K-VHE30-1440-24 K-VHE35-1440-24 K-VHE40-1440-24 K-VHE50-1440-24

RELATED ACCESSORIES > RELATED LED > ADJUSTABLE WHITE / DIM TO WARM

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-18D30-0960-24	- Dim To Warm LED Tape	20	9.6 W/m	K-18D30-0960-24
LED tape K-27T50-1440-24	- RGB+Tunable White	20	14.4 W/m	K-27T50-1440-24

RELATED ACCESSORIES > RELATED LED > DIGITAL

Name	Key features	IP protection rating	Power consumption	Ref.
Digital LED strip K-DL-1229-24	- Digital tape	20	12.29 W/m	K-DL30-1229-24 K-DL40-1229-24
Digital LED strip KWP-GDL-1229-24	- Digital tape	65	12.29 W/m	KWP-GDL30-1229-24 KWP-GDL40-1229-24

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > OTHER

Name	Key features	Material	Color	Ref.
Gland 6,4x1,6		rubber		C24518C07
Gland 9x1,5		Material, Material, multiselect		C42295C07

Profile KOZMA

Ref. A18040

Name	Key features	Material	Color	Ref.
Gland 11x1,5		rubber		C42296C07
Hermetic coupler THB.391.A4A, 4 pin	- 4 power terminals - compact dimensions	PA		C42268C10
Hermetic coupler THB.381, 2pin	- 2 power terminals - compact dimensions	PA		C28125C07
Hermetic coupler THB.391.A5A, 5 pin	- 5 power terminals - compact dimensions	PA		C28156C07
Joint connector THB.200.E5E, 5 pin	- 5 power terminals - 3-line branch	Material, Material, multiselect		C28157C07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > ADDITIONAL ITEMS

Name	Key features	Material	Color	Ref.
Adapter LENSO	- Necessary when using the DILENSO cover	PC	 transparent glossy	E62146

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONNECTORS

Name	Material	Color	Ref.
Connector ZM	stainless steel	 silver	42716
		 silver	42717
		 silver	42720
		 silver	42728
		 black colored	C24797C07
		colorless non colored	C24797N00
		 black colored	C28070C07
		 silver	C28070N00
		 black colored	C28071C07
		 silver	C28071N00
		 black colored	C28072C07
		 silver	C28072N00
		 black colored	C28073C07
		 silver	C28073N00
		 black colored	C28074C07
		 silver	C28074N00
Connector ZM-NA	stainless steel	 black colored	C28075C07
		 silver	C28075N00
		 silver	C28243N00
			42305
			42339
Connector ZM-PION	stainless steel	 silver	42723
			42724
			42725
			C28242N00
		 silver	42314
		 silver	42316
		 silver	42320
		 silver	42718
		 silver	42719
		 black colored	C28084C07
Connector ZM-MINI	stainless steel	 silver	C28084N00
		 black colored	C28085C07
		 silver	C28085N00
		 black colored	C28086C07
		 silver	C28086N00
		 black colored	C28087C07
		 silver	C28087N00
		 black colored	C28088C07
		 silver	C28088N00
			44501
		 silver	C28083N00

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > TECHNICAL AND PROTECTIVE INSERTS

Name	Key features	Material	Color	Ref.
Protective insert TECH-11 NEW	- Protection of the fixture interior during installation	PVC	 gray colored	C24574C02_1 C24574C02_2 C24574C02_3

RELATED ACCESSORIES > ELECTRONICS > SWITCHES

Name	Key features	IP protection rating	Ref.
Proximity switch UNI-11 NEW	- touchless switch - width 11mm	20	E61603
Proximity switch UNI-11P NEW	- touchless switch - width 11mm - factory pre-soldered wires	20	E61604
Proximity switch UNI-P	- touchless switch - width only 7mm - factory pre-soldered wires	20	E61580
Switch MICRO 96W IP20	- push button switch - factory pre-soldered wires	20	1491
Switch MICRO 96W IP20	- push button switch - factory pre-soldered wires - version with logo	20	1491LOGO
Proximity switch UNI	- touchless switch - width only 7mm	20	E61579