

Profile KOZMA-BD

Ref. A18080

NEW



- Profile designed for bending in the lighting plane
- Bending requires the use of specialized equipment – KLUŚ offers a professional bending service using dedicated machines
- No collision with the ceiling structure
- Line of light flush with the surface
- Non visible aluminum elements

APPLICATION

- the profile is used for creating curves
- main and decorative lighting


MOUNTING

- in drywall, with mounting adhesive

ADDITIONAL INFORMATION

- in order to protect the lighting fixture during installation, a TECH-KA protective insert should be used
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING

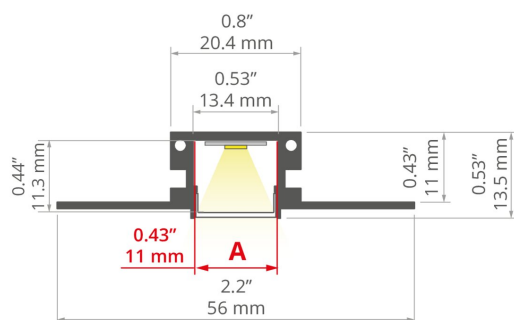

TECHNICAL SPECIFICATIONS

Material	aluminum
Color	 silver non anodized
Possible fixture IP	20
Possible fixture shapes	linear, polygonal, rectangular
Profile cross-section	rectangular
Width	56 mm
Height	13.5 mm
LED gluing width A	11 mm
Number of LED strips A (8 mm wide)	1
Width of the glow	11.2 mm
Max power of a single KLUŚ LED strip	24 W/m
Possibility of bending	yes
Downward light arc radius	yes
Down	500 mm
The cover is cut to the length of the profile	yes
Can be easily connected into runs	yes
Mounting to drywall	yes

Length	Ref
2005 mm	A18080N_2
3010 mm	A18080N_3


Standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)

Profile KOZMA-BD

Ref. A18080

To cover with plaster	yes
Wire out back of extrusion	yes

SAMPLE PROJECTS

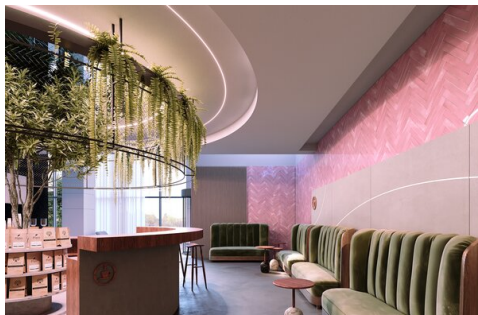

RELATED PROFILES > TRIMLESS



Profile KOZMA
A18040

RELATED ACCESSORIES > COVERS

NAME			KEY FEATURES	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
Cover BENCO-11	NEW		- For indoor and outdoor applications - UV resistant	silicon	50 %	frosted	B17215F
Cover HS-11			- For indoor and outdoor applications - UV resistant - high durability	PC	59 %	frosted	B17208F
					88 %	clear	B17208C
Cover LIGER-11			- high light quality - Ease of obtaining a line of light - Perfectly diffusing - For indoor and outdoor applications	PC	21 %	black	B17037B
					59 %	satin	B17037S

RELATED ACCESSORIES > END CAPS

NAME		MATERIAL	COLOR	REF.
End cap KOZMA		PP	 gray	C24217C02

RELATED ACCESSORIES > RELATED LED > HIGH EFFICACY

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-VHE-1440-24	- universal for basic applications - high efficacy - High Efficacy	20	14.4 W/m	K-VHE27-1440-24 K-VHE30-1440-24 K-VHE35-1440-24 K-VHE40-1440-24 K-VHE50-1440-24
LED tape K-VHE-0960-24	- universal for basic applications - high efficacy - High Efficacy	20	9.6 W/m	K-VHE27-0960-24 K-VHE30-0960-24 K-VHE35-0960-24 K-VHE40-0960-24 K-VHE50-0960-24
LED tape K-VHE-0480-24	- universal for basic applications - high efficacy - High Efficacy	20	4.8 W/m	K-VHE27-0480-24 K-VHE30-0480-24 K-VHE35-0480-24 K-VHE40-0480-24 K-VHE50-0480-24

RELATED ACCESSORIES > RELATED LED > CRI 95+

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-CR-1440-24	- universal for basic applications - CRI over 95	20	14.4 W/m	K-CR27-1440-24 K-CR30-1440-24 K-CR35-1440-24 K-CR40-1440-24 K-CR50-1440-24
LED tape K-CR-0960-24	- universal for basic applications - CRI over 95	20	9.6 W/m	K-CR27-0960-24 K-CR30-0960-24 K-CR35-0960-24 K-CR40-0960-24 K-CR50-0960-24
LED tape K-CR-0480-24	- universal for basic applications - CRI over 95	20	4.8 W/m	K-CR27-0480-24 K-CR30-0480-24 K-CR35-0480-24 K-CR40-0480-24 K-CR50-0480-24

RELATED ACCESSORIES > RELATED LED > WHITE MONO

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-0360-24 3.6 W/m, IP20 NEW		20	3.6 W/m	K-27-0360-24 K-30-0360-24 K-35-0360-24 K-40-0360-24 K-50-0360-24

Profile KOZMA-BD

Ref. A18080

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-0720-24 7.2 W/m, IP20 NEW		20	7.2 W/m	K-27-0720-24 K-30-0720-24 K-35-0720-24 K-40-0720-24 K-50-0720-24
LED tape K-1080-24 10.8 W/m, IP20 NEW		20	10.8 W/m	K-27-1080-24 K-30-1080-24 K-35-1080-24 K-40-1080-24 K-50-1080-24
LED tape K-HD-0430-24 4.3 W/m, IP20 NEW		20	4.3 W/m	K-HD27-0430-24 K-HD30-0430-24 K-HD35-0430-24 K-HD40-0430-24 K-HD50-0430-24
LED tape K-HD-0830-24 8.3 W/m, IP20 NEW		20	8.3 W/m	K-HD27-0830-24 K-HD30-0830-24 K-HD35-0830-24 K-HD40-0830-24 K-HD50-0830-24
LED tape K-HD-1260-24 12.6 W/m, IP20 NEW		20	12.6 W/m	K-HD27-1260-24 K-HD30-1260-24 K-HD35-1260-24 K-HD40-1260-24 K-HD50-1260-24
LED tape K-HD-0960-24	- high LED density - Ease of obtaining a line of light	20	9.6 W/m	K-HD27-0960-24 K-HD30-0960-24 K-HD35-0960-24 K-HD40-0960-24 K-HD50-0960-24
LED tape K-HD-1440-24	- high LED density - Ease of obtaining a line of light	20	14.4 W/m	K-HD27-1440-24 K-HD30-1440-24 K-HD35-1440-24 K-HD40-1440-24 K-HD50-1440-24
LED tape K-HD-0480-24	- high LED density - Ease of obtaining a line of light	20	4.8 W/m	K-HD27-0480-24 K-HD30-0480-24 K-HD35-0480-24 K-HD40-0480-24 K-HD50-0480-24
LED tape K-0960-24	- universal for basic applications	20	9.6 W/m	K-27-0960-24 K-30-0960-24 K-30-0960-24-R30 K-35-0960-24 K-40-0960-24 K-40-0960-24-R30 K-50-0960-24 K-65-0960-24
LED tape K-1440-24	- universal for basic applications	20	14.4 W/m	K-27-1440-24 K-30-1440-24 K-30-1440-24-R30 K-35-1440-24 K-40-1440-24 K-40-1440-24-R30 K-50-1440-24
LED tape K-0480-24	- universal for basic applications	20	4.8 W/m	K-27-0480-24 K-30-0480-24 K-35-0480-24 K-40-0480-24 K-50-0480-24
LED tape K-2300-24	- high power	20	23 W/m	K-30-2300-24 K-40-2300-24

Profile KOZMA-BD

Ref. A18080

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-2400-24	- high power	20	24 W/m	K-27-2400-24 K-30-2400-24 K-35-2400-24 K-40-2400-24 K-50-2400-24

RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CCT

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-RGB-0700-24V	- RGB	20	7 W/m	K-RGB-0700-24V
LED tape K-RGBW-1530-24	- RGBW (3000K) - high LED density	20	15.3 W/m	K-RGBW-1530-24
LED tape K-RGB-1200-24	- RGB	20	12 W/m	K-RGB-1200-24

RELATED ACCESSORIES > RELATED LED > ADJUSTABLE WHITE / DIM TO WARM

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-18D30-0960-24	- Dim To Warm LED Tape	20	9.6 W/m	K-18D30-0960-24
LED tape K-27T50-1440-24	- RGB+Tunable White	20	14.4 W/m	K-27T50-1440-24

RELATED ACCESSORIES > RELATED LED > DIGITAL

Name	Key features	IP protection rating	Power consumption	Ref.
Digital LED strip K-DL-1229-24	- Digital tape	20	12.29 W/m	K-DL30-1229-24 K-DL40-1229-24

RELATED ACCESSORIES > RELATED LED > BENDABLE

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-VBT-0720-24	- LED tape for bent profiles	20	7.2 W/m	K-VBT27-0720-24 K-VBT30-0720-24 K-VBT35-0720-24 K-VBT40-0720-24 K-VBT50-0720-24

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONNECTORS

Name	Material	Color	Ref.
------	----------	-------	------

Profile KOZMA-BD

Ref. A18080

Name	Material	Color	Ref.
Connector ZM	stainless steel	 silver	42716
		 silver	42717
		 silver	42720
		 silver	42728
		 black colored	C24797C07
		colorless non colored	C24797N00
		 black colored	C28070C07
		 silver	C28070N00
		 black colored	C28071C07
		 silver	C28071N00
		 black colored	C28072C07
		 silver	C28072N00
		 black colored	C28073C07
		 silver	C28073N00
		 black colored	C28074C07
		 silver	C28074N00
		 black colored	C28075C07
		 silver	C28075N00
		 silver	C28243N00
Connector ZM-NA	stainless steel	 silver	42305
			42339
			42723
			42724
			42725
Connector ZM-PION	stainless steel	 silver	C28242N00
			42314
			42316
			42320
			42718
			42719
			C28084C07
			C28084N00
			C28085C07
			C28085N00
			C28086C07
			C28086N00
			C28087C07
			C28087N00
			C28088C07
			C28088N00
Connector ZM-MINI	stainless steel	 silver	44501
			C28083N00

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > TECHNICAL AND PROTECTIVE INSERTS

Name	Key features	Material	Color	Ref.
Protective insert TECH-11 	- Protection of the fixture interior during installation	PVC	 gray colored	C24574C02_1 C24574C02_2 C24574C02_3