

Profile MICRO-PLUS

Ref. A02966



- Wide range of accessories
- Low height
- Smooth profile surfaces
- Small bending radius

APPLICATION

- furniture, decorative and functional lighting


MOUNTING

- to the surface, suspended or recessed, using dedicated accessories, properly selected screws, with double-sided adhesive tape or mounting adhesive
- easy assembly and disassembly by snapping in and out

ADDITIONAL INFORMATION

- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING



TECHNICAL SPECIFICATIONS

Material	aluminum
Possible fixture IP	20, 67
Possible fixture shapes	linear, round
Profile cross-section	rectangular
Width	15.6 mm
Height	6 mm
LED gluing width A	11.2 mm
Number of LED strips A (8 mm wide)	1
Width of the glow	11.2 mm
Max power of a single KLUŚ LED strip	24 W/m
Lighting angle adjustment from	0
Lighting angle adjustment up to	150
Possibility of bending	yes
Radius of the light arc	yes
Inward	150 mm
Outdoor	150 mm

Color	Length	Ref
■ silver non anodized	1000 mm	A02966NA_1
	2005 mm	A02966NA_2
	3010 mm	A02966NA_3
■ silver anodized	1000 mm	A02966A_1
	2005 mm	A02966A_2
	3010 mm	A02966A_3
□ white lacquered	1000 mm	A02966L9010OD_1
	2005 mm	A02966L9010OD_2
	3010 mm	A02966L9010OD_3
■ black anodized	1000 mm	A02966A07_1
	2005 mm	A02966A07_2
	3010 mm	A02966A07_3

Standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)

Profile MICRO-PLUS

Ref. A02966

Building type	Commercial, Residential, HoReCa object, Entertainment/ Arts
Facility zone	kitchen, bathroom, under- cabinet / furniture, office, exhibition / tradeshow / display, cove / perimeter, fitness / spa, media rooms / av
Easy assembly and disassembly by snapping in and out	yes
The cover is cut to the length of the profile	yes
Wire out end cap	yes
Wire out back of extrusion	yes

LINE OF LIGHT TABLE

LED tape	HS-11 frosted	KA-11 frosted,	KA-11S frosted
K-RGBW-1530-24	HL (1)	HL (1)	HL (1)

Description

✓ - Line of Light for a number (X) of rows - Pixel free imaging

X - Visible Dotting from Diodes

HL - Centered Line of Light - Concentrated in middle

HL (X) - Centered Line of Light for a number (X) of rows - Concentrated in middle

Line of Light Guide



Clean Line of Light (Pixel free imaging)




Centered Line of Light



Visible Dotting from Diodes

SAMPLE PROJECTS

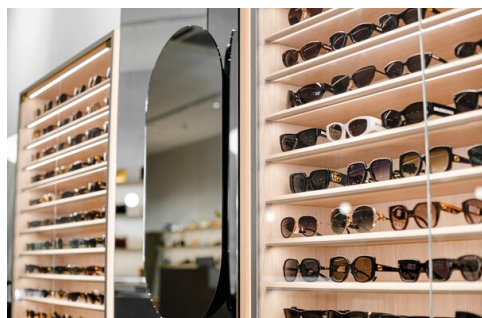

Profile MICRO-PLUS

Ref. A02966

SIMILAR PROFILES



Profile MICRO-NK
A01587



Profile MICRO-HG
A01419



Profile MICRO-H
A00599

RELATED ACCESSORIES > COVERS

NAME		KEY FEATURES	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
Cover LIGER-11		- high light quality - Ease of obtaining a line of light - Perfectly diffusing - For indoor and outdoor applications	PC	21 %	black	B17037B
				59 %	satin	B17037S
Cover HS-11		- For indoor and outdoor applications - UV resistant - high durability	PC	59 %	frosted	B17208F
				88 %	clear	B17208C
Cover KA-11		- maximum brightness - indoor use - basic - universal	PC	67 %	frosted	B17064F
				89 %	clear	B17064C
Cover KA-11S		- maximum brightness - high durability - high light quality - indoor use - Perfectly diffusing	PC	73 %	frosted	B17038F
Cover KA-T-11		- maximum brightness - indoor use - economic - universal for basic applications	PVC	54 %	frosted	B17179F
				86 %	clear	B17179C

Profile MICRO-PLUS

Ref. A02966

RELATED ACCESSORIES > END CAPS

NAME			MATERIAL	COLOR	REF.
Electricity conductive end cap MICRO-PLUS	NEW		ABS	 black	C28202C07P
				 gray	C28202C02P
				 white	C28202C10P
End cap MICRO-PLUS			PP	 black	C24392C07
				 gray	C24392C02
				 silver	C24392L01
				 white	C24392C10
End cap with hole MICRO-PLUS-OTW			PP	 black	C24392C07TW
				 gray	C24392C02TW
				 silver	C24392L01TW
				 white	C24392C10TW
End cap M-K			ABS	 gray	C24216C02

RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CCT

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-RGBW-1530-24	- RGBW (3000K) - high LED density	20	15.3 W/m	K-RGBW-1530-24
LED tape KWP-GRGBW-1530-24	- RGBW (3000K)	65	15.3 W/m	KWP-GRGBW-1530-24
LED tape K-RGB-0700-24V	- RGB	20	7 W/m	K-RGB-0700-24V
LED tape K-RGB-1200-24	- RGB	20	12 W/m	K-RGB-1200-24
LED tape KWP-RGB-1200-24	- RGB	65	12 W/m	KWP-RGB-1200-24

RELATED ACCESSORIES > RELATED LED > WHITE MONO

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-0360-24 3.6 W/m, IP20 NEW		20	3.6 W/m	K-27-0360-24 K-30-0360-24 K-35-0360-24 K-40-0360-24 K-50-0360-24

Profile MICRO-PLUS

Ref. A02966

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-0720-24 7.2 W/m, IP20 NEW		20	7.2 W/m	K-27-0720-24 K-30-0720-24 K-35-0720-24 K-40-0720-24 K-50-0720-24
LED tape K-1080-24 10.8 W/m, IP20 NEW		20	10.8 W/m	K-27-1080-24 K-30-1080-24 K-35-1080-24 K-40-1080-24 K-50-1080-24
LED tape K-HD-0430-24 4.3 W/m, IP20 NEW		20	4.3 W/m	K-HD27-0430-24 K-HD30-0430-24 K-HD35-0430-24 K-HD40-0430-24 K-HD50-0430-24
LED tape K-HD-0830-24 8.3 W/m, IP20 NEW		20	8.3 W/m	K-HD27-0830-24 K-HD30-0830-24 K-HD35-0830-24 K-HD40-0830-24 K-HD50-0830-24
LED tape K-HD-1260-24 12.6 W/m, IP20 NEW		20	12.6 W/m	K-HD27-1260-24 K-HD30-1260-24 K-HD35-1260-24 K-HD40-1260-24 K-HD50-1260-24
LED tape KWP-GHD-0430-24 4.3 W/m, IP65 NEW		65	4.3 W/m	KWP-GHD27-0430-24 KWP-GHD30-0430-24 KWP-GHD35-0430-24 KWP-GHD40-0430-24 KWP-GHD50-0430-24
LED tape KWP-GHD-0830-24 8.3 W/m, IP65 NEW		65	8.3 W/m	KWP-GHD27-0830-24 KWP-GHD30-0830-24 KWP-GHD35-0830-24 KWP-GHD40-0830-24 KWP-GHD50-0830-24
LED tape K-0480-24	- universal for basic applications	20	4.8 W/m	K-27-0480-24 K-30-0480-24 K-35-0480-24 K-40-0480-24 K-50-0480-24
LED tape K-0960-24	- universal for basic applications	20	9.6 W/m	K-27-0960-24 K-30-0960-24 K-30-0960-24-R30 K-35-0960-24 K-40-0960-24 K-40-0960-24-R30 K-50-0960-24 K-65-0960-24
LED tape K-1440-24	- universal for basic applications	20	14.4 W/m	K-27-1440-24 K-30-1440-24 K-30-1440-24-R30 K-35-1440-24 K-40-1440-24 K-40-1440-24-R30 K-50-1440-24
LED tape K-HD-0480-24	- high LED density - Ease of obtaining a line of light	20	4.8 W/m	K-HD27-0480-24 K-HD30-0480-24 K-HD35-0480-24 K-HD40-0480-24 K-HD50-0480-24

Profile MICRO-PLUS

Ref. A02966

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-HD-0960-24	- high LED density - Ease of obtaining a line of light	20	9.6 W/m	K-HD27-0960-24 K-HD30-0960-24 K-HD35-0960-24 K-HD40-0960-24 K-HD50-0960-24
LED tape K-HD-1440-24	- high LED density - Ease of obtaining a line of light	20	14.4 W/m	K-HD27-1440-24 K-HD30-1440-24 K-HD35-1440-24 K-HD40-1440-24 K-HD50-1440-24
LED tape KWP-GHD-0480-24	- high LED density - Ease of obtaining a line of light	65	4.8 W/m	KWP-GHD27-0480-24 KWP-GHD30-0480-24 KWP-GHD35-0480-24 KWP-GHD40-0480-24 KWP-GHD50-0480-24
LED tape KWP-GHD-1260-24 12.6 W/m, IP65		65	12.6 W/m	KWP-GHD27-1260-24 KWP-GHD30-1260-24 KWP-GHD35-1260-24 KWP-GHD40-1260-24 KWP-GHD50-1260-24
LED tape K-2300-24	- high power	20	23 W/m	K-30-2300-24 K-40-2300-24
LED tape K-2400-24	- high power	20	24 W/m	K-27-2400-24 K-30-2400-24 K-35-2400-24 K-40-2400-24 K-50-2400-24

RELATED ACCESSORIES > RELATED LED > CRI 95+

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-CR-0480-24	- universal for basic applications - CRI over 95	20	4.8 W/m	K-CR27-0480-24 K-CR30-0480-24 K-CR35-0480-24 K-CR40-0480-24 K-CR50-0480-24
LED tape K-CR-0960-24	- universal for basic applications - CRI over 95	20	9.6 W/m	K-CR27-0960-24 K-CR30-0960-24 K-CR35-0960-24 K-CR40-0960-24 K-CR50-0960-24
LED tape K-CR-1440-24	- universal for basic applications - CRI over 95	20	14.4 W/m	K-CR27-1440-24 K-CR30-1440-24 K-CR35-1440-24 K-CR40-1440-24 K-CR50-1440-24
LED tape KWP-CR-0480-24	- universal for basic applications - CRI over 95	65	4.8 W/m	KWP-CR27-0480-24 KWP-CR30-0480-24 KWP-CR35-0480-24 KWP-CR40-0480-24 KWP-CR50-0480-24
LED tape KWP-CR-0960-24	- universal for basic applications - CRI over 95	65	9.6 W/m	KWP-CR27-0960-24 KWP-CR30-0960-24 KWP-CR35-0960-24 KWP-CR40-0960-24 KWP-CR50-0960-24

RELATED ACCESSORIES > RELATED LED > HIGH EFFICACY

Profile MICRO-PLUS

Ref. A02966

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-VHE-0480-24	- universal for basic applications - high efficacy - High Efficacy	20	4.8 W/m	K-VHE27-0480-24 K-VHE30-0480-24 K-VHE35-0480-24 K-VHE40-0480-24 K-VHE50-0480-24
LED tape K-VHE-0960-24	- universal for basic applications - high efficacy - High Efficacy	20	9.6 W/m	K-VHE27-0960-24 K-VHE30-0960-24 K-VHE35-0960-24 K-VHE40-0960-24 K-VHE50-0960-24
LED tape K-VHE-1440-24	- universal for basic applications - high efficacy - High Efficacy	20	14.4 W/m	K-VHE27-1440-24 K-VHE30-1440-24 K-VHE35-1440-24 K-VHE40-1440-24 K-VHE50-1440-24

RELATED ACCESSORIES > RELATED LED > ADJUSTABLE WHITE / DIM TO WARM

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-18D30-0960-24	- Dim To Warm LED Tape	20	9.6 W/m	K-18D30-0960-24
LED tape K-27T50-1440-24	- RGB+Tunable White	20	14.4 W/m	K-27T50-1440-24

RELATED ACCESSORIES > RELATED LED > DIGITAL

Name	Key features	IP protection rating	Power consumption	Ref.
Digital LED strip K-DL-1229-24	- Digital tape	20	12.29 W/m	K-DL30-1229-24 K-DL40-1229-24
Digital LED strip KWP-GDL-1229-24	- Digital tape	65	12.29 W/m	KWP-GDL30-1229-24 KWP-GDL40-1229-24

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > MOUNTING BRACKETS

Name	Key features	Material	Color	Ref.
NEW Mounting bracket REG-PD-EXT	- Mounting with angle adjustment function	aluminum, stainless steel	black white gray	C28303C07 C28303C10 C28303N00
Mounting bracket REG-PD	- Mounting with angle adjustment function	ASA	gray	C28055C02
Mounting bracket PLANISA	- Montaż opraw w systemach nisz sufitowych	PS	gray	C28051C02
Mounting bracket PDS-STN	- For indoor and outdoor applications	stainless steel	silver	C24190N00
Mounting bracket PIONISA		PS	gray	C28052C02
Mounting bracket PL-PDM	- Aesthetic installation of linear fixtures	PP	gray	C24041C02
Mounting bracket PDS	- For indoor and outdoor applications	stainless steel	silver white black	C24189C02 C24223C10 C24189C07
Mounting bracket PDS-STN-90G	- Angular mount for indoor and outdoor applications	stainless steel	silver white black	C24370N00 C24370L10 C24370L07

Profile MICRO-PLUS

Ref. A02966

Name	Key features	Material	Color	Ref.
Mounting bracket PDS-STN-90D	- Angular mount for indoor and outdoor applications	stainless steel	 silver  white  black	C24367N00 C24367L10 C24367L07
Mounting bracket PDS-STN-ALFA		stainless steel	 silver	C28060N00
Mounting bracket PDS-STN-45D	- Angular mount for indoor and outdoor applications	stainless steel	 silver	C24456N00
Mounting bracket PDS-STN-60D	- Angular mount for indoor and outdoor applications	stainless steel	 silver	C24457N00

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > SURFACE SPRINGS

Name	Material	Color	Ref.
Spring PDS	stainless steel	 silver	C24501N00

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONDUCTIVE FASTENERS AND HEADS FOR PROFILES

Name	Key features	Material	Color	Ref.
Head ZO		stainless steel	 silver	C28115N00
Head BZP-ZO		stainless steel	 silver	42214
Fastener PUSZ-LIN-MR	- Power supply cable - mounting in thin walls (from 1mm)	stainless steel, brass, nylon aluminum, brass, nylon aluminum, brass, nylon	 silver  white lacquered  black lacquered	C28163N00 C28163L10 C28163L07
Fastener PUSZ-PRET-MR	- Power supply cable - mounting in thin walls (from 1mm)	stainless steel, brass, nylon aluminum, brass, nylon aluminum, brass, nylon	 silver  white lacquered  black lacquered	C28166N00 C28166L10 C28166L07
Fastener PUSZ-PRET-MR, silver		stainless steel	 silver	C28119N00
Fastener FI-8-LIN-MR	- Power supply cable - mounting in thin walls (from 1mm)	stainless steel, PA aluminum, PA aluminum, PA	 silver  white  black	C28172N00 C28172L10 C28172L07
Fastener PUSZ-LIN-MR, silver		stainless steel	 silver	C28122N00
Fastener DP-ZZ, silver		stainless steel	 silver	00651
Fastener DP-MOC-ZO, silver		stainless steel	 silver	00646
Fastener DP-MOC-ZZ, silver		stainless steel	 silver	00647

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > FASTENERS AND HEADS FOR PROFILES

Name	Material	Color	Ref.
Fastener DP, silver	stainless steel	 silver	00644

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONNECTORS

Name	Material	Color	Ref.
Connector PD-MICRO	stainless steel	 silver	C42150N00

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > SUSPENSION AND MOUNTING SETS

Profile MICRO-PLUS

Ref. A02966

Name	Key features	Material	Color	Ref.
Fastener set W1		brass, stainless steel	 silver	C28203N00
Fastener set W6		stainless steel, brass	 silver	C28205N00
Fastener set W7		brass, stainless steel	 silver	42605
Fastener set W9		stainless steel	 silver	C28207N00
Fastener set W10		stainless steel	 silver	C28208N00
Fastener set RG-1	- Cable adjustment at the ceiling, cable included	brass	 silver glossy	C28230P00
			 silver satin	C28230P01
			 white colored	C28230L10
			 black colored	C28230L07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > SECURITY AND BLOCKS

Name	Key features	Material	Color	Ref.
Block ZM, gray	- Accessory locking in the ZM system	silicon	 gray	C28194N00

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CANOPIES

Name	Key features	Material	Color	Ref.
Canopy BOX-M70 NEW		aluminum	 silver anodized  white lacquered  black anodized	C24541A C24541L10 C24541A07
Canopy BOX-M600 NEW		aluminum	 silver anodized  white lacquered  black anodized	C24542A C24542L10 C24542A07
Canopy Fi-60mm	- Convenient cable length adjustment, in the ZM system	steel	 gray lacquered  white lacquered  black lacquered	C24540L01 C24540L10 C24540L07
Canopy BOX-KR600		aluminum	 black lacquered  white lacquered	C24667L07 C24667L10
Canopy BOX-KS600		aluminum	 black lacquered  white lacquered	C24669L07 C24669L10
BOX-KR90		aluminum	 black lacquered  white lacquered	C24666L07 C24666L10
Canopy BOX-KS90		aluminum	 black lacquered  white lacquered	C24668L07 C24668L10

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > OTHER

Name	Key features	Material	Color	Ref.
Gland 9x1,5		Material, Material, multiselect		C42295C07
Gland 11x1,5		rubber		C42296C07
Gland 6,4x1,6		rubber		C24518C07
Hermetic coupler THB.391.A4A, 4 pin	- 4 power terminals - compact dimensions	PA		C42268C10
Hermetic coupler THB.381, 2pin	- 2 power terminals - compact dimensions	PA		C28125C07
Hermetic coupler THB.391.A5A, 5 pin	- 5 power terminals - compact dimensions	PA		C28156C07

Profile MICRO-PLUS

Ref. A02966

Name	Key features	Material	Color	Ref.
Joint connector THB.200.E5E, 5 pin	- 5 power terminals - 3-line branch	Material, Material, multiselect		C28157C07

RELATED ACCESSORIES > ELECTRONICS > SWITCHES

Name	Key features	IP protection rating	Ref.
Proximity switch UNI-11 NEW	- touchless switch - width 11mm	20	E61603
Proximity switch UNI-11P NEW	- touchless switch - width 11mm - factory pre-soldered wires	20	E61604
Proximity switch UNI-P	- touchless switch - width only 7mm - factory pre-soldered wires	20	E61580
Switch MICRO 96W IP20	- push button switch - factory pre-soldered wires	20	1491
Switch MICRO 96W IP20	- push button switch - factory pre-soldered wires - version with logo	20	1491LOGO
Proximity switch UNI	- touchless switch - width only 7mm	20	E61579