

Profile MICRO-30DEG-KOZ

Ref. A00021

NEW



IP20

IP67



- Lighting angle: 30 Degrees
- Compact dimensions – no collision with ceiling structure
- Non visible aluminum elements
- Dedicated for installation in plasterboard

APPLICATION

- main and decorative lighting


MOUNTING

- in drywall, with mounting adhesive

ADDITIONAL INFORMATION

- in order to protect the lighting fixture during installation, a TECH-KA protective insert should be used
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING

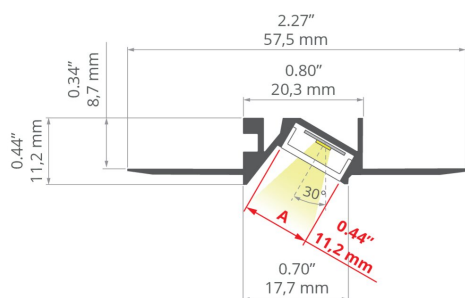

TECHNICAL SPECIFICATIONS

Material	aluminum
Color	 silver non anodized
Possible fixture IP	20, 67
Possible fixture shapes	linear, polygonal
Profile cross-section	angled
Width	57.5 mm
Height	11.2 mm
LED gluing width A	11.2 mm
Number of LED strips A (8 mm wide)	1
Width of the glow	11.2 mm
Max power of a single KLUŚ LED strip	24 W/m
Lighting at an angle	30
Building type	Entertainment/ Arts, Residential, Commercial
Facility zone	communication routes and corridors, wall lighting
The cover is cut to the length of the profile	yes
Can be easily connected into runs	yes

Length	Ref
1000 mm	A00021N_1
2005 mm	A00021N_2
3010 mm	A00021N_3

Standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)

Profile MICRO-30DEG-KOZ

Ref. A00021

Decorative lighting	yes
Mounting to drywall	yes
To cover with plaster	yes
Wire out back of extrusion	yes

SAMPLE PROJECTS



RELATED ACCESSORIES > COVERS

NAME		KEY FEATURES	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
Cover HS-11		- For indoor and outdoor applications - UV resistant - high durability	PC	59 %	frosted	B17208F
				88 %	clear	B17208C
Cover KA-11		- maximum brightness - indoor use - basic - universal	PC	67 %	frosted	B17064F
				89 %	clear	B17064C
Cover LIGER-11		- high light quality - Ease of obtaining a line of light - Perfectly diffusing - For indoor and outdoor applications	PC	21 %	black	B17037B
				59 %	satin	B17037S
Cover KA-T-11		- maximum brightness - indoor use - economic - universal for basic applications	PVC	54 %	frosted	B17179F
				86 %	clear	B17179C

Profile MICRO-30DEG-KOZ

Ref. A00021

RELATED ACCESSORIES > END CAPS

NAME			MATERIAL	COLOR	REF.
End cap MICRO-30DEG-KOZ-L	NEW		ABS	 gray	C24548C02
End cap MICRO-30DEG-KOZ-P	NEW		ABS	 gray	C24549C02

RELATED ACCESSORIES > RELATED LED > WHITE MONO

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-0360-24 3.6 W/m, IP20	NEW	20	3.6 W/m	K-27-0360-24 K-30-0360-24 K-35-0360-24 K-40-0360-24 K-50-0360-24
LED tape K-0720-24 7.2 W/m, IP20	NEW	20	7.2 W/m	K-27-0720-24 K-30-0720-24 K-35-0720-24 K-40-0720-24 K-50-0720-24
LED tape K-1080-24 10.8 W/m, IP20	NEW	20	10.8 W/m	K-27-1080-24 K-30-1080-24 K-35-1080-24 K-40-1080-24 K-50-1080-24
LED tape K-HD-0430-24 4.3 W/m, IP20	NEW	20	4.3 W/m	K-HD27-0430-24 K-HD30-0430-24 K-HD35-0430-24 K-HD40-0430-24 K-HD50-0430-24
LED tape K-HD-0830-24 8.3 W/m, IP20	NEW	20	8.3 W/m	K-HD27-0830-24 K-HD30-0830-24 K-HD35-0830-24 K-HD40-0830-24 K-HD50-0830-24
LED tape K-HD-1260-24 12.6 W/m, IP20	NEW	20	12.6 W/m	K-HD27-1260-24 K-HD30-1260-24 K-HD35-1260-24 K-HD40-1260-24 K-HD50-1260-24
LED tape KWP-GHD-0430-24 4.3 W/m, IP65	NEW	65	4.3 W/m	KWP-GHD27-0430-24 KWP-GHD30-0430-24 KWP-GHD35-0430-24 KWP-GHD40-0430-24 KWP-GHD50-0430-24
LED tape KWP-GHD-0830-24 8.3 W/m, IP65	NEW	65	8.3 W/m	KWP-GHD27-0830-24 KWP-GHD30-0830-24 KWP-GHD35-0830-24 KWP-GHD40-0830-24 KWP-GHD50-0830-24

Profile MICRO-30DEG-KOZ

Ref. A00021

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape KWP-0360-24 3.6 W/m, IP65 NEW		65	3.6 W/m	KWP-27-0360-24 KWP-30-0360-24 KWP-35-0360-24 KWP-40-0360-24 KWP-50-0360-24
LED tape KWP-0720-24 7.2 W/m, IP65 NEW		65	7.2 W/m	KWP-27-0720-24 KWP-30-0720-24 KWP-35-0720-24 KWP-40-0720-24 KWP-50-0720-24
LED tape KWP-1080-24 10.8 W/m, IP65 NEW		65	10.8 W/m	KWP-27-1080-24 KWP-30-1080-24 KWP-35-1080-24 KWP-40-1080-24 KWP-50-1080-24
LED tape KWP-GHD-0480-24	- high LED density - Ease of obtaining a line of light	65	4.8 W/m	KWP-GHD27-0480-24 KWP-GHD30-0480-24 KWP-GHD35-0480-24 KWP-GHD40-0480-24 KWP-GHD50-0480-24
LED tape K-0480-24	- universal for basic applications	20	4.8 W/m	K-27-0480-24 K-30-0480-24 K-35-0480-24 K-40-0480-24 K-50-0480-24
LED tape K-0960-24	- universal for basic applications	20	9.6 W/m	K-27-0960-24 K-30-0960-24 K-30-0960-24-R30 K-35-0960-24 K-40-0960-24 K-40-0960-24-R30 K-50-0960-24 K-65-0960-24
LED tape K-1440-24	- universal for basic applications	20	14.4 W/m	K-27-1440-24 K-30-1440-24 K-30-1440-24-R30 K-35-1440-24 K-40-1440-24 K-40-1440-24-R30 K-50-1440-24
LED tape K-HD-0480-24	- high LED density - Ease of obtaining a line of light	20	4.8 W/m	K-HD27-0480-24 K-HD30-0480-24 K-HD35-0480-24 K-HD40-0480-24 K-HD50-0480-24
LED tape K-HD-0960-24	- high LED density - Ease of obtaining a line of light	20	9.6 W/m	K-HD27-0960-24 K-HD30-0960-24 K-HD35-0960-24 K-HD40-0960-24 K-HD50-0960-24
LED tape K-HD-1440-24	- high LED density - Ease of obtaining a line of light	20	14.4 W/m	K-HD27-1440-24 K-HD30-1440-24 K-HD35-1440-24 K-HD40-1440-24 K-HD50-1440-24
LED tape KWP-GHD-1260-24 12.6 W/m, IP65		65	12.6 W/m	KWP-GHD27-1260-24 KWP-GHD30-1260-24 KWP-GHD35-1260-24 KWP-GHD40-1260-24 KWP-GHD50-1260-24
LED tape K-2300-24	- high power	20	23 W/m	K-30-2300-24 K-40-2300-24

Profile MICRO-30DEG-KOZ

Ref. A00021

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-2400-24	- high power	20	24 W/m	K-27-2400-24 K-30-2400-24 K-35-2400-24 K-40-2400-24 K-50-2400-24

RELATED ACCESSORIES > RELATED LED > CRI 95+

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-CR-0480-24	- universal for basic applications - CRI over 95	20	4.8 W/m	K-CR27-0480-24 K-CR30-0480-24 K-CR35-0480-24 K-CR40-0480-24 K-CR50-0480-24
LED tape K-CR-0960-24	- universal for basic applications - CRI over 95	20	9.6 W/m	K-CR27-0960-24 K-CR30-0960-24 K-CR35-0960-24 K-CR40-0960-24 K-CR50-0960-24
LED tape K-CR-1440-24	- universal for basic applications - CRI over 95	20	14.4 W/m	K-CR27-1440-24 K-CR30-1440-24 K-CR35-1440-24 K-CR40-1440-24 K-CR50-1440-24

RELATED ACCESSORIES > RELATED LED > HIGH EFFICACY

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-VHE-0480-24	- universal for basic applications - high efficacy - High Efficacy	20	4.8 W/m	K-VHE27-0480-24 K-VHE30-0480-24 K-VHE35-0480-24 K-VHE40-0480-24 K-VHE50-0480-24
LED tape K-VHE-0960-24	- universal for basic applications - high efficacy - High Efficacy	20	9.6 W/m	K-VHE27-0960-24 K-VHE30-0960-24 K-VHE35-0960-24 K-VHE40-0960-24 K-VHE50-0960-24
LED tape K-VHE-1440-24	- universal for basic applications - high efficacy - High Efficacy	20	14.4 W/m	K-VHE27-1440-24 K-VHE30-1440-24 K-VHE35-1440-24 K-VHE40-1440-24 K-VHE50-1440-24

RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CCT

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-RGBW-1530-24	- RGBW (3000K) - high LED density	20	15.3 W/m	K-RGBW-1530-24
LED tape KWP-GRGBW-1530-24	- RGBW (3000K)	65	15.3 W/m	KWP-GRGBW-1530-24
LED tape K-RGB-0700-24V	- RGB	20	7 W/m	K-RGB-0700-24V
LED tape K-RGB-1200-24	- RGB	20	12 W/m	K-RGB-1200-24
LED tape KWP-RGB-1200-24	- RGB	65	12 W/m	KWP-RGB-1200-24

RELATED ACCESSORIES > RELATED LED > ADJUSTABLE WHITE / DIM TO WARM

Profile MICRO-30DEG-KOZ

Ref. A00021

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-18D30-0960-24	- Dim To Warm LED Tape	20	9.6 W/m	K-18D30-0960-24
LED tape K-27T50-1440-24	- RGB+Tunable White	20	14.4 W/m	K-27T50-1440-24

RELATED ACCESSORIES > RELATED LED > DIGITAL

Name	Key features	IP protection rating	Power consumption	Ref.
Digital LED strip K-DL-1229-24	- Digital tape	20	12.29 W/m	K-DL30-1229-24 K-DL40-1229-24
Digital LED strip KWP-GDL-1229-24	- Digital tape	65	12.29 W/m	KWP-GDL30-1229-24 KWP-GDL40-1229-24

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONNECTORS

Name	Material	Color	Ref.
Connector ZM-PION	stainless steel	 silver	42314
		 silver	42316
		 silver	42320
		 silver	42718
		 silver	42719
		 black colored	C28084C07
		 silver	C28084N00
		 black colored	C28085C07
		 silver	C28085N00
		 black colored	C28086C07
		 silver	C28086N00
		 black colored	C28087C07
		 silver	C28087N00
		 black colored	C28088C07
		 silver	C28088N00
Connector ZM	stainless steel	 silver	42716
		 silver	42717
		 silver	42720
		 silver	42728
		 black colored	C24797C07
		colorless non colored	C24797N00
		 black colored	C28070C07
		 silver	C28070N00
		 black colored	C28071C07
		 silver	C28071N00
		 black colored	C28072C07
		 silver	C28072N00
		 black colored	C28073C07
		 silver	C28073N00
		 black colored	C28074C07
		 silver	C28074N00
		 black colored	C28075C07
		 silver	C28075N00
		 silver	C28243N00

RELATED ACCESSORIES > ELECTRONICS > SWITCHES

Name	Key features	IP protection rating	Ref.
Proximity switch UNI-11 	- touchless switch - width 11mm	20	E61603
Proximity switch UNI-11P 	- touchless switch - width 11mm - factory pre-soldered wires	20	E61604

Profile MICRO-30DEG-KOZ

Ref. A00021

Name	Key features	IP protection rating	Ref.
Magnetic switch UNI-M07P NEW	- magnetic switch with magnet included - width only 7mm - factory pre-soldered wires	20	E62154
Magnetic switch UNI-M11 NEW	- magnetic switch with magnet included - width 11mm	20	E62157
Magnetic switch UNI-M11P NEW	- magnetic switch with magnet included - width 11mm - factory pre-soldered wires	20	E62158
Magnetic switch UNI-M07 NEW	- magnetic switch with magnet included - width only 7mm	20	E62153
Proximity switch UNI	- touchless switch - width only 7mm	20	E61579
Proximity switch UNI-P	- touchless switch - width only 7mm - factory pre-soldered wires	20	E61580
Switch MICRO 96W IP20	- push button switch - factory pre-soldered wires	20	1491
Switch MICRO 96W IP20	- push button switch - factory pre-soldered wires - version with logo	20	1491LOGO