


Profile MICRO-HG

Ref. A01419



IP20

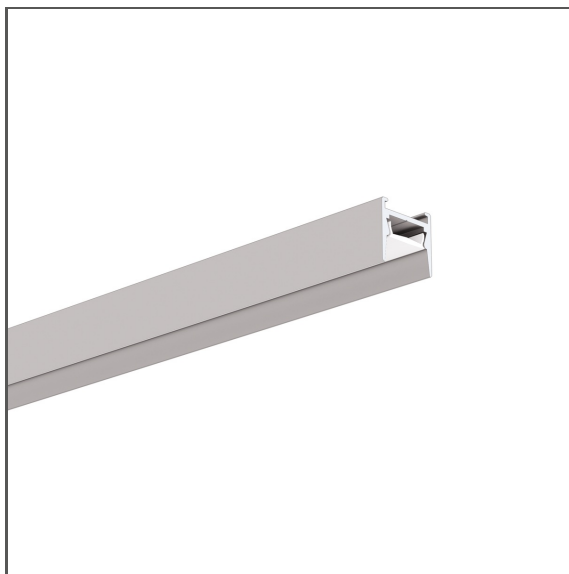

- Hidden light source
- Invisible mounting bracket
- Smooth profile walls

APPLICATION

- furniture and decorative lighting


MOUNTING

- to the surface or suspended, using dedicated accessories
- easy assembly and disassembly by snapping in and out

ADDITIONAL INFORMATION

- the installation of the cover in the recess reduces the effect of glare
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING



TECHNICAL SPECIFICATIONS

Material	aluminum
Possible fixture IP	20
Possible fixture shapes	linear
Profile cross-section	rectangular
Width	16 mm
Height	15 mm
LED gluing width A	11.2 mm
Number of LED strips A (8 mm wide)	1
Width of the glow	11.2 mm
Max power of a single KLUŚ LED strip	24 W/m
Building type	Commercial, Residential, HoReCa object, Entertainment/ Arts
Facility zone	kitchen, bathroom, under- cabinet / furniture, office, media rooms / av
Wire out back of extrusion	yes

Color	Length	Ref
■ silver anodized	1000 mm	A01419A_1
	2005 mm	A01419A_2
	3010 mm	A01419A_3
■ black anodized	1000 mm	A01419A07_1
	2005 mm	A01419A07_2
	3010 mm	A01419A07_3

Standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)

LINE OF LIGHT TABLE

Profile MICRO-HG

Ref. A01419

LED tape	HS-11 frosted	KA-11 frosted,
K-RGBW-1530-24	HL (1)	HL (1)

Description


✔ - Line of Light for a number (X) of rows - Pixel free imaging

X - Visible Dotting from Diodes


HL - Centered Line of Light - Concentrated in middle

HL (X) - Centered Line of Light for a number (X) of rows - Concentrated in middle

Line of Light Guide



Clean Line of Light (Pixel free imaging)





Centered Line of Light



Visible Dotting from Diodes

SAMPLE PROJECTS

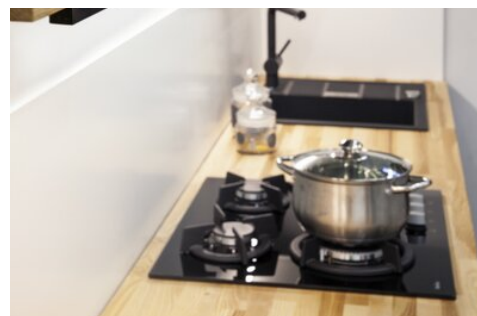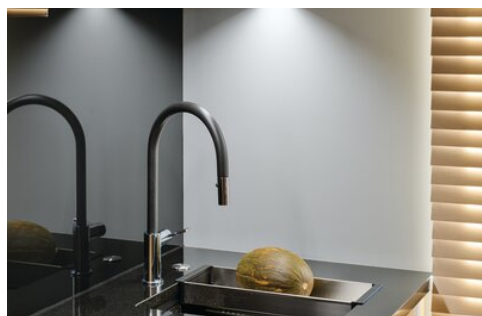

SIMILAR PROFILES



Profile MICRO-H
A00599



Profile MICRO-NK
A01587



Profile MICRO-PLUS
A02966

Profile MICRO-HG

Ref. A01419

RELATED ACCESSORIES > COVERS

NAME		KEY FEATURES	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
Cover LIGER-11		- high light quality - Ease of obtaining a line of light - Perfectly diffusing - For indoor and outdoor applications	PC	21 %	black	B17037B
				59 %	satin	B17037S
Cover HS-11		- For indoor and outdoor applications - UV resistant - high durability	PC	59 %	frosted	B17208F
				88 %	clear	B17208C
Cover KA-11		- maximum brightness - indoor use - basic - universal	PC	67 %	frosted	B17064F
				89 %	clear	B17064C
Cover KA-T-11		- maximum brightness - indoor use - economic - universal for basic applications	PVC	54 %	frosted	B17179F
				86 %	clear	B17179C

RELATED ACCESSORIES > END CAPS

NAME		MATERIAL	COLOR	REF.
End cap MICRO-G		ABS	■ black	C24319C07
			■ gray	C24319C02

RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CCT

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-RGBW-1530-24	- RGBW (3000K) - high LED density	20	15.3 W/m	K-RGBW-1530-24
LED tape K-RGB-0700-24V	- RGB	20	7 W/m	K-RGB-0700-24V
LED tape K-RGB-1200-24	- RGB	20	12 W/m	K-RGB-1200-24

RELATED ACCESSORIES > RELATED LED > WHITE MONO

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-0360-24 3.6 W/m, IP20 NEW		20	3.6 W/m	K-27-0360-24 K-30-0360-24 K-35-0360-24 K-40-0360-24 K-50-0360-24
LED tape K-0720-24 7.2 W/m, IP20 NEW		20	7.2 W/m	K-27-0720-24 K-30-0720-24 K-35-0720-24 K-40-0720-24 K-50-0720-24

Profile MICRO-HG

Ref. A01419

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-1080-24 10.8 W/m, IP20 NEW		20	10.8 W/m	K-27-1080-24 K-30-1080-24 K-35-1080-24 K-40-1080-24 K-50-1080-24
LED tape K-HD-0430-24 4.3 W/m, IP20 NEW		20	4.3 W/m	K-HD27-0430-24 K-HD30-0430-24 K-HD35-0430-24 K-HD40-0430-24 K-HD50-0430-24
LED tape K-HD-0830-24 8.3 W/m, IP20 NEW		20	8.3 W/m	K-HD27-0830-24 K-HD30-0830-24 K-HD35-0830-24 K-HD40-0830-24 K-HD50-0830-24
LED tape K-HD-1260-24 12.6 W/m, IP20 NEW		20	12.6 W/m	K-HD27-1260-24 K-HD30-1260-24 K-HD35-1260-24 K-HD40-1260-24 K-HD50-1260-24
LED tape K-0480-24	- universal for basic applications	20	4.8 W/m	K-27-0480-24 K-30-0480-24 K-35-0480-24 K-40-0480-24 K-50-0480-24
LED tape K-0960-24	- universal for basic applications	20	9.6 W/m	K-27-0960-24 K-30-0960-24 K-30-0960-24-R30 K-35-0960-24 K-40-0960-24 K-40-0960-24-R30 K-50-0960-24 K-65-0960-24
LED tape K-1440-24	- universal for basic applications	20	14.4 W/m	K-27-1440-24 K-30-1440-24 K-30-1440-24-R30 K-35-1440-24 K-40-1440-24 K-40-1440-24-R30 K-50-1440-24
LED tape K-HD-0480-24	- high LED density - Ease of obtaining a line of light	20	4.8 W/m	K-HD27-0480-24 K-HD30-0480-24 K-HD35-0480-24 K-HD40-0480-24 K-HD50-0480-24
LED tape K-HD-0960-24	- high LED density - Ease of obtaining a line of light	20	9.6 W/m	K-HD27-0960-24 K-HD30-0960-24 K-HD35-0960-24 K-HD40-0960-24 K-HD50-0960-24
LED tape K-HD-1440-24	- high LED density - Ease of obtaining a line of light	20	14.4 W/m	K-HD27-1440-24 K-HD30-1440-24 K-HD35-1440-24 K-HD40-1440-24 K-HD50-1440-24
LED tape K-2300-24	- high power	20	23 W/m	K-30-2300-24 K-40-2300-24
LED tape K-2400-24	- high power	20	24 W/m	K-27-2400-24 K-30-2400-24 K-35-2400-24 K-40-2400-24 K-50-2400-24

RELATED ACCESSORIES > RELATED LED > CRI 95+

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-CR-0480-24	- universal for basic applications - CRI over 95	20	4.8 W/m	K-CR27-0480-24 K-CR30-0480-24 K-CR35-0480-24 K-CR40-0480-24 K-CR50-0480-24
LED tape K-CR-0960-24	- universal for basic applications - CRI over 95	20	9.6 W/m	K-CR27-0960-24 K-CR30-0960-24 K-CR35-0960-24 K-CR40-0960-24 K-CR50-0960-24
LED tape K-CR-1440-24	- universal for basic applications - CRI over 95	20	14.4 W/m	K-CR27-1440-24 K-CR30-1440-24 K-CR35-1440-24 K-CR40-1440-24 K-CR50-1440-24

RELATED ACCESSORIES > RELATED LED > HIGH EFFICACY

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-VHE-0480-24	- universal for basic applications - high efficacy - High Efficacy	20	4.8 W/m	K-VHE27-0480-24 K-VHE30-0480-24 K-VHE35-0480-24 K-VHE40-0480-24 K-VHE50-0480-24
LED tape K-VHE-0960-24	- universal for basic applications - high efficacy - High Efficacy	20	9.6 W/m	K-VHE27-0960-24 K-VHE30-0960-24 K-VHE35-0960-24 K-VHE40-0960-24 K-VHE50-0960-24
LED tape K-VHE-1440-24	- universal for basic applications - high efficacy - High Efficacy	20	14.4 W/m	K-VHE27-1440-24 K-VHE30-1440-24 K-VHE35-1440-24 K-VHE40-1440-24 K-VHE50-1440-24

RELATED ACCESSORIES > RELATED LED > ADJUSTABLE WHITE / DIM TO WARM

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-18D30-0960-24	- Dim To Warm LED Tape	20	9.6 W/m	K-18D30-0960-24
LED tape K-27T50-1440-24	- RGB+Tunable White	20	14.4 W/m	K-27T50-1440-24

RELATED ACCESSORIES > RELATED LED > DIGITAL

Name	Key features	IP protection rating	Power consumption	Ref.
Digital LED strip K-DL-1229-24	- Digital tape	20	12.29 W/m	K-DL30-1229-24 K-DL40-1229-24

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > MOUNTING BRACKETS

Name	Material	Color	Ref.
------	----------	-------	------

Profile MICRO-HG

Ref. A01419

Name	Material	Color	Ref.
Mounting bracket PDS-H	POM	 white	C24214C02

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONDUCTIVE FASTENERS AND HEADS FOR PROFILES

Name	Key features	Material	Color	Ref.
Head BZP-ZO		stainless steel	 silver	42214
Fastener FI-8-LIN-MR	- Power supply cable - mounting in thin walls (from 1mm)	stainless steel, PA aluminum, PA aluminum, PA	 silver	C28172N00
			 white	C28172L10
			 black	C28172L07
Fastener PUSZ-LIN-MR	- Power supply cable - mounting in thin walls (from 1mm)	stainless steel, brass, nylon aluminum, brass, nylon aluminum, brass, nylon	 silver	C28163N00
			 white lacquered	C28163L10
			 black lacquered	C28163L07
Fastener PUSZ-PRET-MR	- Power supply cable - mounting in thin walls (from 1mm)	stainless steel, brass, nylon aluminum, brass, nylon aluminum, brass, nylon	 silver	C28166N00
			 white lacquered	C28166L10
			 black lacquered	C28166L07
Fastener PUSZ-PRET-MR, silver		stainless steel	 silver	C28119N00
Fastener PUSZ-LIN-MR, silver		stainless steel	 silver	C28122N00

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > SECURITY AND BLOCKS

Name	Key features	Material	Color	Ref.
Block H	- Accessory locking in the H system	steel	 silver	C24366N00

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > SUSPENSION AND MOUNTING SETS

Name	Key features	Material	Color	Ref.
Fastener set W1		brass, stainless steel	 silver	C28203N00
Fastener set W6		stainless steel, brass	 silver	C28205N00
Fastener set W7		brass, stainless steel	 silver	42605
Fastener set RG-1	- Cable adjustment at the ceiling, cable included	brass	 silver glossy	C28230P00
			 silver satin	C28230P01
			 white colored	C28230L10
			 black colored	C28230L07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CANOPIES

Name	Key features	Material	Color	Ref.
Canopy BOX-M70 		aluminum	 silver anodized	C24541A
			 white lacquered	C24541L10
			 black anodized	C24541A07
Canopy Fi-60mm	- Convenient cable length adjustment, in the ZM system	steel	 gray lacquered	C24540L01
			 white lacquered	C24540L10
			 black lacquered	C24540L07
BOX-KR90		aluminum	 black lacquered	C24666L07
			 white lacquered	C24666L10
Canopy BOX-KS90		aluminum	 black lacquered	C24668L07
			 white lacquered	C24668L10

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > OTHER

Name	Material	Ref.
Gland 9x1,5	Material, Material, multiselect	C42295C07
Gland 11x1,5	rubber	C42296C07
Gland 6,4x1,6	rubber	C24518C07

RELATED ACCESSORIES > ELECTRONICS > SWITCHES

Name	Key features	IP protection rating	Ref.
Proximity switch UNI-11 NEW	- touchless switch - width 11mm	20	E61603
Proximity switch UNI-11P NEW	- touchless switch - width 11mm - factory pre-soldered wires	20	E61604
Proximity switch UNI-P	- touchless switch - width only 7mm - factory pre-soldered wires	20	E61580
Switch MICRO 96W IP20	- push button switch - factory pre-soldered wires	20	1491
Switch MICRO 96W IP20	- push button switch - factory pre-soldered wires - version with logo	20	1491LOGO
Proximity switch UNI	- touchless switch - width only 7mm	20	E61579