

Profile OLEK

Ref. A08505



IP20

IP67



- Smooth profile surfaces
- Lighting fixture with round cross-section
- Luminaire direction adjustment
- Wide range of accessories

APPLICATION

- main and decorative lighting


MOUNTING

- suspended, using conductive end caps and dedicated accessories

ADDITIONAL INFORMATION

- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ
- NCS Premium paint option - minimum order quantity 30pcs - available on order within 14 days

TECHNICAL DRAWING



TECHNICAL SPECIFICATIONS

Material	aluminum
Possible fixture IP	20, 67
Possible fixture shapes	linear, polygonal
Profile cross-section	round
Width	18.5 mm
Height	15.2 mm
LED gluing width A	10 mm
Number of LED strips A (8 mm wide)	1
Width of the glow	11.2 mm
Max power of a single KLUŚ LED strip	24 W/m
Lighting angle adjustment from	0
Lighting angle adjustment up to	360
Possibility of obtaining a line of light	yes
Building type	Commercial, Residential, Entertainment/ Arts, HoReCa object
Facility zone	kitchen, bathroom, under-cabinet / furniture, decorative
The cover is cut to the length of the profile	yes

Color	Length	Ref
■ silver anodized	1000 mm	A08505A_1
	2005 mm	A08505A_2
	3010 mm	A08505A_3
■ black anodized	1000 mm	A08505A07_1
	2005 mm	A08505A07_2
	3010 mm	A08505A07_3
□ white lacquered	1000 mm	A08505L10OD_1
	3010 mm	A08505L10OD_3
	2005 mm	A08505L10OD_2
■ caramel (NCSS3030-Y60R) lacquered	2005 mm	A08505L14OD_2
■ sand (NCSS2010-Y30R) lacquered	2005 mm	A08505L11OD_2
■ pastel blue (NCSS2010-B) lacquered	2005 mm	A08505L13OD_2
■ light sage (NCSS2010-G50Y) lacquered	2005 mm	A08505L12OD_2

Standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)

Can be easily connected into runs	yes
Wire out end cap	yes

LINE OF LIGHT TABLE

LED tape	LIGER-11 satin	LIGER-11 black	HS-11 frosted	KA-11R frosted
K-0360-24	✓ (1)	X	X	✓ (1)
K-0720-24	✓ (1)	X	X	✓ (1)
K-1080-24	✓ (1)	X	X	✓ (1)
K-HD-0430-24	✓ (1)	✓ (1)	X	✓ (1)
K-HD-0830-24	✓ (1)	✓ (1)	X	✓ (1)
K-HD-1260-24	✓ (1)	✓ (1)	X	✓ (1)
KWP-0360-24	✓ (1)	X	X	✓ (1)
KWP-0720-24	✓ (1)	X	X	✓ (1)
KWP-1080-24	✓ (1)	X	X	✓ (1)
KWP-GHD-0430-24	✓ (1)	✓ (1)	X	✓ (1)
KWP-GHD-0830-24	✓ (1)	✓ (1)	X	✓ (1)
K-2400-24	✓ (1)	X	X	✓ (1)
KWP-GDL-1229-24	✓ (1)	X	X	✓ (1)
K-RGB-1200-24	✓ (1)	X	X	✓ (1)
KWP-RGB-1200-24	✓ (1)	X	X	✓ (1)
K-18D30-0960-24	✓ (1)	✓ (1)	X	✓ (1)

Description


✓ - Line of Light for a number (X) of rows - Pixel free imaging

X - Visible Dotting from Diodes


HL - Centered Line of Light - Concentrated in middle

HL (X) - Centered Line of Light for a number (X) of rows - Concentrated in middle

Line of Light Guide



Clean Line of Light (Pixel free imaging)




Centered Line of Light



Visible Dotting from Diodes

SAMPLE PROJECTS

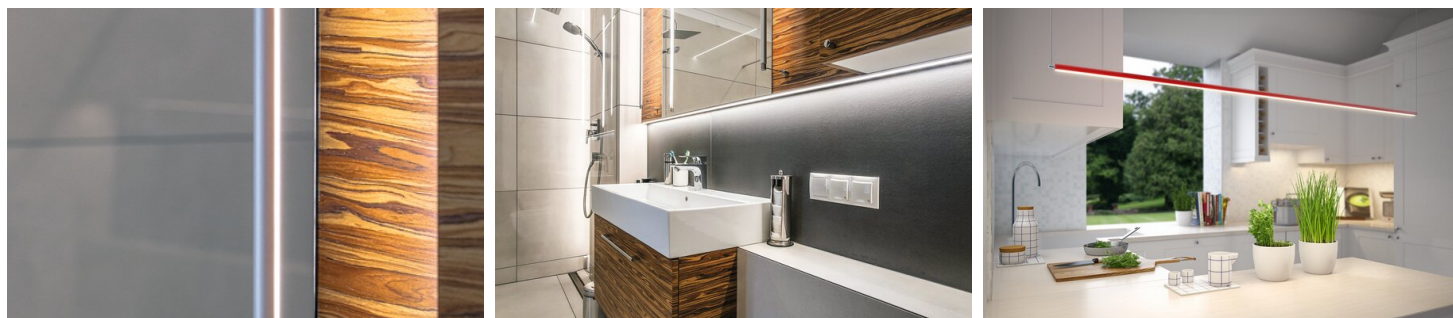

RELATED ACCESSORIES > COVERS

NAME		KEY FEATURES	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
Cover LIGER-11		- high light quality - Ease of obtaining a line of light - Perfectly diffusing - For indoor and outdoor applications	PC	21 %	black	B17037B
				59 %	satın	B17037S
Cover HS-11		- For indoor and outdoor applications - UV resistant - high durability	PC	59 %	frosted	B17208F
				88 %	clear	B17208C
Cover KA-11R		- maximum brightness - high durability - high light quality - indoor use - Perfectly diffusing	PC	62 %	frosted	B17076F
Cover KA-11		- maximum brightness - indoor use - basic - universal	PC	67 %	frosted	B17064F
				89 %	clear	B17064C
Cover KA-T-11		- maximum brightness - indoor use - economic - universal for basic applications	PVC	54 %	frosted	B17179F
				86 %	clear	B17179C
Focusing cover LENSO-11-30°DEG		- indoor use - focusing	PC	80 %	semi-transparent	B17112T

Profile OLEK

Ref. A08505

RELATED ACCESSORIES > END CAPS

NAME			MATERIAL	COLOR	REF.
Electricity conductive end cap OLEK	NEW		ABS	black	C28212C07P
				gray	C28212C02P
				white	C28212C10P
Electricity conductive end cap OLEK-LUK	NEW		ABS, stainless steel	black	C28213C07P
				gray	C28213C02P
				white	C28213C10P
End cap with hole OLEK-LUK-F15	NEW		ABS	black	C24204C07TW
				gray	C24204C02TW
				white	C24204C10TW
End cap OLEK			ABS	black	C24203C07
				caramel (NCSS3030-Y60R)	C24203L14
				gray	C24203C02
				light sage (NCSS2010-G50Y)	C24203L12
				pastel blue (NCSS2010-B)	C24203L13
				sand (NCSS2010-Y30R)	C24203L11
				white	C24203C10
End cap OLEK-LUK			ABS	black	C24204C07
				gray	C24204C02
				white	C24204C10

RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CCT

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-RGBW-1530-24	- RGBW (3000K) - high LED density	20	15.3 W/m	K-RGBW-1530-24
LED tape KWP-GRGBW-1530-24	- RGBW (3000K)	65	15.3 W/m	KWP-GRGBW-1530-24

Profile OLEK

Ref. A08505

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-RGB-0700-24V	- RGB	20	7 W/m	K-RGB-0700-24V
LED tape KWP-RGB-0700-24	- RGB	65	7 W/m	KWP-RGB-0700-24
LED tape KWP-RGB-1200-24	- RGB	65	12 W/m	KWP-RGB-1200-24
LED tape K-RGB-1200-24	- RGB	20	12 W/m	K-RGB-1200-24

RELATED ACCESSORIES > RELATED LED > WHITE MONO

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-0360-24 3.6 W/m, IP20 NEW		20	3.6 W/m	K-27-0360-24 K-30-0360-24 K-35-0360-24 K-40-0360-24 K-50-0360-24
LED tape K-0720-24 7.2 W/m, IP20 NEW		20	7.2 W/m	K-27-0720-24 K-30-0720-24 K-35-0720-24 K-40-0720-24 K-50-0720-24
LED tape K-1080-24 10.8 W/m, IP20 NEW		20	10.8 W/m	K-27-1080-24 K-30-1080-24 K-35-1080-24 K-40-1080-24 K-50-1080-24
LED tape K-HD-0430-24 4.3 W/m, IP20 NEW		20	4.3 W/m	K-HD27-0430-24 K-HD30-0430-24 K-HD35-0430-24 K-HD40-0430-24 K-HD50-0430-24
LED tape K-HD-0830-24 8.3 W/m, IP20 NEW		20	8.3 W/m	K-HD27-0830-24 K-HD30-0830-24 K-HD35-0830-24 K-HD40-0830-24 K-HD50-0830-24
LED tape K-HD-1260-24 12.6 W/m, IP20 NEW		20	12.6 W/m	K-HD27-1260-24 K-HD30-1260-24 K-HD35-1260-24 K-HD40-1260-24 K-HD50-1260-24
LED tape KWP-0360-24 3.6 W/m, IP65 NEW		65	3.6 W/m	KWP-27-0360-24 KWP-30-0360-24 KWP-35-0360-24 KWP-40-0360-24 KWP-50-0360-24
LED tape KWP-0720-24 7.2 W/m, IP65 NEW		65	7.2 W/m	KWP-27-0720-24 KWP-30-0720-24 KWP-35-0720-24 KWP-40-0720-24 KWP-50-0720-24
LED tape KWP-1080-24 10.8 W/m, IP65 NEW		65	10.8 W/m	KWP-27-1080-24 KWP-30-1080-24 KWP-35-1080-24 KWP-40-1080-24 KWP-50-1080-24
LED tape KWP-GHD-0430-24 4.3 W/m, IP65 NEW		65	4.3 W/m	KWP-GHD27-0430-24 KWP-GHD30-0430-24 KWP-GHD35-0430-24 KWP-GHD40-0430-24 KWP-GHD50-0430-24

Profile OLEK

Ref. A08505

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape KWP-GHD-0830-24 8.3 W/m, IP65 NEW		65	8.3 W/m	KWP-GHD27-0830-24 KWP-GHD30-0830-24 KWP-GHD35-0830-24 KWP-GHD40-0830-24 KWP-GHD50-0830-24
LED tape K-0480-24	- universal for basic applications	20	4.8 W/m	K-27-0480-24 K-30-0480-24 K-35-0480-24 K-40-0480-24 K-50-0480-24
LED tape K-0960-24	- universal for basic applications	20	9.6 W/m	K-27-0960-24 K-30-0960-24 K-30-0960-24-R30 K-35-0960-24 K-40-0960-24 K-40-0960-24-R30 K-50-0960-24 K-65-0960-24
LED tape K-1440-24	- universal for basic applications	20	14.4 W/m	K-27-1440-24 K-30-1440-24 K-30-1440-24-R30 K-35-1440-24 K-40-1440-24 K-40-1440-24-R30 K-50-1440-24
LED tape K-HD-0480-24	- high LED density - Ease of obtaining a line of light	20	4.8 W/m	K-HD27-0480-24 K-HD30-0480-24 K-HD35-0480-24 K-HD40-0480-24 K-HD50-0480-24
LED tape K-HD-0960-24	- high LED density - Ease of obtaining a line of light	20	9.6 W/m	K-HD27-0960-24 K-HD30-0960-24 K-HD35-0960-24 K-HD40-0960-24 K-HD50-0960-24
LED tape K-HD-1440-24	- high LED density - Ease of obtaining a line of light	20	14.4 W/m	K-HD27-1440-24 K-HD30-1440-24 K-HD35-1440-24 K-HD40-1440-24 K-HD50-1440-24
LED tape KWP-1440-24	- universal for basic applications	65	14.4 W/m	KWP-27-1440-24 KWP-30-1440-24 KWP-35-1440-24 KWP-40-1440-24 KWP-50-1440-24
LED tape KWP-0480-24	- universal for basic applications	65	4.8 W/m	KWP-27-0480-24 KWP-30-0480-24 KWP-35-0480-24 KWP-40-0480-24 KWP-50-0480-24
LED tape KWP-0960-24	- universal for basic applications	65	9.6 W/m	KWP-27-0960-24 KWP-30-0960-24 KWP-35-0960-24 KWP-40-0960-24 KWP-50-0960-24 KWP-65-0960-24
LED tape KWP-GHD-0480-24	- high LED density - Ease of obtaining a line of light	65	4.8 W/m	KWP-GHD27-0480-24 KWP-GHD30-0480-24 KWP-GHD35-0480-24 KWP-GHD40-0480-24 KWP-GHD50-0480-24

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape KWP-GHD-1260-24 12.6 W/m, IP65		65	12.6 W/m	KWP-GHD27-1260-24 KWP-GHD30-1260-24 KWP-GHD35-1260-24 KWP-GHD40-1260-24 KWP-GHD50-1260-24
LED tape K-2300-24	- high power	20	23 W/m	K-30-2300-24 K-40-2300-24
LED tape K-2400-24	- high power	20	24 W/m	K-27-2400-24 K-30-2400-24 K-35-2400-24 K-40-2400-24 K-50-2400-24

RELATED ACCESSORIES > RELATED LED > CRI 95+

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-CR-0480-24	- universal for basic applications - CRI over 95	20	4.8 W/m	K-CR27-0480-24 K-CR30-0480-24 K-CR35-0480-24 K-CR40-0480-24 K-CR50-0480-24
LED tape K-CR-0960-24	- universal for basic applications - CRI over 95	20	9.6 W/m	K-CR27-0960-24 K-CR30-0960-24 K-CR35-0960-24 K-CR40-0960-24 K-CR50-0960-24
LED tape K-CR-1440-24	- universal for basic applications - CRI over 95	20	14.4 W/m	K-CR27-1440-24 K-CR30-1440-24 K-CR35-1440-24 K-CR40-1440-24 K-CR50-1440-24
LED tape KWP-CR-0480-24	- universal for basic applications - CRI over 95	65	4.8 W/m	KWP-CR27-0480-24 KWP-CR30-0480-24 KWP-CR35-0480-24 KWP-CR40-0480-24 KWP-CR50-0480-24
LED tape KWP-CR-0960-24	- universal for basic applications - CRI over 95	65	9.6 W/m	KWP-CR27-0960-24 KWP-CR30-0960-24 KWP-CR35-0960-24 KWP-CR40-0960-24 KWP-CR50-0960-24

RELATED ACCESSORIES > RELATED LED > HIGH EFFICACY

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-VHE-0480-24	- universal for basic applications - high efficacy - High Efficacy	20	4.8 W/m	K-VHE27-0480-24 K-VHE30-0480-24 K-VHE35-0480-24 K-VHE40-0480-24 K-VHE50-0480-24
LED tape K-VHE-0960-24	- universal for basic applications - high efficacy - High Efficacy	20	9.6 W/m	K-VHE27-0960-24 K-VHE30-0960-24 K-VHE35-0960-24 K-VHE40-0960-24 K-VHE50-0960-24
LED tape K-VHE-1440-24	- universal for basic applications - high efficacy - High Efficacy	20	14.4 W/m	K-VHE27-1440-24 K-VHE30-1440-24 K-VHE35-1440-24 K-VHE40-1440-24 K-VHE50-1440-24

RELATED ACCESSORIES > RELATED LED > ADJUSTABLE WHITE / DIM TO WARM

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-18D30-0960-24	- Dim To Warm LED Tape	20	9.6 W/m	K-18D30-0960-24
LED tape K-27T50-1440-24	- RGB+Tunable White	20	14.4 W/m	K-27T50-1440-24

RELATED ACCESSORIES > RELATED LED > DIGITAL

Name	Key features	IP protection rating	Power consumption	Ref.
Digital LED strip K-DL-1229-24	- Digital tape	20	12.29 W/m	K-DL30-1229-24 K-DL40-1229-24
Digital LED strip KWP-GDL-1229-24	- Digital tape	65	12.29 W/m	KWP-GDL30-1229-24 KWP-GDL40-1229-24

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > FASTENERS AND HEADS FOR PROFILES

Name	Key features	Material	Color	Ref.
Fastener FI-8-LIN-ZM	- Installation in the ZM system	stainless steel, PA	silver white black	C28170N00 C28170L10 C28170L07
Fastener FI-10-ZM-P, silver	- Cross mounting	stainless steel	silver	C28117N00
Fastener UCHO-ZM	- Convenient mounting in the ZM system	aluminum	silver anodized black anodized	C28192N00 C28192L07
Fastener FI-8-PRET-ZM	- Installation in the ZM system	stainless steel aluminum aluminum	silver white black	C28189N00 C28189L10 C28189L07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > MOUNTING BRACKETS

Name	Key features	Material	Color	Ref.
Fastener set NEO-ZM-3	- 3 pieces for heavy fixtures	magnet	silver	C28105N00
Fastener set NEO-ZM-4	- 4 pieces for light fixtures	magnet	silver	C28106N00
Fastener set PLD-20	- Aesthetic installation, rotation, 2 pieces	PC	colorless non colored	C28061C00

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONDUCTIVE FASTENERS AND HEADS FOR PROFILES

Name	Key features	Material	Color	Ref.
Fastener PUSZ-PRET-ZM	- Power supply cable - mounting in the ZM system	stainless steel, brass, nylon aluminum, brass, nylon aluminum, brass, nylon	silver white black	C28161N00 C28161L10 C28161L07
Fastener FI-8-LIN-ZMZ	- Power supply - mounting in the ZM system	stainless steel, steel, PA, EPDM aluminum, PA, EPDM aluminum, PA, EPDM	silver white black	C28171N00 C28171L10 C28171L07
Fastener PUSZ-LIN-MR	- Power supply cable - mounting in thin walls (from 1mm)	stainless steel, brass, nylon aluminum, brass, nylon aluminum, brass, nylon	silver white lacquered black lacquered	C28163N00 C28163L10 C28163L07

Profile OLEK

Ref. A08505

Name	Key features	Material	Color	Ref.
Fastener PUSZ-LIN-ZM	- Power supply cable - mounting in the ZM system	stainless steel, brass, nylon, aluminum aluminum, brass, nylon aluminum, brass, nylon	silver white lacquered black lacquered	C28160N00 C28160L10 C28160L07
Fastener DP-ZZ-PDS-O, silver		stainless steel	silver	00655
Fastener PUSZ-ZM	- Power supply - mounting in the ZM system	stainless steel aluminum aluminum	silver white lacquered black lacquered	C20010N00 C20010L10 C20010L07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > SUSPENSION AND MOUNTING SETS

Name	Key features	Material	Color	Ref.
Fastener set FI-8-ZM-1 NEW	- Power supply, for wall and drywall, in the ZM system	stainless steel, aluminum	silver white lacquered black lacquered	C28134N00 C28134L10 C28134L07
Fastener set FI-8-ZM-2 NEW	- Convenient cable length adjustment, in the ZM system	stainless steel, aluminum	silver white lacquered black lacquered	C28135N00 C28135L10 C28135L07
Fastener set W8		stainless steel	silver	C28206N00
Fastener set RD-1	- Smooth cable adjustment, cable included	brass	silver glossy silver satin white lacquered black lacquered	C28231P00 C28231P01 C28231L10 C28231L07
Fastener set RG-1	- Cable adjustment at the ceiling, cable included	brass	silver glossy silver satin white colored black colored	C28230P00 C28230P01 C28230L10 C28230L07
Fastener set RD-2	- Smooth cable adjustment, angled mounting, cable included	brass	silver glossy silver satin white lacquered black lacquered	C28232P00 C28232P01 C28232L10 C28232L07
Fastener set RD-3	- Smooth cable adjustment	brass	silver glossy silver satin white lacquered black lacquered	C28233P00 C28233P01 C28233L10 C28233L07
Fastener set RD-4	- Smooth cable adjustment, angled mounting	brass	silver glossy silver satin white lacquered black lacquered	C28234P00 C28234P01 C28234L10 C28234L07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CANOPIES

Name	Key features	Material	Color	Ref.
Canopy BOX-M70 NEW		aluminum	silver anodized white lacquered black anodized	C24541A C24541L10 C24541A07
Canopy BOX-M600 NEW		aluminum	silver anodized white lacquered black anodized	C24542A C24542L10 C24542A07
Canopy Fi-60mm	- Convenient cable length adjustment, in the ZM system	steel	gray lacquered white lacquered black lacquered	C24540L01 C24540L10 C24540L07
Canopy BOX-KR600		aluminum	black lacquered white lacquered	C24667L07 C24667L10

Profile OLEK

Ref. A08505

Name	Key features	Material	Color	Ref.
Canopy BOX-KS600		aluminum	black lacquered white lacquered	C24669L07 C24669L10
BOX-KR90		aluminum	black lacquered white lacquered	C24666L07 C24666L10
Canopy BOX-KS90		aluminum	black lacquered white lacquered	C24668L07 C24668L10

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > OTHER

Name	Key features	Material	Color	Ref.
Gland 6,4x1,6		rubber		C24518C07
Hermetic coupler THB.391.A4A, 4 pin	- 4 power terminals - compact dimensions	PA		C42268C10
Hermetic coupler THB.381, 2pin	- 2 power terminals - compact dimensions	PA		C28125C07
Hermetic coupler THB.391.A5A, 5 pin	- 5 power terminals - compact dimensions	PA		C28156C07
Joint connector THB.200.E5E, 5 pin	- 5 power terminals - 3-line branch	Material, Material, multiselect		C28157C07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONNECTORS

Name	Material	Color	Ref.
Connector ZM-MINI	stainless steel	silver	44501 C28083N00
Connector ZM	stainless steel	silver	42716
		silver	42717
		silver	42720
		silver	42728
		black colored	C24797C07
		colorless non colored	C24797N00
		black colored	C28070C07
		silver	C28070N00
		black colored	C28071C07
		silver	C28071N00
		black colored	C28072C07
		silver	C28072N00
		black colored	C28073C07
		silver	C28073N00
		black colored	C28074C07
		silver	C28074N00
Connector ZM-Y	stainless steel	black colored	C28082C07
		silver	C28082N00
		black colored	C28079C07
		silver	C28079N00
Connector ZM-X	stainless steel	black colored	C28080C07
		silver	C28080N00
		black colored	C28081C07
		silver	C28081N00
Connector ZM-T	stainless steel	black colored	C28076C07
		silver	C28076N00
		black colored	C28077C07
		silver	C28077N00
		black colored	C28078C07
		silver	C28078N00

Name	Material	Color	Ref.
Connector ZM-PION	stainless steel	 silver	42314
		 silver	42316
		 silver	42320
		 silver	42718
		 silver	42719
		 black colored	C28084C07
		 silver	C28084N00
		 black colored	C28085C07
		 silver	C28085N00
		 black colored	C28086C07
		 silver	C28086N00
		 black colored	C28087C07
		 silver	C28087N00
		 black colored	C28088C07
		 silver	C28088N00

RELATED ACCESSORIES > ELECTRONICS > SWITCHES

Name	Key features	IP protection rating	Ref.
Proximity switch UNI-11 	- touchless switch - width 11mm	20	E61603
Proximity switch UNI-11P 	- touchless switch - width 11mm - factory pre-soldered wires	20	E61604
Proximity switch UNI-P	- touchless switch - width only 7mm - factory pre-soldered wires	20	E61580
Switch MICRO 96W IP20	- push button switch - factory pre-soldered wires	20	1491
Switch MICRO 96W IP20	- push button switch - factory pre-soldered wires - version with logo	20	1491LOGO
Proximity switch UNI	- touchless switch - width only 7mm	20	E61579