

Profile OLIS

Ref. A18003



- Illuminated skirting board
- Masking the expansion joints between the wall and the floor
- Masking gaps on uneven surfaces
- Space for cable management
- Easy assembly

APPLICATION

- warning and decorative lighting
- function of a standard skirting board

MOUNTING


- to the surface, using mounting adhesives

ADDITIONAL INFORMATION

- masking the gaps between the profile and the mounting surface is possible thanks to the use of a dedicated seal
- the use of a dedicated connection strip at the back of the profile prevents slits between individual sections of the profile and facilitates the routing of cables
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ
- characteristic visible lines along the profile are a normal phenomenon, resulting from the manufacturing process and are not a defect of the product

TECHNICAL DRAWING

1:2



TECHNICAL SPECIFICATIONS

Material	aluminum
Possible fixture IP	20, 65
Possible fixture shapes	linear, polygonal
Width	14 mm
Height	80 mm
LED gluing width A	7 mm
Width of the glow	7.2 mm
Max power of a single KLUŚ LED strip	9.6 W/m
Building type	Residential, HoReCa object, Commercial, Obiekt kulturalno/rozrywkowy
Facility zone	communication routes and corridors, office, lobby / foyer, media rooms / av, conference room, stairs / hallways
The cover is cut to the length of the profile	yes
Can be easily connected into runs	yes
Decorative lighting	yes
Functional lighting	yes

Color	Length	Ref
■ silver anodized	1000 mm	A18003A_1
	2005 mm	A18003A_2
	3010 mm	A18003A_3
□ white lacquered	1000 mm	A18003L10_1
	2005 mm	A18003L10_2
	3010 mm	A18003L10_3
■ black anodized	1000 mm	A18003A07_1
	3010 mm	A18003A07_3
	2005 mm	A18003A07_2

Standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance ± 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance ± 5 mm)


Profile OLIS

Ref. A18003

Wire out back of extrusion

yes

SAMPLE PROJECTS

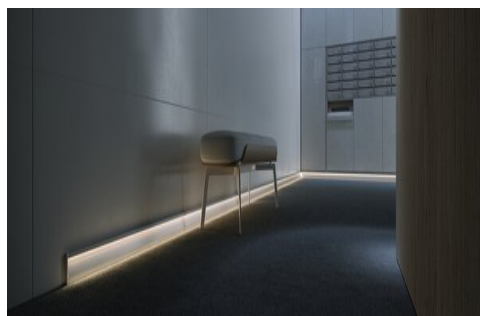

RELATED ACCESSORIES > COVERS

NAME		KEY FEATURES	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
Cover BENCO-7		- indoor use - perfect for bent profiles	silicon	53 %	frosted	B17069F
Cover PIKO-7		- For indoor and outdoor applications - Perfectly diffusing - UV resistant - Thin line of light	PMMA	17 %	black	B17001B
				43 %	satin	B17001S

Profile OLIS

Ref. A18003

RELATED ACCESSORIES > END CAPS

NAME			MATERIAL	COLOR	REF.
End cap OLIS-90Z	NEW		ABS	black	C24478L07
				gray	C24478C02
				white	C24478L10
End cap OLIS-L	NEW		ABS	black	C24480L07
				gray	C24480C02
				white	C24480L10
End cap OLIS-P	NEW		ABS	black	C24481L07
				gray	C24481C02
				white	C24481L10
End cap OLIS-90W			ABS	black	C24477L07
				gray	C24477C02
				white	C24477L10

RELATED ACCESSORIES > RELATED LED > ULTRATHIN

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-0450-24	- Thin line of light	20	4.5 W/m	K-27-0450-24 K-30-0450-24 K-35-0450-24 K-40-0450-24 K-50-0450-24
LED tape K-0910-24 9.1 W/m, IP20 NEW		20	9.1 W/m	K-27-0910-24 K-30-0910-24 K-35-0910-24 K-40-0910-24 K-50-0910-24
LED tape K-SHD-0960-24	- ideal for use with black covers - high LED density	20	9.6 W/m	K-SHD22-0960-24 K-SHD25-0960-24 K-SHD27-0960-24 K-SHD30-0960-24 K-SHD35-0960-24 K-SHD40-0960-24 K-SHD50-0960-24
LED tape KWP-5K-0450-24	- Thin line of light - easy snap-in installation	65	4.5 W/m	KWP-5K27-0450-24 KWP-5K30-0450-24 KWP-5K35-0450-24 KWP-5K40-0450-24 KWP-5K50-0450-24

Profile OLIS

Ref. A18003

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape KWP-5K-0910-24 9.1 W/m, IP65 NEW		65	9.1 W/m	KWP-5K27-0910-24 KWP-5K30-0910-24 KWP-5K35-0910-24 KWP-5K40-0910-24 KWP-5K50-0910-24
LED tape KWP-5KSHD-0960-24	- easy snap-in installation - high LED density - ideal for use with black covers	65	9.6 W/m	KWP-5KSHD27-0960-24 KWP-5KSHD30-0960-24 KWP-5KSHD35-0960-24 KWP-5KSHD40-0960-24 KWP-5KSHD50-0960-24

RELATED ACCESSORIES > RELATED LED > ADJUSTABLE WHITE / DIM TO WARM

Name	IP protection rating	Power consumption	Ref.
LED tape K-BT27T50-0910-24	20	9.1 W/m	K-BT27T50-0910-24

RELATED ACCESSORIES > RELATED LED > WHITE MONO

Name	IP protection rating	Power consumption	Ref.
LED tape K-1490-24 14.9 W/m, IP20 NEW	20	14.9 W/m	K-27-1490-24 K-30-1490-24 K-35-1490-24 K-40-1490-24 K-50-1490-24
LED tape K-BT-1490-24 14.9 W/m, IP20 NEW	20	14.9 W/m	K-BT27-1490-24 K-BT30-1490-24 K-BT35-1490-24 K-BT40-1490-24 K-BT50-1490-24

RELATED ACCESSORIES > RELATED LED > BENDABLE

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-BT-0450-24	- Thin line of light - LED tape for bent profiles	20	4.5 W/m	K-BT27-0450-24 K-BT30-0450-24 K-BT35-0450-24 K-BT40-0450-24 K-BT50-0450-24
LED tape K-BT-0910-24	- LED tape for bent profiles	20	9.1 W/m	K-BT27-0910-24 K-BT30-0910-24 K-BT35-0910-24 K-BT40-0910-24 K-BT50-0910-24

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > OTHER

Name	Key features	Material	Color	Ref.
Gland 6,4x1,6		rubber		C24518C07
Hermetic coupler THB.391.A4A, 4 pin	- 4 power terminals - compact dimensions	PA		C42268C10
Hermetic coupler THB.381, 2pin	- 2 power terminals - compact dimensions	PA		C28125C07
Hermetic coupler THB.391.A5A, 5 pin	- 5 power terminals - compact dimensions	PA		C28156C07

Profile OLIS

Ref. A18003

Name	Key features	Material	Color	Ref.
Joint connector THB.200.E5E, 5 pin	- 5 power terminals - 3-line branch	Material, Material, multiselect		C28157C07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > ADDITIONAL ITEMS

Name	Material	Color	Ref.
Connecting Strip OS NEW	PCV	☐ white colored	C24009C10_1 C24009C10_2 C24009C10_3

RELATED ACCESSORIES > ELECTRONICS > OTHER

Name	IP protection rating	Ref.
Fastener JST-BEC NEW		E60022