



Profile OPK-4

Ref. A00370

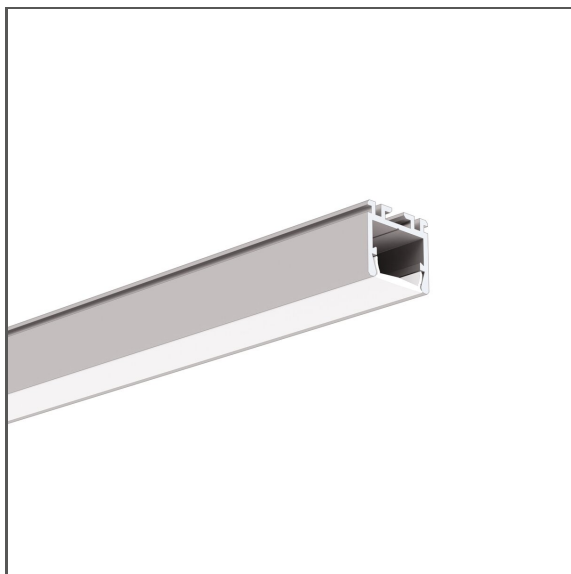

TECHNICAL DRAWING



- Wide range of accessories
- Easy maintenance
- Small bending radius
- Possibility of bending in the light plane

APPLICATION

- main and decorative lighting

MOUNTING

- recessed, using a dedicated mounting track

ADDITIONAL INFORMATION

- disassembly from the mounting track using special plates
- smooth transition from a recessed into a suspended fixture
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL SPECIFICATIONS

Material	aluminum
Color	 silver anodized
Possible fixture IP	20, 67
Possible fixture shapes	linear, polygonal
Profile cross-section	rectangular
Width	15.2 mm
Height	13.5 mm
LED gluing width A	12 mm
Number of LED strips A (8 mm wide)	1
Width of the glow	11.2 mm
Max power of a single KLUŚ LED strip	24 W/m
Possibility of obtaining a line of light	yes
Possibility of bending	yes
Radius of the light arc	yes
Inward	300 mm
Outdoor	300 mm
Downward light arc radius	yes
Down	500 mm

Length	Ref
1000 mm	A00370A_1
2005 mm	A00370A_2
3010 mm	A00370A_3

Standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)

Profile OPK-4

Ref. A00370

Building type	Residential, Retail, HoReCa object
Facility zone	kitchen, under-cabinet / furniture
The cover is cut to the length of the profile	yes
Can be easily connected into runs	yes
Mounting to drywall	yes
Wire out back of extrusion	yes

LINE OF LIGHT TABLE

LED tape	LIGER-11 satin	LIGER-11 black	HS-11 frosted	KA-11 frosted,
K-0360-24	✓ (1)	X	✓ (1)	✓ (1)
K-0720-24	✓ (1)	X	✓ (1)	✓ (1)
K-1080-24	✓ (1)	X	✓ (1)	✓ (1)
K-HD-0430-24	✓ (1)	✓ (1)	✓ (1)	✓ (1)
K-HD-0830-24	✓ (1)	✓ (1)	✓ (1)	✓ (1)
K-HD-1260-24	✓ (1)	✓ (1)	✓ (1)	✓ (1)
KWP-0360-24	✓ (1)	X	✓ (1)	✓ (1)
KWP-0720-24	✓ (1)	X	✓ (1)	✓ (1)
KWP-1080-24	✓ (1)	X	✓ (1)	✓ (1)
KWP-GHD-0430-24	✓ (1)	✓ (1)	✓ (1)	✓ (1)
KWP-GHD-0830-24	✓ (1)	✓ (1)	✓ (1)	✓ (1)
KWP-HD-0430-24	✓ (1)	✓ (1)	✓ (1)	✓ (1)
KWP-HD-0830-24	✓ (1)	✓ (1)	✓ (1)	✓ (1)
KWP-HD-1260-24	✓ (1)	✓ (1)	✓ (1)	✓ (1)
K-2400-24	✓ (1)	X	✓ (1)	✓ (1)
KWP-GDL-1229-24	✓ (1)	X	X	✓ (1)
K-RGBW-1530-24	✓ (1)	✓ (1)	✓ (1)	✓ (1)
K-RGB-0700-24V	✓ (1)	X	X	✓ (1)
K-RGB-1200-24	✓ (1)	X	X	✓ (1)
KWP-RGB-1200-24	✓ (1)	X	X	✓ (1)
K-18D30-0960-24	✓ (1)	✓ (1)	✓ (1)	✓ (1)
KWP-18D30-0960-24	✓ (1)	✓ (1)	✓ (1)	✓ (1)
KWP-27T50-1440-24	✓ (1)	✓ (1)	✓ (1)	✓ (1)

Description

✓ - Line of Light for a number (X) of rows - Pixel free imaging

X - Visible Dotting from Diodes


HL - Centered Line of Light - Concentrated in middle

HL (X) - Centered Line of Light for a number (X) of rows - Concentrated in middle

Profile OPK-4

Ref. A00370

Line of Light Guide



Clean Line of Light (Pixel free imaging)






Centered Line of Light




Visible Dotting from Diodes

SAMPLE PROJECTS

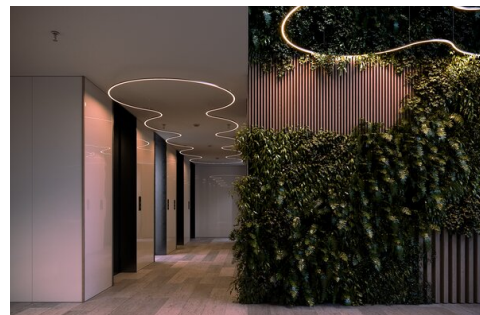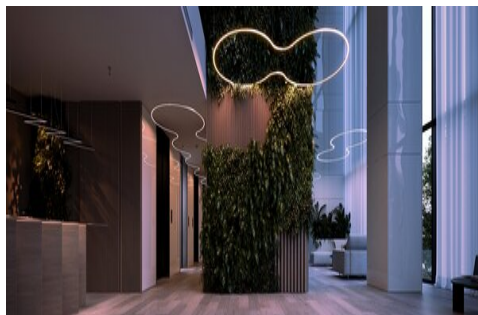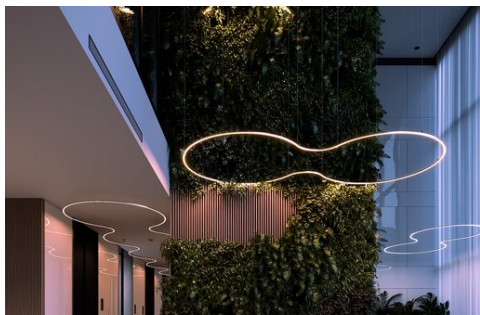

RELATED PROFILES > TRIMLESS



Profile TPK-4
A18044

Profile OPK-4

Ref. A00370

RELATED ACCESSORIES > COVERS

NAME		KEY FEATURES	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
Cover BENCO-11		- For indoor and outdoor applications - UV resistant	silicon	50 %	frosted	B17215F
Cover LIGER-11		- high light quality - Ease of obtaining a line of light - Perfectly diffusing - For indoor and outdoor applications	PC	21 % 59 %	black satin	B17037B B17037S
Cover HS-11		- For indoor and outdoor applications - UV resistant - high durability	PC	59 % 88 %	frosted clear	B17208F B17208C
Cover KA-11		- maximum brightness - indoor use - basic - universal	PC	67 % 89 %	frosted clear	B17064F B17064C
Cover KA-T-11		- maximum brightness - indoor use - economic - universal for basic applications	PVC	54 % 86 %	frosted clear	B17179F B17179C

RELATED ACCESSORIES > END CAPS

NAME		MATERIAL	COLOR	REF.
End cap OPK-4		ABS	 gray	C24238C02

RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CCT

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-RGBW-1530-24	- RGBW (3000K) - high LED density	20	15.3 W/m	K-RGBW-1530-24
LED tape KWP-RGBW-1530-24	- RGBW (3000K)	65	15.3 W/m	KWP-RGBW-1530-24
LED tape KWP-GRGBW-1530-24	- RGBW (3000K)	65	15.3 W/m	KWP-GRGBW-1530-24
LED tape K-RGB-0700-24V	- RGB	20	7 W/m	K-RGB-0700-24V
LED tape KWP-RGB-0700-24	- RGB	65	7 W/m	KWP-RGB-0700-24
LED tape KWP-14KHDRGB-1920-24	- RGB - easy snap-in installation	65	19.2 W/m	KWP-14KHDRGB-1920-24
LED tape K-RGB-1200-24	- RGB	20	12 W/m	K-RGB-1200-24
LED tape KWP-RGB-1200-24	- RGB	65	12 W/m	KWP-RGB-1200-24

RELATED ACCESSORIES > RELATED LED > WHITE MONO

Profile OPK-4

Ref. A00370

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-0360-24 3.6 W/m, IP20 NEW		20	3.6 W/m	K-27-0360-24 K-30-0360-24 K-35-0360-24 K-40-0360-24 K-50-0360-24
LED tape K-0720-24 7.2 W/m, IP20 NEW		20	7.2 W/m	K-27-0720-24 K-30-0720-24 K-35-0720-24 K-40-0720-24 K-50-0720-24
LED tape K-1080-24 10.8 W/m, IP20 NEW		20	10.8 W/m	K-27-1080-24 K-30-1080-24 K-35-1080-24 K-40-1080-24 K-50-1080-24
LED tape K-HD-0430-24 4.3 W/m, IP20 NEW		20	4.3 W/m	K-HD27-0430-24 K-HD30-0430-24 K-HD35-0430-24 K-HD40-0430-24 K-HD50-0430-24
LED tape K-HD-0830-24 8.3 W/m, IP20 NEW		20	8.3 W/m	K-HD27-0830-24 K-HD30-0830-24 K-HD35-0830-24 K-HD40-0830-24 K-HD50-0830-24
LED tape K-HD-1260-24 12.6 W/m, IP20 NEW		20	12.6 W/m	K-HD27-1260-24 K-HD30-1260-24 K-HD35-1260-24 K-HD40-1260-24 K-HD50-1260-24
LED tape KWP-0360-24 3.6 W/m, IP65 NEW		65	3.6 W/m	KWP-27-0360-24 KWP-30-0360-24 KWP-35-0360-24 KWP-40-0360-24 KWP-50-0360-24
LED tape KWP-0720-24 7.2 W/m, IP65 NEW		65	7.2 W/m	KWP-27-0720-24 KWP-30-0720-24 KWP-35-0720-24 KWP-40-0720-24 KWP-50-0720-24
LED tape KWP-1080-24 10.8 W/m, IP65 NEW		65	10.8 W/m	KWP-27-1080-24 KWP-30-1080-24 KWP-35-1080-24 KWP-40-1080-24 KWP-50-1080-24
LED tape KWP-GHD-0430-24 4.3 W/m, IP65 NEW		65	4.3 W/m	KWP-GHD27-0430-24 KWP-GHD30-0430-24 KWP-GHD35-0430-24 KWP-GHD40-0430-24 KWP-GHD50-0430-24
LED tape KWP-GHD-0830-24 8.3 W/m, IP65 NEW		65	8.3 W/m	KWP-GHD27-0830-24 KWP-GHD30-0830-24 KWP-GHD35-0830-24 KWP-GHD40-0830-24 KWP-GHD50-0830-24
LED tape KWP-HD-0430-24 4.3 W/m, IP65 NEW		65	4.3 W/m	KWP-HD27-0430-24 KWP-HD30-0430-24 KWP-HD35-0430-24 KWP-HD40-0430-24 KWP-HD50-0430-24

Profile OPK-4

Ref. A00370

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape KWP-HD-0830-24 8.3 W/m, IP65 NEW		65	8.3 W/m	KWP-HD27-0830-24 KWP-HD30-0830-24 KWP-HD35-0830-24 KWP-HD40-0830-24 KWP-HD50-0830-24
LED tape KWP-HD-1260-24 12.6 W/m, IP65 NEW		65	12.6 W/m	KWP-HD27-1260-24 KWP-HD30-1260-24 KWP-HD35-1260-24 KWP-HD40-1260-24 KWP-HD50-1260-24
LED tape K-0480-24	- universal for basic applications	20	4.8 W/m	K-27-0480-24 K-30-0480-24 K-35-0480-24 K-40-0480-24 K-50-0480-24
LED tape K-0960-24	- universal for basic applications	20	9.6 W/m	K-27-0960-24 K-30-0960-24 K-30-0960-24-R30 K-35-0960-24 K-40-0960-24 K-40-0960-24-R30 K-50-0960-24 K-65-0960-24
LED tape K-1440-24	- universal for basic applications	20	14.4 W/m	K-27-1440-24 K-30-1440-24 K-30-1440-24-R30 K-35-1440-24 K-40-1440-24 K-40-1440-24-R30 K-50-1440-24
LED tape K-HD-0480-24	- high LED density - Ease of obtaining a line of light	20	4.8 W/m	K-HD27-0480-24 K-HD30-0480-24 K-HD35-0480-24 K-HD40-0480-24 K-HD50-0480-24
LED tape K-HD-0960-24	- high LED density - Ease of obtaining a line of light	20	9.6 W/m	K-HD27-0960-24 K-HD30-0960-24 K-HD35-0960-24 K-HD40-0960-24 K-HD50-0960-24
LED tape K-HD-1440-24	- high LED density - Ease of obtaining a line of light	20	14.4 W/m	K-HD27-1440-24 K-HD30-1440-24 K-HD35-1440-24 K-HD40-1440-24 K-HD50-1440-24
LED tape KWP-1440-24	- universal for basic applications	65	14.4 W/m	KWP-27-1440-24 KWP-30-1440-24 KWP-35-1440-24 KWP-40-1440-24 KWP-50-1440-24
LED tape KWP-0480-24	- universal for basic applications	65	4.8 W/m	KWP-27-0480-24 KWP-30-0480-24 KWP-35-0480-24 KWP-40-0480-24 KWP-50-0480-24
LED tape KWP-0960-24	- universal for basic applications	65	9.6 W/m	KWP-27-0960-24 KWP-30-0960-24 KWP-35-0960-24 KWP-40-0960-24 KWP-50-0960-24 KWP-65-0960-24

Profile OPK-4

Ref. A00370

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape KWP-GHD-0480-24	- high LED density - Ease of obtaining a line of light	65	4.8 W/m	KWP-GHD27-0480-24 KWP-GHD30-0480-24 KWP-GHD35-0480-24 KWP-GHD40-0480-24 KWP-GHD50-0480-24
LED tape KWP-GHD-1260-24 12.6 W/m, IP65		65	12.6 W/m	KWP-GHD27-1260-24 KWP-GHD30-1260-24 KWP-GHD35-1260-24 KWP-GHD40-1260-24 KWP-GHD50-1260-24
LED tape K-2300-24	- high power	20	23 W/m	K-30-2300-24 K-40-2300-24
LED tape K-2400-24	- high power	20	24 W/m	K-27-2400-24 K-30-2400-24 K-35-2400-24 K-40-2400-24 K-50-2400-24

RELATED ACCESSORIES > RELATED LED > CRI 95+

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-CR-0480-24	- universal for basic applications - CRI over 95	20	4.8 W/m	K-CR27-0480-24 K-CR30-0480-24 K-CR35-0480-24 K-CR40-0480-24 K-CR50-0480-24
LED tape K-CR-0960-24	- universal for basic applications - CRI over 95	20	9.6 W/m	K-CR27-0960-24 K-CR30-0960-24 K-CR35-0960-24 K-CR40-0960-24 K-CR50-0960-24
LED tape K-CR-1440-24	- universal for basic applications - CRI over 95	20	14.4 W/m	K-CR27-1440-24 K-CR30-1440-24 K-CR35-1440-24 K-CR40-1440-24 K-CR50-1440-24
LED tape KWP-CR-0960-24	- universal for basic applications - CRI over 95	65	9.6 W/m	KWP-CR27-0960-24 KWP-CR30-0960-24 KWP-CR35-0960-24 KWP-CR40-0960-24 KWP-CR50-0960-24
LED tape KWP-CR-0480-24	- universal for basic applications - CRI over 95	65	4.8 W/m	KWP-CR27-0480-24 KWP-CR30-0480-24 KWP-CR35-0480-24 KWP-CR40-0480-24 KWP-CR50-0480-24

RELATED ACCESSORIES > RELATED LED > HIGH EFFICACY

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-VHE-0480-24	- universal for basic applications - high efficacy - High Efficacy	20	4.8 W/m	K-VHE27-0480-24 K-VHE30-0480-24 K-VHE35-0480-24 K-VHE40-0480-24 K-VHE50-0480-24
LED tape K-VHE-0960-24	- universal for basic applications - high efficacy - High Efficacy	20	9.6 W/m	K-VHE27-0960-24 K-VHE30-0960-24 K-VHE35-0960-24 K-VHE40-0960-24 K-VHE50-0960-24

Profile OPK-4

Ref. A00370

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-VHE-1440-24	- universal for basic applications - high efficacy - High Efficacy	20	14.4 W/m	K-VHE27-1440-24 K-VHE30-1440-24 K-VHE35-1440-24 K-VHE40-1440-24 K-VHE50-1440-24

RELATED ACCESSORIES > RELATED LED > BENDABLE

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-VBT-0720-24	- LED tape for bent profiles	20	7.2 W/m	K-VBT27-0720-24 K-VBT30-0720-24 K-VBT35-0720-24 K-VBT40-0720-24 K-VBT50-0720-24
LED tape K-BTRGB40-1510-24		20	15.1 W/m	K-BTRGB40-1510-24

RELATED ACCESSORIES > RELATED LED > DIGITAL

Name	Key features	IP protection rating	Power consumption	Ref.
Digital LED strip K-DLRGB-1670-24 NEW	- RGB	20	16.7 W/m	K-DLRGB-1670-24
Digital LED strip K-DLRGB40-2246-24 NEW	- RGBW led strip (4000K)	20	22.46 W/m	K-DLRGB40-2246-24
Digital LED strip K-DL-1229-24	- Digital tape	20	12.29 W/m	K-DL30-1229-24 K-DL40-1229-24
Digital LED strip KWP-GDL-1229-24	- Digital tape	65	12.29 W/m	KWP-GDL30-1229-24 KWP-GDL40-1229-24
Digital LED strip KWP-GDLRGB-1670-24	- RGB	65	16.7 W/m	KWP-GDLRGB-1670-24
Digital LED strip KWP-GDLRGB40-2246-24		65	22.46 W/m	KWP-GDLRGB40-2246-24

RELATED ACCESSORIES > RELATED LED > ADJUSTABLE WHITE / DIM TO WARM

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-18D30-0960-24	- Dim To Warm LED Tape	20	9.6 W/m	K-18D30-0960-24
LED tape K-27T50-1440-24	- RGB+Tunable White	20	14.4 W/m	K-27T50-1440-24
LED tape KWP-18D30-0960-24		65	9.6 W/m	KWP-18D30-0960-24
LED tape KWP-27T50-1440-24		65	14.4 W/m	KWP-27T50-1440-24

RELATED ACCESSORIES > RELATED LED

Name	IP protection rating	Power consumption	Ref.
LED tape KWP-14KRGB27T50-1200-24, 2700K, 390 lm/m, 12 W/m, IP65	65	12 W/m	KWP-14KRGB27T50-1200-24
LED tape KWP-RGB27T50-1200-24, 2700K, 390 lm/m, 12 W/m, IP65	65	12 W/m	KWP-RGB27T50-1200-24

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > SURFACE SPRINGS

Profile OPK-4

Ref. A00370

Name	Material	Color	Ref.
Spring GP	stainless steel	 silver	C24500N00

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONDUCTIVE FASTENERS AND HEADS FOR PROFILES

Name	Key features	Material	Color	Ref.
Head BZP-ZO		stainless steel	 silver	42214
Fastener PUSZ-LIN-ZM	- Power supply cable - mounting in the ZM system	stainless steel, brass, nylon,	 silver	C28160N00
		aluminum	 white lacquered	C28160L10
		aluminum, brass, nylon	 black lacquered	C28160L07
Fastener FI-8-LIN-ZMZ	- Power supply - mounting in the ZM system	stainless steel, steel, PA, EPDM	 silver	C28171N00
		aluminum, PA, EPDM	 white	C28171L10
		aluminum, PA, EPDM	 black	C28171L07
Fastener PUSZ-PRET-ZM	- Power supply cable - mounting in the ZM system	stainless steel, brass, nylon	 silver	C28161N00
		aluminum, brass, nylon	 white	C28161L10
		aluminum, brass, nylon	 black	C28161L07
Fastener PUSZ-LIN-MR	- Power supply cable - mounting in thin walls (from 1mm)	stainless steel, brass, nylon	 silver	C28163N00
		aluminum, brass, nylon	 white lacquered	C28163L10
		aluminum, brass, nylon	 black lacquered	C28163L07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > FASTENERS AND HEADS FOR PROFILES

Name	Key features	Material	Color	Ref.
Fastener FI-8-LIN-ZM	- Installation in the ZM system	stainless steel, PA	 silver	C28170N00
			 white	C28170L10
			 black	C28170L07
Fastener FI-10-ZM-P, silver	- Cross mounting	stainless steel	 silver	C28117N00
Fastener UCHO-ZM	- Convenient mounting in the ZM system	aluminum	 silver anodized	C28192N00
			 black anodized	C28192L07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > SUSPENSION AND MOUNTING SETS

Name	Key features	Material	Color	Ref.
Fastener set FI-8-ZM-1 	- Power supply, for wall and drywall, in the ZM system	stainless steel, aluminum	 silver  white lacquered  black lacquered	C28134N00 C28134L10 C28134L07
Fastener set FI-8-ZM-2 	- Convenient cable length adjustment, in the ZM system	stainless steel, aluminum	 silver  white lacquered  black lacquered	C28135N00 C28135L10 C28135L07
Fastener set PUSZ-ZM-1 	- Power supply, for wall and drywall, in the ZM system	stainless steel, aluminum	 silver  white lacquered  black lacquered	C28130N00 C28130L10 C28130L07
Fastener set PUSZ-ZM-2 	- Convenient cable length adjustment, in the ZM system	stainless steel, aluminum	 silver  white lacquered  black lacquered	C28131N00 C28131L10 C28131L07
Fastener set W1		brass, stainless steel	 silver	C28203N00
Fastener set W6		stainless steel, brass	 silver	C28205N00
Fastener set W7		brass, stainless steel	 silver	42605

Profile OPK-4

Ref. A00370

Name	Key features	Material	Color	Ref.
Fastener set RD-1	- Smooth cable adjustment, cable included	brass	 silver glossy	C28231P00
			 silver satin	C28231P01
			 white lacquered	C28231L10
			 black lacquered	C28231L07
Fastener set RG-1	- Cable adjustment at the ceiling, cable included	brass	 silver glossy	C28230P00
			 silver satin	C28230P01
			 white colored	C28230L10
			 black colored	C28230L07
Fastener set RD-2	- Smooth cable adjustment, angled mounting, cable included	brass	 silver glossy	C28232P00
			 silver satin	C28232P01
			 white lacquered	C28232L10
			 black lacquered	C28232L07
Fastener set RD-3	- Smooth cable adjustment	brass	 silver glossy	C28233P00
			 silver satin	C28233P01
			 white lacquered	C28233L10
			 black lacquered	C28233L07
Fastener set RD-4	- Smooth cable adjustment, angled mounting	brass	 silver glossy	C28234P00
			 silver satin	C28234P01
			 white lacquered	C28234L10
			 black lacquered	C28234L07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CANOPIES

Name	Key features	Material	Color	Ref.
Canopy BOX-M70 NEW		aluminum	 silver anodized	C24541A
			 white lacquered	C24541L10
			 black anodized	C24541A07
Canopy BOX-M600 NEW		aluminum	 silver anodized	C24542A
			 white lacquered	C24542L10
			 black anodized	C24542A07
Canopy Fi-60mm	- Convenient cable length adjustment, in the ZM system	steel	 gray lacquered	C24540L01
			 white lacquered	C24540L10
			 black lacquered	C24540L07
Canopy BOX-KR600		aluminum	 black lacquered	C24667L07
			 white lacquered	C24667L10
Canopy BOX-KS600		aluminum	 black lacquered	C24669L07
			 white lacquered	C24669L10
BOX-KR90		aluminum	 black lacquered	C24666L07
			 white lacquered	C24666L10
Canopy BOX-KS90		aluminum	 black lacquered	C24668L07
			 white lacquered	C24668L10

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > OTHER

Name	Key features	Material	Color	Ref.
Gland 6,4x1,6		rubber		C24518C07
Gland 9x1,5		Material, Material, multiselect		C42295C07
Gland 11x1,5		rubber		C42296C07
Hermetic coupler THB.391.A4A, 4 pin	- 4 power terminals - compact dimensions	PA		C42268C10
Hermetic coupler THB.381, 2pin	- 2 power terminals - compact dimensions	PA		C28125C07
Hermetic coupler THB.391.A5A, 5 pin	- 5 power terminals - compact dimensions	PA		C28156C07

Profile OPK-4

Ref. A00370

Name	Key features	Material	Color	Ref.
Joint connector THB.200.E5E, 5 pin	- 5 power terminals - 3-line branch	Material, Material, multiselect		C28157C07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > LATCHES

Name	Key features	Material	Color	Ref.
Adapters set ZM-16	- Connection of the ZM system with the 45-STN mount	PC	 transparent	C29001C00

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONNECTORS

Name	Material	Color	Ref.
Connector ZM	stainless steel	 silver	42716
		 silver	42717
		 silver	42720
		 silver	42728
		 black colored	C24797C07
		colorless non colored	C24797N00
		 black colored	C28070C07
		 silver	C28070N00
		 black colored	C28071C07
		 silver	C28071N00
		 black colored	C28072C07
		 silver	C28072N00
		 black colored	C28073C07
		 silver	C28073N00
		 black colored	C28074C07
		 silver	C28074N00
		 black colored	C28075C07
		 silver	C28075N00
		 silver	C28243N00
Connector ZM-Y	stainless steel	 black colored	C28082C07
		 silver	C28082N00
Connector ZM-X	stainless steel	 black colored	C28079C07
		 silver	C28079N00
		 black colored	C28080C07
		 silver	C28080N00
		 black colored	C28081C07
		 silver	C28081N00
Connector ZM-T	stainless steel	 black colored	C28076C07
		 silver	C28076N00
		 black colored	C28077C07
		 silver	C28077N00
		 black colored	C28078C07
		 silver	C28078N00
Connector ZM-PION	stainless steel	 silver	42314
		 silver	42316
		 silver	42320
		 silver	42718
		 silver	42719
		 black colored	C28084C07
		 silver	C28084N00
		 black colored	C28085C07
		 silver	C28085N00
		 black colored	C28086C07
		 silver	C28086N00
		 black colored	C28087C07
		 silver	C28087N00
		 black colored	C28088C07
		 silver	C28088N00
Connector ZM-MINI	stainless steel	 silver	44501
			C28083N00

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > MOUNTING BRACKETS

Name	Key features	Material	Color	Ref.
Fastener set NEO-ZM-3	- 3 pieces for heavy fixtures	magnet	 silver	C28105N00
Fastener set NEO-ZM-4	- 4 pieces for light fixtures	magnet	 silver	C28106N00

RELATED ACCESSORIES > ELECTRONICS > SWITCHES

Name	Key features	IP protection rating	Ref.
Proximity switch UNI-11 	- touchless switch - width 11mm	20	E61603
Proximity switch UNI-11P 	- touchless switch - width 11mm - factory pre-soldered wires	20	E61604
Proximity switch UNI-P	- touchless switch - width only 7mm - factory pre-soldered wires	20	E61580
Switch MICRO 96W IP20	- push button switch - factory pre-soldered wires	20	1491
Switch MICRO 96W IP20	- push button switch - factory pre-soldered wires - version with logo	20	1491LOGO
Proximity switch UNI	- touchless switch - width only 7mm	20	E61579