

Profile PDS-T-BOK

Ref. A00016

NEW



IP20

IP65



- Mounting to 10 mm - 0.4" drywall
- Dedicated for ceramic finishes and installation on the edges of moldings
- Stable mounting to a suspended ceiling
- Possibility of mounting sealed LED strips of the 8K series

APPLICATION

- main and decorative lighting


MOUNTING

- in drywall, with screws

ADDITIONAL INFORMATION

- in order to protect the lighting fixture during installation, a TECH-KA protective insert should be used
- smooth transition from a recessed into a suspended fixture
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING



TECHNICAL SPECIFICATIONS

Material	aluminum
Possible fixture IP	20, 65
Possible fixture shapes	linear
Width	36 mm
Height	12 mm
Maximum length on request	6 mm
LED gluing width A	11.2 mm
Number of LED strips A (8 mm wide)	1
Width of the glow	11 mm
Max power of a single KLUŚ LED strip	19.2 W/m
Possibility of obtaining a line of light	yes
Building type	Commercial, Residential, HoReCa object, Retail, Entertainment/ Arts
The cover is cut to the length of the profile	yes
Mounting to drywall	yes
To cover with plaster	yes
Wire out end cap	yes

Color	Length	Ref
■ silver anodized	1000 mm	A00016A_1
	2005 mm	A00016A_2
	3010 mm	A00016A_3
■ silver non anodized	1000 mm	A00016N_1
	2005 mm	A00016N_2
	3010 mm	A00016N_3

Standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)

Wire out back of extrusion

yes

LINE OF LIGHT TABLE

LED tape	LIGER-11 satin	LIGER-11 black	HS-11 frosted	KA-11 frosted,	KA-T-11R frosted
K-1275-24	✓ (1)	X	X	✓ (1)	✓ (1)
K-0960-24	✓ (1)	X	✓ (1)	✓ (1)	✓ (1)
K-1440-24	✓ (1)	X	✓ (1)	✓ (1)	✓ (1)
K-0360-24	✓ (1)	X	✓ (1)	✓ (1)	✓ (1)
K-0720-24	✓ (1)	X	✓ (1)	✓ (1)	✓ (1)
K-1080-24	✓ (1)	X	✓ (1)	✓ (1)	✓ (1)
K-0500-24	✓ (1)	X	✓ (1)	✓ (1)	✓ (1)
K-1000-24	✓ (1)	X	✓ (1)	✓ (1)	✓ (1)
K-HD-0430-24	✓ (1)	✓ (1)	✓ (1)	✓ (1)	✓ (1)
K-1500-24	✓ (1)	X	✓ (1)	✓ (1)	✓ (1)
K-CB-1000-24	✓ (1)	✓ (1)	✓ (1)	✓ (1)	✓ (1)
K-HD-0830-24	✓ (1)	✓ (1)	✓ (1)	✓ (1)	✓ (1)
K-HD-1260-24	✓ (1)	✓ (1)	✓ (1)	✓ (1)	✓ (1)
KWP-GHD-0430-24	✓ (1)	✓ (1)	✓ (1)	✓ (1)	✓ (1)
KWP-GHD-0830-24	✓ (1)	✓ (1)	✓ (1)	✓ (1)	✓ (1)
K-2300-24	✓ (1)	X	X	✓ (1)	✓ (1)
K-2400-24	✓ (1)	X	✓ (1)	✓ (1)	✓ (1)
KWP-GDL-1229-24	✓ (1)	X	X	✓ (1)	✓ (1)
K-CR-1220-24	✓ (1)	X	X	✓ (1)	✓ (1)
K-CR-1275-24	✓ (1)	X	X	✓ (1)	✓ (1)
K-CRHD-1820-24	✓ (1)	✓ (1)	✓ (1)	✓ (1)	✓ (1)
K-CRHD-1910-24	✓ (1)	✓ (1)	✓ (1)	✓ (1)	✓ (1)
K-HEHD-0480-24	✓ (1)	X	✓ (1)	✓ (1)	✓ (1)
K-HEHD-0960-24	✓ (1)	X	✓ (1)	✓ (1)	✓ (1)
K-HEHD-1440-24	✓ (1)	X	✓ (1)	✓ (1)	✓ (1)
K-HEHD-1920-24	✓ (1)	X	✓ (1)	✓ (1)	✓ (1)
K-RGB-0700-24V	✓ (1)	X	X	✓ (1)	✓ (1)
K-RGB-1200-24	✓ (1)	X	X	✓ (1)	✓ (1)
KWP-RGB-1200-24	✓ (1)	X	X	✓ (1)	✓ (1)
K-18D30-0960-24	✓ (1)	✓ (1)	✓ (1)	✓ (1)	✓ (1)
K-27T50-1440-24	✓ (1)	✓ (1)	✓ (1)	✓ (1)	✓ (1)
K-SD-1440-24	✓ (1)	X	✓ (1)	✓ (1)	✓ (1)

Profile PDS-T-BOK

Ref. A00016

Description

✓ - Line of Light for a number (X) of rows - Pixel free imaging

X - Visible Dotting from Diodes


HL - Centered Line of Light - Concentrated in middle

HL (X) - Centered Line of Light for a number (X) of rows - Concentrated in middle

Line of Light Guide



Clean Line of Light (Pixel free imaging)





Centered Line of Light



Visible Dotting from Diodes

SAMPLE PROJECTS

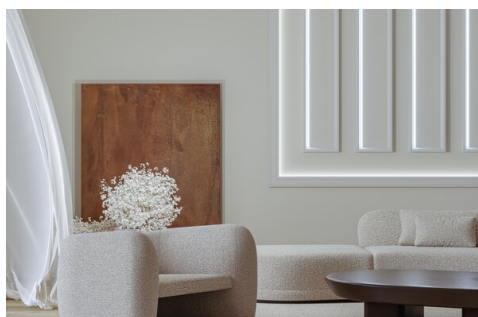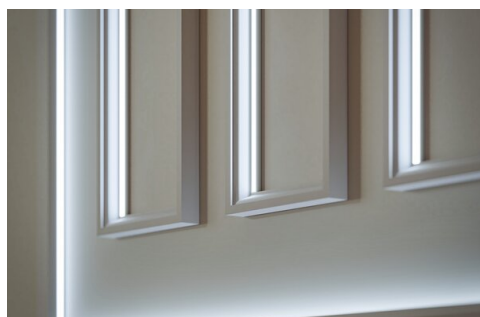

SIMILAR PROFILES




Profile PDS-T
A02057



Profile PDS-UST
A02725



Profile PDS-H
A09204



Profile PDS-ZM-PLUS
A02056



Profile PDS-ZMG
A01418

RELATED ACCESSORIES > COVERS

NAME		KEY FEATURES	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
Cover LIGER-11		- high light quality - Ease of obtaining a line of light - Perfectly diffusing - For indoor and outdoor applications	PC	21 %	black	B17037B
				59 %	satin	B17037S
Cover KA-11		- maximum brightness - indoor use - basic - universal	PC	67 %	frosted	B17064F
				89 %	clear	B17064C
Cover KA-T-11		- maximum brightness - indoor use - economic - universal for basic applications	PVC	54 %	frosted	B17179F
				86 %	clear	B17179C
Cover HS-11		- For indoor and outdoor applications - UV resistant - high durability	PC	59 %	frosted	B17208F
				88 %	clear	B17208C

RELATED ACCESSORIES > END CAPS

NAME		MATERIAL	COLOR	REF.
End cap PDS-4-PLUS		ABS	 black	C24337C07
			 caramel (NCSS3030-Y60R)	C24337L14
			 gray	C24337C02
			 light sage (NCSS2010-G50Y)	C24337L12
			 pastel blue (NCSS2010-B)	C24337L13
			 sand (NCSS2010-Y30R)	C24337L11
			 silver	C24337L01
			 white	C24337C10
End cap with hole PDS-4-PLUS-OTW		ABS	 black	C24337C07TW
			 gray	C24337C02TW
			 white	C24337C10TW

RELATED ACCESSORIES > RELATED LED > WHITE MONO

Profile PDS-T-BOK

Ref. A00016

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-0360-24 3.6 W/m, IP20 NEW		20	3.6 W/m	K-27-0360-24 K-30-0360-24 K-35-0360-24 K-40-0360-24 K-50-0360-24
LED tape K-HD-0430-24 4.3 W/m, IP20 NEW		20	4.3 W/m	K-HD27-0430-24 K-HD30-0430-24 K-HD35-0430-24 K-HD40-0430-24 K-HD50-0430-24
LED tape K-0480-24	- universal for basic applications	20	4.8 W/m	K-27-0480-24 K-30-0480-24 K-35-0480-24 K-40-0480-24 K-50-0480-24
LED tape K-0500-24 5 W/m, IP20 NEW		20	5 W/m	K-30-0500-24 K-40-0500-24
LED tape K-0720-24 7.2 W/m, IP20 NEW		20	7.2 W/m	K-27-0720-24 K-30-0720-24 K-35-0720-24 K-40-0720-24 K-50-0720-24
LED tape K-HD-0830-24 8.3 W/m, IP20 NEW		20	8.3 W/m	K-HD27-0830-24 K-HD30-0830-24 K-HD35-0830-24 K-HD40-0830-24 K-HD50-0830-24
LED tape K-0960-24	- universal for basic applications	20	9.6 W/m	K-27-0960-24 K-30-0960-24 K-30-0960-24-R30 K-35-0960-24 K-40-0960-24 K-40-0960-24-R30 K-50-0960-24 K-65-0960-24
LED tape K-1000-24 10 W/m, IP20 NEW		20	10 W/m	K-30-1000-24 K-40-1000-24
LED tape K-CB-1000-24 10 W/m, IP20 NEW		20	10 W/m	K-CB27-1000-24 K-CB30-1000-24 K-CB40-1000-24 K-CB50-1000-24
LED tape K-1080-24 10.8 W/m, IP20 NEW		20	10.8 W/m	K-27-1080-24 K-30-1080-24 K-35-1080-24 K-40-1080-24 K-50-1080-24
LED tape K-HD-1260-24 12.6 W/m, IP20 NEW		20	12.6 W/m	K-HD27-1260-24 K-HD30-1260-24 K-HD35-1260-24 K-HD40-1260-24 K-HD50-1260-24
LED tape K-1275-24	- universal for basic applications	20	14.4 W/m	K-22-1275-24 K-25-1275-24 K-27-1275-24 K-30-1275-24 K-35-1275-24 K-40-1275-24 K-50-1275-24

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-1440-24	- universal for basic applications	20	14.4 W/m	K-27-1440-24 K-30-1440-24 K-30-1440-24-R30 K-35-1440-24 K-40-1440-24 K-40-1440-24-R30 K-50-1440-24
LED tape K-1500-24 15 W/m, IP20 NEW		20	15 W/m	K-30-1500-24 K-40-1500-24
LED tape K-2300-24	- high power	20	23 W/m	K-30-2300-24 K-40-2300-24
LED tape K-2400-24	- high power	20	24 W/m	K-27-2400-24 K-30-2400-24 K-35-2400-24 K-40-2400-24 K-50-2400-24
LED tape KWP-GHD-0430-24 4.3 W/m, IP65 NEW		65	4.3 W/m	KWP-GHD27-0430-24 KWP-GHD30-0430-24 KWP-GHD35-0430-24 KWP-GHD40-0430-24 KWP-GHD50-0430-24
LED tape KWP-GHD-0480-24	- high LED density - Ease of obtaining a line of light	65	4.8 W/m	KWP-GHD27-0480-24 KWP-GHD30-0480-24 KWP-GHD35-0480-24 KWP-GHD40-0480-24 KWP-GHD50-0480-24
LED tape KWP-GHD-0830-24 8.3 W/m, IP65 NEW		65	8.3 W/m	KWP-GHD27-0830-24 KWP-GHD30-0830-24 KWP-GHD35-0830-24 KWP-GHD40-0830-24 KWP-GHD50-0830-24
LED tape KWP-GHD-0960-24	- high LED density - Ease of obtaining a line of light	65	9.6 W/m	KWP-GHD27-0960-24 KWP-GHD30-0960-24 KWP-GHD35-0960-24 KWP-GHD40-0960-24 KWP-GHD50-0960-24
LED tape KWP-GHD-1260-24 12.6 W/m, IP65		65	12.6 W/m	KWP-GHD27-1260-24 KWP-GHD30-1260-24 KWP-GHD35-1260-24 KWP-GHD40-1260-24 KWP-GHD50-1260-24
LED tape KWP-GHD-1440-24	- high LED density - Ease of obtaining a line of light	65	14.4 W/m	KWP-GHD27-1440-24 KWP-GHD30-1440-24 KWP-GHD35-1440-24 KWP-GHD40-1440-24 KWP-GHD50-1440-24

RELATED ACCESSORIES > RELATED LED > CRI 95+

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-CR-0480-24	- universal for basic applications - CRI over 95	20	4.8 W/m	K-CR27-0480-24 K-CR30-0480-24 K-CR35-0480-24 K-CR40-0480-24 K-CR50-0480-24
LED tape K-CR-1210-24	- CRI over 95	20	4.8 W/m	K-CR22-1210-24 K-CR25-1210-24 K-CR27-1210-24 K-CR30-1210-24 K-CR35-1210-24 K-CR40-1210-24 K-CR50-1210-24

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-CRHD-1910-24	- CRI over 95 - high LED density	20	9.1 W/m	K-CRHD22-1910-24 K-CRHD25-1910-24 K-CRHD27-1910-24 K-CRHD30-1910-24 K-CRHD35-1910-24 K-CRHD40-1910-24 K-CRHD50-1910-24
LED tape K-CR-1220-24	- CRI over 95	20	9.6 W/m	K-CR22-1220-24 K-CR25-1220-24 K-CR27-1220-24 K-CR30-1220-24 K-CR35-1220-24 K-CR40-1220-24 K-CR50-1220-24
LED tape K-CR-1275-24	- CRI over 95	20	14.4 W/m	K-CR22-1275-24 K-CR25-1275-24 K-CR27-1275-24 K-CR30-1275-24 K-CR35-1275-24 K-CR40-1275-24 K-CR50-1275-24
LED tape K-CRHD-1820-24	- CRI over 95 - high LED density	20	18.25 W/m	K-CRHD22-1820-24 K-CRHD25-1820-24 K-CRHD27-1820-24 K-CRHD30-1820-24 K-CRHD35-1820-24 K-CRHD40-1820-24 K-CRHD50-1820-24

RELATED ACCESSORIES > RELATED LED > HIGH EFFICACY

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-HEHD-0480-24	- CRI over 95 - High Efficacy	20	4.8 W/m	K-HEHD22-0480-24 K-HEHD25-0480-24 K-HEHD27-0480-24 K-HEHD30-0480-24 K-HEHD35-0480-24 K-HEHD40-0480-24 K-HEHD50-0480-24
LED tape K-HEHD-0960-24	- CRI over 95 - High Efficacy	20	9.6 W/m	K-HEHD22-0960-24 K-HEHD25-0960-24 K-HEHD27-0960-24 K-HEHD30-0960-24 K-HEHD35-0960-24 K-HEHD40-0960-24 K-HEHD50-0960-24
LED tape K-HEHD-1440-24	- CRI over 95 - High Efficacy	20	14.4 W/m	K-HEHD22-1440-24 K-HEHD25-1440-24 K-HEHD27-1440-24 K-HEHD30-1440-24 K-HEHD35-1440-24 K-HEHD40-1440-24 K-HEHD50-1440-24
LED tape K-HEHD-1920-24	- CRI over 95 - High Efficacy	20	19.2 W/m	K-HEHD22-1920-24 K-HEHD25-1920-24 K-HEHD27-1920-24 K-HEHD30-1920-24 K-HEHD35-1920-24 K-HEHD40-1920-24 K-HEHD50-1920-24

RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CCT

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-RGB-0700-24V	- RGB	20	7 W/m	K-RGB-0700-24V
LED tape K-RGB-1200-24	- RGB	20	12 W/m	K-RGB-1200-24
LED tape KWP-8KRGB-0700-24	- RGB - easy snap-in installation	65	7 W/m	KWP-8KRGB-0700-24
LED tape KWP-RGB-1200-24	- RGB	65	12 W/m	KWP-RGB-1200-24
LED tape KWP-GRGB-1530-24 15.3 W/m, IP65 NEW	- RGBW - high LED density	65	15.3 W/m	KWP-GRGB30-1530-24 KWP-GRGB40-1530-24
LED tape KWP-8KHDRGB-1920-24	- RGB - easy snap-in installation	65	19.2 W/m	KWP-8KHDRGB-1920-24

RELATED ACCESSORIES > RELATED LED > ADJUSTABLE WHITE / DIM TO WARM

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-18D30-0960-24	- Dim To Warm LED Tape	20	9.6 W/m	K-18D30-0960-24
LED tape K-27T50-1440-24	- RGB+Tunable White	20	14.4 W/m	K-27T50-1440-24

RELATED ACCESSORIES > RELATED LED > DIGITAL

Name	Key features	IP protection rating	Power consumption	Ref.
Digital LED strip K-DL-1229-24	- Digital tape	20	12.29 W/m	K-DL30-1229-24 K-DL40-1229-24
Digital LED strip KWP-GDL-1229-24	- Digital tape	65	12.29 W/m	KWP-GDL30-1229-24 KWP-GDL40-1229-24

RELATED ACCESSORIES > RELATED LED

Name	IP protection rating	Power consumption	Ref.
LED tape K-SD-1440-24	20	14.4 W/m	K-SD27-1440-24 K-SD30-1440-24 K-SD35-1440-24 K-SD40-1440-24

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > TECHNICAL AND PROTECTIVE INSERTS

Name	Key features	Material	Color	Ref.
Protective insert TECH-11 NEW	- Protection of the fixture interior during installation	PVC	 gray colored	C24574C02_1 C24574C02_2 C24574C02_3