

Profile TAN-C5

Ref. A05391



IP20



- Simplified design
- Installation in corners
- Lighting at a 45° angle

APPLICATION

- furniture and functional lighting


MOUNTING

- to the surface, using dedicated accessories, mounting adhesive or double-sided adhesive tape
- easy assembly and disassembly by snapping in and out

ADDITIONAL INFORMATION

- cover with a simplified structure
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING

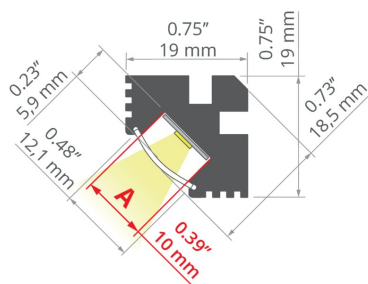

TECHNICAL SPECIFICATIONS

Material	aluminum
Possible fixture IP	20
Possible fixture shapes	linear
Profile cross-section	angled
Width	19 mm
Height	19 mm
LED gluing width A	10 mm
Number of LED strips A (8 mm wide)	1
Width of the glow	12.5 mm
Max power of a single KLUŚ LED strip	15 W/m
Lighting at an angle	45
Building type	Residential, Retail, HoReCa object
Facility zone	office, kitchen, bathroom, under-cabinet / furniture, cove / perimeter, exhibition / tradeshow / display
Easy assembly and disassembly by snapping in and out	yes

Color	Length	Ref
■ silver		A05391A_1
■ silver anodized	2005 mm	A05391A_2
■ silver non anodized	1000 mm	A05391N_1
	2005 mm	A05391N_2


Standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)

Profile TAN-C5

Ref. A05391

The cover is cut to the length of the profile	yes
Wire out end cap	yes
Wire out back of extrusion	yes

SAMPLE PROJECTS

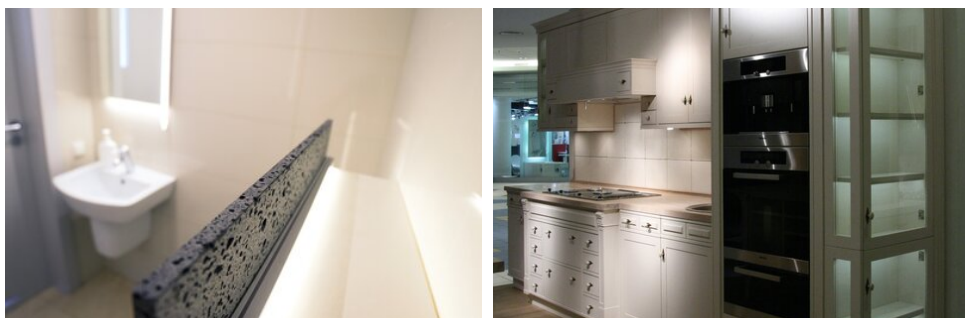

RELATED ACCESSORIES > COVERS

NAME	KEY FEATURES	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
Cover T-13	 - indoor use - for basic applications	PMMA	85 %	semi-transparent	B17015T

RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CCT

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-RGB-0700-24V	- RGB	20	7 W/m	K-RGB-0700-24V
LED tape K-RGB-1200-24	- RGB	20	12 W/m	K-RGB-1200-24

RELATED ACCESSORIES > RELATED LED > WHITE MONO

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-0360-24 3.6 W/m, IP20 NEW		20	3.6 W/m	K-27-0360-24 K-30-0360-24 K-35-0360-24 K-40-0360-24 K-50-0360-24
LED tape K-0720-24 7.2 W/m, IP20 NEW		20	7.2 W/m	K-27-0720-24 K-30-0720-24 K-35-0720-24 K-40-0720-24 K-50-0720-24

Profile TAN-C5

Ref. A05391

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-1080-24 10.8 W/m, IP20 NEW		20	10.8 W/m	K-27-1080-24 K-30-1080-24 K-35-1080-24 K-40-1080-24 K-50-1080-24
LED tape K-HD-0430-24 4.3 W/m, IP20 NEW		20	4.3 W/m	K-HD27-0430-24 K-HD30-0430-24 K-HD35-0430-24 K-HD40-0430-24 K-HD50-0430-24
LED tape K-HD-0830-24 8.3 W/m, IP20 NEW		20	8.3 W/m	K-HD27-0830-24 K-HD30-0830-24 K-HD35-0830-24 K-HD40-0830-24 K-HD50-0830-24
LED tape K-HD-1260-24 12.6 W/m, IP20 NEW		20	12.6 W/m	K-HD27-1260-24 K-HD30-1260-24 K-HD35-1260-24 K-HD40-1260-24 K-HD50-1260-24
LED tape K-0480-24	- universal for basic applications	20	4.8 W/m	K-27-0480-24 K-30-0480-24 K-35-0480-24 K-40-0480-24 K-50-0480-24
LED tape K-0960-24	- universal for basic applications	20	9.6 W/m	K-27-0960-24 K-30-0960-24 K-30-0960-24-R30 K-35-0960-24 K-40-0960-24 K-40-0960-24-R30 K-50-0960-24 K-65-0960-24
LED tape K-1440-24	- universal for basic applications	20	14.4 W/m	K-27-1440-24 K-30-1440-24 K-30-1440-24-R30 K-35-1440-24 K-40-1440-24 K-40-1440-24-R30 K-50-1440-24
LED tape K-HD-0480-24	- high LED density - Ease of obtaining a line of light	20	4.8 W/m	K-HD27-0480-24 K-HD30-0480-24 K-HD35-0480-24 K-HD40-0480-24 K-HD50-0480-24
LED tape K-HD-0960-24	- high LED density - Ease of obtaining a line of light	20	9.6 W/m	K-HD27-0960-24 K-HD30-0960-24 K-HD35-0960-24 K-HD40-0960-24 K-HD50-0960-24
LED tape K-HD-1440-24	- high LED density - Ease of obtaining a line of light	20	14.4 W/m	K-HD27-1440-24 K-HD30-1440-24 K-HD35-1440-24 K-HD40-1440-24 K-HD50-1440-24

RELATED ACCESSORIES > RELATED LED > CRI 95+

Name	Key features	IP protection rating	Power consumption	Ref.

Profile TAN-C5

Ref. A05391

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-CR-0480-24	- universal for basic applications - CRI over 95	20	4.8 W/m	K-CR27-0480-24 K-CR30-0480-24 K-CR35-0480-24 K-CR40-0480-24 K-CR50-0480-24
LED tape K-CR-0960-24	- universal for basic applications - CRI over 95	20	9.6 W/m	K-CR27-0960-24 K-CR30-0960-24 K-CR35-0960-24 K-CR40-0960-24 K-CR50-0960-24
LED tape K-CR-1440-24	- universal for basic applications - CRI over 95	20	14.4 W/m	K-CR27-1440-24 K-CR30-1440-24 K-CR35-1440-24 K-CR40-1440-24 K-CR50-1440-24

RELATED ACCESSORIES > RELATED LED > HIGH EFFICACY

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-VHE-0480-24	- universal for basic applications - high efficacy - High Efficacy	20	4.8 W/m	K-VHE27-0480-24 K-VHE30-0480-24 K-VHE35-0480-24 K-VHE40-0480-24 K-VHE50-0480-24
LED tape K-VHE-0960-24	- universal for basic applications - high efficacy - High Efficacy	20	9.6 W/m	K-VHE27-0960-24 K-VHE30-0960-24 K-VHE35-0960-24 K-VHE40-0960-24 K-VHE50-0960-24
LED tape K-VHE-1440-24	- universal for basic applications - high efficacy - High Efficacy	20	14.4 W/m	K-VHE27-1440-24 K-VHE30-1440-24 K-VHE35-1440-24 K-VHE40-1440-24 K-VHE50-1440-24

RELATED ACCESSORIES > RELATED LED > ADJUSTABLE WHITE / DIM TO WARM

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-18D30-0960-24	- Dim To Warm LED Tape	20	9.6 W/m	K-18D30-0960-24
LED tape K-27T50-1440-24	- RGB+Tunable White	20	14.4 W/m	K-27T50-1440-24

RELATED ACCESSORIES > RELATED LED > DIGITAL

Name	Key features	IP protection rating	Power consumption	Ref.
Digital LED strip K-DL-1229-24	- Digital tape	20	12.29 W/m	K-DL30-1229-24 K-DL40-1229-24

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > MOUNTING BRACKETS

Name	Key features	Material	Color	Ref.
Mounting bracket 45-EXT NEW	- Mounting with angle adjustment function	aluminum, stainless steel	 gray	C28309N00

Profile TAN-C5

Ref. A05391

Name	Key features	Material	Color	Ref.
Mounting bracket 45-STN	- For indoor and outdoor applications	stainless steel	silver black white	C24144N00 C24262L07 C24265L10

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > FASTENERS AND HEADS FOR PROFILES

Name	Material	Color	Ref.
Head 45-ZO	stainless steel	silver	42211
Head 45-ST	stainless steel	silver	C28111N00

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONDUCTIVE FASTENERS AND HEADS FOR PROFILES

Name	Material	Color	Ref.
Fastener DP-45-MOC-ZO, gray	stainless steel	gray	00653

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > OTHER

Name	Material	Ref.
Gland 6,4x1,6	rubber	C24518C07

RELATED ACCESSORIES > ELECTRONICS > SWITCHES

Name	Key features	IP protection rating	Ref.
Proximity switch UNI-11 NEW	- touchless switch - width 11mm	20	E61603
Proximity switch UNI-P	- touchless switch - width only 7mm - factory pre-soldered wires	20	E61580