

# TABLE OF CONTENTS

<b>1</b>	<b>Introduction</b>	<b>1</b>
<b>2</b>	<b>Related Work</b>	<b>7</b>
2.1	GPUS for explicit and implicit methods . . . . .	7
2.2	GPUS/RBF . . . . .	7
2.3	RBF/Finite-Difference . . . . .	7
2.3.1	Global RBF Method . . . . .	7
2.3.2	RBF-FD . . . . .	7
2.4	Preconditioners . . . . .	7
2.5	Sparse matrix libraries . . . . .	7
2.6	Various GPU/based libraries . . . . .	7
2.6.1	CUSP . . . . .	7
2.6.2	ViennaCL . . . . .	7
2.7	Parallel implementations of RBF . . . . .	8
2.8	Contributions of this Work . . . . .	8
<b>3</b>	<b>Fragments (integrate above)</b>	<b>9</b>
3.1	Fragments . . . . .	10
<b>I</b>	<b>Preliminaries</b>	<b>14</b>
<b>4</b>	<b>RBF Methods for PDEs</b>	<b>15</b>
4.1	Survey of Related Work . . . . .	15
4.1.1	Global RBF Methods . . . . .	19
4.1.2	Compactly Support RBFs . . . . .	20
4.1.3	Local RBF Methods . . . . .	21
4.1.4	Recent Advances in Conditioning . . . . .	22
4.2	Comparison of RBF Methods . . . . .	22
4.2.1	RBF Scattered Data Interpolation . . . . .	23
4.2.2	Reconstructing Solutions for PDEs . . . . .	24
4.2.3	PDE Methods . . . . .	25

<b>5</b>	<b>Introduction to RBF-FD</b>	<b>30</b>
5.1	Background . . . . .	31
5.2	The RBF-generated Finite Differences Method . . . . .	32
5.2.1	Stencil Weights . . . . .	33
5.2.2	Differentiation Matrix . . . . .	34
5.2.3	Multiple Operators . . . . .	34
5.3	Weight Operators . . . . .	35
5.3.1	First and Second Derivatives ( $\frac{1}{r} \frac{d\phi}{dr}, \frac{d^2\phi}{dr^2}$ ) . . . . .	35
5.3.2	Cartesian Gradient ( $\nabla$ ) . . . . .	36
5.3.3	Cartesian Laplacian ( $\nabla^2$ ) . . . . .	36
5.3.4	Laplace-Beltrami ( $\Delta_S$ ) on the Sphere . . . . .	36
5.3.5	Constrained Gradient ( $P_x \cdot \nabla$ ) on the Sphere . . . . .	37
5.3.6	Hyperviscosity $\Delta^k$ for Stabilization . . . . .	37
5.4	On Choosing the Right $\epsilon$ . . . . .	38
5.5	Generating Stencils . . . . .	38
5.5.1	Node Placement – Centroidal Voronoi Tessellation . . . . .	39
5.5.2	Approximate Nearest Neighbor (ANN) Query . . . . .	39
<b>6</b>	<b>A Distributed Multi-GPU RBF-FD Implementation</b>	<b>41</b>
<b>7</b>	<b>Parallel Solvers</b>	<b>42</b>
7.1	On the use of libraries for parallel solvers . . . . .	42
7.2	Partitioning . . . . .	43
7.3	Local node ordering . . . . .	44
7.4	Two level parallelism . . . . .	47
7.4.1	Overlapping Computation and Communication . . . . .	47
7.4.2	Explicit Solvers . . . . .	48
7.4.3	Fragments (integrate above) . . . . .	52
7.4.4	Implicit Solvers . . . . .	52
7.5	RBF-FD as SpMV . . . . .	53
<b>8</b>	<b>Sparse Matrix Multiplication on the GPU</b>	<b>54</b>
<b>9</b>	<b>GMRES</b>	<b>55</b>
<b>10</b>	<b>Numerical Validation</b>	<b>56</b>
10.1	Choosing $\epsilon$ . . . . .	56
10.1.1	CVT epsilon tests . . . . .	56
10.2	Parabolic . . . . .	56
10.3	Hyperbolic . . . . .	56
10.3.1	Vortex Rollup . . . . .	58
10.3.2	Solid body rotation . . . . .	60
10.4	Fragments (integrate above) . . . . .	63
10.4.1	CFL . . . . .	64
10.5	GFLOP Throughput . . . . .	64
10.6	Elliptic . . . . .	65

<b>11 Stokes</b>	<b>66</b>
11.1 Introduction . . . . .	66
11.2 Bad Problem . . . . .	69
11.2.1 Details . . . . .	69
11.3 RBF-FD Weights . . . . .	69
11.4 GPU Based Solver . . . . .	70
11.4.1 GMRES Algorithm . . . . .	70
11.4.2 Multiple GPUs . . . . .	71
11.5 Multiple GPUs . . . . .	72
11.5.1 Solution Ordering . . . . .	73
11.6 Governing Equations . . . . .	74
11.6.1 Constraints . . . . .	76
11.6.2 Manufactured Solution . . . . .	76
11.7 Preconditioning . . . . .	77
11.8 GMRES Results . . . . .	78
11.9 Fragments . . . . .	78
<b>12 Performance Benchmarks</b>	<b>79</b>
12.1 Metrics . . . . .	79
12.2 OpenCL . . . . .	79
12.2.1 OpenCL vs CUDA . . . . .	79
12.2.2 Asynchronous Queuing . . . . .	80
12.3 Fermi Architecture . . . . .	80
12.3.1 Double Precision . . . . .	80
12.3.2 Local Caching . . . . .	80
12.3.3 Multiple Kernel Scheduling . . . . .	80
12.3.4 Future NVidia Hardware . . . . .	80
12.4 HPC Spear Cluster . . . . .	81
12.5 Keeneland . . . . .	81
12.6 Future Hardware . . . . .	81
12.7 MPI_Alltoally . . . . .	81
12.8 Asynchronous OpenCL . . . . .	84
12.9 Multi-Queue OpenCL . . . . .	84
12.10 GPU Kernel Optimizations . . . . .	84
12.10.1 Work-Group Size and Number of Stencils . . . . .	84
12.10.2 Parallel Reduction in Shared Memory . . . . .	84
12.10.3 Comparison: custom SpMV for explicit schemes vs ViennaCL . . . . .	84
<b>13 Neighbor Queries and Node Ordering</b>	<b>85</b>
13.1 Neighbor Queries . . . . .	85
13.1.1 k-D Tree . . . . .	85
13.1.2 Locality Sensitive Hashing . . . . .	85
13.2 Node Ordering . . . . .	85
<b>14 Community Outreach</b>	<b>88</b>

<b>A</b>	<b>Avoiding Pole Singularities with RBF-FD</b>	<b>89</b>
<b>B</b>	<b>Projected Weights on the Sphere</b>	<b>91</b>
B.1	Direct Weights . . . . .	91
B.2	Indirect Weights . . . . .	92
B.2.1	Comparison of Direct and Indirect Weights . . . . .	92
B.3	Conclusions . . . . .	93

# CHAPTER 1

## INTRODUCTION

outline:

- high performance computing demand for numerical modeling
  - complexity of physics terms plus the complexity of numerical methods push the limits of hardware
  - problem since the dawn of computing: limited registers/ALUs, unlimited computation. how do we triage?
  - utilize every available piece of hardware, parallelism, etc.
  - new algorithms think smarter, not just faster.
- a new era of numerical methods ushered by Radial Basis functions
  - scattered nodes
    - \* place samples where they are necessary, not where the grid requires
    - \* maximize the representation of nodes and minimize interpolation error
    - \* higher order accuracy than standard
  -

Unanswered Questions:

- If RBF-FD is higher order accurate than FV, why would anyone opt for FV?
  - the conservative form FV is preferred in physical science since it does not allow loss of (what? mass/energy/???)
  - FV are typically low-order. what is the trade-off in complexity between methods. For a much higher-order RBF-FD if it is not conservative, how many iterations is it accurate consistent with the low-order FV? 1

**Background on GPUs.** GPUs were introduced in 80's see master's thesis.

Originally GPUs were designed as parallel rasterizing units. They had limited logic control in contrast to the serial CPUs and their advanced branching and looping logic.

Gradually new and complex logic was added to the GPU to produce the shader languages that allowed developers to customize specific parts of the rendering pipeline. This allowed

scientific problems such as the diffusion equation [cite Lore and others](#) to be solved in process of rendering. In other words, the GPU was tricked into computing.

The year 2006 brought the modern age of GPU computing with the introduction of CUDA from NVidia. The high level language allowed scientists to leverage the GPU as a parallel accelerator without all of the overhead of setting up graphics contexts and tricking the hardware into computing. Memory management is still the developer's responsibility, but compiler transforms generic C/Fortran code to GPU instruction set.

Scientific Computing has seen a widespread adoption of GPGPU because of the goal to get to "exa-scale" computing, which may only be possible in the near future with the help of GPU accelerators [4].

NVidia is not the only company involved in many core parallel accelerators. Other groups like AMD and Intel have been increasing the number of cores as well. The end effect is a hybridization where CPUs look similar to GPUs and vice-versa.

Until 2009, the hardware distinction required that developers target parallelism on CPUs and GPUs using different languages. Then the OpenCL standard was drafted and implemented. OpenCL is a parallel language that strives to provide functional portability rather than performance.

We focus on the OpenCL language within this dissertation with confidence that hardware will change frequently. In fact, every 18 months [cite](#) shows a new release of GPU hardware, manycore CPU hardware and extensions to parallel languages. But if hardware is constantly changing, then we need to focus on a high level implementation that allows portability. We need a language like OpenCL to carry our implementations into the future regardless of what hardware and which company survive.

**Scientific problems and the need for computational methods.** Many scientific problems of importance can be expressed as a collection of partial differential equations defined for some domain. In order to solve these problems , computational numerical methods are employed on a discretized version of the domain. Traditionally, three major categories exist for PDE solutions: [finite difference \(FD\)](#), [finite element \(FEM\)](#) and [spectral element \(SEM\)](#) [? ]. Interestingly, all three of these methods rely on an underlying mesh, making them *meshed methods*. While each has had a turn in the spotlight, more recently a new category, or rather a generalization on all three previous categories, has emerged: *meshfree methods*.

**Traditional methods (FD, FV, FEM, SEM) and their dependence on structured meshes and "nice" connections (e.g., Delaunay)..** Note, finite element allows for triangle meshes, but well balanced Delaunay are preferred to limit ill conditioning. The same regularity in nodes is preferred with RBF methods. The reason for this is to keep best conditioning of the system.

Leaders in computational science are cobbled together with metaphorical bubble gum and duct tape. Many scientists neglect to plan in advance for items like:

- generic point clouds; most methods require a point cloud include some connectivity information for structured and unstructured mesh.
- we need to add adaptive mesh refinement
- we need to avoid pole singularities

- save on interpolations and differences but get similar answer in  $O(nm)$ .

recently, meshfree methods surfaced leveraging RBFs.

RBFs have interesting history. Started with interpolation, but went to collocation with global SEM scheme. The global scheme has  $O(N^2)$  complexity..

Most recently RBFs went to RBF-FD. Introduces sparsity and reduces cost of scaling..

For RBF problems in general there is limited work that scales the methods to large problems..

Large problems require high performance computing. Given lack of scaling in literature, it has been irrelevant until recently to assess the possibility of solving PDEs with RBF-FD on GPUs..

**what is new in the thesis (summarize: 1-2 pages).** The large scale contributions of this thesis can be summarized as follows:

- This thesis covers details related to the application of the RBF-FD method for both explicit and implicit solutions for PDES.
- Our domain decomposition algorithm provides the first known parallelization of RBF-FD across multiple CPUs.
- Furthermore, we offload intense computational tasks to the GPU creating the first ever single- and multi-GPU implementation of RBF-FD.

As part of the research on RBF-FD within those three areas we additionally contributed the following:

- Application of RBF-FD to Centroidal Voronoi Tessellation grids.
- Approximate Nearest Neighbor methods for faster neighbor queries and improved system conditioning

**Research Statement.** What motivated this research?

The goal of this dissertation is to present a unified approach to parallel solutions of Partial Differential Equations (PDEs) with a method called Radial Basis Function-generated Finite Differences (RBF-FD).

**fix:** Many scientific problems of importance can be expressed as a collection of PDEs. Solutions to these problems provide answers to many simple questions such as the current temperature of a material, or perhaps the current position of a moving object. Complex and coupled PDEs can simulate the growth of zebra stripes or cheetah spots [45] or even model the flow of fluids. **Need refs for examples**

In order to solve these problems, computational numerical methods are employed on a discretized version of the domain. Traditionally, three (**and how would I classify FV? PartOfUnity?**) major categories exist for PDE solutions: finite difference (FD), finite element (FEM) and spectral element (SEM) [28]. Interestingly, all three of these methods rely on an underlying mesh, making them *meshed methods*. While each has had a turn in the

spotlight, more recently a new category, or rather a generalization on all three previous categories, has emerged: *meshfree methods*.

The first task in traditional meshed methods is to generate an underlying grid/mesh. Node placement can be done in a variety of ways including uniform, non-uniform and random (monte carlo) sampling, or through iterative methods like Lloyd's algorithm that generate a regularized sampling of the domain (see e.g., [24]). meshed methods have constraints on edge length and angle. Delaunay answers this, but is costly to compute Mesh2d, Triangle, DIstmesh In addition to choosing nodes, meshed methods require connectivity/adjacency lists to form stencils (FD) or elements (FEM, SEM)—this implies an added challenge to cover the domain closure with a chosen element type. While these tasks may be straightforward in one- or two-dimensions, the extension into higher dimensions becomes increasingly more cumbersome [61].

Complex geometries, irregular boundaries and mesh refinement also pose a problem for meshed methods. As the complexity of the geometry/boundaries increases, so too should the resolution of the approximating mesh in order to accurately reconstruct the detail present. A naïve approach to refinement increases the density of nodes uniformly across the domain, adding much more computation and memory storage than necessary for activity that is localized to sub-regions of the domain. Multiresolution methods attempt to compromise between accurate approximation of the domain and reduced resolution by one of two approaches: a) *multilevel methods* that decompose the model into a hierarchy with several levels of mesh detail, then only use a level when it is required to capture phenomena; and b) *adaptive irregular sampling* which has one level of detail, but non-uniform nodal density concentrated in areas of high activity [51]. Such techniques require robust methods and complex code capable of either coarsening/smoothing the approximate solutions to new level, or handling non-uniform node placement, element size etc.

Ideally, we seek a method defined on arbitrary geometries, that behaves regularly in any dimension, and avoids the cost of mesh generation. The ability to locally refine areas of interest in a practical fashion is also desirable. Fortunately, meshfree methods provide all of these properties: based wholly on a set of independent points in  $n$ -dimensional space, there is minimal cost for mesh generation, and refinement is as simple as adding new points where they are needed.

Since their adoption by the mathematics community in the 1980s ([28]), a plethora of meshfree methods have arisen for the solution of PDEs. For example, smoothed particle hydrodynamics, partition of unity method, element-free Galerkin method and others have been considered for fluid flow problems [16]. For a recent survey of methods see [61].

A subset of meshfree methods of particular interest to the community today revolves around Radial Basis Functions (RBFs). RBFs are a class of radially symmetric functions (i.e., symmetric about a point,  $x_j$ , called the *center*) of the form:

$$\phi_j(\mathbf{x}) = \phi(r(\mathbf{x})) \quad (1.1)$$

where the value of the univariate function  $\phi$  is a function of the Euclidean distance from the center point  $\mathbf{x}_j$  given by  $r(\mathbf{x}) = \|\mathbf{x} - \mathbf{x}_j\|_2 = \sqrt{(x - x_j)^2 + (y - y_j)^2 + (z - z_j)^2}$ . Examples of commonly used RBFs are available in Table 4.1 with their corresponding plots in Figure 1.1. RBF methods are based on a superposition of translates of these radially symmetric functions, providing a linearly independent but non-orthogonal basis used to

interpolate between nodes in  $n$ -dimensional space. An example of RBF interpolation in 2D using 15 Gaussians is shown in Figure 4.3, where  $\phi_j(r(\mathbf{x}))$  is an RBF centered at  $\{\mathbf{x}_j\}_{j=1}^n$ .

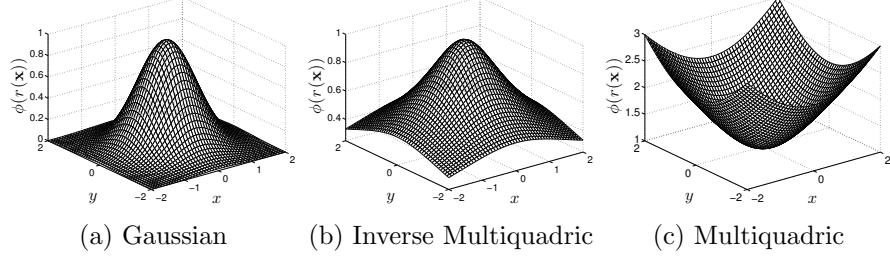


Figure 1.1: Commonly used RBFs.

With a history extending back four decades for RBF interpolation schemes [48], and two decades for RBFs applied to solving PDEs [55], many avenues of research remain untouched within their realm. Being a meshless method, RBF methods excel at solving problems that require geometric flexibility with scattered node layouts in  $n$ -dimensional space. They naturally extend into higher dimensions without significant increase in programming complexity [34, 96]. In addition to competitive accuracy and convergence compared with other state-of-the-art methods [31, 32, 34, 35, 96], they also boast stability for large time steps.

Like most numerical methods, RBFs come with certain limitations. For example, RBF interpolation is—in general—not a well-posed problem, so it requires careful choice of positive definite or conditionally positive definite basis functions [28, 51]. The example 2D RBFs presented in Figure 1.1 are infinitely smooth and satisfy the (conditional) positive definite requirements.

Infinitely smooth RBFs depend on a shape or support parameter  $\epsilon$  that controls the width of the function. The functional form of the shape function becomes  $\phi(\epsilon r)$ . Decreasing  $\epsilon$  increases the support of the RBF and in most cases, the accuracy of the interpolation, but worsens the conditioning of the RBF interpolation problem [77]. The conditioning of the system also dramatically decreases as the number of nodes in the problem increases. Fortunately, recent algorithms such as Contour-Padé [37] and RBF-QR [40, 42] allow for numerically stable computation of interpolants in the nearly flat RBF regime (i.e.,  $\epsilon \rightarrow 0$ ) where high accuracy has been observed [43, 60].

Historically, the most common way to leverage RBFs for PDE solutions is in a global interpolation sense. That is, the value of a function value or any of its derivatives at a node location is a linear combination of all the function values over the *entire* domain, just as in a pseudospectral method. If using infinitely smooth RBFs, this leads to spectral (exponential) convergence of the RBF interpolant for smooth data [38]. As discussed in [35], global RBF methods require  $O(N^3)$  floating point operations (FLOPs) in pre-processing, where  $N$  is the total number of nodes, to assemble and solve a dense linear system for differentiation coefficients. The coefficients in turn are assembled into a dense Differentiation Matrix (DM) that is applied via matrix-vector multiply to compute derivatives at all  $N$  nodes for a cost of  $O(N^2)$  operations. assumes explicit scheme

Alternatively, one can use RBF-generated finite differences (RBF-FD) to introduce sparse DMs (Note: for pure interpolation, compactly supported RBFs can also introduce

sparse matrices [93]). RBF-FD was first introduced by Tolstykh in 2000 [87], but it was the simultaneous, yet independent, efforts in [80], [86], [95] and [15] that gave the method its real start. RBF-FD share advantages with global RBF methods, like the ability to function without an underlying mesh, easily extend to higher dimensions and afford large time steps; however spectral accuracy is lost. Some of the advantages of RBF-FD include high computational speed together with high-order accuracy (6th to 10th order accuracy is common) and the opportunity for parallelization.

The RBF-FD method is similar in concept to classical finite-differences (FD): both methods approximate derivatives as a weighted sum of values at nodes within a nearby neighborhood. The two methods differ in that the underlying differentiation weights are exact for RBFs rather than polynomials.

As in FD, increasing the stencil size  $n$  increases the accuracy of the approximation. Given  $N$  total nodes in the domain (such as on the surface of a sphere),  $N$  linear systems, each of size  $n \times n$ , are solved to calculate the differentiation weights. Since  $n \ll N$ , the RBF-FD preprocessing complexity is dominated by  $O(N)$ —much lower than for the global RBF method of  $O(N^3)$ —with derivative evaluations on the order of  $O(nN) \implies O(N)$  FLOPs.

# CHAPTER 2

## RELATED WORK

### 2.1 GPUS for explicit and implicit methods

### 2.2 GPUS/RBF

[78, 79]. Our paper [11] introduced the first implementation of RBF-FD to span multiple CPUs and multiple GPUs.

### 2.3 RBF/Finite-Difference

#### 2.3.1 Global RBF Method

#### 2.3.2 RBF-FD

RBF-FD have been successfully employed for a variety of problems including Hamilton-Jacobi equations [15], convection-diffusion problems [16, 83], incompressible Navier-Stokes equations [17, 80], transport on the sphere [41], and the shallow water equations [33].

### 2.4 Preconditioners

Many preconditioners are based on physical properties of the domain, PDE and the spectral properties of the numerical method.

### 2.5 Sparse matrix libraries

### 2.6 Various GPU-based libraries

#### 2.6.1 CUSP

GMRES in CUSP is based on the Givens rotations for the Arnoldi process.

#### 2.6.2 ViennaCL

GMRES in ViennaCL is based on Householder reflections for the Arnoldi process. We opted to leverage the ViennaCL package in most of our implementations.

$$\phi_j(\epsilon \|\mathbf{x} - \mathbf{x}_j\|) = e^{-(\epsilon \|\mathbf{x} - \mathbf{x}_j\|)^2}, (\epsilon = 2) \quad \hat{f}_N = \sum_{j=1}^N w_j \phi_j(\epsilon \|\mathbf{x} - \mathbf{x}_j\|)$$

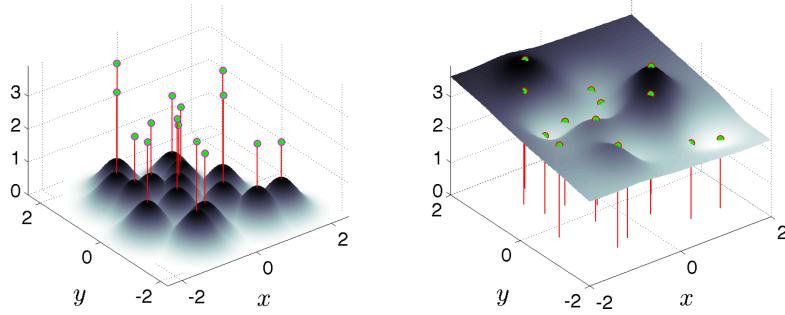


Figure 2.1: RBF interpolation using 15 translates of the Gaussian RBF with  $\epsilon = 2$ . One RBF is centered at each node in the domain. Linear combinations of these produce an interpolant over the domain passing through known function values.

## 2.7 Parallel implementations of RBF

As  $N$  grows larger, it behooves us to work on parallel architectures, be it CPUs or GPUs. With regard to the latter, there is some research on leveraging RBFs on GPUs in the fields of visualization [21, 92], surface reconstruction [14, 20], and neural networks [12]. However, research on the parallelization of RBF algorithms to solve PDEs on multiple CPU/GPU architectures is essentially non-existent. We have found three studies that have addressed this topic, none of which implement RBF-FD but rather take the avenue of domain decomposition for global RBFs (similar to a spectral element approach). In [23], Divo and Kassab introduce subdomains with artificial boundaries that are processed independently. Their implementation was designed for a 36 node cluster, but benchmarks and scalability tests are not provided. Kosec and Šarler [59] parallelize coupled heat transfer and fluid flow models using OpenMP on a single workstation with one dual-core processor. They achieved a speedup factor of 1.85x over serial execution, although there were no results from scaling tests. Yokota, Barba and Knepley [100] apply a restrictive additive Schwarz domain decomposition to parallelize global RBF interpolation of more than 50 million nodes on 1024 CPU processors. Only Schmidt et al. [79] have accelerated a global RBF method for PDEs on the GPU. Their MATLAB implementation applies global RBFs to solve the linearized shallow water equations utilizing the AccelerEyes Jacket [2] library to target a single GPU.

## 2.8 Contributions of this Work

Within this dissertation, we have developed the first implementation of RBF-FD to span multiple CPUs. Each CPU has a corresponding GPU attached to it in a one-to-one correspondence. We thus also introduced the first known implementation of accelerated RBF-FD on the GPU.

continue with outline of chapters We present our explicit and implicit solutions to PDEs with our multi-GPU RBF-FD implementation.

# CHAPTER 3

## Fragments (Integrate Above)

with the goal of solving coupled fluid flows modelling the physics (?) in the interior of the earth. We require both advective terms and diffusive terms. The components of a good pressure fluid solver are explicit and implicit differentiation. Whether we solve a steady-state PDE implicitly or a hyperbolic PDE with an implicit time-scheme, we require an *implicit solver*. An implicit solver is nothing but a method of assembling a differentiation matrix, forcing terms on the RHS and then solving the linear system. A direct LU factorization would suffice if our system is dense, but with RBF-FD the system is sparse. Sparse systems can be efficiently solved under the right conditions through sparse iterative solvers. :

Sufficient understanding of RBF interpolation led to the development of the first global RBF method for PDEs in [55]. Most popular among global methods is collocation, wherein RBF interpolation approximates the PDE solution by solving a large, dense linear system. In some cases RBF collocation demonstrates higher accuracy for the same number of nodes when compared to other state-of-the-art pseudospectral methods (e.g., [60] [? ] [? ]). In [? ], spectral accuracy was demonstrated for hyperbolic PDEs even with local refinement of nodes in time.

Unfortunately—ill-conditioning aside—collocation methods are prohibitively expensive to solve when scaled to a large number of nodes. Assuming the collocation matrix does not change in time, global methods, with their dense systems, scale at  $O(N^3)$  operations for initial preconditioning/preprocessing followed by  $O(N^2)$  operations every time-step. This complexity is consistent with any collocation scheme. However, by introducing sparsity into the system (e.g., using compactly supported RBFs), the complexity is somewhat reduced.

General Purpose GPU (GPGPU) computing is one of today’s hottest trends within scientific computing. The release of NVidia’s CUDA at the end of 2006 marked both a redesign of GPU architecture, plus the addition of a new software layer that finally made GPGPU accessible to the general public. The CUDA API includes routines for memory control, interoperability with graphics contexts (i.e., OpenGL programs), and provides GPU implementation subsets of BLAS and FFTW libraries [69]. After the undeniable success of CUDA for C, new projects emerged to encourage GPU programming in languages like FORTRAN (see e.g., HMPP [1] and Portland Group Inc.’s CUDA-FORTRAN [71]).

In early 2009, the Khronos Group—the group responsible for maintaining OpenGL—announced a new specification for a general parallel programming language referred to as the Open Compute Language (OpenCL) [58]. Similar in design to the CUDA language—in

many ways it is a simple refactoring of the predecessor—the goal of OpenCL is to provide a mid-to-low level API and language to control any multi- or many-core processor in a uniform fashion. Today, OpenCL drivers exist for a variety of hardware including NVidia GPUs, AMD/ATI CPUs and GPUs, and Intel CPUs.

This *functional portability* is the cornerstone of the OpenCL language. However, functional portability does not imply performance portability. That is, OpenCL allows developers to write kernels capable of running on all types of target hardware, but optimizing kernels for one type of target (e.g., GPU) does not guarantee the kernel will run efficiently on another target (e.g., CPU). With CPUs tending toward many cores, and the once special purpose, many-core GPUs offering general purpose functionality, it is easy to see that soon the CPU and GPU will meet somewhere in the middle as general purpose many-core architectures. Already, ATI has introduced the Fusion APU (Accelerated Processing Unit) which couples an AMD CPU and ATI GPU within a single die. OpenCL is an attempt to standardize programming ahead of this intersection.

Petascale computing centers around the world are leveraging GPU accelerators to achieve peak performance. In fact, many of today's high performance computing installations boast significantly more GPU accelerators than CPU counterparts. The Keeneland project is one such example, currently with 240 CPUs accompanied by 360 NVidia Fermi class GPUs with at least double that number expected by the end of 2012 [89].

Such throughput oriented architectures require developers to decompose problems into thousands of independent parallel tasks in order to fully harness the capabilities of the hardware. To this end, a plethora of research has been dedicated to researching algorithms in all fields of computational science. Of interest to us are methods for atmospheric- and geo-sciences.

### 3.1 Fragments

- what is new in the thesis (summarize: 1-2 pages)
- get all your figures
- 1/2 page description per figures
  - All figure captions (self-contained). Don't skimp on words.
- Previous work
  - GPUS/implicit methods
  - GPUS/RBF
  - RBF/Finite-Difference
  - Preconditionners (info on that)
  - Sparse matrix libraries
  - Various GPU-based libraries
  - Parallel implementations of RBF (there are any?)

Benchmarking....

- Timing (serial, parallel)
- Timing with special node reorderings. Explain logic

Test cases ...

Get all your references in bibtex. Send them to me.

Need detailed table of content.

As will be demonstrated in Chapter ??, most of the literature surrounding the solution of PDEs with RBFs is based on collocation. Collocation finds an interpolant that passes through a set of *collocation points* (commonly chosen to coincide with RBF centers) satisfying the differential equations with zero residual. Collocation, then, is a global interpolation problem. Alternative methods exist based on local collocation formulations (see [? ? ? ? ?]). Recently, a new approach using FD-like stencils to approximate differential operators was proposed (see e.g., [? ? ? ?]). The so-called RBF-FD method uses RBFs to interpolate initial conditions, but not the differential equations—generalized FD stencils approximate differential operators.

Even today, RBFs are still up-and-coming in the scientific world with many avenues of research left to consider. Global formulations are understood to have spectral convergence properties, high accuracy and other benefits like adaptivity and ease of implementation over meshed methods [? ]. However, little is known about the behavior of local and RBF-FD methods. Open questions include (but are in no way limited to): a) ideal node placement to eliminate singularities; b) data-structures for stencil storage and evaluation; c) problem sizes larger than a few thousand nodes; and d) parallel implementations across new heterogeneous multi- and many-core architectures. In response to this, our group, in collaboration with researchers assembled from a national lab and four universities (see Chapter ??), has been granted funds by the National Science Foundation to collaboratively:

*“Bring RBFs to the forefront of multi-scale geophysical modeling by developing fast, efficient, and parallelizable RBF algorithms in arbitrary geometries, with performance enhanced by hardware accelerators, such as graphic processing units (GPUs).”* [? ]

In the last few years, GPUs transitioned from hardware dedicated to the embarrassingly parallel tasks involved in graphics rendering (e.g., rasterization) into multi-core co-processors for high performance scientific computing. Thanks to the highly profitable and always demanding gaming industry, what began as a static rendering pipeline, was molded to allow fully dynamic execution with a SIMD-like programming model (Single Instruction Multiple Threads or SIMT). Changes in hardware were followed closely by evolving programming languages. Today, GPUs can be manipulated via high level languages similar to C/C++ and require no knowledge of computer graphics. In Chapters ?? and ?? we will discuss how GPU hardware and languages evolved to exceptionally higher compute capability than traditional CPUs, and became a popular platform for high performance computing.

True to our purpose statement above, the goal of this project is to integrate RBF methods for PDEs, Geophysics and large scale GPU computing. We begin in Chapter ?? with a discussion of related work on RBF-PDE methods, their applications, and related work on

GPUs. In Chapter ?? a formal introduction to RBFs for the solution of PDEs is provided. Chapter ?? considers various languages available for GPU computing and their appropriateness for our task. This is followed by a discussion in Chapter ?? of GPU hardware and the large scale clusters with integrated GPUs which will be used for heterogeneous multi-core computing. Finally, in Chapter ?? we present our proposal for research into efficient PDE solutions on multi-node, multi-GPU compute clusters using radial basis functions for Tsunami simulation.

## **TABLE OF CONTENTS**

# **Part I**

# **Preliminaries**

# CHAPTER 4

## RBF METHODS FOR PDES

The process of solving partial differential equations (PDEs) using radial basis functions (RBFs) dates back to 1990 [55, 56]. However, at the core of all RBF methods lies the fundamental problem of approximation/interpolation. Some methods (e.g., global- and compact-RBF methods) apply RBFs to approximate derivatives directly. Others (e.g., RBF-generated Finite Differences) leverage the basis functions to generate weights for finite-differencing stencils, utilizing the weights in turn to approximate derivatives. Regardless, to track the history of RBF methods, one must look back to 1971 and R.L. Hardy’s seminal research on interpolation with multi-quadric basis functions [48].

As “meshless” methods, RBF methods excel at solving problems that require geometric flexibility with scattered node layouts in  $D$ -dimensional space. They naturally extend into higher dimensions without significant increase in programming complexity [34, 96]. In addition to competitive accuracy and convergence compared with other state-of-the-art methods [31, 32, 34, 35, 96], they also boast stability for large time steps.

This chapter is dedicated to summarizing the four-decade history of RBF methods leading up to the development of the RBF-generated Finite Differences (RBF-FD) method. Beginning with a brief introduction to RBFs and a historical survey, we attempt to classify related work into three types: global, compact, and local methods. Following this, the general approximation problem is introduced, with a look at the core of all three method classifications: RBF scattered-data interpolation.

Three global RBF collocation methods are presented: Kansa’s method, Fasshauer’s method and Direct collocation. Within the historical context of RBF methods we highlight extensions that lead to local interpolation matrices instead of a single global interpolation matrix. Additionally, the RBF-pseudospectral (RBF-PS) method is shown as an extension to fit global RBF methods into the framework of pseudo-spectral methods.

### 4.1 Survey of Related Work

In Radial Basis Function methods, radially symmetric functions provide a non-orthogonal basis used to interpolate between nodes of a point cloud. RBFs are univariate and a function of distance from a center point defined in  $\mathbb{R}^D$ , so they easily extend into higher dimensions without significant change in programming complexity. Examples of commonly used RBFs from the literature are provided in Table 4.1; 2D representations of the same functions can

be found in Figure 4.1. Figure 4.2 illustrates the radial symmetry of RBFs—in this case, a Gaussian RBF—in the first three dimensions.

RBF methods are based on a superposition of translates of these radially symmetric functions, providing a linearly independent but non-orthogonal basis used to interpolate between nodes in  $D$ -dimensional space. The interpolation problem—referred to as *RBF scattered data interpolation*—seeks the unknown coefficients,  $\mathbf{c} = \{c_j\}$ , that satisfy:

$$\sum_{j=1}^N \phi_j(r(\mathbf{x})) c_j = f(\mathbf{x}),$$

where  $\phi_j(r(\mathbf{x}))$  is an RBF centered at  $\{\mathbf{x}_j\}_{j=1}^n$ . In theory the radial coordinate,  $r(\mathbf{x})$ , could be any distance metric, but is most often assumed to be  $r(\mathbf{x}) = \|\mathbf{x} - \mathbf{x}_j\|_2$  (i.e., Euclidean distance), as it is here. The coefficients  $\mathbf{c}$  result in a smooth interpolant that collocates sample values  $f(\mathbf{x}_j)$ . An example of RBF interpolation in 2D using 15 Gaussians is shown in Figure 4.3.

RBFs have been shown in some cases to have exponential convergence for function approximation [28]. It is also possible to reformulate RBF methods as pseudospectral methods that have generated solutions to ill-posed problems for which Chebyshev-based and other pseudospectral methods fail [26]. However, as with all methods, RBFs come with certain limitations. For example, RBF interpolation is—in general—not a well-posed problem, so it requires careful choice of positive definite or conditionally positive definite basis functions (see [28, 51] for details).

RBFs depend on a shape or support parameter  $\epsilon$  that controls the width of the function. The functional form of the shape function becomes  $\phi(\epsilon r(\mathbf{x}))$ . For simplicity in what follows, we use the notation  $\phi_j(\mathbf{x})$  to imply  $\phi(\epsilon \|\mathbf{x} - \mathbf{x}_j\|_2)$ . Decreasing  $\epsilon$  increases the support of the RBF and in most cases, the accuracy of the interpolation, but worsens the conditioning of the RBF interpolation problem [77]. This inverse relationship is widely known as the *Uncertainty Relation* [51, 77]. Fortunately, recent algorithms such as Contour-Padé [37] and RBF-QR [40, 42] allow for numerically stable computation of interpolants in the nearly flat RBF regime (i.e.,  $\epsilon \rightarrow 0$ ) where high accuracy has been observed [43, 60].

RBF methods for interpolation first appeared in 1971 with Hardy’s seminal research on multiquadratics [48]. In his 1982 survey of scattered data interpolation methods [44], Franke rated multiquadratics first-in-class against 28 other methods (3 of which were RBFs) [44]. Many other RBFs, including those presented in Table 4.1 have been applied in literature, but for PDEs in particular, none have rivaled the attention received by multiquadratics.

By 1990, the understanding of the scientific community regarding RBFs was sufficiently developed for collocating PDEs [55, 56]. PDE collocation seeks a solution of the form

$$(\mathcal{L}u)(x_i) = \sum_{j=1}^N \phi_j(x_i) c_j = f(x_i)$$

where  $\mathcal{L}$  is, in general, a nonlinear differential operator acting on  $u(x)$ . The solution  $u(x)$

Name	Abbrev.	Formula	Order ( $m$ )
Multiquadric	MQ	$\sqrt{1 + (\varepsilon r)^2}$	1
Inverse Multiquadric	IMQ	$\frac{1}{\sqrt{1+(\varepsilon r)^2}}$	0
Gaussian	GA	$e^{-(\varepsilon r)^2}$	0
Thin Plate Splines	TPS	$r^2 \ln r $	2
Wendland ( $C^2$ )	W2	$(1 - \varepsilon r)^4(4\varepsilon r + 1)$	0

Table 4.1: Examples of frequently used RBFs based on [28, 43].  $\varepsilon$  is the support parameter. All RBFs have global support. For compact support, enforce a cut-off radius (see Equation 4.1).

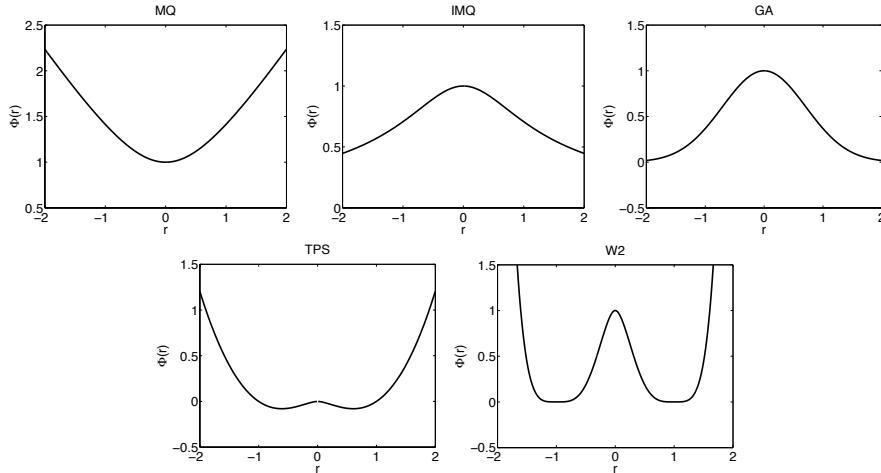


Figure 4.1: Example RBF shapes from Table 4.1 with parameter  $\varepsilon = 1$ .

is expressed as a linear combination of  $N$  basis functions  $\phi_j(x)$ , not necessarily RBFs:

$$u(x) = \sum_{i=1}^N \phi_i(x) c_i$$

As in the problem of RBF scattered data interpolation,  $\mathbf{c} = \{c_j\}$  is the unknown coefficient vector. Under the assumption that  $\mathcal{L}$  is a linear operator, one can collocate the differential equation. Alternatively, individual derivative operators can be expressed as linear combinations of the unknowns  $u_j$  (leading to the RBF-FD methods). In all cases, a linear system of equations arises, with different degrees of sparsity, dependent on the chosen basis functions and how the various constraints are enforced. While we restrict the  $\phi_j(x)$  to RBFs or various operators applied to the RBFs, we note that spectral methods, finite-element or spectral-element methods can be formulated in a similar way with different choices of basis

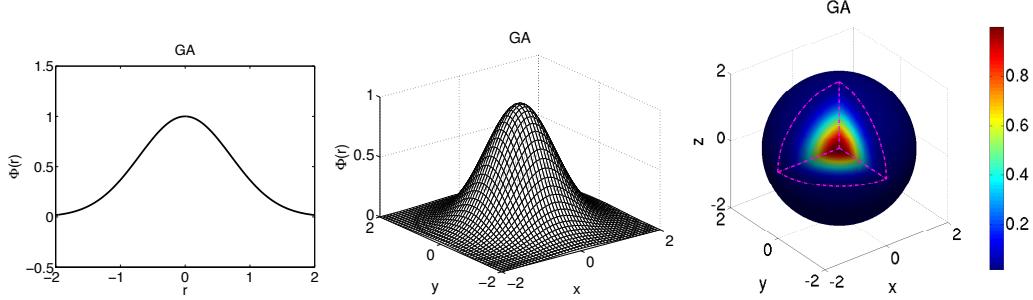


Figure 4.2: The Gaussian (GA) RBF (Table 4.1) with parameter  $\epsilon = 1$  and  $r$  in  $D = 1, 2$  and  $3$ .

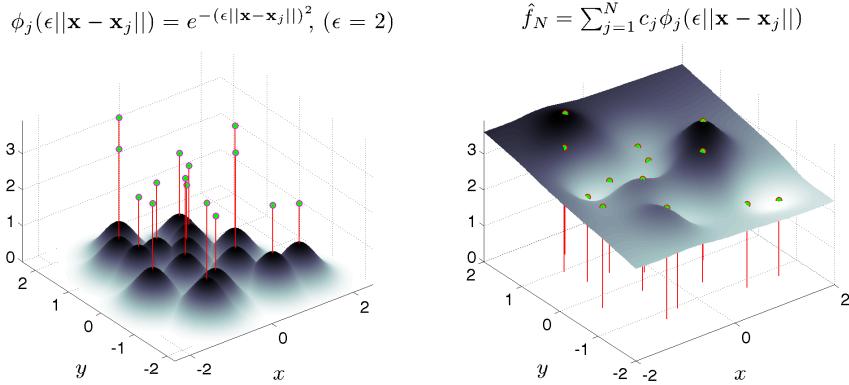


Figure 4.3: RBF interpolation using 15 translates of the Gaussian RBF with  $\epsilon = 2$ . One RBF is centered at each node in the domain. Linear combinations of these produce an interpolant over the domain passing through known function values.

functions. Of course,  $u$  can be a vector of unknown variables ( $\mathbf{c}$  then becomes a matrix).

In Table 4.3 we classify references according to their choice of collocation method and RBF interpolation type. There are three main categories of RBF interpolation; we list them in Table 4.2. The first is *Global* in the case that a single, large ( $N \times N$ ) and dense matrix corresponding to globally supported RBFs is inverted; second, *Compact* if compactly supported RBFs are used to produce a single, large, but sparse matrix; and third, *Local* if compactly supported RBFs are used to produce many small but dense matrices with one corresponding to each collocation point. In all three cases the matrices are symmetric and with the correct choice of RBF they are at least conditionally positive definite. The final row of Table 4.3 considers literature on the RBF-FD method and will be discussed in depth in Chapter ??.

We note that three types of collocation occur throughout the RBF literature: Kansa's unsymmetric collocation method [55, 56], Fasshauer's symmetric collocation method [27], and the Direct collocation method [30].

Prior to launching into derivation each RBF collocation method, we first survey the classifications to highlight benefits, shortcomings, and to provide a brief historical context. A

Interpolation Type	Dense/Sparse $A$	Dim( $A$ ) ( $N_S \ll N$ )	# of $A^{-1}$	RBF Support
Global	Dense	$N \times N$	1	Global
Compact	Sparse	$N \times N$	1	Compact
Local	Dense	$N_S \times N_S$	N	Global/Compact

Table 4.2: RBF interpolation types and properties, assuming a problem with  $N$  nodes.

survey of related work in the RBF community that involves parallelization and optimization is deferred to Chapter ??.

#### 4.1.1 Global RBF Methods

*Kansa's method* [55, 56] (a.k.a. unsymmetric collocation) was the first RBF method for PDEs, and is still the most frequently used method. The idea behind Kansa's method is that an approximate solution to the PDE can be found by finding an interpolant which satisfies the differential operator with zero residual at a set of *collocation points* (these coincide with the RBF centers). To find the interpolant, the differential equation is formulated as a two block (unsymmetric) linear system with: 1) the approximation of values at boundary points with boundary data only, and 2) the approximation of interior points by directly applying the differential operator. It was shown in [27, 49] that the unsymmetric linear system produced by Kansa's method does not guarantee non-singularity; although it is also noted that in practice singularities are rare encounters [60].

The second alternative for RBF collocation, is based on Hermite scattered data interpolation (see [98]). The so-called *Fasshauer* or *Symmetric Collocation* method ([27]) performs a change of basis for the interpolant by directly applying the differential operator to the RBFs. It then collocates using the same approach as Kansa's method [60, 83]. The resulting block structure of the linear system is symmetric and guaranteed to be non-singular [27]. In comparison to Kansa's method, the disadvantages of Fasshauer's method include: a) requirement of higher order differentiability of the basis functions (to satisfy double application of the differential operator) and b) the linear system is larger and more complex to form [28]. As [49] points out, the possible existence of a singularity in Kansa's method is not enough to justify the added difficulties of using Fasshauer's method.

The last collocation method, *Direct Collocation*, was introduced by Fedoseyev, Friedman and Kansa [30] and satisfies the differential operator on the interior and the boundary. Larsson and Fornberg [60] observe that this third method has a matrix structure similar to that found in Kansa's method; however, it is noted that the dimensions of the matrix blocks for each method differ. This is due to collocation constraints added for the differential operator applied to the boundary. Aside from the survey on RBF collocation presented by Larsson and Fornberg [60], no related work was found that applied, or investigated, this method further.

Both Kansa's method and Fasshauer's methods were shown in [26] to fit well in the gen-

eralized framework of pseudo-spectral methods with a subtle change in algorithm. While collocation methods explicitly compute the coefficients for a continuous derivative approximation, their alternates, referred to in literature as RBF-pseudospectral (RBF-PS) methods, never explicitly compute the interpolant coefficients. Instead, a differentiation matrix (DM) is assembled and used to approximate derivates at the collocation points only [29]. Since most computational models are simply concerned with the solution at collocation points, the change to assemble DMs as in RBF-PS is organic.

Following the evolution of the RBF-PS algorithm, applications of global RBFs in the classic collocation sense (i.e., without the RBF-PS DMs) become impractical. This statement stems from the algorithmic complexity of each method. Global RBF methods result in full matrices [28]. The global collocation methods then scale on the order of  $O(N^3)$  floating point operations (FLOPs) to solve for weighting coefficients on a given node layout, plus  $O(N^2)$  to apply the weights for derivatives. If time-stepping is required, global collocation methods must recompute the time-dependent coefficients with additional cost dominated by  $O(N^3)$  operations. RBF-PS methods have similar requirements for  $O(N^3)$  operations to assemble the differentiation matrix and  $O(N^2)$  to apply for derivatives. However, by avoiding time-dependent coefficients, RBF-PS methods only apply the differentiation matrix each time-step for  $O(N^2)$  operations. As an aside, the  $O(N^3)$  complexity for each method—typically due to an LU-decomposition, with subsequent forward- and back-solves—could be reduced. While not in mainstream use by the RBF community, [65] correctly points out that the use of iterative solvers could reduce complexity of preprocessing to the order of  $O(N^2)$ .

Hon et al. [50] employed Kansa’s method to solve shallow water equations for Typhoon simulation. In [35], Flyer and Wright employed RBF-PS (Kansa method) for the solution of shallow water equations on a sphere. Their results show that RBFs allow for longer time steps with spectral accuracy. The survey [31] by Flyer and Fornberg showcases RBF-PS (Kansa) out-performing some of the best available methods in geosciences, namely: Finite Volume, Spectral Elements, Double Fourier, and Spherical Harmonics. When applied to problems such as transport on the sphere [34], shallow water equations [35], and 3D mantle convection[96], RBF-PS consistently required fewer time steps, and a fraction of the nodes for similar accuracy [31].

#### 4.1.2 Compactly Support RBFs

Thus far, all cases of collocation and interpolation mentioned have assumed globally supported RBFs. While global RBFs are well-studied and have nice properties, a major limitation is the large, dense system that must be solved. One alternative to global support is to use a set of compactly supported RBFs (CSRBFs) that are defined as:

$$\phi(r) = \begin{cases} \varphi(r) & r \in [0, 1] \\ 0 & r > 1 \end{cases} \quad (4.1)$$

where a radius is defined past which the RBF (in this case  $\varphi(r)$ ) has no influence on the interpolant. Note that the radius can be scaled to fit a desired support. Methods that leverage CSRBFs produce a global interpolation matrix that is *sparse* and therefore results

	RBF Interpolation Type		
Method	Global (Dense)	Compact (Sparse Global)	Local
Kansa's Method	[26, 31, 34, 35, 37, 43, 44, 49, 50, 55, 56, 60, 66, 79, 96]	[43, 91]	[23, 59, 88, 90]
Fasshauer's Method	[26, 27, 60]	[63]	[83, 84, 85]
Direct Collocation	[30, 60]		[15, 16, 32, 33, 40, 41, 80, 81, 94, 95, 97]
RBF-FD	N/A	N/A	

Table 4.3: Classification of references based on choice of RBF interpolation types and method for solving PDEs. References may appear in multiple cells according to the breadth of their research.

in a system that is more efficiently assembled and solved [28]. The actual complexity estimate of the CSRBF method depends on the sparsity of the problem as well as the ordering of the assembled system. Assuming  $n \ll N$  where  $n$  represents the number of nodes in support, [101] approximates the complexity as dominated by  $O(N)$  for properly structured systems within MATLAB, and the investigation in [65] found  $O(N^{1.5})$  consistent with the estimate provided by their choice of general sparse solver package. Fasshauer [28] provides a stationary multilevel collocation method based on CSRBF with  $O(N)$  complexity, but the method is plagued by poor convergence. In the context of CSRBFs, analogues to Kansa's method and Fasshauer's method are known by the names *radial point interpolation method (RPIM)* [91] and *radial point interpolation collocation method (RPICM)* [63], respectively. A more thorough survey of CSRBF history can be found in [28, 51].

CSRBFs have attracted a lot of attention in applications. For example, in the field of dynamic surface and image deformation, compact support allows for local transformations which do not induce global deformation (see e.g., [19, 62, 99]).

We note that sparsity and spectral accuracy cannot be achieved simultaneously.

#### 4.1.3 Local RBF Methods

Around 2005, Šarler and Vertnik [88, 90] demonstrated that if compactly supported RBFs are chosen, the traditional global collocation matrix from Kansa's method, can be avoided altogether in favor of small localized collocation matrices defined for each node. Local collocation still faces possible ill-conditioning and singularities like global collocation, but make it easier to distribute computation across parallel systems. Also, the smaller linear systems can be solved with less conditioning issues. In [90], the authors consider 2D diffusion problems. Divo and Kassab [23] employ the method for Poisson-like PDEs

including fluid flow and heat transfer. Kosec and Šarler [59] apply the same technique to solve coupled heat transfer and fluid flow problems.

In similar fashion, Stevens et al. [85] introduced a local version of Fasshauer's method called *local Hermitian interpolation*. The authors have applied their method to 3D soil problems based on transient Richards' equations [83, 84, 85].

#### 4.1.4 Recent Advances in Conditioning

Recently, Fornberg and Wright [37] presented the *Contour–Padé algorithm*, which allows for numerically stable computation of highly accurate interpolants for (very small) cases typically associated with ill-conditioning induced by nearly flat RBFs (i.e.,  $\epsilon \rightarrow 0$ ). Larsson and Fornberg [60] applied the algorithm to all three methods of collocation (Kansa's, Fasshauer's and Direct Collocation) with considerable gain in accuracy over solutions from classical second-order FD and a pseudospectral method. Note that currently, the Contour–Padé algorithm was only studied for global RBF interpolation, not for compact or local collocation methods.

The *RBF-QR* method, an alternative for numerically stable computation in the limit as  $\epsilon \rightarrow 0$ , was introduced by Fornberg and Piret [42] in context of a sphere, and later extended to planar 2D problems in [39]. The RBF-QR method is simple to implement (less than 100 lines of Matlab code), and it allows solution of large problems that are typically ill-conditioned. Fornberg, Larsson and Flyer [39] successfully applied RBF-QR on large problems with 6000 nodes for globally supported basis functions.

With these two algorithms, global RBF methods have overcome most ill-conditioning issues for small to mid-sized problems. Unfortunately, both Contour-Padé and RBF-QR fail for large enough problems due to ill-conditioning. As the number of RBFs increases beyond a few thousand nodes it is impossible to avoid ill-conditioning of the extremely large interpolation matrix.

This reveals the benefit of local methods, which decrease the number of RBFs and ill-conditioning. However, in the limit as local stencil size increases to include all nodes in a domain, the local and global method are equivalent; thus it is known that local methods also suffer extreme ill-conditioning around 2000 nodes per stencil [81]. To our knowledge, no research has yet been published that applies the RBF-QR method to RBF-FD stencils.

## 4.2 Comparison of RBF Methods

We now detail RBF methods for PDEs leading up to the derivation of RBF-FD. Following [66], consider a PDE expressed in terms of a (linear) differential operator,  $\mathcal{L}$ :

$$\begin{aligned}\mathcal{L}u &= f && \text{on } \Omega \\ u &= g && \text{on } \Gamma\end{aligned}$$

where  $\Omega$  is the interior of the physical domain,  $\Gamma$  is the boundary of  $\Omega$  and  $f, g$  are known explicitly. In the case of a non-linear differential operator, a Newton's iteration, or some other method, can be used to linearize the problem (see e.g., [97]); of course, this increases the complexity of a single time step. Then, the unknown solution,  $u$ , which produces the

observations on the right hand side can be approximated by an interpolant function  $u_\phi$  expressed as a linear combination of radial basis functions,  $\{\phi_j(x) = \phi(\|x - x_j\|)\}_{j=1}^N$ , and polynomial functions  $\{P_l(x)\}_{l=1}^M$ :

$$u_\phi(x) = \sum_{j=1}^N \phi_j(x) c_j + \sum_{l=1}^M P_l(x) d_l, \quad P_l(x) \in \Pi_p^D \quad (4.2)$$

where  $\phi_j(x) = \|x - x_j\|$  ( $\|\cdot\|$  is standard Euclidean distance). The second sum represents a linear combination of polynomials that enforces zero approximation error when  $u(x)$  is a polynomial of degree less than or equal to  $p$ . The variable  $D$  is the problem dimension (i.e.,  $u_\phi(x) \in \mathbb{R}^D$ ). To eliminate degrees of freedom for well-posedness,  $p$  should be greater than or equal to the order of the chosen RBF (see Table 4.1) [51]. Note that Equation 4.2 is evaluated at  $\{x_j\}_{j=1}^N$  data points through which the interpolant is required to pass with zero residual. We refer to the  $x_j$ 's as *collocation points* (a.k.a. trial points), taken as the RBF centers. The test points,  $x$ , usually coincide with collocation points, although this is not a requirement.

To clarify the role of the polynomial part in Equation 4.2, it is necessary to put aside the PDE for the moment and consider only the problem of *scattered data interpolation* with Radial Basis Functions.

#### 4.2.1 RBF Scattered Data Interpolation

Borrowing notation from [28, 51], we seek an interpolant of the form

$$f(x) = \sum_{j=1}^N \phi_j(x) c_j$$

where  $f(x)$  is expressed as a scalar product between the unknown coefficient weights  $c_j$  and the radial basis functions  $\phi_j(x)$ .

To obtain the unknown coefficients,  $c_j$ , form a linear system in terms of the  $N$  RBF centers:

$$\begin{aligned} f(x) &= \sum_{j=1}^N c_j \phi_j(x) \quad \text{for } x = \{x_j\}_{j=1}^N \\ (\ f \ ) &= [ \ \phi \ ] ( \ c \ ) \end{aligned}$$

The invertibility of this system depends on the choice of RBF, so one typically chooses a function that is positive definite to avoid issues. It has been shown (see [28, 51]) that some choices of RBFs (e.g. multiquadratics and thin-plate splines [49]) are not positive definite and therefore there is no guarantee that the approximation is well-posed. A sufficient condition for well-posedness is that the matrix be *conditionally positive definite*. In [28], Fasshauer demonstrates that conditional positive definiteness is guaranteed when Equation 4.2 exactly reproduces functions of degree less than or equal  $m$ . For RBF scattered data interpolation in one dimension, this can be achieved by adding a polynomial

of order  $m$  with  $M = \binom{m+1}{1}$  terms (e.g.,  $x^0, x^1, \dots, x^m$ ). For  $\mathbb{R}^2$ , the terms would be:  $1, x, y, xy, x^2y, xy^2, \dots, x^my^{m-1}, x^{m-1}y^m, x^my^m$ . In  $\mathbb{R}^D$ ,  $M = \binom{m+D}{D}$  [51], giving

$$\begin{aligned} \sum_{j=1}^N c_j \phi_j(x) + \sum_{l=1}^M d_l P_l(x) &= f(x), \quad P_l(x) \in \Pi_m^D \\ [\phi \quad P] \begin{pmatrix} c \\ d \end{pmatrix} &= (f) \end{aligned} \quad (4.3)$$

where the second summation (referred to as *interpolation conditions* [51]) ensures the minimum degree of the interpolant. Refer to Table 4.1 for a short list of recommended RBFs and minimally required orders of  $m$ . This document prefers the Gaussian RBF. Notice, in Equation ??, that the interpolation conditions add  $M$  new degrees of freedom, so we must provide  $M$  additional constraints to square the system. In this case:

$$\sum_{j=1}^N c_j P_l(x_j) = 0, \quad l = 1, \dots, M$$

or

$$P^T c = 0. \quad (4.4)$$

It is now possible again to write the interpolation problem as a linear system using Equations 4.3 and 4.4:

$$\underbrace{\begin{bmatrix} \phi & P \\ P^T & 0 \end{bmatrix}}_A \begin{pmatrix} c \\ d \end{pmatrix} = \begin{pmatrix} f \\ 0 \end{pmatrix} \quad (4.5)$$

Equation 4.5, typically a dense system except in the case of RBFs with compact support, can be solved efficiently via standard methods like LU-decomposition. With the coefficients, the interpolant can be sampled at any test points,  $\{x_i\}_{i=1}^n$ , by returning to Equation 4.3:

$$f(x_i) = \sum_{j=1}^N c_j \phi_j(x_i) + \sum_{l=1}^M d_l P_l(x_i) \quad (4.6)$$

$$= \underbrace{\begin{bmatrix} \phi & P \end{bmatrix}}_B \begin{pmatrix} c \\ d \end{pmatrix} \Big|_{x=x_i} \quad (4.7)$$

#### 4.2.2 Reconstructing Solutions for PDEs

In the next few subsections, we will consider collocation equations based on this general form:

$$\begin{aligned} \mathcal{L}u_\phi(x) &= f(x) \quad \text{on } \Omega \\ \mathcal{B}u_\phi(x) &= g(x) \quad \text{on } \Gamma \end{aligned}$$

where the methods presented below will apply the differential operators,  $\mathcal{L}$  and  $\mathcal{B}$ , to different choices of  $u_\phi$  and different sets of collocation points. In many applications  $\mathcal{L}$  is chosen as a differential operator (e.g.,  $\frac{\partial}{\partial x}$ ,  $\nabla$ ,  $\nabla^2$ ) and  $\mathcal{B} = I$  (i.e. identity operator for Dirichlet boundary conditions) for PDEs. For RBF scattered data interpolation,  $\mathcal{L} = I$ . There are also applications where  $\mathcal{L}$  is a convolution operator (see e.g., [13, 14]) capable of smoothing/de-noising a surface reconstructed from point clouds.

For all the methods to be presented a linear system is generated:

$$\begin{aligned} A_{\mathcal{L}} \begin{pmatrix} c \\ d \end{pmatrix} &= \begin{pmatrix} f \\ 0 \end{pmatrix} \\ \begin{pmatrix} c \\ d \end{pmatrix} &= A_{\mathcal{L}}^{-1} \begin{pmatrix} f \\ 0 \end{pmatrix} \end{aligned} \quad (4.8)$$

where matrix  $A_{\mathcal{L}}$  depends on the choice of collocation method. Once the linear system is solved, the value  $u(x)$  is reconstructed at the test points following Equation 4.7:

$$\begin{aligned} u(x) &\approx [\phi \quad P] \begin{pmatrix} c \\ d \end{pmatrix} \Big|_{x=x_i} \\ &\approx BA_{\mathcal{L}}^{-1} \begin{pmatrix} f \\ 0 \end{pmatrix} \end{aligned} \quad (4.9)$$

Likewise, to obtain differential quantities we have:

$$\begin{aligned} \mathcal{L}u(x) &\approx [\phi_{\mathcal{L}} \quad P_{\mathcal{L}}] \begin{pmatrix} c \\ d \end{pmatrix} \Big|_{x=x_i} \\ &\approx B_{\mathcal{L}}A_{\mathcal{L}}^{-1} \begin{pmatrix} f \\ 0 \end{pmatrix} \end{aligned}$$

#### 4.2.3 PDE Methods

Now, since  $u_\phi(x)$  from Equation 4.2 cannot (in general) satisfy the PDE everywhere, we enforce the PDE at a set of collocation points, which are distributed over both the interior and the boundary. Again, these points do not necessarily coincide with the RBF centers, but it is convenient for this to be true in practice.

**Kansa's Method.** The first global RBF method for PDEs, *Kansa's method* [55, 56], collocates the solution through known values on the boundary, while constraining the interpolant to satisfy the PDE operator on the interior. This is equivalent to choosing  $u_\phi$  according to Equation 4.2. The resulting system is given by [66]; assuming that  $\mathcal{L}$  is a linear operator,

$$\mathcal{L}u_\phi(x_i) = \sum_{j=1}^N c_j \mathcal{L}\phi_j(x_i) + \sum_{l=1}^M d_l \mathcal{L}P_l(x_i) = f(x_i) \quad i = 1, \dots, n_I \quad (4.10)$$

$$\mathcal{B}u_\phi(x_i) = \sum_{j=1}^N c_j \mathcal{B}\phi_j(x_i) + \sum_{l=1}^M d_l \mathcal{B}P_l(x_i) = g(x_i) \quad i = n_I + 1, \dots, n \quad (4.11)$$

$$\sum_{j=1}^N c_j P_l(x_j) = 0 \quad l = 1, \dots, M \quad (4.12)$$

where  $n_I$  are the number of interior collocation points, with the number of boundary collocation points equal to  $n - n_I$ . First, observe that the differential operators are applied directly to the RBFs inside summations, rather than first solving the scattered data interpolation problem and then applying the operator to the interpolant. Second, since the basis functions are known analytically, it is possible (although sometimes painful) to derive  $\mathcal{L}\phi$  (refer to [28] for RBF derivative tables); the same is true for the polynomials  $P_l$ .

We can now reformulate Kansa's method as the linear system:

$$\underbrace{\begin{bmatrix} \phi_{\mathcal{L}} & P_{\mathcal{L}} \\ \phi_{\mathcal{B}} & P_{\mathcal{B}} \\ P^T & 0 \end{bmatrix}}_{A_{\mathcal{L}}} \begin{pmatrix} c \\ d \end{pmatrix} = \begin{pmatrix} f \\ g \\ 0 \end{pmatrix} \quad (4.13)$$

where  $\phi_{\mathcal{L}} = \mathcal{L}\phi$ ,  $P_{\mathcal{L}} = \mathcal{L}P$  are the interior components (Equation 4.10),  $\phi_{\mathcal{B}}$  and  $P_{\mathcal{B}}$  are the boundary components (Equation 4.11), and  $P^T = [P_{\mathcal{L}}^T \ P_{\mathcal{B}}^T]$  are constraints for both interior and boundary polynomial parts (Equation 4.12). From Equation 4.13 it should be clear why Kansa's method is also known as the *Unsymmetric* collocation method.

Recall that the matrix in Equation 4.13 has no guarantee of non-singularity [27]; however, singularities are rare in practice [60].

**Fasshauer's Method.** *Fasshauer's method* [27] addresses the problem of singularity in Kansa's method by assuming the interpolation to be Hermite. That is, it requires higher differentiability of the basis functions (they must be at least  $C^k$ -continuous if  $\mathcal{L}$  is of order  $k$ ). Leveraging this assumption, Fasshauer's method chooses:

$$u_{\phi}(x_i) = \sum_{j=1}^{N_I} c_j \mathcal{L}\phi_j(x_i) + \sum_{j=N_I+1}^N c_j \mathcal{B}\phi_j(x_i) + \sum_{l=1}^M d_l P_l(x_i) \quad (4.14)$$

as the interpolant passing through collocation points. Note  $N_I$  is used here to specify the number of RBF centers in the interior of  $\Omega$ . Here the interpolant is similar to Equation 4.2, but a change of basis functions is used for the expansion:  $\mathcal{L}\phi_j(x)$  on the interior and  $\mathcal{B}\phi_j(x)$  on the boundary.

Collocating (i.e., substituting Equation 4.14 into Equations 4.10-4.12) we get:

$$\begin{aligned} \sum_{j=1}^{N_I} c_j \mathcal{L}^2 \phi_j(x_i) + \sum_{j=N_I+1}^N c_j \mathcal{L} \mathcal{B} \phi_j(x_i) + \sum_{l=1}^M d_l \mathcal{L} P_l(x_i) &= f(x_i) \quad i = 1, \dots, n_I \\ \sum_{j=1}^{N_I} c_j \mathcal{B} \mathcal{L} \phi_j(x_i) + \sum_{j=N_I+1}^N c_j \mathcal{B}^2 \phi_j(x_i) + \sum_{l=1}^M d_l \mathcal{B} P_l(x_i) &= g(x_i) \quad i = n_I + 1, \dots, n \\ \sum_{j=1}^{N_I} c_j \mathcal{L} P_l(x_j) + \sum_{j=N_I+1}^N c_j \mathcal{B} P_l(x_j) &= 0 \quad l = 1, \dots, M \end{aligned} \quad (4.15)$$

which is reformatted as the linear system:

$$\underbrace{\begin{bmatrix} \phi_{\mathcal{L}\mathcal{L}} & \phi_{\mathcal{L}\mathcal{B}} & P_{\mathcal{L}} \\ \phi_{\mathcal{B}\mathcal{L}} & \phi_{\mathcal{B}\mathcal{B}} & P_{\mathcal{B}} \\ P_{\mathcal{L}}^T & P_{\mathcal{B}}^T & 0 \end{bmatrix}}_{A_{\mathcal{L}}} \begin{pmatrix} c \\ d \end{pmatrix} = \begin{pmatrix} f \\ g \\ 0 \end{pmatrix} \quad (4.16)$$

Note that  $\phi_{\mathcal{L}\mathcal{L}}$  represents the first summation in Equation 4.15. The linear system generated by Fasshauer's method reveals an interesting structure: namely, the subscripts  $\mathcal{L}$  and  $\mathcal{B}$  show blocks of influence in the matrix. For example, the interior RBF centers influence collocation on the interior collocation points ( $\phi_{\mathcal{L}\mathcal{L}}$ ), boundary centers influence collocation on the interior ( $\phi_{\mathcal{L}\mathcal{B}}$ ), interior centers influence collocation on the boundary ( $\phi_{\mathcal{B}\mathcal{L}}$ ), and so forth. In the case where the collocation points and RBF centers do not coincide, the subscripts would also indicate which set of points the operators are applied to [83].

The symmetry of Fasshauer's (*symmetric collocation*) method is apparent in Equation 4.16. Likewise, it is clear that the symmetric method requires more storage and computation to solve compared to Kansa's method. However, based on the assumption that collocation points coincide with RBF centers, the symmetry reduces storage requirements by half.

**Direct Collocation.** In *Direct collocation* (see [30, 60], the interpolant is chosen as Equation 4.2 (the same as Kansa's method). However, the Direct method collocates both the interior and boundary operators at the boundary points:

$$\begin{aligned} \sum_{j=1}^N c_j \mathcal{L} \phi_j(x_i) + \sum_{l=1}^M d_l \mathcal{L} P_l(x_i) &= f(x_i) \quad i = 1, \dots, n \\ \sum_{j=1}^N c_j \mathcal{B} \phi_j(x_i) + \sum_{l=1}^M d_l \mathcal{B} P_l(x_i) &= g(x_i) \quad i = 1, \dots, n_B = n - n_I \\ \sum_{j=1}^N c_j P_l(x_j) &= 0 \quad l = 1, \dots, M \end{aligned} \quad (4.17)$$

Reformulating as a linear system we get:

$$\begin{bmatrix} \phi_{\mathcal{L}} & P_{\mathcal{L}} \\ \phi_{\mathcal{B}} & P_{\mathcal{B}} \\ P^T & 0 \end{bmatrix} \begin{pmatrix} c \\ d \end{pmatrix} = \begin{pmatrix} f \\ g \\ 0 \end{pmatrix} \quad (4.18)$$

While the final system in Equation 4.18 is structured the same as Kansa's method (Equation 4.13), careful inspection of the index  $i$  in Equations 4.10 and 4.17 reveals that Direct collocation produces a larger system.

**RBF-PS.** The extension of global collocation to traditional pseudo-spectral form was introduced by Fasshauer in [26]. Dubbed RBF-PS, the method utilizes the same logic from Kansa's and Fasshauer's collocation methods to form matrix  $A_{\mathcal{L}}$  (i.e.,  $A_{\mathcal{L}}$  can be

either Equation 4.13 or 4.16). However, RBF-PS subtly assumes the solution,  $u(x)$ , is only required at collocation points [26, 28]. Then, extending Equation 4.9, RBF-PS gives:

$$\begin{aligned} u(x) &= (BA_{\mathcal{L}}^{-1}) \begin{pmatrix} f \\ 0 \end{pmatrix} \\ &= D_{\mathcal{L}}^T \begin{pmatrix} f \\ 0 \end{pmatrix}. \end{aligned} \quad (4.19)$$

where  $D_{\mathcal{L}}$  is a discrete differentiation matrix (DM) for the operator  $\mathcal{L}$ . Here,  $D_{\mathcal{L}}$  is independent of the function  $f(x)$  and is assembled by solving the system:

$$D_{\mathcal{L}} = A_{\mathcal{L}}^{-T} B^T \quad (4.20)$$

An LU-decomposition ( $O(N^3)$ ) in preprocessing is fitting to efficiently solve the multiple RHS system [28, 96]. Forward- and back-solves ( $O(N^2)$ ), to complete assembly of  $D_{\mathcal{L}}$ , also occur in preprocessing.

Since matrix  $D_{\mathcal{L}}$  is independent of functions  $u(x)$  and  $f(x)$ , the matrix is only updated if the RBF centers move—a compelling benefit for time-dependent problems on stationary nodes; otherwise, the time-dependent solution is given by a matrix-vector multiply ( $O(N^2)$ ). In contrast to RBF-PS, classic global RBF collocation methods also construct LU factors—in this case, for  $A_{\mathcal{L}}^{-1}$ —in preprocessing, but delay application of forward- and back-solves to occur at each time-step when resolving time-dependent weighting coefficients. An additional pre-multiply by  $B$  ( $O(N^2)$ ) is then required to complete the time-step under classic RBF collocation.

**Local Methods.** In the methods above, globally supported RBFs were required. However, another trend is to use RBFs defined with some cut-off radius to enforce compact support. In some cases, authors have used the compact support to produce a single (large) sparse system for interpolation (see e.g., [19, 62, 63, 91, 99]). Other approaches use compact support to produce local linear systems defined at each collocation point. Examples of this include [88, 90] for Kansa’s method, [83, 84, 85] for Fasshauer’s method. To our knowledge no one has considered local Direct collocation. Also, instead of specifying a cut-off radius, some authors specify the exact stencil size (i.e., number of neighboring points to include); see e.g., [23, 83].

After observing the general structure of the symmetric and unsymmetric collocation methods above, it is necessary only to present the symmetric (i.e. Fasshauer’s) local method and note that in the unsymmetric case certain blocks will be zero allowing the system to shrink.

The formula for the interpolant local to the  $(k)$ -th collocation point (i.e., RBF center) is given by:

$$u_{\phi}^{(k)}(x_i) = \sum_{j(k)=1}^{N_I} c_j^{(k)} \mathcal{L} \phi_j(x_i) + \sum_{j(k)=N_I+1}^{N_S} c_j^{(k)} \mathcal{B} \phi_j(x_i) + \sum_{l=1}^M d_l^{(k)} P_l(x_i)$$

where  $N_S$  represents the number of points that defines the local stencil;  $N$  is possibly a function of the cut-off radius in the RBF,  $N_I$  is the number of interior stencil points (those

points of the stencil that lie in the interior of  $\Omega$ ). The index  $j$  is a function of the stencil center  $k$  allowing the system to include a local neighborhood of stencil points.

Collocating produces a linear system with similar structure to the global collocation problem, but the dimensions are much smaller:

$$\underbrace{\begin{bmatrix} \phi_{\mathcal{L}\mathcal{L}} & \phi_{\mathcal{L}\mathcal{B}} & P_{\mathcal{L}} \\ \phi_{\mathcal{B}\mathcal{L}} & \phi_{\mathcal{B}\mathcal{B}} & P_{\mathcal{B}} \\ P_{\mathcal{L}}^T & P_{\mathcal{B}}^T & 0 \end{bmatrix}}_{A_{\mathcal{L}}} \begin{pmatrix} c^{(k)} \\ d^{(k)} \end{pmatrix} = \begin{pmatrix} f \\ g \\ 0 \end{pmatrix} \quad (4.21)$$

Solving this system gives an interpolant locally defined around the stencil center. Note that approximating the PDE solution  $u(x)$  requires finding the stencil center nearest  $x$ , then using the local interpolant for that stencil. Since interpolation is local (i.e.,  $c_j^{(k)}$ 's are unique to each RBF center), reconstructing the derivatives with Equation 4.10 is limited to an inner product for each center rather than the matrix-vector grouping possible with global RBFs. Note that because the interpolants are local, there is no notion of global continuity/smoothness of the solution.

# CHAPTER 5

## INTRODUCTION TO RBF-FD

While most of the literature surrounding RBFs for PDEs involves collocation, an alternative method does exist: RBF-generated Finite Differences (RBF-FD). RBF-FD is a hybrid of RBF scattered data interpolation and Finite Difference (FD) stencils.

The idea behind FD stencils is to express various derivative operators as a linear combination of known functional values in the neighborhood of a point where an approximation to the derivative operator is desired. Common approximations such as upwind differencing, center differencing, higher order approximations, and even spectral operators, are of this form.

A common approach to building such discrete operators is to form a local interpolant in a neighborhood of the target point, and simply differentiate it analytically. This is the approach taken in RBF-FD, which allows for stencils with irregular placement and number of nodes, and assigns their weights based on an RBF [95]. Such an approach leads to very simple implementations of time-advancement schemes, whether explicit or implicit. The solution at the new time step is simply some linear—if  $\mathcal{L}$  is linear, nonlinear otherwise—combination of the unknown functional values (if implicit scheme) or known functional value (if explicit scheme).

Key challenges lie in the choice of grid, the choice of stencil, whether or not to change the support as a function of the stencil, how to guaranty the stability of the differentiation operator after discretization, etc.

The choice to study RBF-FD within this work is motivated by two factors. First, RBF-FD represents one of the latest developments within the RBF community. The method was first introduced in 2000 [87], but is only now showing signs it has obtained the critical-mass following necessary for the method’s use in large-scale scientific models. Our goal throughout the dissertation has been to scale RBF-FD to complex problems on high resolution meshes, and to lead the way for its adoption in high performance computational geophysics. Second, RBF-FD inherits many of the positive features from global and local collocation schemes, but sacrifices others for the sake of significantly reduced computational complexity and increased parallelism. Graphics Processing Units (GPUs), introduced in Chapter ??, are many-core accelerators capable of general purpose, embarrassingly parallel computations. GPUs represent the latest trend in high performance computing, where compute nodes are commonly supplemented by one or more accessory GPUs. Our effort leads the way for application of RBF-FD in an age when compute nodes with attached accelerator boards

will be key to breaching the exa-scale computing barrier [4].

## 5.1 Background

RBF-generated Finite Differences (RBF-FD) were first introduced by Tolstykh in 2000 [87], but it was the simultaneous, yet independent, efforts in [80], [86], [95] and [15] that gave the method its real start. The RBF-FD method (and the RBF-HFD, “Hermite” equivalent [97]) is similar in concept to classical finite-differences (FD), but differs in that the underlying differentiation weights are exact for RBFs rather than polynomials. The method contrasts with global RBF methods in the sense that it does not collocate the PDE. Instead, RBF-FD provides a set of generalized FD weights representing the discrete differential operator for a small neighborhood of nodes.

RBF-FD share many advantages with global RBF methods, like the ability to function without an underlying mesh, easily extend to higher dimensions and afford large time steps; however spectral accuracy is lost. Other advantages of RBF-FD include lower computational complexity together with high-order accuracy (6th to 10th order accuracy is common). As in FD, increasing the stencil size,  $n$ , increases the accuracy of the approximation. While not a panacea for PDEs, the method is simple to code, easily extensible to higher dimensions, and powerful in its ability to avoid singularities introduced by the coordinate systems that might impact other methods (see e.g., [34, 41]).

In some ways, RBF-FD and global RBF methods are plagued by the same difficulties. For example, as the number of nodes in the stencil increases, so too does the ill-conditioning of the linear systems to be solved. Similarly, the most accurate weights occur when  $\epsilon \rightarrow 0$ , but values in that regime beget additional ill-conditioning problems—a recurrence of the *Uncertainty Relation* [77]. One key difference in the multiple independent RBF-FD origins was that Wright [95] focused on bypassing ill-conditioning of RBF-FD and investigated its behavior in the limit as  $\epsilon \rightarrow 0$  by means of the Contour-Padé algorithm.

Given  $N$  total nodes in the domain,  $N$  linear systems, each of size  $(n+1) \times (n+1)$ , are solved to calculate the differentiation weights. With  $n \ll N$ , the RBF-FD preprocessing complexity is dominated by  $O(N)$ ; significantly lower than the global RBF or RBF-PS methods ( $O(N^3)$ ). The cost per time step is also dominated by  $O(N)$ .

RBF-FD have been successfully employed for a variety of problems including Hamilton-Jacobi equations [15], convection-diffusion problems [16, 83], incompressible Navier-Stokes equations [17, 80], transport on the sphere [41], and the shallow water equations [33]. Shu et al. [81] compared the RBF-FD method to Least Squares FD (LSFD) in context of 2D incompressible viscous cavity flow, and found that under similar conditions, the RBF-FD method was more accurate than LSFD, but the solution required more iterations of an iterative solver. RBF-FD was applied to Poisson’s equation in [94]. Chandhini and Sanyasiraju [16] studied it in context of 1D and 2D, linear and non-linear, convection-diffusion equations, demonstrating solutions that are non-oscillatory for high Reynolds number, with improved accuracy over classical FD. An application to Hamilton-Jacobi problems [15], and 2D linear and non-linear PDEs including Navier-Stokes equations [80] have all been considered.


## 5.2 The RBF-generated Finite Differences Method

The RBF-FD method is similar to classical Finite Differences in that RBF-FD allows derivatives of a function  $u(x)$  to be approximated by weighted combinations of  $n$  function values in a small neighborhood (i.e.,  $n \ll N$ ) around a *center* node,  $x_c$ . That is:

$$\mathcal{L}u(x) |_{x=x_c} \approx \sum_{j=1}^n c_j u(x_j) \quad (5.1)$$

where  $\mathcal{L}u$  again represents a differential quantity over  $u(x)$  (e.g.,  $\mathcal{L} = \frac{\partial}{\partial x}$ ). We refer to the  $n$  nodes around  $x_c$  as a *stencil* with size  $n$ . While not required, in practice one considers stencils to include the center,  $x_c$ , plus the  $n - 1$  nearest neighboring nodes. The definition of “nearest” depends the choice of distance metric; here, Euclidean distance ( $\|x - x_c\|_2$ ) is preferred.

Generally, one typically needs derivatives at every node in the discretized domain to solve PDEs. To achieve this with RBF-FD, stencils are generated around each node in the domain. Stencils need not have the same size ( $n$ ), but here this is assumed for simplicity in discussion. Furthermore, the number of stencils need not match the number of nodes in the domain.

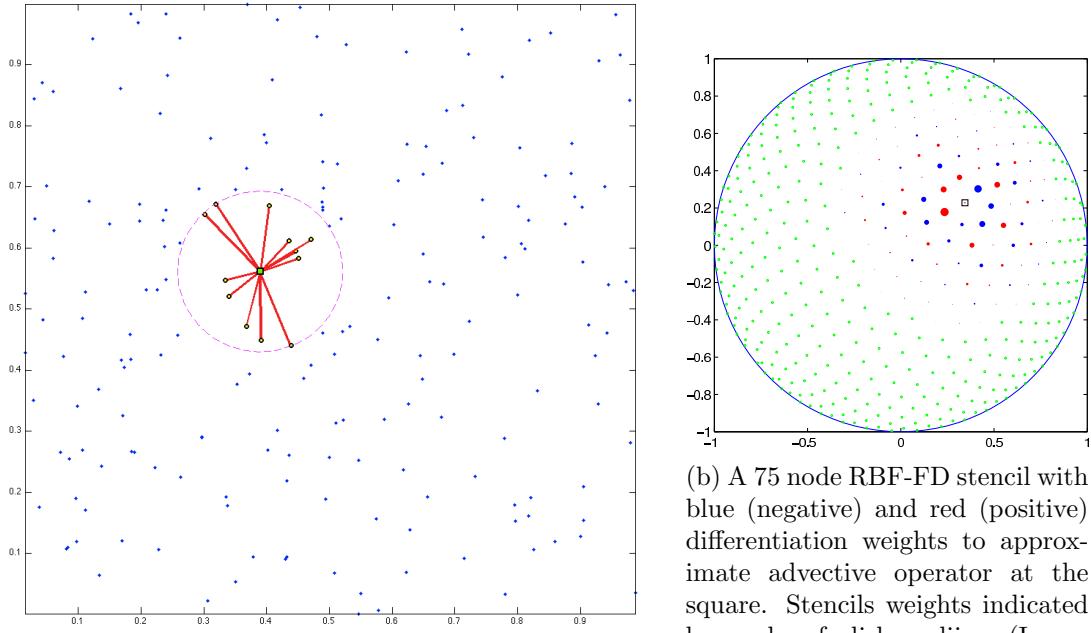

(a) A 13 node RBF-FD stencil of randomly distributed nodes. The stencil centered at the green square contains the 12 nearest neighbors contained within the minimum covering circle drawn in purple.

(b) A 75 node RBF-FD stencil with blue (negative) and red (positive) differentiation weights to approximate advective operator at the square. Stencils weights indicated by scale of disk radii. (Image courtesy of Bengt Fornberg and Natasha Flyer)

Figure 5.1: Examples of stencils computable with RBF-FD

Figure 5.1 provides two examples of RBF-FD stencils. First, Figure 5.1a illustrates a single stencil of size  $n = 13$  in a domain of randomly distributed nodes. The stencil center,  $x_c$ , is represented by a green square, with the 12 neighboring nodes connected via red edges. The purple circle, the minimum covering circle for the stencil, demonstrates that the stencil contains only the 12 nearest neighbors of the center node. In Figure 5.1b, a larger RBF-FD stencil of size  $n = 75$  on the unit sphere is shown as red and blue disks surrounding the center represented as a square. Green disks are nodes outside of the stencil. The radii and color of the red and blue disks represent the magnitude and alternating sign of coefficients,  $c_j$ , determined to calculate a derivative quantity at the stencil center.

### 5.2.1 Stencil Weights

To approximate  $\mathcal{L}u(x)$ , one requires the stencil *weights* (coefficients),  $c_j$ . Stencil weights are a discrete representation of the differential operator at the stencil center and may vary by node location (e.g., nodes at the boundary are usually governed by another operator,  $\mathcal{B}$ ). Weights are obtained by enforcing that they be exact within the space spanned by the RBFs centered at stencil nodes (i.e.,  $\phi_j(x) = \phi(\epsilon\|x - x_j\|_2)$ ; an RBF centered at  $x_j$ ). Various studies [33, 36, 41, 97] show that better accuracy is achieved when the interpolant can exactly reproduce a constant,  $p_0$ , such that

$$\mathcal{L}\phi_i(x)|_{x=x_c} = \sum_{j=1}^n c_j \phi_j(x_i) + c_{n+1} p_0 \quad \text{for } i = 1, 2, \dots, n$$

with  $\mathcal{L}\phi_i$  provided by analytically applying the differential operator to the RBF. Assuming  $p_0 = 1$ , the constraint  $\sum_{i=1}^n c_i = \mathcal{L}p_0|_{x=x_c} = 0$  completes the system:

$$\begin{aligned} \begin{bmatrix} \phi_1(x_1) & \phi_2(x_1) & \cdots & \phi_n(x_1) & 1 \\ \phi_1(x_2) & \phi_2(x_2) & \cdots & \phi_n(x_2) & 1 \\ \vdots & \ddots & \ddots & \vdots & \vdots \\ \phi_1(x_n) & \phi_2(x_n) & \cdots & \phi_n(x_n) & 1 \\ 1 & 1 & \cdots & 1 & 0 \end{bmatrix} \begin{pmatrix} c_1 \\ c_2 \\ \vdots \\ c_n \\ c_{n+1} \end{pmatrix} &= \begin{pmatrix} \mathcal{L}\phi_1(x)|_{x=x_c} \\ \mathcal{L}\phi_2(x)|_{x=x_c} \\ \vdots \\ \mathcal{L}\phi_n(x)|_{x=x_c} \\ 0 \end{pmatrix} \quad (5.2) \\ \begin{bmatrix} \phi & P \\ P^T & 0 \end{bmatrix} \begin{pmatrix} c_{\mathcal{L}} \\ d_{\mathcal{L}} \end{pmatrix} &= \begin{pmatrix} \phi_{\mathcal{L}} \\ 0 \end{pmatrix}. \end{aligned}$$

The choice of  $\mathcal{L}$  can be any linear operator. As an example, if  $\mathcal{L}$  is the identity operator, then the above procedure leads to RBF-FD weights for interpolation. If  $\mathcal{L} = \frac{\partial}{\partial x}$ , one obtains the weights to approximate the first derivative in  $x$ . Refer to [28] for a table of commonly used RBF derivatives.

The small  $(n+1) \times (n+1)$  system in Equation 5.2 is dense, and is solved at a cost of  $O(n^3)$  floating point operations (FLOPs) using direct methods like LU-decomposition. The resulting stencil weights,  $c_{\mathcal{L}} = \{c_j\}_{j=1}^n$  can be substituted into Equation 11.3 for the derivative approximation at  $x_c$ . Coefficient  $c_{n+1}$  ( $d_{\mathcal{L}} = c_{n+1}$ ), included in the solution of Equation 5.2, is of no use and discarded once the system has been solved.

Based on the choice of support parameter,  $\epsilon$ , the Equation 5.2 may suffer problems with conditioning. In such cases, stable methods like Contour–Padé [95] or RBF-QR [40? ] may be preferred.

### 5.2.2 Differentiation Matrix

Note that Equation 5.2 resolves the weights only for the stencil  $x_c$ . The small system solve is repeated  $N$  times—once for each stencil—to obtain a total of  $N \times n$  stencil weights.

For PDEs, it is common practice to assemble a *differentiation matrix* (DM); a discrete representation of the PDE operator on the domain. Given the set of nodes in the domain  $\{x_k\}_{k=1}^N$ , the  $c$ -th row of the DM represents the discrete PDE operator for the stencil centered at node  $x_c$  with stencil nodes  $\{x_j\}_{j=1}^n$ :

$$\begin{aligned}\mathcal{L}u(x) &\approx D_{\mathcal{L}}u \\ D_{\mathcal{L}}^{(c,k)} &= \begin{cases} c_j & x_k = x_j \\ 0 & x_k \neq x_j \end{cases}\end{aligned}$$

where  $(c, k)$  represents the (row, column) index of  $D_{\mathcal{L}}$  and vector  $u = \{u(x_k)\}_{k=1}^N$ . Equation 11.3 can be rewritten as:

$$\mathcal{L}u(x) |_{x=x_c} \approx D_{\mathcal{L}}^{(c)} u .$$

In the solution of PDEs the DMs are utilized in explicit and implicit modes. Here explicit implies evaluating the matrix-vector multiply to get derivative values,  $u'$ , from explicitly known vector of solution values  $u$ :

$$u' = D_{\mathcal{L}}u$$

whereas implicit solves for unknown  $u$ :

$$D_{\mathcal{L}}u = f$$

An example RBF-FD DM is illustrated in Figure 5.2. In this example, assume operator  $\mathcal{L} = \frac{\partial}{\partial x}$  is approximated at all  $N$  stencil centers of an arbitrary domain. RBF-FD weights assemble the rows of the differentiation matrix,  $D_x$ . On each row, weights are indicated by blue dots. The sparsity of rows reflects the subset of  $\{x_k\}_{k=1}^N$  included in corresponding stencils of size  $n$ . On the right hand side, discrete derivative values  $\frac{du}{dx}$  are approximated at all stencil centers.

Differentiation matrices are assembled at a cost of  $O(n^3N)$  FLOPs; although, the goal of RBF-FD is to keep stencil neighborhoods small,  $n \ll N$  and the cost of assembly is dominated by  $O(N)$ . Furthermore, RBF-FD weights are independent of function values ( $u(x)$ ) and rely only on stencil node locations. The implications of this are profound in the context of time-dependent PDEs, since the stencil weights remain constant so long as the nodes are stationary. The DM assembly is then part of a one-time preprocessing step.

The sparsity exhibited by the DM in Figure 5.2 is typical for RBF-FD due to  $n \ll N$ . Best practices dictate that the DMs be stored in a compressed sparse storage format to retain only non-zeros and their corresponding indices in memory.

### 5.2.3 Multiple Operators

In many cases, multiple derivatives (e.g.,  $\mathcal{L} = \nabla^2$ ,  $\frac{\partial}{\partial x}$ ,  $\frac{\partial}{\partial y}$ , etc.) are required at stencil centers. This is common, for example, when solving coupled PDEs. For RBF-FD, acquiring

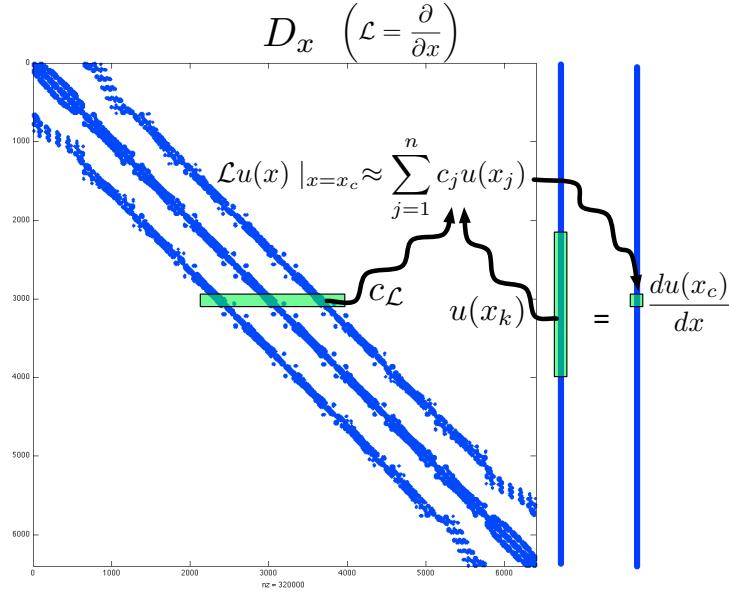


Figure 5.2: Differentiation matrix  $D_x$  is applied to the solution values  $u(x)$  to obtain derivative approximations,  $\frac{du}{dx}$ .

weights for each additional operator can be both straight-forward and computationally efficient. For each change of differential operator, observe that only the RHS of Equation 5.2 is modified. Thus, new operators amount to extending Equation 5.2 to solve

$$\begin{bmatrix} \phi & P \\ P^T & 0 \end{bmatrix} \begin{bmatrix} c_{\nabla^2} & c_x & c_y & \cdots \\ d_{\nabla^2} & d_x & d_y & \cdots \end{bmatrix} = \begin{bmatrix} \phi_{\nabla^2} & \phi_x & \phi_y & \cdots \\ 0 & 0 & 0 & \cdots \end{bmatrix}.$$

where multiple sets of weights  $(c_{\nabla}, c_x, c_y)$  solved simultaneously. This dense, symmetric, multiple RHS linear system is considered ideal by linear algebra packages, and many highly optimized routines exist to solve them (e.g., LAPACK “dgesv”).

### 5.3 Weight Operators

In the course of this work we work with a variety of PDEs. This section enumerates a list of relevant operators and their corresponding equations for the RHS of Equation 5.2. Whenever possible the general form of  $\mathcal{L}\phi$  is provided; otherwise the Gaussian RBF ( $\phi(r) = e^{-(\epsilon r)^2}$ ) is assumed.

#### 5.3.1 First and Second Derivatives ( $\frac{1}{r} \frac{d\phi}{dr}, \frac{d^2\phi}{dr^2}$ )

The following are used in subsequent derivatives:

$$\begin{aligned} \frac{1}{r} \frac{d}{dr} \phi(r) &= -2\epsilon^2 \phi(r) \\ \frac{d^2\phi}{dr^2} &= \epsilon^2 (-2 + 4(\epsilon r)^2) \phi(r) \end{aligned}$$

### 5.3.2 Cartesian Gradient ( $\nabla$ )

The first derivatives in Cartesian coordinates  $(\frac{\partial}{\partial x}, \frac{\partial}{\partial y}, \frac{\partial}{\partial z})$  are produced via the chain rule:

$$\begin{aligned}\frac{\partial \phi}{\partial x} &= \frac{dr}{dx} \frac{d\phi}{dr} = \frac{(x - x_j)}{r} \frac{d\phi}{dr} \\ \frac{\partial \phi}{\partial y} &= \frac{dr}{dy} \frac{d\phi}{dr} = \frac{(y - y_j)}{r} \frac{d\phi}{dr} \\ \frac{\partial \phi}{\partial z} &= \frac{dr}{dz} \frac{d\phi}{dr} = \frac{(z - z_j)}{r} \frac{d\phi}{dr}\end{aligned}$$

### 5.3.3 Cartesian Laplacian ( $\nabla^2$ )

Fasshauer [28] provides the general form of  $\nabla^2$  in 2D as:

$$\nabla^2 = \frac{d^2}{dr^2} \phi(r) + \frac{1}{r} \frac{d}{dr} \phi(r)$$

For Gaussian RBFs in particular we have the following operators:

- 1D:

$$\nabla^2 = \epsilon^2 (-2 + 4(\epsilon r)^2) \phi(r)$$

- 2D:

$$\nabla^2 = \epsilon^2 (-4 + 4(\epsilon r)^2) \phi(r)$$

- 3D:

$$\nabla^2 = \epsilon^2 (-6 + 4(\epsilon r)^2) \phi(r)$$

which all fit  $\nabla^2 = \frac{d^2}{dr^2} \phi(r) + \frac{d-1}{r} \frac{d}{dr} \phi(r)$  for dimension  $d$ .

### 5.3.4 Laplace-Beltrami ( $\Delta_S$ ) on the Sphere

The  $\nabla^2$  operator can be represented in spherical polar coordinates for  $\mathbb{R}^3$  as:

$$\nabla^2 = \underbrace{\frac{1}{r} \frac{\partial}{\partial r} \left( r^2 \frac{\partial}{\partial r} \right)}_{\text{radial}} + \underbrace{\frac{1}{r^2} \Delta_S}_{\text{angular}},$$

where  $\Delta_S$  is the Laplace-Beltrami operator—i.e., the Laplacian operator constrained to the surface of the sphere. This form nicely illustrates the separation of components into radial and angular terms.

In the case of PDEs solved on the unit sphere, there is no radial term, so we have:

$$\nabla^2 \equiv \Delta_S. \tag{5.3}$$

Although this originated in the spherical coordinate system, [96] introduced the following Laplace-Beltrami operator for the surface of the sphere:

$$\Delta_S = \frac{1}{4} \left[ (4 - r^2) \frac{\partial^2 \phi}{\partial r^2} + \frac{4 - 3r^2}{r} \frac{\partial \phi}{\partial r} \right],$$

where  $r$  is the Euclidean distance between nodes of an RBF-FD stencil and is independent of our choice of coordinate system.

### 5.3.5 Constrained Gradient ( $P_x \cdot \nabla$ ) on the Sphere

Following [33, 35], the gradient operator can be constrained to the sphere with this projection matrix:

$$P = I - \mathbf{x}\mathbf{x}^T = \begin{pmatrix} (1-x_1^2) & -x_1x_2 & -x_1x_3 \\ -x_1x_2 & (1-x_2^2) & -x_2x_3 \\ -x_1x_3 & -x_2x_3 & (1-x_3^2) \end{pmatrix} = \begin{pmatrix} P_{x_1} \\ P_{x_2} \\ P_{x_3} \end{pmatrix} \quad (5.4)$$

where  $\mathbf{x}$  is the unit normal at the stencil center.

The direct method of computing RBF-FD weights for the projected gradient for  $\mathbf{P} \cdot \nabla$  is presented in [35]. When solving for the weights, we apply the projection on the right hand side of our small linear system. We let  $\mathbf{x} = (x_1, x_2, x_3)$  be the stencil center, and  $\mathbf{x}_k = (x_{1,k}, x_{2,k}, x_{3,k})$  indicate an RBF-FD stencil node.

Using the chain rule, and assumption that

$$r(\mathbf{x}_k - \mathbf{x}) = \|\mathbf{x}_k - \mathbf{x}\| = \sqrt{(x_{1,k} - x_1)^2 + (x_{2,k} - x_2)^2 + (x_{3,k} - x_3)^2},$$

we obtain the unprojected gradient of  $\phi$  as

$$\nabla\phi(r(\mathbf{x}_k - \mathbf{x})) = \frac{\partial r}{\partial \mathbf{x}} \frac{\partial \phi(r(\mathbf{x}_k - \mathbf{x}))}{\partial r} = -(\mathbf{x}_k - \mathbf{x}) \frac{1}{r(\mathbf{x}_k - \mathbf{x})} \frac{\partial \phi(r(\mathbf{x}_k - \mathbf{x}))}{\partial r}.$$

Applying the projection matrix gives

$$\begin{aligned} \mathbf{P}\nabla\phi(r(\mathbf{x}_k - \mathbf{x})) &= -(\mathbf{P} \cdot \mathbf{x}_k - \mathbf{P} \cdot \mathbf{x}) \frac{1}{r(\mathbf{x}_k - \mathbf{x})} \frac{\partial \phi(r(\mathbf{x}_k - \mathbf{x}))}{\partial r} \\ &= -(\mathbf{P} \cdot \mathbf{x}_k - 0) \frac{1}{r(\mathbf{x}_k - \mathbf{x})} \frac{\partial \phi(r(\mathbf{x}_k - \mathbf{x}))}{\partial r} \\ &= -(I - \mathbf{x}\mathbf{x}^T)(\mathbf{x}_k) \frac{1}{r(\mathbf{x}_k - \mathbf{x})} \frac{\partial \phi(r(\mathbf{x}_k - \mathbf{x}))}{\partial r} \\ &= \begin{pmatrix} x\mathbf{x}^T \mathbf{x}_k - x_k \\ y\mathbf{x}^T \mathbf{x}_k - y_k \\ z\mathbf{x}^T \mathbf{x}_k - z_k \end{pmatrix} \frac{1}{r(\mathbf{x}_k - \mathbf{x})} \frac{\partial \phi(r(\mathbf{x}_k - \mathbf{x}))}{\partial r} \end{aligned}$$

Thus, we directly compute the weights for  $P_x \cdot \nabla$  using these three RHS in Equation 5.2:

$$\begin{aligned} P \frac{\partial}{\partial x_1} &= (x_1 \mathbf{x}^T \mathbf{x}_k - x_{1,k}) \frac{1}{r(\mathbf{x}_k - \mathbf{x})} \frac{\partial \phi(r(\mathbf{x}_k - \mathbf{x}))}{\partial r} \Big|_{\mathbf{x}=\mathbf{x}_j} \\ P \frac{\partial}{\partial x_2} &= (x_2 \mathbf{x}^T \mathbf{x}_k - x_{2,k}) \frac{1}{r(\mathbf{x}_k - \mathbf{x})} \frac{\partial \phi(r(\mathbf{x}_k - \mathbf{x}))}{\partial r} \Big|_{\mathbf{x}=\mathbf{x}_j} \\ P \frac{\partial}{\partial x_3} &= (x_3 \mathbf{x}^T \mathbf{x}_k - x_{3,k}) \frac{1}{r(\mathbf{x}_k - \mathbf{x})} \frac{\partial \phi(r(\mathbf{x}_k - \mathbf{x}))}{\partial r} \Big|_{\mathbf{x}=\mathbf{x}_j} \end{aligned}$$

### 5.3.6 Hyperviscosity $\Delta^k$ for Stabilization

When explicitly solving hyperbolic equations, differentiation matrices encode convective operators of the form

$$D = \alpha \frac{\partial}{\partial \lambda} + \beta \frac{\partial}{\partial \theta} \quad (5.5)$$

The convective operator, discretized through RBF-FD, has eigenvalues in the right half-plane causing the method to be unstable [33, 41]. Stabilization of the RBF-FD method is achieved through the application of a hyperviscosity filter to Equation (5.5) [41]. By using Gaussian RBFs,  $\phi(r) = e^{-(\epsilon r)^2}$ , the hyperviscosity (a high order Laplacian operator) simplifies to

$$\Delta^k \phi(r) = \epsilon^{2k} p_k(r) \phi(r) \quad (5.6)$$

where  $k$  is the order of the Laplacian and  $p_k(r)$  are multiples of generalized Laguerre polynomials that are generated recursively ([41]):

$$\begin{cases} p_0(r) &= 1, \\ p_1(r) &= 4(\epsilon r)^2 - 2d, \\ p_k(r) &= 4((\epsilon r)^2 - 2(k-1) - \frac{d}{2})p_{k-1}(r) - 8(k-1)(2(k-1) - 2 + d)p_{k-2}(r), \end{cases} \quad k = 2, 3, \dots$$

where  $d$  is the dimension of the problem. In application of hyperviscosity, we assume a  $d = 2$  on the surface of the sphere since individual RBF-FD stencils can be viewed as (nearly) lying on a plane. For small  $N$ , the diameter of the stencil may not be sufficiently small compared to the radius of the sphere, and hyperviscosity might not work as advertised.

In the case of parabolic and hyperbolic PDEs, hyperviscosity is added as a filter to the right hand side of the evaluation. For example, at the continuous level, the equation solved takes the form

$$\frac{\partial u}{\partial t} = -\mathcal{L}u + Hu, \quad (5.7)$$

where  $\mathcal{L}$  is the PDE operator, and  $H$  is the hyperviscosity filter operator. Applying hyperviscosity shifts all the eigenvalues of  $L$  (the discrete form of  $\mathcal{L}$ ) to the left half of the complex plane. This shift is controlled by  $k$ , the order of the Laplacian, and a scaling parameter  $\gamma_c$ , defined by

$$H = \gamma \Delta^k = \gamma_c N^{-k} \Delta^k.$$

It was found in [33], and verified in our own application, that  $\gamma = \gamma_c N^{-k}$  provides stability and good accuracy for all values of  $N$  considered here. It also ensures that the viscosity vanishes as  $N \rightarrow \infty$  [33]. In general, the larger the stencil size, the higher the order of the Laplacian. This is attributed to the fact that, for convective operators, larger stencils treat a wider range of modes accurately. As a result, the hyperviscosity operator should preserve as much of that range as possible. The parameter  $\gamma_c$  must also be chosen with care and its sign depends on  $k$  (for  $k$  even,  $\gamma_c$  will be negative and for  $k$  odd, it will be positive). If  $\gamma_c$  is too large, the eigenvalues move outside the stability domain of our time-stepping scheme and/or eigenvalues corresponding to lower physical modes are not left intact, reducing the accuracy of our approximation. If  $\gamma_c$  is too small, eigenvalues remain in the right half-plane [33, 41].

## 5.4 On Choosing the Right $\epsilon$

## 5.5 Generating Stencils

For each of the  $N$  small system solves of Equation (5.2), the  $n$  nearest neighbors to  $\mathbf{x}_j$  need to be located. This can be done efficiently using neighbor query algorithms or

spatial partitioning data-structures such as Locality Sensitive Hashing (LSH) and  $k$ D-Tree. Different query algorithms often have a profound impact on the DM structure and memory access patterns. We choose a Raster ( $ijk$ ) ordering LSH algorithm [? ] leading to the matrix structure in Figures 7.4 and 7.5. While querying neighbors for each stencil is an embarrassingly parallel operation, the node sets used here are stationary and require stencil generation only once. Efficiency and parallelism for this task has little impact on the overall run-time of tests, which is dominated by the time-stepping. We preprocess node sets and generate stencils serially, then load stencils and nodes from disk at run-time. In contrast to the RBF-FD view of a static grid, Lagrangian/particle based PDE algorithms promote efficient parallel variants of LSH in order to accelerate querying neighbors at each time-step [47, 70].

Many algorithms exist to query the  $k$ -nearest neighbors (equivalently all nodes in the minimum/smallest enclosing circle). Some algorithms overlay a grid similar to Locality Sensitive Hashing and query such as... [? ].

### 5.5.1 Node Placement – Centroidal Voronoi Tessellation

We make the assumption for now that we use regularly distributed nodes. Centroidal Voronoi tessellations provide reasonably good distributions for solutions. Examples (heat ellipse, ellipsoid, sphere, square cavity).

The motivation behind RBF-FD is generality/functionality in the numerical method. Scattered nodes are supported. Distribution requires proper choice of support, and tight nodes result in increased conditioning

### 5.5.2 Approximate Nearest Neighbor (ANN) Query

RBF-FD operates on general node distributions. Historically, stencils are uniform in size ( $n$ ) and generated by selecting the  $(n - 1)$  true nearest neighbors to a node  $x_c$ . This is a  $k$ -NN query.

Alternative queries are possible: ball query and approximate nearest neighbor. The approximate is of particular interest because nodes closest to the stencil will always be selected, whereas the nodes further away have minimal influence so swapping out can't hurt. The justification in altering the selection is for reduced complexity in neighbor queries.

For example, in general brute force is inefficient. The author of [28] queries  $n$  nearest neighbors for a compact-support RBF partition of unity example with a  $k$ -D tree. In [33, 41] a  $k$ -D Tree is leveraged for all neighbor queries for RBF-FD.

In our work in [11] an alternative to  $k$ -D tree was leveraged, based loosely on Locality Sensitive Hashing.

Rather than iterate through all  $N$  nodes to find the true neighbors, or step through a  $k$ -D tree in something like  $O(\log N)$  that requires extra built-out, ANN allows us to use a set of nodes that satisfy

**$k$ -D Tree.** Most of the RBF community leverages the  $k$ -D tree, due to its low computational complexity for querying neighbors and its wide availability as standalone software in the public domain (e.g., matlab central has a few implementations for download, and the MATLAB Statistics Toolbox includes an efficient k-D Tree).

The complexity of assembling the tree is

The Matlab central  $k$ -D Tree is MEX compiled and efficient. We integrated the standalone C++ code into our library.

While the  $k$ -D Tree functions well for queries, its downfall is a large cost in preprocessing to build the tree. For moving nodes, such as in Lagrangian schemes, this cost is prohibitively high. In an attempt to reduce the cost, lagrangian schemes introduced approximate nearest neighbor queries based on

Approximate nearest neighbors will be nearly balanced. We observe that RBF-FD functions as well on stencils of true nearest neighbors as it does on approximate nearest neighbors.

## CHAPTER 6

### A DISTRIBUTED MULTI-GPU RBF-FD IMPLEMENTATION

Parallel implementations of RBF methods currently rely on parallel domain decomposition. Depending on the implementation, domain decomposition not only accelerates solution procedures, but can decrease the ill-conditioning that plague all global RBF methods [23]. The ill-conditioning is reduced if each domain is treated as a separate RBF domain, and the boundary update is treated separately. Domain decomposition methods for RBFs were introduced by Beatson et al. [5] in the year 2000 as a way to increase problem sizes into the millions of nodes.

Divo and Kassab [23] used a domain decomposition method with artificial subdomain boundaries for their implementation of a local collocation method [23]. Subdomains are processed independently. The derivative values at artificial boundary points are averaged to maintain global consistency of physical values. Their implementation was designed for a 36 node cluster, but benchmarks and scalability tests are not provided.

Kosec and Šarler [59] used OpenMP to parallelize coupled heat transfer and fluid flow problems on a single workstation. Their test cases used local collocation, explicit time-stepping and Neumann boundary conditions. A speedup factor of 1.85x over serial execution was achieved by executing on two CPU cores; no results from scaling tests were provided.

Stevens et al. [85] mention a parallel implementation under development, but no document is available yet.

Additional RBF implementations are discussed at the end of this chapter in the context of parallel co-processing with the GPU.

In this work, we will add to the above experiences, with the added twist of incorporating an implementation on the GPU (see later chapters).

RBFs on GPU work: [78, 79] (global), [100] (compact)

# CHAPTER 7

## PARALLEL SOLVERS

Parallel solution of PDEs in a distributed computing environment requires three design decisions [75]. First, partitioning the domain and distributing work across compute nodes requires knowledge of *neighboring processors* with which communication will occur. Intelligent partitioning impacts load balancing on processors and the computation to communication ratio; imbalanced computation can cause excessive delay per iteration as processors wait to receive information. Second, one must decide what information each processor is able to access regarding node information, solution values, etc and establish index mappings that translate between a processor’s local context and the global problem. In situations where processors are not aware of all nodes/solution values in the global domain, the index mappings are essential to maintaining solution consistency at each time-step. Last but not least, each processor can re-order nodes locally in an effort to improve solver efficiency and local system conditioning. Node ordering also allows us to minimize data transfer between CPU and GPU.

Parallelization of the RBF-FD method is achieved at two levels. First, the physical domain of the problem—in this case, the unit sphere—is partitioned into overlapping sub-domains, each handled by a different CPU process. All CPUs operate independently to compute/load RBF-FD stencil weights, run diagnostic tests and perform other initialization tasks. A CPU computes only weights corresponding to stencils centered in the interior of its partition. After initialization, CPUs continue concurrently to solve the PDE. Communication barriers ensure that the CPUs execute in lockstep to maintain consistent solution values in regions where partitions overlap. The second level of parallelization offloads time-stepping of the PDE to the GPU. Evaluation of the right hand side of Equation (5.7) is data-parallel: the solution derivative at each stencil center is evaluated independently of the other stencils. This maps well to the GPU, offering decent speedup even in unoptimized kernels. Although the stencil weight calculation is also data-parallel, we assume that in this context that the weights are precomputed and loaded once from disk during the initialization phase.

### 7.1 On the use of libraries for parallel solvers

Since our focus within this work is to lay the foundation for parallel computing with RBF-FD, we have made several simplifying assumptions in our code design. Libraries like

PETsc, Hypre, Trilinos and Deal.ii distribute sparse matrix operations in similar fashion to our approach. When work initially began on this dissertation, none of these competing libraries contained support for the GPU. PETsc is currently developing support for the GPU, but we have not had the chance to consider it yet.

Our codebase began as a prototype demonstrating the feasibility of RBF-FD operating on the GPU. Starting from the perspective of RBF-FD as a Lagrangian method with stationary nodes, the code was developed as  $N$  independent dot products of weights and solution values to approximate derivatives. Weights were stored linearly in memory, with the solution values read randomly. On the GPU, stencils were evaluated independently by threads, or shared by a warp of threads. Operating on stencils in this way implied that GPU kernels were to be hand written, tuned and optimized.

Much later, our perspective evolved to see derivative approximation and time-stepping as sparse matrix operations. This opened new possibilities for optimization and allowed us to forego hand optimization and fine-tuning of GPU kernels. With all of the effort put into optimizing sparse operations within libraries like CUSP [6], ViennaCL [73] and even the Nvidia provided CUSPARSE [? ], formulating the problem in terms of sparse matrix operations allows us to quickly prototype on the GPU and leverage all of the optimizations available within the third party libraries.

In the most recent version of ViennaCL a set of auto-tuning options were introduced. We have not investigated these options, but the idea is that they would only improve the efficiency of our code.

## 7.2 Partitioning

For ease of development and parallel debugging, partitioning is initially assumed to be linear within one physical direction (typically the  $x$ -direction). Figure 7.1 illustrates a partitioning of  $N = 10,201$  nodes on the unit sphere onto four CPUs. Each partition, illustrated as a unique color, represents set  $\mathcal{G}$  for a single CPU. Alternating representations between node points and interpolated surfaces illustrates the overlap regions where nodes in sets  $\mathcal{O}$  and  $\mathcal{R}$  (i.e., nodes requiring MPI communication) reside. As stencil size increases, the width of the overlap regions relative to total number of nodes on the sphere also increases.

*Author's Note: Q: what is the percentage overlap for  $n$ ?  $\frac{1}{2}n^{\frac{1}{d}}$  gives depth into neighbor since n is uniformly sampled we expect a cube shape. (SHould be literature on this...no?)*

The linear partitioning in Figure 7.1 was chosen for ease of implementation. Communication is limited for each processor to left and right neighbors only, which simplifies parallel debugging. This partitioning, however, does not guarantee properly balanced computational work-loads. *Author's Note: Update w/ ParMETIS* Other partitionings of the sphere exist but are not studied here because this paper's focus is neither on efficiency nor on selecting a partitioning strategy for maximum accuracy. Examples of alternative approaches include a cubed-sphere [52] or icosahedral geodesic grid [72], which can evenly balance the computational load across partitions. Other interesting partitionings can be generated with software libraries such as the METIS [57] family of algorithms, capable of partitioning and reordering directed graphs produced by RBF-FD stencils.

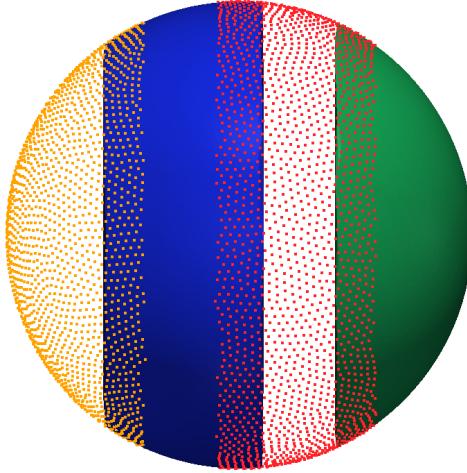


Figure 7.1: Partitioning of  $N = 10,201$  nodes to span four processors with stencil size  $n = 31$ .

### 7.3 Local node ordering

After partitioning, each CPU/GPU is responsible for its own subset of nodes. To simplify accounting, we track nodes in two ways. Each node is assigned a global index, that uniquely identifies it. This index follows the node and its associated data as it is shuffled between processors. In addition, it is important to treat the nodes on each CPU/GPU in an identical manner. Implementations on the GPU are more efficient when node indices are sequential. Therefore, we also assign a local index for the nodes on a given CPU, which run from 1 to the maximum number of nodes on that CPU.

It is convenient to break up the nodes on a given CPU into various sets according to whether they are sent to other processors, are retrieved from other processors, are permanently on the processor, etc. Note as well, that each node has a home processor since the RBF nodes are partitioned into multiple domains without overlap. Table 7.1, defines the collection of index lists that each CPU must maintain for both multi-CPU and multi-GPU implementations.

Figure 7.2 illustrates a configuration with two CPUs and two GPUs, and 9 stencils, four on CPU1, and five on CPU2, separated by a vertical line in the figure. Each stencil has size  $n = 5$ . In the top part of the figures, the stencils are laid out with blue arrows pointing to stencil neighbors and creating the edges of a directed adjacency graph. Note that the connection between two nodes is not always bidirectional. For example, node 6 is in the stencil of node 3, but node 3 is not a member of the stencil of node 6. Gray arrows point to stencil neighbors outside the small window and are not relevant to the following discussion, which focuses only on data flow between CPU1 and CPU2. Since each CPU is responsible for the derivative evaluation and solution updates for any stencil center, it is clear that some nodes have a stencil with nodes that are on a different CPU. For example, node 8 on CPU1 has a stencil comprised of nodes 4,5,6,9, and itself. The data associated with node 6 must be retrieved from CPU2. Similarly, the data from node 5 must be sent

---

$\mathcal{G}$	: all nodes received and contained on the CPU/GPU $g$
$\mathcal{Q}$	: stencil centers managed by $g$ (equivalently, stencils computed by $g$ )
$\mathcal{B}$	: stencil centers managed by $g$ that require nodes from another CPU/GPU
$\mathcal{O}$	: nodes managed by $g$ that are sent to other CPUs/GPUs
$\mathcal{R}$	: nodes required by $g$ that are managed by another CPU/GPU

---

Table 7.1: Sets defined for stencil distribution to multiple CPUs

to CPU2 to complete calculations at the center of node 6.

The set of all nodes that a CPU interacts with is denoted by  $\mathcal{G}$ , which includes not only the nodes stored on the CPU, but the nodes required from other CPUs to complete the calculations. The set  $\mathcal{Q} \in \mathcal{G}$  contains the nodes at which the CPU will compute derivatives and apply solution updates. The set  $\mathcal{R} = \mathcal{G} \setminus \mathcal{Q}$  is formed from the set of nodes whose values must be retrieved from another CPU. For each CPU, the set  $\mathcal{O} \in \mathcal{Q}$  is sent to other CPUs. The set  $\mathcal{B} \in \mathcal{Q}$  consists of nodes that depend on values from  $\mathcal{R}$  in order to evaluate derivatives. Note that  $\mathcal{O}$  and  $\mathcal{B}$  can overlap, but differ in size, since the directed adjacency graph produced by stencil edges is not necessarily symmetric. The set  $\mathcal{B} \setminus \mathcal{O}$  represents nodes that depend on  $\mathcal{R}$  but are not sent to other CPUs, while  $\mathcal{Q} \setminus \mathcal{B}$  are nodes that have no dependency on information from other CPUs. The middle section Figure 7.2 lists global node indices contained in  $\mathcal{G}$  for each CPU. Global indices are paired with local indices to indicate the node ordering internal to each CPU. The structure of set  $\mathcal{G}$ ,

$$\mathcal{G} = \{\mathcal{Q} \setminus \mathcal{B}, \mathcal{B} \setminus \mathcal{O}, \mathcal{O}, \mathcal{R}\}, \quad (7.1)$$

is designed to simplify both CPU-CPU and CPU-GPU memory transfers by grouping nodes of similar type. The color of the global and local indices in the figure indicate the sets to which they belong. They are as follows: white represents  $\mathcal{Q} \setminus \mathcal{B}$ , yellow represents  $\mathcal{B} \setminus \mathcal{O}$ , green indices represent  $\mathcal{O}$ , and red represent  $\mathcal{R}$ .

The structure of  $\mathcal{G}$  offers two benefits: first, solution values in  $\mathcal{R}$  and  $\mathcal{O}$  are contiguous in memory and can be copied to or from the GPU without the filtering and/or re-ordering normally required in preparation for efficient data transfers. Second, asynchronous communication allows for the overlap of communication and computation. This will be considered as part of future research on algorithm optimization. Distinguishing the set  $\mathcal{B} \setminus \mathcal{O}$  allows the computation of  $\mathcal{Q} \setminus \mathcal{B}$  while waiting on  $\mathcal{R}$ .

**Author's Note:** The local index set is ordered as  $QmB, BmO, O, R$

**Author's Note:** Domain boundary nodes appear at beginning of the list

When targeting the GPU, communication of solution or intermediate values is a four step process:

1. Transfer  $\mathcal{O}$  from GPU to CPU
2. Distribute  $\mathcal{O}$  to other CPUs, receive  $R$  from other CPUs
3. Transfer  $\mathcal{R}$  to the GPU
4. Launch a GPU kernel to operate on  $\mathcal{Q}$

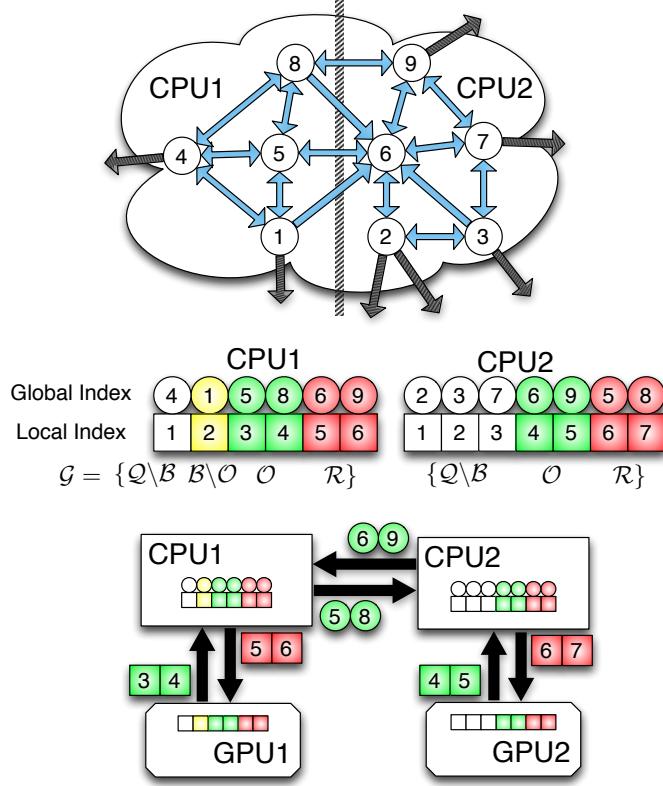


Figure 7.2: Partitioning, index mappings and memory transfers for nine stencils ( $n = 5$ ) spanning two CPUs and two GPUs. Top: the directed graph created by stencil edges is partitioned for two CPUs. Middle: the partitioned stencil centers are reordered locally by each CPU to keep values sent to/received from other CPUs contiguous in memory. Bottom: to synchronize GPUs, CPUs must act as intermediaries for communication and global to local index translation. Middle and Bottom: color coding on indices indicates membership in sets from Table 7.1:  $Q \setminus B$  is white,  $B \setminus O$  is yellow,  $O$  is green and  $R$  is red.

The data transfers involved in this process are illustrated at the bottom of Figure 7.2. Each GPU operates on the local indices ordered according to Equation (7.1). The set  $\mathcal{O}$  is copied off the GPU and into CPU memory as one contiguous memory block. The CPU then maps local to global indices and transfers  $\mathcal{O}$  to other CPUs. CPUs send only the subset of node values from  $\mathcal{O}$  that is required by the destination processors, but it is important to note that node information might be sent to several destinations. As the set  $\mathcal{R}$  is received, the CPU converts back from global to local indices before copying a contiguous block of memory to the GPU.

This approach is scalable to a very large number of processors, since the individual processors do not require the full mapping between RBF nodes and CPUs.

## 7.4 Two level parallelism

Our current implementation assumes that we are computing on a cluster of CPUs, with one GPU attached to each CPU. The CPU maintains control of execution and launches kernels on the GPU that execute in parallel. Under the OpenCL standard [58], a tiered memory hierarchy is available on the GPU with *global device memory* as the primary and most abundant memory space. The memory space for GPU kernels is separate from the memory available to a CPU, so data must be explicitly copied to/from global device memory on the GPU.

- How to copy to/from GPU
- Where are the synchronization points (lockstep and overlapping)

Author's Note: [The basic primitives necessary to parallelize our problems: SpMV, AXPY and](#)

### 7.4.1 Overlapping Computation and Communication

Need to describe our approach to launch

In simplest form (& indicates an overlapped execution; overlapping is possible by non-blocking launches to the GPU before comm is started):

- $U'_{Q \setminus B} = A_{Q \setminus B} U_{Q \setminus B}$
- & MPI\_alltoallv
- $U'_B = A_B U_B$

This form benefits because stencils are operated on in their entirety. For the GPU this is important because we maintain SIMD nature.

A more complex form which might overlap more comm and comp depending on the size of B (i.e., might be beneficial for large stencil sizes):

- $U'_{Q \setminus B} = A_{Q \setminus B} U_{Q \setminus B}$
- & MPI\_alltoallv
- &  $U'_B = A_{B \setminus R} U_{B \setminus R}$  (partial sparse vector product)
- $U'_B + = A_R U_R$

Note that there is no non-blocking version of MPI\_alltoallv within the MPI standard, so the above two algorithms will not be overlapped when computing on the CPU. To overlap on the CPU, [?] refers to the non-blocking collective as MPI\_ialltoallv. With a collective like this, we could enforce a pattern like:

- MPI\_alltoallv
- &  $U'_{Q \setminus B} = A_{Q \setminus B} U_{Q \setminus B}$

- &  $U'_B = A_{B \setminus R} U_{B \setminus R}$  (partial sparse vector product)
- MPI\_wait
- $U'_B + = A_R U_R$

### 7.4.2 Explicit Solvers

Our implementation leverages the GPU for acceleration of the standard fourth order Runge-Kutta (RK4) scheme. Nodes are stationary, so stencil weights are calculated once at the beginning of the simulation, and reused in every iteration. To avoid the cost of calculating stencil weights each time a test case is run, they are written to disk and loaded from file on subsequent runs. There is one set of weights computed for each new grid. Ignoring code initialization, the cost of the algorithm is simply the explicit time advancement of the solution.

Figure 7.3 summarizes the time advancement steps for the multi-CPU/GPU implementation. The RK4 steps are:

$$\begin{aligned}\mathbf{k}_1 &= \Delta t f(t_n, \mathbf{u}_n) \\ \mathbf{k}_2 &= \Delta t f\left(t_n + \frac{1}{2} \Delta t, \mathbf{u}_n + \frac{1}{2} \mathbf{k}_1\right) \\ \mathbf{k}_3 &= \Delta t f\left(t_n + \frac{1}{2} \Delta t, \mathbf{u}_n + \frac{1}{2} \mathbf{k}_2\right) \\ \mathbf{k}_4 &= \Delta t f(t_n + \Delta t, \mathbf{u}_n + \mathbf{k}_3) \\ \mathbf{u}_{n+1} &= \mathbf{u}_n + \frac{1}{6}(\mathbf{k}_1 + 2\mathbf{k}_2 + 2\mathbf{k}_3 + \mathbf{k}_4),\end{aligned}$$

where each equation has a corresponding kernel launch. To handle a variety of Runge-Kutta implementations, steps  $\mathbf{k}_{1 \rightarrow 4}$  correspond to calls to the same kernel with different arguments. The evaluation kernel returns two output vectors:

1.  $\mathbf{k}_i = \Delta t f(t_n + \alpha_i \Delta t, \mathbf{u}_n + \alpha_i \mathbf{k}_{i-1})$ , for steps  $i = 1, 2, 3, 4$ , and
2.  $\mathbf{u}_n + \alpha_{i+1} \mathbf{k}_i$

We choose  $\alpha_i = 0, \frac{1}{2}, \frac{1}{2}, 1, 0$  and  $\mathbf{k}_0 = \mathbf{u}_n$ . The second output for each  $\mathbf{k}_{i=1,2,3}$  serves as input to the next evaluation,  $\mathbf{k}_{i+1}$ . In an effort to avoid an extra kernel launch—and corresponding memory loads—the SAXPY that produces the second output uses the same evaluation kernel. Both outputs are stored in global device memory. When the computation spans multiple GPUs, steps  $\mathbf{k}_{1 \rightarrow 3}$  are each followed by a communication barrier to synchronize the subsets  $\mathcal{O}$  and  $\mathcal{R}$  of the second output (this includes copying the subsets between GPU and CPU). An additional synchronization occurs on the updated solution,  $\mathbf{u}_{n+1}$ , to ensure that all GPUs share a consistent view of the solution going into the next time-step.

To evaluate  $\mathbf{k}_{1 \rightarrow 4}$ , the discretized operators from Equation (5.7) are applied using sparse matrix-vector multiplication. If the operator  $D$  is composed of multiple derivatives, a differentiation matrix for each derivative is applied independently, including an additional multiplication for the discretized  $H$  operator. On the GPU, the kernel parallelizes across rows of the DMs, so all derivatives for stencils are computed in one kernel call.

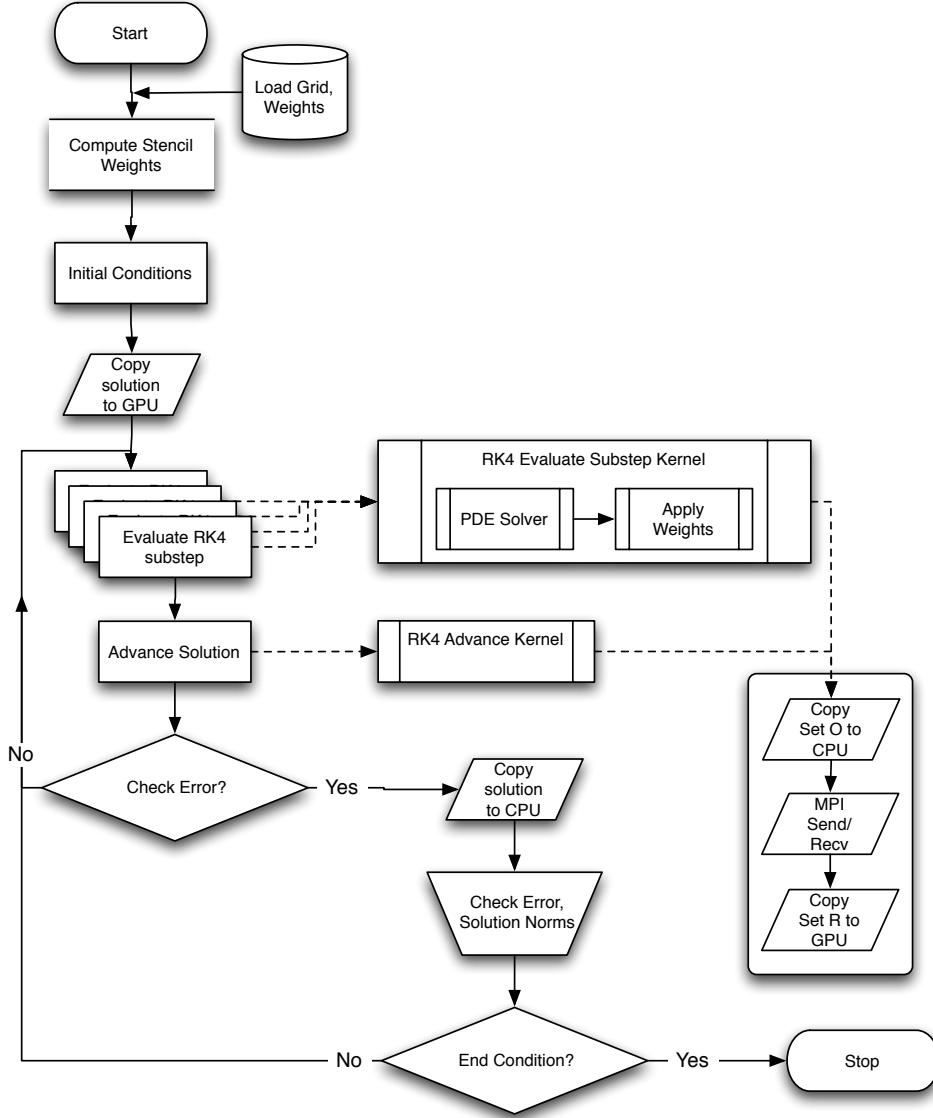


Figure 7.3: Workflow for RK4 on multiple GPUs.

For the GPU, the OpenCL language [58] assumes a lowest common denominator of hardware capabilities to provide functional portability. For example, all target architectures are assumed to support some level of SIMD (Single Instruction Multiple Data) execution for kernels. Multiple *work-items* execute a kernel in parallel. A collection of work-items performing the same task is called a *work-group*. While a user might think of work-groups as executing all work-items simultaneously, the work-items are divided at the hardware level into one or more SIMD *warps*, which are executed by a single multiprocessor. On the family of Fermi GPUs, a warp is 32 work-items [69]. OpenCL assumes a tiered memory hierarchy that provides fast but small *local memory* space that is shared within a work-group [58]. Local memory on Fermi GPUs is 48 KB per multiprocessor [69]. The *global device memory*

allows sharing between work-groups and is the slowest but most abundant memory. In the GPU computing literature, the terms *thread* and *shared memory* are synonymous to *work-item* and *local memory* respectively, and are preferred below.

Although the primary focus of this paper is the implementation and verification of the RBF-FD method across multiple CPUs and GPUs, we have nonetheless tested two approaches to the computation of derivatives on the GPU to assess the potential for further improvements in performance. In both cases, the stencil weights are stored in CSR format [6], a packed one-dimensional array in global memory with all the weights of a single stencil in consecutive memory addresses. Each operator is stored as an independent CSR matrix. The consecutive ordering on the weights implies that the solution vector, structured according to the ordering of set  $\mathcal{G}$  is treated as random access.

All the computation on the GPU is performed in 8-byte double precision.

**Naive Approach: One thread per stencil.** In this first implementation, each thread computes the derivative at one stencil center (Figure 7.4). The advantage of this approach is trivial concurrency. Since each stencil has the same number of neighbors, each derivative has an identical number of computations. As long as the number of stencils is a multiple of the warp size, there are no idle threads. Should the total number of stencils be less than a multiple of the warp size, the final warp would contain idle threads, but the impact on efficiency would be minimal assuming the stencil size is sufficiently large.

Perfect concurrency from a logical point of view does not imply perfect efficiency in practice. Unfortunately, the naive approach is memory bound. When threads access weights in global memory, a full warp accesses a 128-byte segment in a single memory operation [69]. Since each thread handles a single stencil, the various threads in a warp access data in very disparate areas of global memory, rather than the same segment. This leads to very large slowdowns as extra memory operations are added for each 128-byte segment that the threads of a warp must access. However, with stencils sharing many common nodes, and the Fermi hardware providing caching, some weights in the unused portions of the segments might remain in cache long enough to hide the cost of so many additional memory loads.

**Alternate Approach: One warp per stencil.** An alternate approach, illustrated in Figure 7.5, dedicates a full warp of threads to a single stencil. Here, 32 threads load the weights of a stencil and the corresponding elements of the solution vector. As the 32 threads each perform a subset of the dot product, their intermediate sums are accumulated in 32 elements of shared memory (one per thread). Should a stencil be larger than the warp size, the warp iterates over the stencil in increments of the warp size until the full dot product is complete. Finally, the first thread of the warp performs a sum reduction across the 32 (warp size) intermediate sums stored in shared memory and writes the derivative value to global memory.

By operating on a warp by warp basis, weights for a single stencil are loaded with a reduced number of memory accesses. Memory loads for the solution vector remain random access but see some benefit when solution values for a stencil are in a small neighborhood in the memory space. Proximity in memory can be controlled by node indexing (see e.g., [?] and [18]).

For stencil sizes smaller than 32, some threads in the warp always remain idle. Idle threads do not slow down the computation within a warp, but under-utilization of the GPU

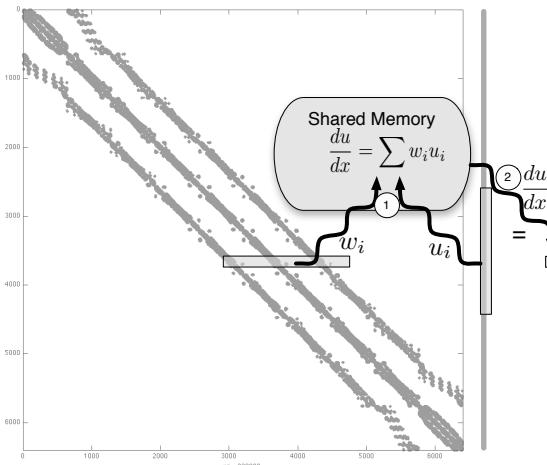


Figure 7.4: Naive approach to sparse matrix-vector multiply. Each thread is responsible for the sparse vector dot product of weights and solution values for derivatives at a single stencil.

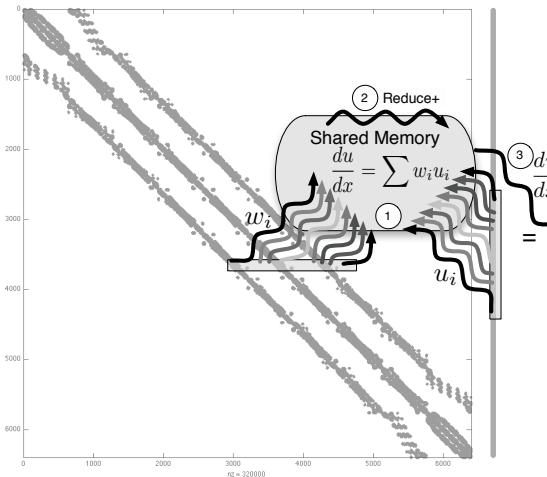


Figure 7.5: Alternative approach. A full warp (32 threads) collaborate to apply weights and compute the derivative at a stencil center.

is not desirable. For small stencil sizes, caching on the Fermi can hide some of the cost of memory loads for the naive approach, with no idle threads, making it more efficient. The real strength of one warp per stencil is seen for large stencil sizes. As part of future work on optimization, we will consider a parallel reduction in shared memory, as well as assigning multiple stencils to a single warp for small  $n$ .

dirichlet: kernel copies dirichlet values into place [Author's Note: Need to dust off code](#)

### 7.4.3 Fragments (integrate above)

While the nomenclature used in this paper is typically associated with CUDA programming, the names *thread* and *warp* are used to clearly illustrate kernel execution in context of the NVidia specific hardware used in tests. OpenCL assumes a lowest common denominator of hardware capabilities to provide functional portability. However, intimate knowledge of hardware allows for better understanding of performance and optimization on a target architecture. For example, OpenCL assumes all target architectures are capable at some level of SIMD (Single Instruction Multiple Data) execution, but CUDA architectures allow for Single Instruction Multiple Thread (SIMT). SIMT is similar to traditional SIMD, but while SIMD immediately serializes on divergent operations, SIMT allows for a limited amount of divergence without serialization.

At the hardware level, a *thread* executes instructions on the GPU. On Fermi level GPUs, groups of 32 threads are referred to as *warps*. A warp is the unit of threads executed concurrently on a single *multi-processor*. In OpenCL (i.e., software), a collection of hardware threads performing the same instructions are referred to as a *work-group* of *work-items*. Work-groups execute as a collection of warps constrained to the same multiprocessor. Multiple work-groups of matching dimension are grouped into an *NDRRange*. The *kernel* provides a master set of instructions for all threads in an NDRRange [58].

NVidia GPUs have a tiered memory hierarchy related to the grouping of threads described above. In multiprocessors, each computing core executes a thread with a limited set of registers. The number of registers varies with the generation of hardware, but always come in small quantities (e.g., 32K shared by all threads of a multiprocessor on the Fermi). Accessing registers is free, but keeping data in registers requires an effort to maintain balance between kernel complexity and the number of threads per block. Threads of a single work-group can share information within a multiprocessor through *shared memory*. With only 48 KB available per multiprocessor [69], shared memory is another fast but limited resource on the GPU. OpenCL refers to shared memory as *local memory*. Sharing information across multiprocessors is possible in *global device memory*—the largest and slowest memory space on the GPU. To improve seek times into global memory, Fermi level architectures include L1 on each multiprocessor and a shared L2 cache for all multiprocessors.

### 7.4.4 Implicit Solvers

Perhaps this section should move up. I think it might be best to discuss GMRES and iterative methods before Distributed Solvers (that way we can say the general solution form is “matrix form”. but in parallel we need to use distributed algorithms.

## 7.5 RBF-FD as SpMV

From the definition of RBF-FD we can formulate the problem computationally in two ways. First, stencil operations are independent. Therefore, we can write kernels with perfect parallelism by dedicating a single thread per stencil or a group of threads per stencil.

Unfortunately, perfect concurrency does not imply perfect or even ideal concurrency on the GPU.

We first demonstrate the case where one thread is dedicated to each stencil. This is followed by dedicating a group of thread to the stencil. In each case we are operating under the assumption that each stencil is independent on the GPU.

To further optimize RBF-FD on the GPU, we formulate the problem in terms of a Sparse Matrix-Vector Mulitply (SpMV). When we consider the problem in this light we generate a single Differentiation Matrix that can see two optimizations not possible with our stencil-based view:

- First, the sparse containers used in SpMV allow for their own unique optimizations to compress storage and leverage hardware cache.
- Evaluation of multiple derivatives can be accumulated by association into one matrix operation. This reduces the total number of floating point operations required per iteration.

We compare the performance of our custom kernel to ViennaCL kernels (ELL, CSR, COO, HYB, DIAG), UBlas (COO, CSR) and Eigen (COO, CSR, ELL)

## CHAPTER 8

# SPARSE MATRIX MULTIPLICATION ON THE GPU

With the generalization of RBF-FD derivative computation formulated as a sparse matrix multiplication, we can consider the various sparse formats provided by CUSP and ViennaCL.

Consider the performance of the problem given

- All stencils with uniform size
- All stencils with non-uniform size

What is the optimal choice of sparse container? How do the sparse containers compare in performance to each other, and to our custom kernels? What can we conclude?

Compare formats:

- JAD
- ELL
- HYB
- COO
- CSR
- DIA

How is communication overlap handled with each format?

Conclude: sparse containers allow increased efficiency compared to our custom kernels.  
The custom kernels compete with CSR and COO.

# CHAPTER 9

## GMRES

The GMRES algorithm follows Algorithm ??.

The Arnoldi process can be completed using in a variety of ways. Some libraries like CUSP and [75] prefer the straightforward Givens rotations because they are easily parallelizable. The givens algorithm is provided in Algorithm ??

Others like [...] prefer to use an alternate algorithm. This algorithm is demonstrated in Algorithm ??.

Parallelizing the algorithm is possible with communication points listed in red (\*).

# CHAPTER 10

## NUMERICAL VALIDATION

### 10.1 Choosing $\epsilon$

Present our attempts to get the right support parameter

We duplicate some results of [33] by choosing the same epsilon values specified in Table 10.1.

I also produced a Matlab script to generate the contours for any stencil size and produced the following figures.

#### 10.1.1 CVT epsilon tests

[33] consider epsilon as a function of the number of nodes on the sphere. However, this assumption requires nodes to be distributed as MD nodes. When we apply the same functions to CVTs of larger problems we get varying results. The subtle perturbations in nodes

test on icosahedral grid

function based on min enclosing circle instead. Will be finer tuned to the grid. if nodes are uniform in stencil and stencil size locked then the only things that can influence epsilon and conditioning is the enclosing circle radius.

### 10.2 Parabolic

Include figure tracking max temperature and min temperature. If we have zero flux conditions then they should average out. If we have Dirichlet BCs the temperature will converge to 0.

### 10.3 Hyperbolic

Here, we present the first results in the literature for parallelizing RBF-FDs on multi-CPU and multi-GPU architectures for solving PDEs. To verify our multi-CPU, single GPU and multi-GPU implementations, two hyperbolic PDEs on the surface of the sphere are tested: 1) vortex roll-up [67, 68] and 2) solid body rotation [53]. These tests were chosen since they are not only standard in the numerical literature, but also for the development of

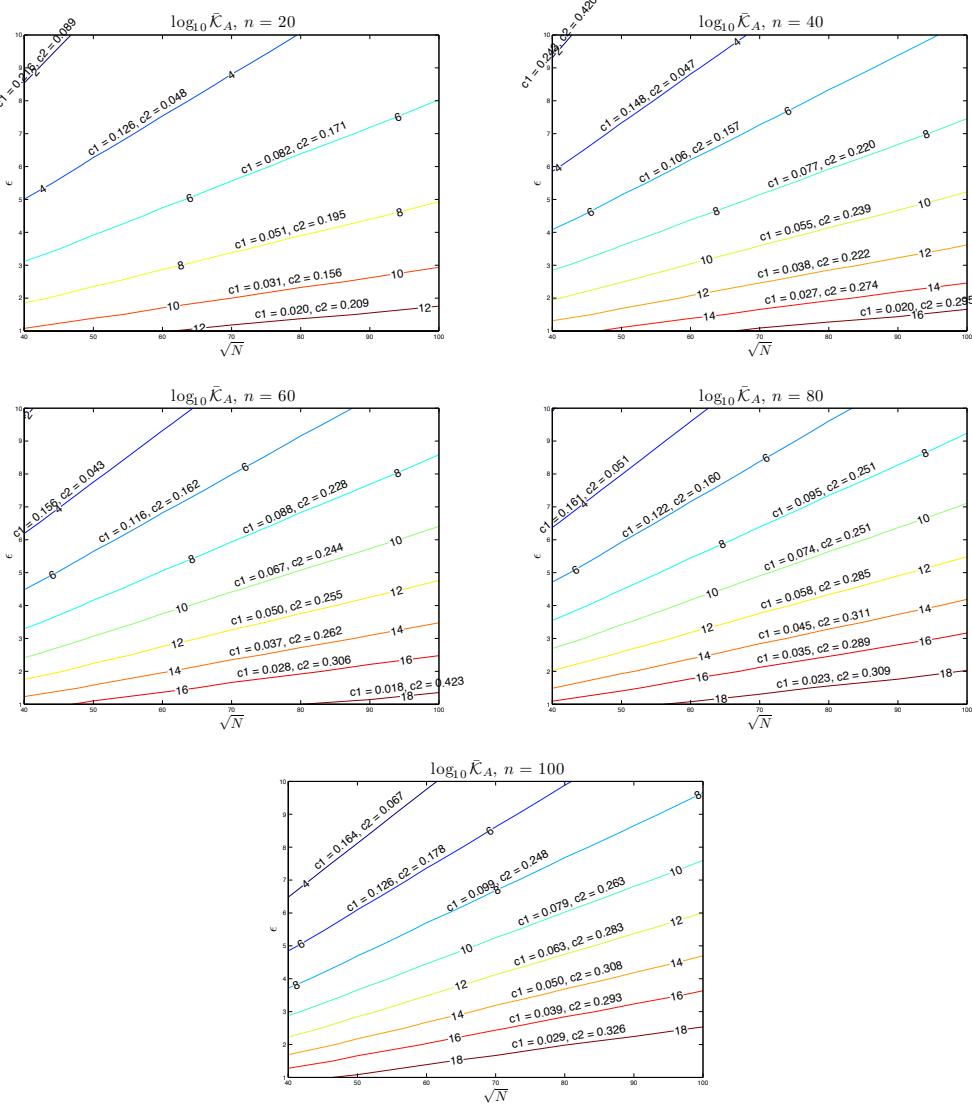


Figure 10.1: Contours for choosing  $\epsilon$  for  $n = 20, 40, 60, 80$  and  $100$  on the unit sphere as a function of  $\sqrt{N}$ . Contours assume near uniform distribution of nodes (e.g., maximum determinant nodes, icosahedral grids and spherical centroidal voronoi tessellations). Superimposed above each contour are parameters for the linear regression of the line,  $c_1\sqrt{N} - c_2$ .

RBFs in solving PDEs on the sphere [32, 34, 40, 43]. Although any ‘approximately evenly’ distributed nodes on the sphere would suffice for our purposes, maximum determinant (MD) node distributions on the sphere are used (see [82] for details) in order to be consistent with previously published results (see e.g., [34] and [41]). Node sets from 1024 to 27,556 are considered with stencil sizes ranging from 17 to 101.

All results in this section are produced by the single-GPU implementation. Multi-CPU and multi-GPU implementations are verified to produce these same results. Synchronization of the solution at each time-step and the use of double precision on both the CPU and

GPU ensure consistent results regardless of the number and/or choice of CPU vs GPU. Eigenvalues are computed on the CPU by the Armadillo library [76].

### 10.3.1 Vortex Rollup

The first test case demonstrates vortex roll-up of a fluid on the surface of a unit sphere. An angular velocity field causes the initial condition to spin into two diametrically opposed but stationary vortices.

The governing PDE in latitude-longitude coordinates,  $(\theta, \lambda)$ , is

$$\frac{\partial h}{\partial t} + \frac{u}{\cos \theta} \frac{\partial h}{\partial \lambda} = 0 \quad (10.1)$$

where the velocity field,  $u$ , only depends on latitude and is given by

$$u = \omega(\theta) \cos \theta.$$

Note that the  $\cos \theta$  in  $u$  and  $1/\cos \theta$  in (10.1) cancel in the analytic formulation, so the discrete operator approximates  $\omega(\theta) \frac{\partial}{\partial \lambda}$ .

Here,  $\omega(\theta)$  is the angular velocity component given by

$$\omega(\theta) = \begin{cases} \frac{3\sqrt{3}}{2\rho(\theta)} \operatorname{sech}^2(\rho(\theta)) \tanh(\rho(\theta)) & \rho(\theta) \neq 0 \\ 0 & \rho(\theta) = 0 \end{cases}$$

where  $\rho(\theta) = \rho_0 \cos \theta$  is the radial distance of the vortex with  $\rho_0 = 3$ . The exact solution to (10.1) at non-dimensional time  $t$  is

$$h(\lambda, \theta, t) = 1 - \tanh\left(\frac{\rho(\theta)}{\gamma} \sin(\lambda - \omega(\theta)t)\right),$$

where  $\gamma$  defines the width of the frontal zone.

From a method of lines approach, the discretized version of (10.1) is

$$\frac{d\mathbf{h}}{dt} = -\operatorname{diag}(\omega(\theta)) D_\lambda \mathbf{h}. \quad (10.2)$$

where  $D_\lambda$  is the DM containing the RBF-FD weights that approximate  $\frac{\partial}{\partial \lambda}$  at each node on the sphere.

For stability, hyperviscosity is added to the right hand side of (10.2) in the form given in (5.7). The scaling parameter  $\gamma_c$  and the order of hyperviscosity  $k$  are given in Table 10.1. The goal when choosing  $k$  is to damp the higher spurious eigenmodes of  $\operatorname{diag}(\omega(\theta)) D_\lambda$  while leaving the lower physical modes that can be resolved by the stencil intact. In this process, the eigenvalues will be pushed into the left half of the complex plane. Then,  $\gamma_c$  is used to condense the eigenvalues as near to the imaginary axis as possible. Figure 10.2b shows the effect of hyperviscosity on the eigenvalues of the DM,  $-\operatorname{diag}(\omega(\theta)) D_\lambda$ , in (10.2).

In order to scale to large node sets, the RBF shape parameter,  $\epsilon$ , is chosen such that the mean condition number of the local RBF interpolation matrices  $\bar{\kappa}_A = \frac{1}{N} \sum_{j=1}^N (\kappa_A)_j$  is kept constant as  $N$  increases (( $\kappa_A$ ) $_j$  is the condition number of the interpolation matrix in ??),

Table 10.1: Values for hyperviscosity and the RBF shape parameter  $\epsilon$  for vortex roll-up test.

Stencil Size ( $n$ )	$\epsilon = c_1\sqrt{N} - c_2$		$H = -\gamma_c N^{-k} \Delta^k$	
	$c_1$	$c_2$	$k$	$\gamma_c$
17	0.026	0.08	2	8
31	0.035	0.1	4	800
50	0.044	0.14	4	145
101	0.058	0.16	4	40

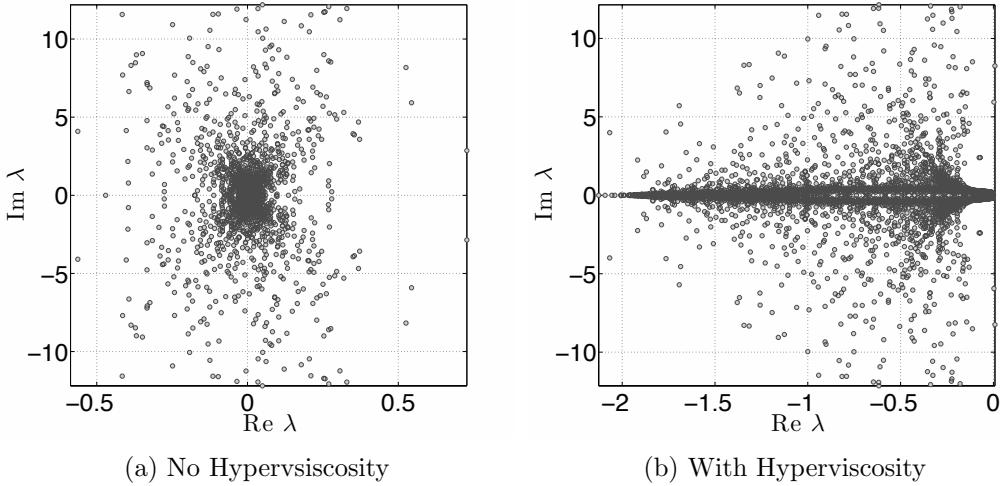


Figure 10.2: Eigenvalues of  $\text{diag}(\omega(\theta))D_\lambda$  for the vortex roll-up test case for  $N = 4096$  nodes, stencil size  $n = 101$  and  $\epsilon = 3.5$ . Left: no hyperviscosity. Right: hyperviscosity enabled with  $k = 4$  and  $\gamma_c = 40$ .

representing the  $j^{th}$  stencil). For a constant mean condition number,  $\epsilon$  varies linearly with  $\sqrt{N}$  (see [33] Figure 4a and b). This is not surprising since the condition number strongly depends on the quantity  $\epsilon r$ , where  $r \sim 1/\sqrt{N}$  on the sphere. Thus, to obtain a constant condition number, we let  $\epsilon(N) = c_1\sqrt{N} - c_2$ , where  $c_1$  and  $c_2$  are constants based on [33].

Figure 10.3 shows the solution to Equation (10.1) at  $t = 10$ , on  $N = 10201$  nodes, with stencil size  $n = 50$ . This resolution is sufficient to properly capture the vortices at  $t = 10$ , but lower resolutions would suffer approximation errors associated with insufficient grid resolution. For this reason, the solution at  $t = 3$  is considered in the normalized  $\ell_2$  error convergence study presented in Figure 10.4. The time step  $\Delta t = 0.05$  for all resolutions.

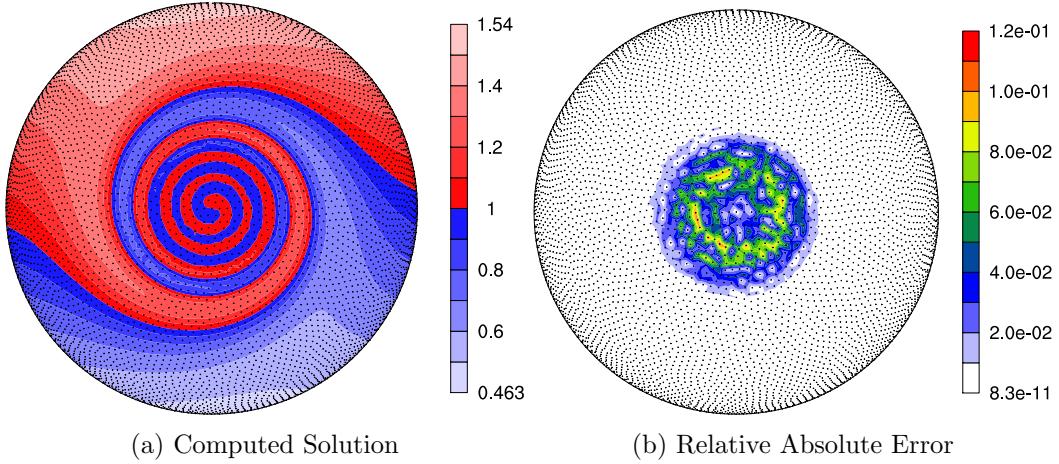


Figure 10.3: Vortex roll-up solution at time  $t = 10$  using RBF-FD with  $N = 10, 201$  and  $n = 50$  point stencil. Normalized  $\ell_2$  error of solution at  $t = 10$  is  $1.25(10^{-2})$

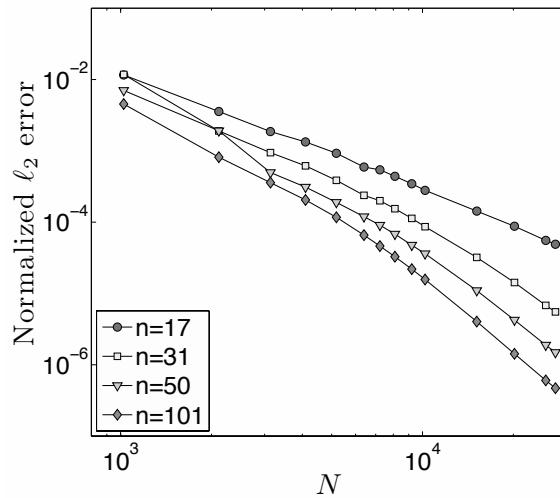


Figure 10.4: Convergence plot for vortex roll-up at  $t = 3$ .

### 10.3.2 Solid body rotation

The second test case simulates the advection of a cosine bell over the surface of a unit sphere at an angle  $\alpha$  relative to the pole of a standard latitude-longitude grid. The governing PDE is

$$\frac{\partial h}{\partial t} + \frac{u}{\cos \theta} \frac{\partial h}{\partial \lambda} + v \frac{\partial h}{\partial \theta} = 0, \quad (10.3)$$

with velocity field,

$$\begin{cases} u = u_0(\cos \theta \cos \alpha + \sin \theta \cos \lambda \sin \alpha), \\ v = -u_0(\sin \lambda \sin \alpha) \end{cases} .$$

inclined at an angle  $\alpha$  relative to the polar axis and velocity  $u_0 = 2\pi/(1036800 \text{ seconds})$  to require 12 days per revolution of the bell as in [34, 68].

The discretized form of (10.3) is

$$\frac{d\mathbf{h}}{dt} = -\text{diag}\left(\frac{u}{\cos \theta}\right) D_\lambda \mathbf{h} - \text{diag}(v) D_\theta \mathbf{h} \quad (10.4)$$

where DMs  $D_\lambda$  and  $D_\theta$  contain RBF-FD weights corresponding to all  $N$  stencils that approximate  $\frac{\partial}{\partial \lambda}$  and  $\frac{\partial}{\partial \theta}$  respectively. Rather than merge the differentiation matrices in (10.4) into one operator, our implementation evaluates them as two sparse matrix-vector multiplies. The separate matrix-vector multiplies are motivated by an effort to provide general and reusable GPU kernels. Additionally, they artificially increase the amount of computation compared to the vortex roll-up test case to simulate cases when operators cannot be merged into one DM (e.g., a non-linear PDE).

By splitting the DM, the singularities at the poles ( $1/\cos \theta \rightarrow \infty$  as  $\theta \rightarrow \pm \frac{\pi}{2}$ ) in (10.3) remain. However, in this case, the approach functions without amplification of errors because the MD node sets have nodes near, but not on, the poles. As noted in [34, 41], applying the entire spatial operator to the right hand side of Equation ?? generates a single DM that analytically removes the singularities at poles.

We will advect a  $C^1$  cosine bell height-field given by

$$h = \begin{cases} \frac{h_0}{2}(1 + \cos(\frac{\pi\rho}{R})) & \rho \leq R \\ 0 & \rho \geq R \end{cases}$$

having a maximum height of  $h_0 = 1$ , a radius  $R = \frac{1}{3}$  and centered at  $(\lambda_c, \theta_c) = (\frac{3\pi}{2}, 0)$ , with  $\rho = \arccos(\sin \theta_c \sin \theta + \cos \theta_c \cos \theta \cos(\lambda - \lambda_c))$ . The angle of rotation,  $\alpha = \frac{\pi}{2}$ , is chosen to transport the bell over the poles of the coordinate system.

Table 10.2: Values for hyperviscosity and RBF shape parameter for the cosine bell test.

	$\epsilon = c_1 \sqrt{N} - c_2$	$H = -\gamma_c N^{-k} \Delta^k$		
Stencil Size ( $n$ )	$c_1$	$c_2$	$k$	$\gamma_c$
17	0.026	0.08	2	$8 * 10^{-4}$
31	0.035	0.1	4	$5 * 10^{-2}$
50	0.044	0.14	6	$5 * 10^{-1}$
101	0.058	0.16	8	$5 * 10^{-2}$

Figure 10.5 compares eigenvalues of the DM for  $N = 4096$  nodes and stencil size  $n = 101$  before and after hyperviscosity is applied. To avoid scaling effects of velocity on the eigenvalues, they have been scaled by  $1/u_0$ . The same approach as in the vortex roll-up case is used to determine the parameters for hyperviscosity and  $\epsilon$ . Our tuned parameters are presented in Table 10.2.

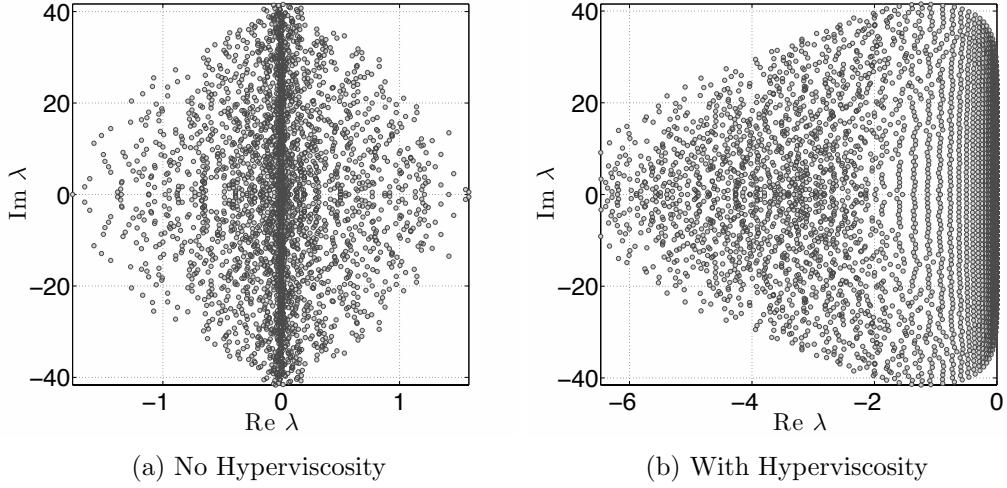


Figure 10.5: Eigenvalues of (10.4) for the cosine bell test case with  $N = 4096$  nodes, stencil size  $n = 101$ , and  $\epsilon = 3.5$ . Left: no hyperviscosity. Right: hyperviscosity enabled with  $k = 8$  and  $\gamma_c = 5 * 10^{-2}$ . Eigenvalues are divided by  $u_0$  to remove scaling effects of velocity.

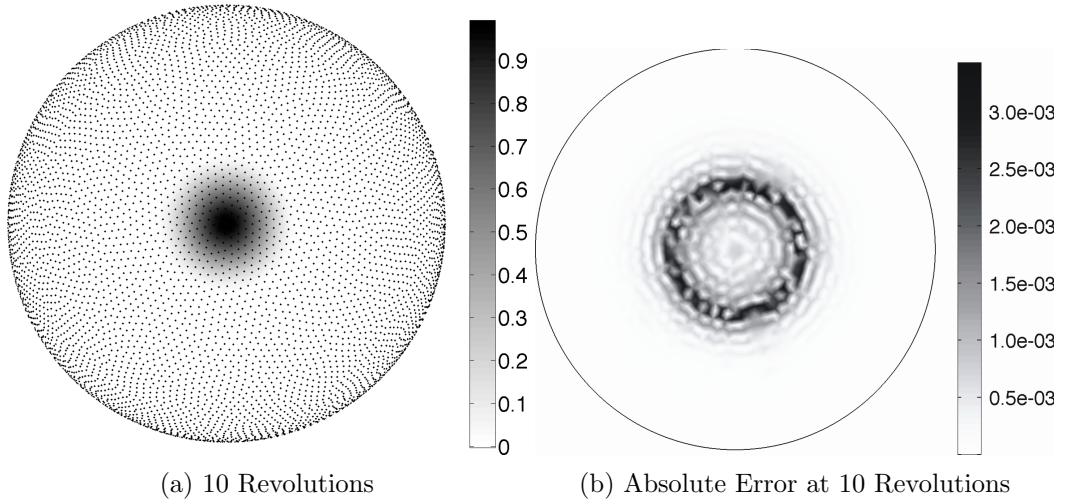


Figure 10.6: Cosine bell solution after 10 revolutions with  $N = 10201$  nodes and stencil size  $n = 101$ . Hyperviscosity parameters are  $k = 8$ ,  $\gamma_c = 5(10^{-2})$ .

Figure 10.6 shows the cosine bell transported ten full revolutions around the sphere. Without hyperviscosity, RBF-FD cannot complete a single revolution of the bell before instability takes over. However, adding hyperviscosity allows computation to extend to dozens or even thousands of revolutions and maintain stability (e.g., see [41]). After ten

revolutions, the cosine bell is still intact. The majority of the absolute error (Figure 10.6b) appears at the base of the  $C^1$  bell where the discontinuity appears in the derivative. At ten revolutions, Figure 10.7 illustrates the convergence of the RBF-FD method. All tests in Figure 10.7 assume 1000 time-steps per revolution (i.e.,  $\Delta t = 1036.8$  seconds).

**Complete:** 17.28 minutes was a conservative step that allowed the problem to scale up to  $N = 27556$  nodes. Compare this to the conservative 30 minute time-step taken for  $N = 4096$  nodes in [34], which was already half necessary for DG and 8x less than necessary for both Spherical Harmonics and Double Fourier methods. **Author's Note:** It would be good to quantify the appropriate  $dt$  that would compare RBF-FD to their  $N = 4096$  case with global RBFs.

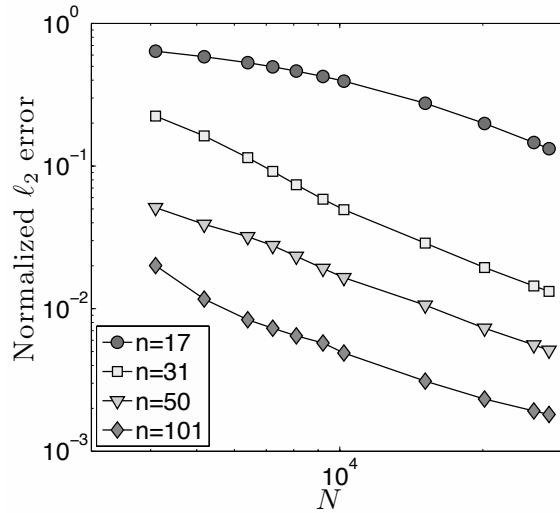


Figure 10.7: Convergence plot for cosine bell advection. Normalized  $\ell_2$  error at 10 revolutions with hyperviscosity enabled.

## 10.4 Fragments (integrate above)

To verify our multi-CPU and multi-CPU+GPU implementations, two hyperbolic PDEs on the surface of the sphere are tested. For both cases a spherical coordinate system is used in terms of latitude  $\lambda$  and longitude  $\theta$ :

$$\begin{aligned} x &= \rho \cos \lambda \cos \theta, \\ y &= \rho \sin \lambda \cos \theta, \\ z &= \rho \sin \theta. \end{aligned}$$

Node sets are the Maximum Determinant point distributions on the sphere [82] consistent with previously published results (see e.g., [? ] and [? ]).

Hyperviscosity parameters  $\gamma_c$  and  $k$  depend on the RHS of the PDE. For this test case, hyperviscosity scaling parameters are listed in Table 10.1. Linear functions to choose the

RBF support parameter  $\epsilon$  are also provided. The parameters  $\gamma_c$  and  $k$  were obtained via trial-and-error parameter searching on  $N = 4096$  nodes. The goal when choosing parameters is to push all eigenvalues to the left half-plane, and then tweak  $\gamma_c$  up or down to condense the eigenvalues as near to the imaginary axis as possible. We try to keep the range of filtered eigenvalue real parts within twice the width of the unfiltered range, so hyperviscosity does not cause too much diffusion in the solution.

For the cosine bell we use the initial conditions

$$h = \begin{cases} \frac{h_0}{2}(1 + \cos(\frac{\pi\rho}{R})) & \rho \leq R \\ 0 & \rho \geq R \end{cases}$$

where the bell of radius  $R = \frac{a}{3}$  is centered at  $(\lambda_c, \theta_c)$  and provided by the expression,

$$\rho = a \arccos(\sin \theta_c \sin \theta + \cos \theta_c \cos \theta \cos(\lambda - \lambda_c)).$$

We assume  $a = 1$ ,  $h_0 = 1$ , and  $(\lambda_c, \theta_c) = (\frac{3\pi}{2}, 0)$ . The angle  $\alpha = \frac{\pi}{2}$  is chosen to transport the bell over the poles of the coordinate system, and  $u_0 = \frac{2\pi a}{1036800}$ .

[Author's Note: State that we can split operator to test cases like nonlinear PDEs.](#)

[Author's Note: Include figures from NCL or Paraview](#)

#### 10.4.1 CFL

We constrict our timesteps according to the Courant-Friedrich-Lowy (CFL) condition:

$$C_{\max} \frac{\Delta x_{\min}}{v_{\max}} < \Delta t$$

where  $\Delta x_{\min}$  is the minimum distance between any two nodes in the domain, and the  $v_{\max}$  is the maximum velocity

For the cosine bell test cases we use a conservative  $C_{\max} = 0.4$  to ensure stable transport in all cases with  $n = 101$ . However, in testing it was found that  $n = 17$  is capable of stably advecting with  $C_{\max} > 1$  for  $n = 17$ ;  $n = 101$  can go up to  $C_{\max} = 0.51$  for  $N = 27556$  (e.g. 650 timesteps per revolution).

apparently, canceling the cosine analytically causes the conditioning of the system to change slightly. The hyperviscosity parameters I have in the paper are for the case with the cosine present. The parameters continue to function well for the other cases, but their impact on the eigenvalue distributions is noticeably higher (further span to the left).

## 10.5 GFLOP Throughput

In order to quantify the performance of our implementation, we can measure two factors. First, we can check the speedup achieved on the GPU relative to the CPU to get an idea of how much return of investment is to be expected by all the effort in porting the application to the GPU. Speedup is measured as the time to execute on the CPU divided by the time to execute on the GPU.

The second quantification is to check the throughput of the process. By quantifying the GFLOP throughput we have a measure that tells us two things: first, a concrete number

quantifying the amount of work performed per second by either hardware, and second because we can calculate the peak throughput possible on each hardware, we also have a measure of how occupied our CPU/GPU units are. With the GFLOPs we can also determine the cost per watt for computation and conclude on what problem sizes the GPU is cost effective to target and use.

Now, as we parallelize across multiple GPUs, these same numbers can come into play. However we are also interested in the efficiency. Efficiency is the speedup divided by the number of processors. With efficiency we have a measure of how well-utilized processors are as we scale either the problem size (weak) or the number of processors (strong). As the efficiency diminishes we can conclude on how many stencils/nodes per processor will keep our processors occupied balanced with the shortest compute time possible (i.e., we are maximizing return of investment).

## 10.6 Elliptic

# CHAPTER 11

## STOKES

### 11.1 Introduction

We consider herein the solution to steady-state viscous Stokes flow on the surface of a sphere, governed by: [Author's Note: Where did we go wrong? Our vector laplacian does not have a curl component included. How do we derive that from here?](#)

$$\nabla \cdot [\eta(\nabla \mathbf{u} + (\nabla \mathbf{u})^T)] + RaT\hat{r} = \nabla p \quad (11.1)$$

$$\nabla \cdot \mathbf{u} = 0 \quad (11.2)$$

where the unknowns  $\mathbf{u}$  and  $p$  represent the vector velocity- and scalar pressure-field respectively,  $\eta$  is the viscosity tensor,  $Ra$  is the non-dimensional Rayleigh number, and  $T$  is an initial temperature profile. Many practical applications in sciences such as geophysics, climate modeling, and computational fluid dynamics must solve variations of the Navier-Stokes equations. The focus of this paper is on the implicit solve component for viscous (Stokes) flow, which amounts to the steady-state problem described by Equations 11.1 and 11.2.

This article introduces the first (to our knowledge) parallel approach to solve the steady-state equations on the surface of the unit sphere with the Radial Basis Function-generated Finite Differences (RBF-FD) method. Building on our work in [?], which parallelized explicit RBF-FD advection, our goal is to integrate both explicit and implicit components within a larger transient flow model.

[Author's Note: follow with details of RBF methods and novelty of RBF-FD.](#)

For decades, the demand for fast and accurate numerical solutions in fluid flow has lead to a plethora of computational methods for various geometries, discretizations and dimensions. On the sphere in  $\mathbb{R}^3$  popular discretizations include the standard latitude-longitude grid, cubed-sphere [68], yin-yang overlapping grid [54], icosahedral grid [72] and centroidal voronoi tessellations [25]. Associate with each discretization is a mesh—specific to the choice of numerical method—that indicates connectivity of nodes for differentiation.

Two decades ago [55], meshless methods based on Radial Basis Functions (RBFs) were introduced for problems that require geometric flexibility with scattered node layouts in  $d$ -dimensional space, plus natural extensions to higher dimensions with minimal change in programming complexity [34, 96]. These RBF methods tout competitive accuracy with

other state-of-the-art and high-order methods [31, 32, 34, 35, 96], as well as stability for large time steps. A survey of RBF methods is provided by [31].

**Author’s Note:** Change first sentence RBF-generated finite differences (RBF-FD) hold a promising future in that they share many advantages of global RBF methods, but reduce computational complexity to  $O(N)$  and exhibit increased parallelism. The method was first suggested in 2000 [87], but made its grand debut a few years later in the simultaneous, yet independent, efforts of [15, 80, 86, 95]. It has been successfully employed for a variety of problems including Hamilton-Jacobi equations [15], convection-diffusion problems [16, 83], incompressible Navier-Stokes equations [17, 80], transport on the sphere [41], and the shallow water equations [33].

Compared to classical finite differences (FD) which calculate differentiation weights with one-dimensional polynomials, RBF-FD leverages  $d$ -dimensional RBFs as test functions. This allows for generalization to  $d$ -dimensional space on completely scattered node layouts. For both methods, a stencil of size  $n$  neighboring nodes determines the accuracy of the approximation. However, contrary to the regular stencil node distributions from FD, RBF-FD allows for completely scattered node distributions. In comparison with global RBF methods, spectral accuracy is sacrificed in exchange for computational speed and parallelism. Still, high-order accuracy is possible with RBF-FD—6th- to 10th-order accuracy is common.

Until now, most of the focus in RBF-FD has been on explicit methods. However, many practical applications in sciences such as geophysics, climate modeling, and computational fluid dynamics must solve variations of the navier stokes equations which include an implicit solve component. This paper develops multi-GPU algorithms for implicit RBF-FD systems toward the goal of integration within transient flow problems. The explicit component of transient flow is a natural extension of our work in [? ].

**Author’s Note:** Flesh these points out and integrate them in surrounding paragraphs (until “end”) Speed not the issue. Need less RBFs for given accuracy of steady state less nodes implies less memory general geometries are supported better distributions of nodes on spheres. competition like CitComS, etc. use cubed sphere, yinyang grids and triangular meshes in combination with low order methods (2nd and 3rd order). Increasing the order of the method or dimension can significantly increase the complexity of the algorithms. RBF-FD naturally extends to higher dimensions and increasing the order is as simple as increasing the number of nodes in the stencil. **Author’s Note:** end

Related work (list references): RBF methods for Elliptic PDEs

- Global [79]
- Compact Support
- divergence-free spherical radial basis Glerkin method for Stokes on the unit sphere [? ]
- RBF-FD
  - Incompressible Navier-Stokes using explicit (Euler) and semi-implicit (Crank Nicholson) time step. Small problem size ( $61 \times 61$ ) and small stencil sizes ( $n = 9$ );

ghost nodes beyond boundary strategy. Both RBF-FD and RBF-HFD tested.  
[17]

Related work on Preconditioned iterative methods for Stokes Flow

- Survey of preconditioners used for Stokes flow problems [64] (limited applicability since they do not assume non-SPD matrices)
- Multi-GPU Jacobi iteration for Navier stokes flow in cavity [http://scholarworks.boisestate.edu/cgi/viewcontent.cgi?article=1003&context=mecheng\\_facpubs](http://scholarworks.boisestate.edu/cgi/viewcontent.cgi?article=1003&context=mecheng_facpubs)

For decades, a major push has been executed in science to parallelize algorithms and leverage resources available on the increasingly capable supercomputers and clusters. Perhaps as soon as the next decade, we will see exascale level architectures ([? ]). Given today's technology, those architecture will surely achieve their performance with the help of accelerator hardware such as GPUs.

To prepare the RBF community for the future, we develop algorithms employing two levels of parallelization: first the MPI standard spans computation across multiple CPUs, and second computation is distributed across the many processing cores of GPU accelerators.

The two level parallelization can even be extended to three level parallelism with pThreads or OpenMP [? ]. While OpenCL provides the means to target parallelism on either multi-core CPUs or many-core GPUs, it does not allow a parallel kernel on one hardware interact with a parallel kernel on the another. That is to say, an OpenCL kernel on the CPU cannot launch kernels on the GPU.

Our goal is to demonstrate to the geosciences that RBF-FD can function well on both hyperbolic and elliptic problems. In [? ] we introduced a multi-GPU implementation of RBF-FD and demonstrated the method's strong ability to stably advect solid bodies on the sphere. In this paper we continue toward the goal of RBF-FD solutions for fluid flow problems with a multi-GPU Poisson solver for steady-state Stokes flow. In this context, speed is not a paramount issue.

Related work on RBF methods targeting the GPU is quite limited. Schmidt et al. [79] solve an implicit system for a global RBF method using Accelerys Jacket in Matlab. Our work in [? ] introduced the first parallel implementation of RBF-FD for explicit advection capable of spanning multiple CPUs as well as multiple GPUs.

Related work on multi-CPU or multi-GPU RBFs

- CPU [100] [? ]
- single-GPU [79]
- multi-GPU
  - Preconditioned BiCGStab for Navier Stokes, Finite Element method [46]

While RBF-FD differentiation matrices are applied in the same fashion as standard FD methods, they are unique in that they are asymmetric, non-positive definite and potentially have high condition numbers. To solve an implicit system therefore, we requie an iterative krylov solver like GMRES or BiCGStab which are applicable to matrices of this type.

Additionally, preconditioned variants of these methods are required to reduce the complexity of the solution process.

Within this paper we implement a preconditioned GMRES method for RBF-FD on multiple GPUs.

#### Parallel GMRES

- CPU only: PETSc [100], Hypre [? ]
- Parallel GMRES on single GPU available in ViennaCL [73] and CUSP [? ]
- Parallel GMRES on Multiple GPUs [3]
- Reduced Communication with increased computation [22]

This article continues our effort with an implementation of RBF-FD on both single and multiple-GPUs for elliptic PDEs. In the next section we introduce

## 11.2 Bad Problem

Our initial derivation of the Stokes problem was incorrect. What we thought was the proper identity reduced the problem to simple scalar velocity laplacians and pressure gradients. The correct formulation of Stokes flow in 3D would have a curl component connecting each dimension.

Rather than start over and reformulate our problem, we opted to continue development of our GPU-based solver with the recognition that the problem we posed is actually a coupled Poisson problem and can be solved using the same iterative solver. By implementing and testing the solver and preconditioners for one problem, we prepare for the other.

### 11.2.1 Details

Items to test for our solver: GFLOPs throughput (CPU,GPU), Convergence of Solver (in iteration residual) vs Preconditioners.

Test problems: Sphere coupled poisson. Annulus. Stokes on annulus?

## 11.3 RBF-FD Weights

Given a set of function values,  $\{u(\mathbf{x}_j)\}_{j=1}^N$ , on a discrete set of nodes  $\{\mathbf{x}_j\}_{j=1}^N$ , the operator  $\mathcal{L}$  acting on  $u(\mathbf{x}_j)$  is approximated by a weighted combination of function values,  $\{u(\mathbf{x}_i)\}_{i=1}^n$ , in a small neighborhood of  $u(\mathbf{x}_j)$ , where  $n$  defines the size of the stencil and  $n \ll N$ :

$$\mathcal{L}u(\mathbf{x})|_{\mathbf{x}=\mathbf{x}_j} \approx \sum_{i=1}^n w_i u(\mathbf{x}_i) \quad (11.3)$$

The RBF-FD weights,  $w_i$ , are found by enforcing that they are exact within the space spanned by the RBFs  $\phi_i(\epsilon r) = \phi(\epsilon \|\mathbf{x} - \mathbf{x}_i\|)$ , centered at the nodes  $\{\mathbf{x}_i\}_{i=1}^n$ , with  $r = \|\mathbf{x} - \mathbf{x}_i\|$  being the distance between the RBF center and the evaluation point measured

in the standard Euclidean 2-norm. It has also been shown through experience and studies [33, 36, 41, 97] that better accuracy is gained by the interpolant being able to reproduce a constant. Hence, the constraint  $\sum_{i=1}^n c_k = \mathcal{L}1|_{\mathbf{x}=\mathbf{x}_j} = 0$  is added, where  $w_{n+1}$  is ignored after the matrix in (11.4) is inverted. That is,

$$\begin{pmatrix} \phi(\epsilon \|\mathbf{x}_1 - \mathbf{x}_1\|) & \phi(\epsilon \|\mathbf{x}_1 - \mathbf{x}_2\|) & \cdots & \phi(\epsilon \|\mathbf{x}_1 - \mathbf{x}_n\|) & 1 \\ \phi(\epsilon \|\mathbf{x}_2 - \mathbf{x}_1\|) & \phi(\epsilon \|\mathbf{x}_2 - \mathbf{x}_2\|) & \cdots & \phi(\epsilon \|\mathbf{x}_2 - \mathbf{x}_n\|) & 1 \\ \vdots & \ddots & \ddots & \vdots & \vdots \\ \phi(\epsilon \|\mathbf{x}_n - \mathbf{x}_1\|) & \phi(\epsilon \|\mathbf{x}_n - \mathbf{x}_2\|) & \cdots & \phi(\epsilon \|\mathbf{x}_n - \mathbf{x}_n\|) & 1 \\ 1 & 1 & \cdots & 1 & 0 \end{pmatrix} \begin{bmatrix} c_1 \\ c_2 \\ \vdots \\ c_n \\ c_{n+1} \end{bmatrix} = \begin{bmatrix} \mathcal{L}\phi(\epsilon \|\mathbf{x} - \mathbf{x}_1\|)|_{\mathbf{x}=\mathbf{x}_j} \\ \mathcal{L}\phi(\epsilon \|\mathbf{x} - \mathbf{x}_2\|)|_{\mathbf{x}=\mathbf{x}_j} \\ \vdots \\ \mathcal{L}\phi(\epsilon \|\mathbf{x} - \mathbf{x}_n\|)|_{\mathbf{x}=\mathbf{x}_j} \\ 0 \end{bmatrix} \quad (11.4)$$

This small system solve is repeated  $N$  times for each  $\mathbf{x}_j$ ,  $j = 1\dots N$ , to form the DM associated with one derivative quantity. As an example, if  $\mathcal{L}$  is the identity operator then the above procedure will lead to RBF-FD interpolation. If  $\mathcal{L}$  is  $\frac{\partial}{\partial x}$ , it will lead to the DM that approximates the first derivative in  $x$ . While Equation 11.4 is symmetric, the added constraints for coefficient  $c_{n+1}$  detracts from the system's positive definite-ness. In lieu of this, a direct LU factorization solves for the weights. Also, observe that multiple right hand sides can be employed to efficiently obtain weights corresponding to all required derivative quantities (i.e.,  $\frac{\partial}{\partial x}$ ,  $\frac{\partial}{\partial y}$ ,  $\nabla^2$ , etc.) in one system solve per stencil center.

## 11.4 GPU Based Solver

**Author's Note:** We should only discuss the ViennaCL implementation. Unless I can get my ILU preconditioner implemented for CUSP.

Our implementation leverages existing libraries for sparse matrix-vector operations on the GPU. Two libraries exist for sparse matrix linear algebra on the GPU: CUSP [6] and ViennaCL [73]. By implementing our algorithm in the context of ViennaCL, we directly benefit from improvements to the performance of underlying sparse matrix-vector product, vector dot vector and other linear algebra primitives. Also, ViennaCL provides seamless interoperability with the Boost::UBLAS, EIGEN and MTL libraries via C++ templates. We test the performance of our algorithm on one or more CPUs with the Boost::UBLAS library.

### Table comparing CUSP and ViennaCL features

The GMRES algorithm was introduced in 1986 by Saad and Schultz [74]. The iterative solver support general matrix structures, whereas methods like Conjugate Gradient require symmetric positive definiteness.

#### 11.4.1 GMRES Algorithm

At the core of the GMRES algorithm is an Arnoldi (orthogonalization) process. **Author's Note:** significance of orthogonalization.

Multiple variants of GMRES exist **Author's Note:** cite refs that utilize unique orthogonalization steps. The motivation behind alternative Arnoldi processes is to save both memory and operation counts. In some cases stability of the GMRES iterations can also

be improved [Author's Note: I recall a paper saved on my laptop](#). Saad [74] introduced a practical implementation of the GMRES method that utilizes Given's rotations to compute an implicit QR factorization. The Given's based algorithm is part of the CUSP library; ViennaCL implements the Householder reflection algorithm.

We have implemented the Given's rotation algorithm within ViennaCL, because it is simpler to implement in parallel and increases parallelism [Author's Note: verify statement with reference](#).

[3] does not describe their use of rotations.)

Note that the application of a preconditioner such as ILU0 introduces an additional call to MPI\_Alltoallv before everywhere  $M^{-1}$  is present in Algorithm 11.2.

---

**Algorithm 11.1** Left-preconditioned GMRES(k) with Given's Rotations

---

```

1:  $\varepsilon$  (tolerance for the residual norm  $r$ ),  $x_0$  (initial guess), and set  $convergence = false$ 
2: MPI_Alltoallv( $x_0$ )
3: while  $convergence == false$  do
4:    $r_0 = M^{-1}(b - Ax_0)$ 
5:   MPI_Alltoallv( $r_0$ )
6:    $\beta = \|r_0\|_2$                                      ▷ MPI_Allreduce( $r_0, r_0$ )
7:    $v_1 = r_0/\beta$ 
8:   for  $j = 1$  to  $k$  do
9:      $w_j = M^{-1}Av_j$                                 ▷ MPI_Alltoallv( $w_j$ )
10:    for  $i = 1$  to  $j$  do
11:       $h_{i,j} = \langle w_j, v_i \rangle$                   ▷ MPI_Allreduce
12:       $w_j = w_j - h_{i,j}v_i$ 
13:    end for
14:     $h_{j+1,j} = \|w_j\|_2$                            ▷ MPI_Allreduce
15:     $v_{j+1} = w_j/h_{j+1,j}$ 
16:  end for
17:  Set  $V_k = [v_1, \dots, v_k]$  and  $\bar{H}_k = (h_{i,j})$  an upper Hessenberg matrix of order  $(m + 1) \times m$ 
18:  Solve a least-square problem of size  $m$ :  $\min_{y \in \mathbb{R}^k} \|\beta e_1 - \bar{H}_k y\|_2$ 
19:   $x_k = x_0 + V_k y_k$ 
20:  if  $\|M^{-1}(b - Ax_k)\|_2 < \varepsilon$  then
21:     $convergence = true$ 
22:  end if
23: end while

```

---

#### 11.4.2 Multiple GPUs

**Domain Decomposition.** A restricted additive Schwarz [? ] domain decomposition is applied. Traditional additive Schwarz methods construct a restriction matrix  $R$  to constrain processor computation to a subdomain and  $R^T$  project it back onto the global domain. In contrast, restricted additive Schwarz replaces the restriction matrix  $R$  with some restriction operator  $R_P^0$  where  $R_P^0 \subset R$ , but continues to use  $R^T$  to project the solution back onto the global domain. The main idea behind re , restricted additive schwarz

assigns all nodes to exactly one subdomain. Regular additive Schwarz would allow nodes to be in one or more subdomains.

$$\mathbf{u} = \sum_{p=0}^{numprocs} R'_p (A(R_p^0)^T)^{-1} R_P^0 R_P F \quad (11.5)$$

where  $R_p$  is a restriction matrix (identity on diagonals for stencils operated on by a processor, zero elsewhere). In our case, the partitions are determined by node coordinates, so all non-zeros for a stencil row end up on the same processor (i.e., the decomposition of the matrix does not allow multiple domain blocks per row).

**MPI Communication.** Mention communication using MPI\_AlltoAllv, MPI\_Allreduce. (Show communication points in algorithm—be sure to explicitly show Givens rotations in algorithm. [3] did list rotations. We also use the CPU for Gram Schmidt process.)

## 11.5 Multiple GPUs

Scaling GMRES across multiple GPUs requires a domain decomposition. Domain decompositions can be interpreted as partitioning of nodes or cuts along

**Domain Decomposition.** The domain is decomposed naïvely by cutting the domain into domain bounding box into  $P$  equal sized partitions. Each processor is assigned one partition. Partitions may contain unequal number of nodes. Future work will integrate a domain partitioning library such as ParMETIS [? ] or SCOTCH [? ] to improve load balancing for processors.

$$\mathbf{u} = \sum_{p=0}^{numprocs} R_p (A R_p^T)^{-1} F \quad (11.6)$$

where  $R_p$  is a restriction matrix (identity on diagonals for stencils operated on by a processor, zero elsewhere). In our case, the partitions are determined by node coordinates, so all non-zeros for a stencil row end up on the same processor (i.e., the decomposition of the matrix does not allow multiple domain blocks per row).

The restriction matrix  $R_p^0$  contains only zeros and ones. Cai et al. [? ] let  $R_p^0$  contain ones on the diagonal to indicate rows of the system for which a processor  $p$  is responsible. Our implementation similarly places  $I$  on the diagonal, but we then apply a general permutation matrix  $P$  to compress  $R_p^0 A$  such that processors assemble an  $N_p \times m$  local matrix (where  $N_p \ll N$  and  $m \ll N$ ). Likewise, processors allocate vectors for the reduced problem size. The solution is  $N_p \times 1$  and RHS is  $m \times 1$ . Recall that the domain decomposition is determined by node partitioning, which does not guarantee rows of the global system corresponding to stencils in a processor's partition will be a contiguous block of the full system.

### 11.5.1 Solution Ordering

To simplify distribution of solution values, we apply a reordering to the system to interleave components of the solution and group solutions by node. This allows us to directly copy a double4 for each


The DM assembly depends on all dimensions of solution values for a single node to be consecutive in memory. While Equation 11.15 has all components of  $U, V, W$  and  $P$  grouped together, the values of  $u_1, v_1, w_1$  and  $p_1$  correspond to node  $(x_1, y_1, z_1)$ .

Figure 11.1 demonstrates the effect of interleaving our solution. The sparsity pattern of the original DM with solutions grouped by component is shown in Figure 11.1a. Well defined blocks of non-zeros are filled with RBF-FD weights from Equation 11.7. Figure 11.1b presents the sparsity pattern for interleaved solution components. The pattern is similar to a single block of Figure 11.1a, but the sub-matrix  $(10 : 50) \times (10 : 50)$  of each solution ordering, shown in Figures 11.1c and 11.1d, illustrate that non-zeros in Figure 11.1b are small  $4 \times 4$  blocks with the structure of Equation 11.7.


**Node Order.** [Author's Note: Should we discuss node ordering and its implications on convergence?](#) if so, I should state:

- Nodes are read from file
- Their order is either: unmodified or modified
- If modified, our goal is to improve memory access patterns by reducing the bandwidth of the DM. A bandwidth of  $n$  is the best case scenario where the solution vector is accessed linearly. The worst case scenario is when bandwidth is  $N$  and the solution is accessed randomly via stencils.
- Ordering nodes according to a space filling curve can reduce the “randomness” of solution access by placing elements of stencils nearby (sometimes sequential) in memory.
- Many space filling curves exist. Raster (IJK), Snake, Morton, Hilbert, U, X, etc. We consider Raster here, with other orderings left for future work.
- Our restriction operator for domain decomposition might reduce the bandwidth for each processor compared to the global DM. How does the combination of restriction and reordering work?
- Reordering the DM has implications on its condition number and the convergence rate of the GMRES algorithm. We should provide bandwidth of matrix before and after reordering, as well as the condition number before and after. We should monitor convergence with and without reordering, and compare the number of GMRES iterations per minute/second.


**MPI Communication.** The majority of communication within our implementation consists of two MPI routines: MPI\_Alltoallv and MPI\_Allreduce.

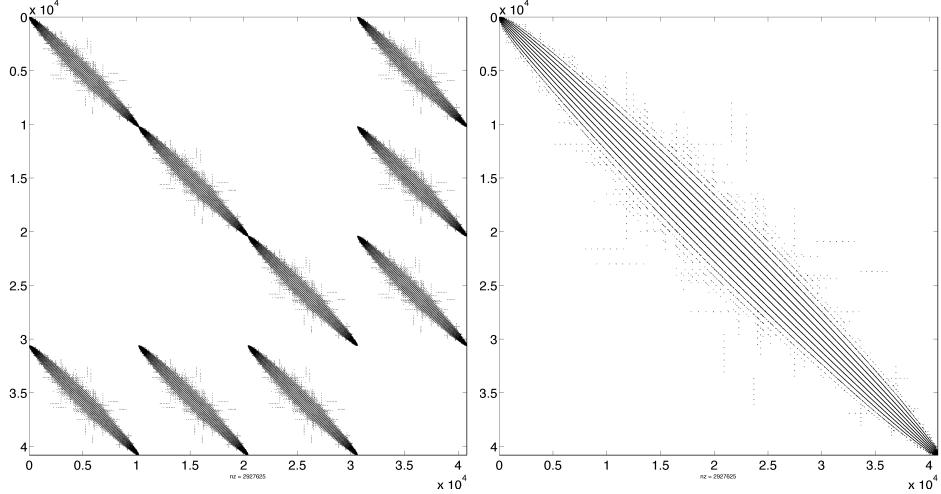


(a) Grouped by Solution Component

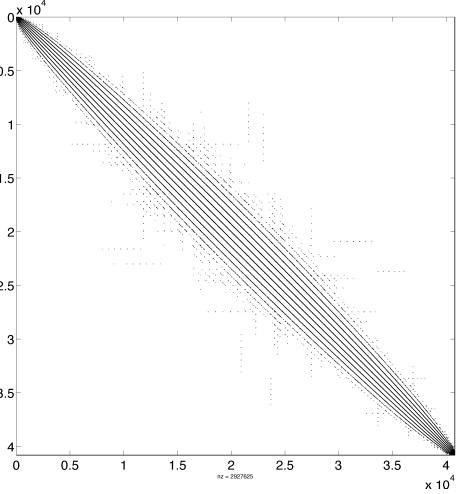

(b) Interleaved Solution Components

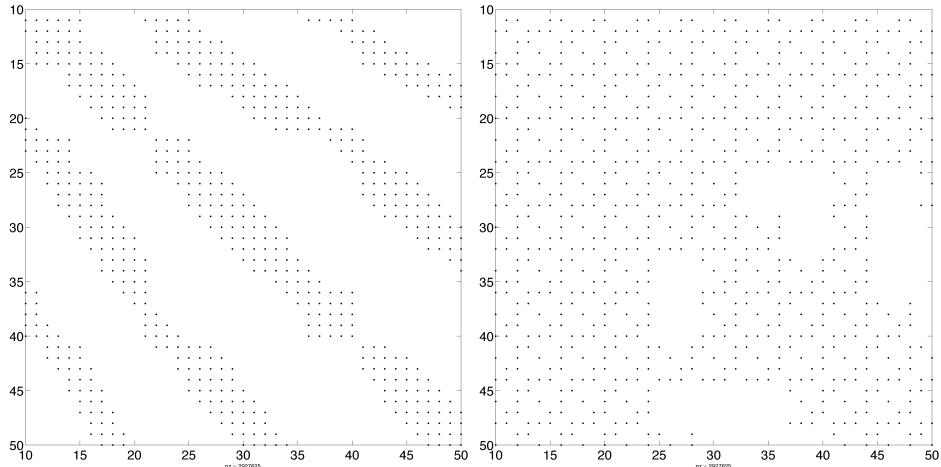

(c) Grouped Submatrix  $(10 : 50) \times (10 : 50)$

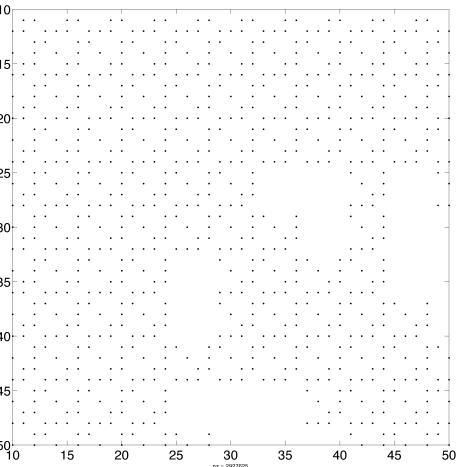

(d) Interleaved Submatrix  $(10 : 50) \times (10 : 50)$

Figure 11.1: Sparsity pattern of linear system in Equation 11.7. Solution values are either ordered by component (e.g.,  $(u_1, \dots, u_N, v_1, \dots, v_N, w_1, \dots, w_N, p_1, \dots, p_N)^T$ ) or interleaved (e.g.,  $(u_1, v_1, w_1, p_1, \dots, u_N, v_N, w_N, p_N)^T$ ).

## 11.6 Governing Equations

We solve the PDE on the surface of the sphere as an example for one and multiple GPUs. Boundary conditions detract from the accuracy of RBF-FD and introduce other issues such as Runge phenomena [?], so we first verify the solution without boundaries.

**Author's Note:** Need to reference work that solves problem in two steps and justify our approach to solve in one step. Golub paper might be good for this. Or the Stoke preconditioners paper

Assuming  $\eta$  is a constant (i.e.,  $\nabla\eta = 0$ ), our system simplifies to

$$\begin{pmatrix} -\eta\nabla^2 & 0 & 0 & \frac{\partial}{\partial x_1} \\ 0 & -\eta\nabla^2 & 0 & \frac{\partial}{\partial x_2} \\ 0 & 0 & -\eta\nabla^2 & \frac{\partial}{\partial x_3} \\ \frac{\partial}{\partial x_1} & \frac{\partial}{\partial x_2} & \frac{\partial}{\partial x_3} & 0 \end{pmatrix} \begin{pmatrix} u_1 \\ u_2 \\ u_3 \\ p \end{pmatrix} = \frac{RaT}{\sqrt{x_1^2 + x_2^2 + x_3^2}} \begin{pmatrix} x_1 \\ x_2 \\ x_3 \\ 0 \end{pmatrix}. \quad (11.7)$$

where the  $\nabla^2$  operator in spherical polar coordinates for  $\mathbb{R}^3$  is:

$$\nabla^2 = \underbrace{\frac{1}{\hat{r}} \frac{\partial}{\partial \hat{r}} \left( \hat{r}^2 \frac{\partial}{\partial \hat{r}} \right)}_{\text{radial}} + \underbrace{\frac{1}{\hat{r}^2} \Delta_S}_{\text{angular}}. \quad (11.8)$$

Here  $\Delta_S$  is the Laplace-Beltrami operator—i.e., the Laplacian constrained to the surface of the sphere with radius  $\hat{r}$ . This form nicely illustrates the components of the  $\nabla^2$  corresponding to the radial and angular terms.

On the surface of the unit sphere the radial term vanishes, so we are left with:

$$\nabla^2 \equiv \Delta_S. \quad (11.9)$$

The following RBF operator from [96]—Equation (20) can be applied to the RHS of Equation 11.4 to generate Laplace-Beltrami RBF-FD weights:

$$\Delta_S = \frac{1}{4} \left[ (4 - r^2) \frac{\partial^2}{\partial r^2} + \frac{4 - 3r^2}{r} \frac{\partial}{\partial r} \right], \quad (11.10)$$

where  $r$  is the Euclidean distance between nodes of an RBF-FD stencil and is independent of our choice of coordinate system.

Additionally following [33, 35], the off-diagonal blocks in Equation 11.7 must be constrained to the sphere via the projection matrix:

$$P = I - \mathbf{x}\mathbf{x}^T = \begin{pmatrix} (1 - x_1^2) & -x_1x_2 & -x_1x_3 \\ -x_1x_2 & (1 - x_2^2) & -x_2x_3 \\ -x_1x_3 & -x_2x_3 & (1 - x_3^2) \end{pmatrix} = \begin{pmatrix} P_{x_1} \\ P_{x_2} \\ P_{x_3} \end{pmatrix} \quad (11.11)$$

where  $\mathbf{x}$  is the unit normal at the stencil center, and [33, 35] show that with a little manipulation weights can be directly computed with these operators for Equation 11.4:

$$P \frac{\partial}{\partial x_1} = (x_1 \mathbf{x}^T \mathbf{x}_k - x_{1,k}) \frac{1}{r} \frac{\partial}{\partial r} |_{\mathbf{x}=\mathbf{x}_j} \quad (11.12)$$

$$P \frac{\partial}{\partial x_2} = (x_2 \mathbf{x}^T \mathbf{x}_k - x_{2,k}) \frac{1}{r} \frac{\partial}{\partial r} |_{\mathbf{x}=\mathbf{x}_j} \quad (11.13)$$

$$P \frac{\partial}{\partial x_3} = (x_3 \mathbf{x}^T \mathbf{x}_k - x_{3,k}) \frac{1}{r} \frac{\partial}{\partial r} |_{\mathbf{x}=\mathbf{x}_j} \quad (11.14)$$

### 11.6.1 Constraints

Due to the lack of boundary conditions on the sphere, the family of solutions that satisfy the PDE in Equation 11.7 includes four free constants (one for each  $u_1, u_2, u_3$  and  $p$ ).

One way to close the null-space of the solution is to augment Equation 11.7 with the following constraints:

$$\begin{pmatrix} -\eta \nabla^2 & 0 & 0 & \frac{\partial}{\partial x_1} & 1_{N \times 1} & 0 & 0 & 0 \\ 0 & -\eta \nabla^2 & 0 & \frac{\partial}{\partial x_2} & 0 & 1_{N \times 1} & 0 & 0 \\ 0 & 0 & -\eta \nabla^2 & \frac{\partial}{\partial x_3} & 0 & 0 & 1_{N \times 1} & 0 \\ \frac{\partial}{\partial x_1} & \frac{\partial}{\partial x_2} & \frac{\partial}{\partial x_3} & 0 & 0 & 0 & 0 & 1_{N \times 1} \\ 1_{1 \times N} & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1_{1 \times N} & 0 & 0 & & & 0_{4 \times 4} & \\ 0 & 0 & 1_{1 \times N} & 0 & & & & \\ 0 & 0 & 0 & 1_{1 \times N} & & & & \end{pmatrix} \begin{pmatrix} u_1 \\ u_2 \\ u_3 \\ p \\ c_1 \\ c_2 \\ c_3 \\ c_4 \end{pmatrix} = \frac{RaT}{\sqrt{x_1^2 + x_2^2 + x_3^2}} \begin{pmatrix} x_1 \\ x_2 \\ x_3 \\ 0 \\ \int_{\Omega} u_1 \partial \bar{\Omega} \\ \int_{\Omega} u_2 \partial \Omega \\ \int_{\Omega} u_3 \partial \Omega \\ \int_{\Omega} p \partial \Omega \end{pmatrix}. \quad (11.15)$$

**Author's Note:** Need the integral of my manufactured solution on the RHS.  $\ell_1$  norm does not converge to 0, so it will screw solve with constraints where the subscript on  $1_{N \times 1}$  indicates a  $N \times 1$  vector of ones. These constraints add the unknowns  $(c_1, c_2, c_3, c_4)$ , which should solve to be zero. The four rows on the bottom require that the solution satisfy the integral over the domain for each solution component. In combination with the four added columns, the constraints indicate that the solution components must satisfy integrals using the same constant value. This is only possible if the constants are zero. Our added constraints are not chosen for physical significance, but for algebraic significance. When solving Equation 11.15 with GMRES, the constraints improve conditioning of the system and increase the rate of convergence.

We also investigate the use of GMRES without constraints. This increases the number of iterations required to converge, but allows increased parallelism (decreased data sharing).

**Author's Note:** Perhaps we can iterate without constraints until convergence slows then "restart" the problem on a single GPU with constraints included? Limits scalability but would allow more parallelism for part of iterations while also reasonable convergence.

### 11.6.2 Manufactured Solution

To verify our implementation, we manufacture a solution that satisfies the continuity equation. Using the identity

$$\nabla \cdot (\nabla \times g(\mathbf{x})) = 0, \quad (11.16)$$

for any function  $g(\mathbf{x})$ , we can easily manufacture a solution by choosing some vector function  $g(\mathbf{x})$ , projecting it onto the sphere via  $P_x g(x)$  and applying the curl projection,  $Q_x$ :

$$Q_x = \begin{bmatrix} 0 & -x_3 & x_2 \\ x_3 & 0 & -x_1 \\ -x_2 & x_1 & 0 \end{bmatrix}. \quad (11.17)$$

Figure 11.2: A divergence free field is manufactured for the sphere.

Then, a manufactured solution that satisfies both momentum and continuity conditions on the surface of the sphere is given by:

$$\mathbf{u} = Q_x(g(\mathbf{x})) \quad (11.18)$$

Typically, on the surface of the sphere, the projection operator from Equation 11.11 must be applied to an arbitrary  $g(\mathbf{x})$ . Here, we choose the components of  $g(\mathbf{x})$  to be various spherical harmonics in Cartesian coordinates where  $P_x Y_l^m = Y_l^m$ . Consequently, application of  $P_x$  can be ignored.

We select  $g(x)$  to be:

$$g(x) = 8Y_3^2 - 3Y_{10}^5 + Y_{20}^{20} \quad (11.19)$$

and the pressure function:

$$P = Y_6^4 \quad (11.20)$$

The manufactured solution is shown in Figure 11.2. A Mollweide projection [? ] maps the sphere onto the plane.

**Convergence.** As the problem size  $N$  increases, we expect the approximation to the solution to converge on the order of  $\sqrt{n}$  where  $n$  is the choice of stencil size. Figure ?? demonstrates the convergence of our solution with respect to  $\sqrt{N}$  for stencil sizes  $n = 31, 101$

**Author's Note:** [update when figure is complete](#).

## 11.7 Preconditioning

GMRES is slow to converge when used without a preconditioner.

The differentiation matrix produced by RBF-FD is asymmetric, non-positive definite, and non-diagonally dominant. Thus, many of the popular choices for preconditioning provided by CUSP and ViennaCL do not apply.

Our tests show that an incomplete LU factorization with zero fill-in [75] functions well.

We also find that a large Krylov subspace must be saved. GMRES converges best when approximately 250 dimensions are saved between restarts.

**Plot comparing residual of GMRES without precond and with ILU0**

**Author's Note:** [Need to comment on the conditioning of the system and how stencils can influence convergence](#) .

Need a table/plot comparing convergence of various preconditioners (ILU0, ILUT, AMG, etc.). We will justify our use of ILU0 even if it is the most basic and frequently least beneficial approach.

Demonstrate ILU0 is best for converging between

- Jacobi
- ILU0 on block  $(1 : 3 * N)$

- ILU0 on full matrix
- ILUT
- AMG

---

**Algorithm 11.2** Incomplete LU Factorization with Zero Fill-in (ILU0)

---

```

1: for i do = 0
2:    $a_{i,i} = a_{i,i}/a_{i,i}$ 
3: end for

```

---

## 11.8 GMRES Results

We want to express benchmarks in terms of the number of GMRES iterations per second, and the number of iterations required to converge. Readers wont care what percentage of peak we are getting, just how fast we get to the solution.

- One GPU
  - Convergence for stokes steady
  - GMRES iteration plot (assuming 1e-8 and restart=60)
- Multi-GPU
  - Number of iterations without constraints
  - Number of iterations with constraints
  - GMRES iteration plot
  - plot: number of GMRES iterations per second w.r.t. number of processors

## 11.9 Fragments

Need to describe the solver.

State that the conditions under which a problem is solved determines how quickly it will converge. For example, nodes too close together on delaunay meshes cause higher condition numbers and require more iterations. Proper choice of preconditioners can dramatically reduce the number of iterations required to converge. Although preconditioners incur an additional cost in preprocessing and at each iteration of the solver, the potential number of iterations they save

John Dennis dissertation has a list of nice datasets (compare the list to Hoth) and their preconditioners. We might list similar paramters used for results here.

# CHAPTER 12

## PERFORMANCE BENCHMARKS

Author's Note: First I need to describe the hardware used. This includes: Troi, Spear, Keeneland; their gpus and RAM, etc. Discuss interconnects (why can't we run multiple kernels on one node of spear)

We present our implementation of an efficient multi-node, multi-GPU RBF PDE package to run on clusters of GPU compute nodes. Each compute node has one or more GPUs attached. Specifically, we utilize the hardware available in the FSU HPC Spear cluster and the NFS funded Keeneland project. While the Spear cluster is only a handful of nodes with 2 GPUs each, Keeneland boasts a total of 240 CPUs and 320 GPUs. The large scale of Keeneland allows us to verify the scaling of our method.

### 12.1 Metrics

The code produces the same results on CPUs and GPUs. However, their performance differs, so we analyze this difference with the speedup metric:

$$S_p = T_{\text{serial}} / T_{\text{parallel}}$$

Author's Note: Include efficiency:

$$E_p = S_p / \# \text{ of processors}$$

### 12.2 OpenCL

We leverage the OpenCL language for functional portability.

Our dedication to OpenCL is a hedged bet that the future architectures will merge in the middle between many and multi-core architectures with co-processors alongside CPUs. By selecting an open standard parallel programming language, we increase the likelihood for future support of our programs.

#### 12.2.1 OpenCL vs CUDA

The market is volatile. Companies survive by investing margins in their next great product. If a product fails or the company faces a recall, their survival may come into

question. Thus far, NVidia's CUDA has been wildly popular, but for the longest time (until May 2012) it was closed source. The closed source limited the language to NVidia hardware. As such, the OpenCL language gained popularity due to its support for AMD, Intel, mobile devices, web browsers, etc. NVidia's push to provide an open source compiler may be an attempt to regain the market share, but OpenCL appears to be on good footing. One other point: with an open source NVidia compiler, OpenCL can be optimized by the more mature NVidia compiler for their proprietary hardware. OpenCL compilers are also becoming more sophisticated at auto-optimization.

### 12.2.2 Asynchronous Queuing

Provide details and simple example of how asynchronous queueing can be used.

Need a figure showing the overlapping comm and comp in a general process with the wait points marked.

## 12.3 Fermi Architecture

In Spring 2010, NVidia will publicly release a new architecture code named "Fermi" [? ]. The new hardware will support many features of interest, the most important being 8x faster double precision than the older Tesla C1060 (GT200 architecture). It will also allow for concurrent kernel execution (for up to 16 small kernels) making it easier to keep the GPU saturated with computation. Table 12.1 considers some of the more monumental differences between the Fermi and GT200 architectures.

### 12.3.1 Double Precision

Double precision operations take XXX cycles

### 12.3.2 Local Caching

Local caching allows us to bypass the need for

### 12.3.3 Multiple Kernel Scheduling

describe fermi's ability to schedule multiple kernels, what it means for our queues. Do we need multiple queues, or just one that is non-blocking. How do we indicate we are done communicating if there is no queue to add markers to?

### 12.3.4 Future NVidia Hardware

The latest hardware is the Kepler. It supports the following features

	Fermi	GT200
# of concurrent kernels	16	1
Warps scheduled concurrently	2	1
Clock cycles to dispatch instruction to warp	2	4
Caching on Global Device Memory	Yes	No
Shared memory	64 KB	16 KB
Shared memory banks	32	16
Bank conflict free FP64 access	Yes	No
Cycles to read FP64 (from shared memory)	2	32
Max allowed warps	48	32

Table 12.1: Comparison of NVidia’s new Fermi architecture to the GT200 architecture used for GTX 280, Tesla C1060 and other GPUs in use today.

## 12.4 HPC Spear Cluster

## 12.5 Keeneland

## 12.6 Future Hardware

These figures represent optimizations of the Cosine Bell and Vortex Roll-up test cases. Essentially, the optimizations here are general for multi-GPU SpMV. Improving these test cases improves all explicit schemes for RBF-FD (i.e., hyperbolic and parabolic equations, and various time stepping schemes like euler, RK4, Adams-Bashforth etc.).

For the MPI I might need to have multiple figures comparing performance. However, for the GPU optimizations I can show a single plot with all the curves on it. These sections will be good

## 12.7 MPI\_Alltoallv

Change send/recv to alltoallv. Track wait time. Show limitation on scalability with GPU (sublinear) vs CPU (linear). How high can we get linear on CPU?

Communication between processors requires each processor to iterate through their neighboring processors and share information. This can be seen as a simple for loop allowing every processor to touch its neighbors in round-robin fashion. The benchmarks seen

in [Author's Note: figures from paper1](#) show the strong scaling of our implementation with a for loop and send/recv.

In Figs ?? we show the strong scaling of the cosine bell after

Alternatively

an all to all collective. That is, all processors share some information with potentially every other processor.

**Author's Note: cleanup:** These results were run on Keeneland. The changes to MPI communication are the result of changing from blocking communication (MPI\_send/MPI\_recv) to non-blocking communication (MPI\_alltoall).

Figure 12.1a shows that our GPU kernel is not much different than in the paper. I have a list of optimizations I'm going through, but this test case focuses on improving the communication.




Figure 12.1b shows the strong scalability of our method on Multiple CPUs. In distributed computing, ideal scaling is linear. This figure demonstrates that our method does scale linearly (almost super-linearly) as the number of CPUs increases, so our prospect for spanning all CPUs on Keeneland is within reach for problem sizes large enough. The super-linear speedup seen for 10 processors results from improved caching on processors as their individual problem sizes decrease and the processors are able to keep a larger percentage of the problem within fast cache memory.

Figure 12.1c shows the scaling of multiple GPUs vs 1 CPU. Ideally, this figure would be the product of the previous two figures since the GPUs are attached to CPUs in a one to one correspondence. However, we see from the sub-linear scaling that while the GPU accelerators are decreasing the time to compute solutions, there is less and less return of investment as the number of processors increase. Between this Figure and the previous, the only thing that differs is the hardware on which stencils are evaluated. The cost of communication stays the same as in the previous figure. But that means the communication consumes a increasing percentage of the iteration time, until it dominates. Additionally, computing on the GPU requires transfer (additional communication) of data between CPU and GPU.

Figure 12.1d shows the scalability of multiple GPUs vs 1 GPU. Here we see a sub-linear behavior for all cases. This is attributed to both the cost of transfer between CPUs and GPUs and the decreasing problem size as number of processors increases, which underutilizes the GPUs.

Figure 12.1e and Figure 12.1f show the smaller percentage of time per iteration dedicated to communication compared to the figures in the paper. In the Figure 12.1f, the way the times bottom out indicates we are/have converged on the minimum time required to launch a GPU kernel, transfer to/from the GPU, and communicate the problem via MPI. To scale to more processors, a larger problem size is absolutely necessary.

I am generating another set of figures that demonstrate the scaling when we overlap communication and computation. MPI collectives do not allow overlap, but the asynchronous GPU kernel launches do. Therefore, I expect: - the scaling on multiple CPUs vs 1 CPU to be the same as it is now - the scaling on multiple GPUs vs 1 GPU will improve to linear/super-linear for problem sizes that occupy the hardware longer than the minimum kernel launch time. For N=27556 we might only see linear speedup up to 6 or 8 processors. - larger problem sizes will still be necessary (I have benchmarks for 100K, 500K and 1M on

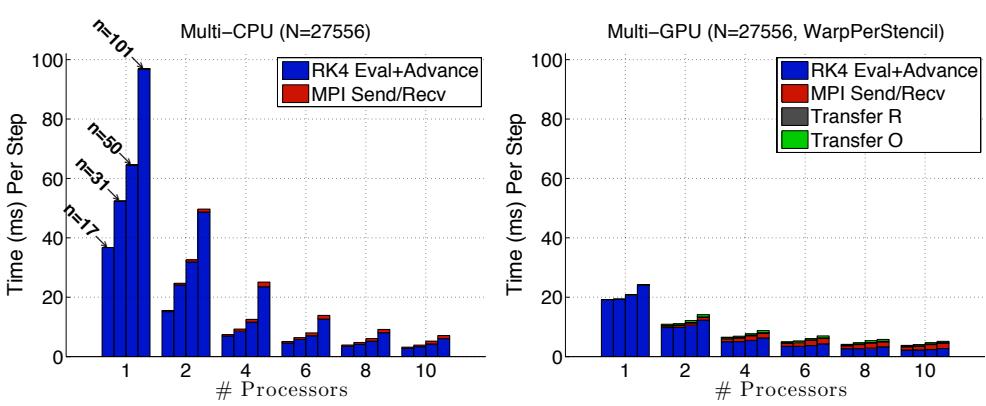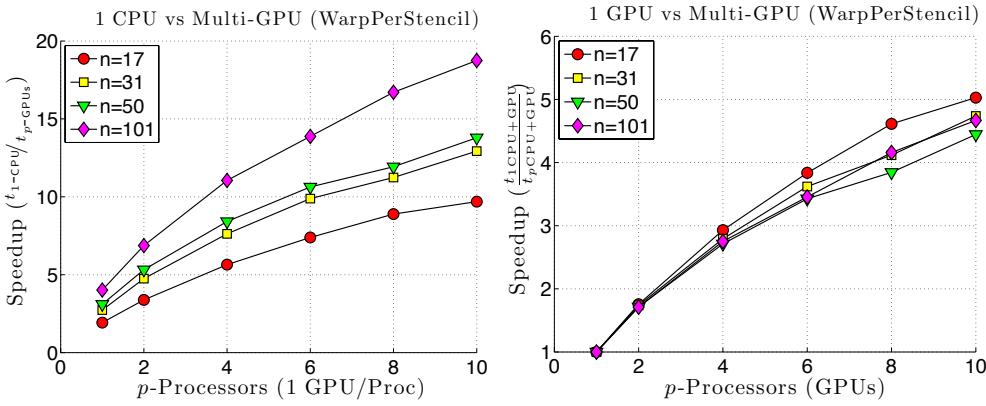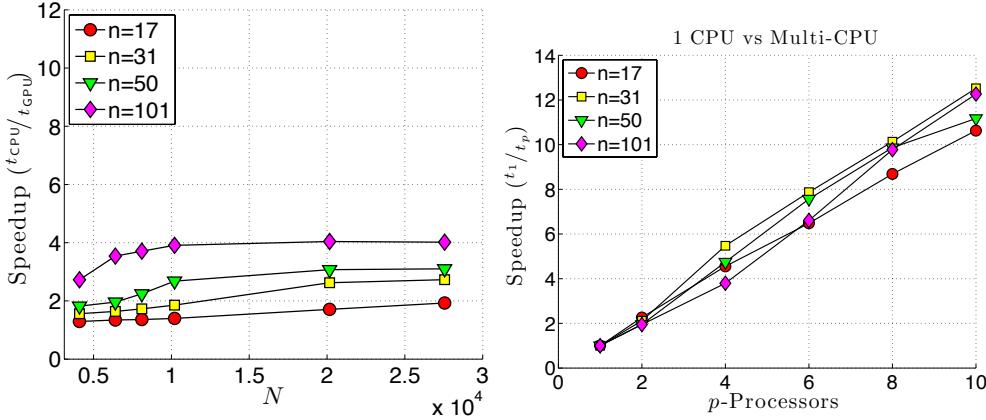

the sphere).

Author's Note: Need to test weak scaling (problem size stays fixed per processor). This will require a modified code, but we can fill the weight matrices with anything and run the kernels. Author's Note: Need to compare one warp of threads to a full block of size  $n$

## 12.8 Asynchronous OpenCL

What are the limitations if using just async and not the queues?

## 12.9 Multi-Queue OpenCL

How does performance improve if we use two queues (one for Q and one for R)?

## 12.10 GPU Kernel Optimizations

### 12.10.1 Work-Group Size and Number of Stencils

What if a work-group is larger than a warp? What if the group was occupied by multiple stencils. What improvements to speedup do we see?

How many stencils can each group handle (assuming values stay in shared memory)? Shared memory bank conflicts? How do we sort the values? What is the occupancy of the GPU?

### 12.10.2 Parallel Reduction in Shared Memory

What significant gain do we see from adding a segmented scan to the shared memory? What other improvements can we think of?

### 12.10.3 Comparison: custom SpMV for explicit schemes vs ViennaCL

# CHAPTER 13

## NEIGHBOR QUERIES AND NODE ORDERING

### 13.1 Neighbor Queries

As part of the preprocessing stage for RBF-FD, the scattered point cloud must be analyzed to generate stencils. To generate a stencil, any collection of nodes can be selected. However, by choosing nodes close to the stencil center and well balanced around it, we stand to get the best possible approximations to derivatives.

Why? well, the approximations are based on differences. Similar to classic FD, draw a secant connecting two nodes of a stencil. The slope of the secant determines the gradient at either point or a point in between. In the limit as the points are moved closer to the same spot, the approximation to the derivative at that point becomes exact.

So ideally every RBF-FD stencil will operate on nearest neighbors. One way to generate nearest neighbors is brute force  $O(N^2)$ ; very inefficient.

Alternatives exist including k-D Tree

#### 13.1.1 k-D Tree

Build complexity, seek times. Internal ordering

We use implementation provided by Andrea Tagliasacchi [?] as a MEX compiled set of routines for Matlab. These same routines are then linked into C/C++.

#### 13.1.2 Locality Sensitive Hashing

[18] provide a fast parallel

[?] is working on parallel generation. [?] has OpenCL neighbor queries

We started with a CPU implementation to test appropriateness.

[Author's Note: Compare performance of stencil generation in C++](#)

### 13.2 Node Ordering

Locality sensitive hashing also allows us to reorder the nodes

[75] mentions the impact of ordering on conditioning.

Algorithms like Reverse Cuthill McKee and Approximate Minimum Degree ordering allow general restructuring of matrices.

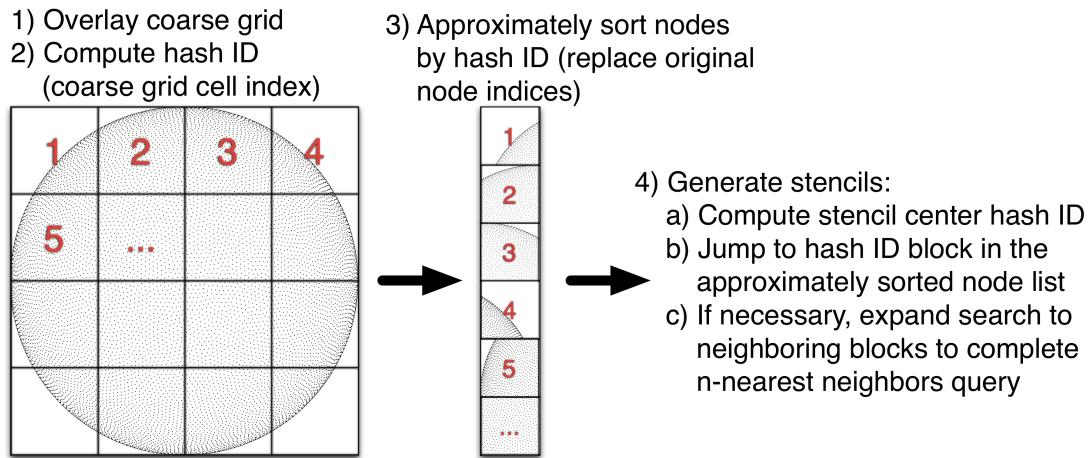


Figure 13.1: High level overview of Locality Sensitive Hashing algorithm. First we overlay a coarse regular grid on the bounding box of the domain. The cells of the coarse grid cells are reordered in memory according to a space filling curve. Then we query neighbors by starting search with [Author's Note: Illustrate the query process](#) cell containing stencil center and append neighboring cells until stencil size  $n$  nodes are found. We take  $n$  closest neighbors (brute force search) if more than  $n$  are appended to the list of candidates.

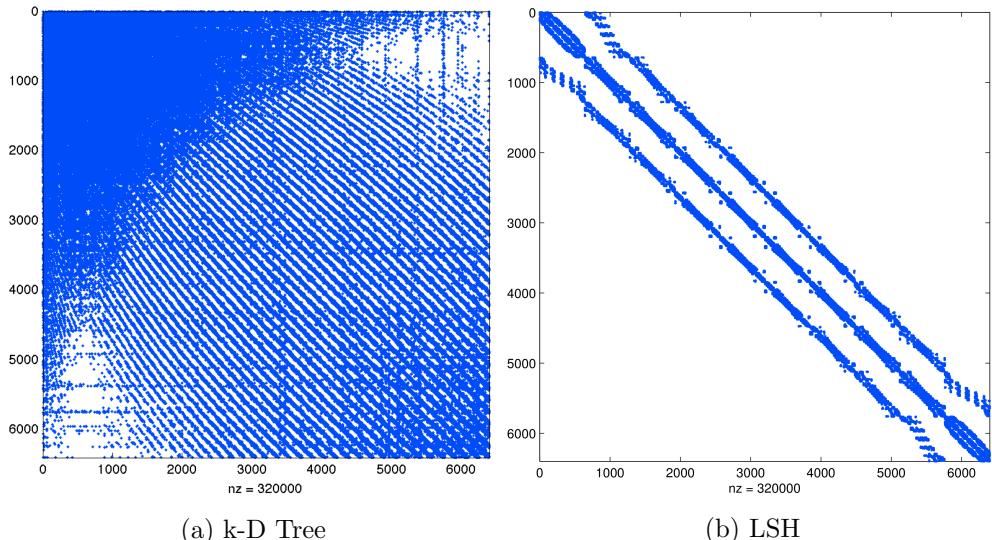


Figure 13.2: Example effects of node reordering within neighbor query algorithm for MD node set  $N = 6400$  with  $n = 50$ . Matrix is 0.78% full. k-D Tree maintains original ordering of the nodes and deceptively appears nearly dense. LSH algorithm reorders nodes according to raster ordering and reveals sparsity of the problem.

Author's Note: NEed to compare conditioning of LSH and other algorithms in Matlab

Q: what is an ideal ordering? Q: what is the best conditioning from ordering? Q: what is the relative cost of ordering?

# CHAPTER 14

## COMMUNITY OUTREACH

- 
- 
- E. F. Bollig. Multi-GPU Solutions of Hyperbolic and Elliptic PDEs with RBF-FD. Contributed Talk. SIAMSEAS Annual Meeting. Huntsville, AL, March 2012
- E. F. Bollig. Parallel Algorithms for RBF-FD Solutions to PDEs on the Sphere. Poster. FSU Dept. of Sci. Comp. Computational Xpo. Tallahassee, FL, March 2012
- E. F. Bollig. A Multi-CPU/GPU implementation of RBF-generated finite differences for PDEs on a Sphere. Poster. American Geophys. Union. San Francisco, CA, December 2011
- E. F. Bollig. Accelerating RBF-FD in Parallel Environments. Student Presentation. NSF CBMS Workshop: Radial Basis Functions Mathematical Developments and Applications. Darmouth, MA, June 2011

TODO: add survey of goals stated in prospectus and whether they were completed or not  
(Probably part of slides, not actual dissertation)

## APPENDIX A

### AVOIDING POLE SINGULARITIES WITH RBF-FD

This content follows [34, 35].

Within the test cases of this dissertation, we solve convective PDEs on the unit sphere with the form:

$$\frac{\partial h}{\partial t} = \mathbf{u} \cdot \nabla h$$

where  $\mathbf{u}$  is velocity. For example, the cosine bell advection has this particular form:

$$\frac{\partial h}{\partial t} = \frac{u}{\cos \theta} \frac{\partial h}{\partial \lambda} + v \frac{\partial h}{\partial \theta} \quad (\text{A.1})$$

in the spherical coordinate system defined by

$$\begin{aligned} x &= \cos \theta \cos \lambda \\ y &= \cos \theta \sin \lambda \\ z &= \sin \theta \end{aligned}$$

where  $\theta \in (-\frac{\pi}{2}, \frac{\pi}{2})$  is the elevation angle and  $\lambda \in (-\pi, \pi)$  is the azimuthal angle. Observe that as  $\theta \rightarrow \pm \frac{\pi}{2}$ , the  $\frac{1}{\cos \theta}$  term goes to infinity as a discontinuity.

One of the many selling points for RBF-FD and other RBF methods is their ability analytically avoid pole singularities, which arise from the choice of coordinate system and not from the methods themselves. Since RBFs are inherently based on Euclidean distance between nodes, and not geodesic distance, it is said that they do not “feel” the effects of the geometry or recognize singularities naturally inherent in the coordinate system [34]. Here we demonstrate how pole singularities are analytically avoided with RBF-FD for cosine bell advection.

Let  $r = \|\mathbf{x} - \mathbf{x}_j\|$  be the Euclidean distance which is invariant of the coordinate system. In Cartesian coordinates, we have

$$r = \sqrt{(x - x_j)^2 + (y - y_j)^2 + (z - z_j)^2}.$$

In spherical coordinates we have:

$$r = \sqrt{2(1 - \cos \theta \cos \theta_j \cos(\lambda - \lambda_j) - \sin \theta \sin \theta_j)}.$$

The RBF-FD operators for  $\frac{d}{d\lambda}, \frac{d}{d\theta}$  are discretized with the chain rule:

$$\frac{d\phi_j(r)}{d\lambda} = \frac{dr}{d\lambda} \frac{d\phi_j(r)}{dr} = \frac{\cos \theta \cos \theta_j \sin(\lambda - \lambda_j)}{r} \frac{d\phi_j(r)}{dr}, \quad (\text{A.2})$$

$$\frac{d\phi_j(r)}{d\theta} = \frac{dr}{d\theta} \frac{d\phi_j(r)}{dr} = \frac{\sin \theta \cos \theta_j \cos(\lambda - \lambda_j) - \cos \theta \sin \theta_j}{r} \frac{d\phi_j(r)}{dr}, \quad (\text{A.3})$$

where  $\phi_j(r)$  is the RBF centered at  $\mathbf{x}_j$ .

Plugging A.2 and A.3 into A.1, produces the following explicit form:

$$\frac{dh}{dt} = u(\cos \theta_j \sin(\lambda - \lambda_j) \frac{1}{r} \frac{d\phi_j}{dr}) + v(\sin \theta \cos \theta_j \cos(\lambda - \lambda_j) - \cos \theta \sin \theta_j \frac{1}{r} \frac{d\phi}{dr})$$

where  $\cos \theta$  from A.2 analytically cancels with the  $\frac{1}{\cos \theta}$  in A.1.

Then, formally, one would assemble differentiation matrices containing weights for the following operators:

$$\mathbf{D}_\lambda = \cos \theta_j \sin(\lambda - \lambda_j) \frac{1}{r} \frac{d\phi_j}{dr}, \quad (\text{A.4})$$

$$\mathbf{D}_\theta = \sin \theta \cos \theta_j \cos(\lambda - \lambda_j) - \cos \theta \sin \theta_j \frac{1}{r} \frac{d\phi}{dr}, \quad (\text{A.5})$$

and solve the explicit method of lines problem:

$$\frac{dh}{dt} = u\mathbf{D}_\lambda h + v\mathbf{D}_\theta h$$

where now the system is completely free of singularities at the poles [35].

We note that the expression  $\cos(\frac{\pi}{2})$  evaluates on some systems to a very small number rather than zero (e.g.,  $6.1(10^{-17})$  on the Keeneland system with the GNU gcc compiler). The small value in turn allows  $\frac{1}{\cos \theta}$  to evaluate to a large value (e.g.,  $1.6(10^{16})$ ) rather than “inf” or “NaN”. A large value allows the cosine terms to cancel in double precision, whereas an “inf” or “NaN” would corrupt the numerics. Rather than avoid placing nodes at the poles, or assuming the machine will numerically cancel the singularities, it is preferred to use operators A.4, A.5 on the RHS of Equation 5.2 to compute RBF-FD weights.

## APPENDIX B

### PROJECTED WEIGHTS ON THE SPHERE

It is shown in [33, 35] that a projection operator

$$\mathbf{P} = \mathbf{I} - \mathbf{x}\mathbf{x}^T = \begin{bmatrix} (1-x^2) & -xy & -xz \\ -xy & (1-y^2) & -yz \\ -xz & -yz & (1-z^2) \end{bmatrix} = \begin{bmatrix} \mathbf{p}_x^T \\ \mathbf{p}_y^T \\ \mathbf{p}_z^T \end{bmatrix}$$

where  $\mathbf{p}_x^T$  represents the projection operator in the  $x$  direction.

From [35], the projected RBF gradient operator is:

$$\begin{aligned} \mathbf{P} \cdot \nabla \phi_k(r(\mathbf{x})) &= \mathbf{P} \cdot \frac{(\mathbf{x} - \mathbf{x}_k)}{r(\mathbf{x})} \frac{d\phi_k(r(\mathbf{x}))}{dr(\mathbf{x})} \\ &= -\mathbf{P} \cdot \mathbf{x}_k \frac{1}{r(\mathbf{x})} \frac{d\phi_k(r(\mathbf{x}))}{dr(\mathbf{x})} \\ &= \begin{bmatrix} x\mathbf{x}^T \mathbf{x}_k - x_k \\ y\mathbf{x}^T \mathbf{x}_k - y_k \\ z\mathbf{x}^T \mathbf{x}_k - z_k \end{bmatrix} \frac{1}{r(\mathbf{x})} \frac{d\phi(r(\mathbf{x}))}{dr}. \end{aligned} \quad (\text{B.1})$$

The operator  $\mathbf{I} - \mathbf{x}\mathbf{x}^T$  for  $\mathbf{x} = (x, y, z)$  projects a vector onto the plane tangent to the unit sphere at  $(x, y, z)$ . Therefore, Equation B.1 gives the projection of the gradient operator at  $\mathbf{x}_k$  onto the plane tangent to  $\mathbf{x}$ .

#### B.1 Direct Weights

Following [33], B.1 takes on the following when adapted to RBF-FD:

$$[\mathbf{p}_x \cdot \nabla f(\mathbf{x})]|_{\mathbf{x}=\mathbf{x}_c} = \sum_{k=1}^n c_k \underbrace{\left[ x_c \mathbf{x}_c^T \mathbf{x}_k - x_k \right]}_{B_{c,k}^{\mathbf{p}_x}} \frac{1}{r} \frac{d\phi(r(x_c))}{dr}. \quad (\text{B.2})$$

and so forth for the  $\mathbf{p}_y \cdot \nabla, \mathbf{p}_z \cdot \nabla$  operators, where  $\mathbf{x}_c$  is the stencil center and  $\mathbf{x}_k$  are stencil nodes. To compute RBF-FD weights for the  $\mathbf{p}_x \cdot \nabla$  operator, the RHS of Equation 5.2 is filled with elements  $B_{c,k}^{\mathbf{p}_x}$ . We will refer to this method of obtaining the weights as the *direct* method due to the ability to directly compute RBF-FD weights for the operators  $\mathbf{P} \cdot \nabla$ , and assemble the differentiation matrices  $\mathbf{D}_{\mathbf{p}_x \cdot \nabla}, \mathbf{D}_{\mathbf{p}_y \cdot \nabla}, \mathbf{D}_{\mathbf{p}_z \cdot \nabla}$  without the need to compute and/or store other weights.

## B.2 Indirect Weights

Alternatively, one is able to compute weights *indirectly* as a weighted combination of existing RBF-FD weights for the unprojected  $\nabla$  operator. Here we assume that differentiation matrices to compute the components of  $\nabla$  are readily available in memory:

$$\mathbf{D}_\nabla = \begin{bmatrix} \mathbf{D}_{\frac{d}{dx}} \\ \mathbf{D}_{\frac{d}{dy}} \\ \mathbf{D}_{\frac{d}{dz}} \end{bmatrix},$$

where each matrix contains weights computed with the operators of Equation ?? applied to the RHS of Equation 5.2.

The differentiation matrices for  $\mathbf{P} \cdot \nabla$  can then be assembled as a weighted combination of the differentiation matrices for the unprojected operator:

$$\mathbf{D}_{\mathbf{P} \cdot \nabla} = \begin{bmatrix} \mathbf{D}_{\mathbf{p}_x \cdot \nabla} \\ \mathbf{D}_{\mathbf{p}_y \cdot \nabla} \\ \mathbf{D}_{\mathbf{p}_z \cdot \nabla} \end{bmatrix} = \begin{bmatrix} \text{diag}(1 - X^2) \mathbf{D}_{\frac{\partial}{\partial x}} - \text{diag}(XY) \mathbf{D}_{\frac{d}{dy}} - \text{diag}(XZ) \mathbf{D}_{\frac{d}{dz}} \\ -\text{diag}(XY) \mathbf{D}_{\frac{d}{dx}} + \text{diag}(1 - Y^2) \mathbf{D}_{\frac{d}{dy}} - \text{diag}(YZ) \mathbf{D}_{\frac{d}{dz}} \\ -\text{diag}(XZ) \mathbf{D}_{\frac{d}{dx}} - \text{diag}(YZ) \mathbf{D}_{\frac{d}{dy}} + \text{diag}(1 - Y^2) \mathbf{D}_{\frac{d}{dz}} \end{bmatrix} \quad (\text{B.3})$$

Author's Note: make it "partial x" instead of d/dx where  $X = \{x_{c,i}\}_{i=1}^N$ ,  $Y = \{y_{c,i}\}_{i=1}^N$ ,  $Z = \{z_{c,i}\}_{i=1}^N$  are all x-components, y-components and z-components of the stencil centers  $\{\mathbf{x}_{c,i}\}_{i=1}^N$  respectively. Author's Note: Gordon discussion: B1: explain why we use this manufactured solution. what was it designed to check. Author's Note: Cleanup: This concept equates to classical Finite Differences where for example, the standard 5-point finite difference formula for approximating the Laplacian can be expressed a weighted combination of differences for

Author's Note: Have not found in literature any mention of the fact that RBF-FD weights can be used to compose operators like this. Generally, its easier to directly compute weights and assumed to be more accurate. But how much more accurate?

One benefit of indirect weights is conservation of memory. For example, for complex operators, a single DM on  $N = 1$ million nodes and  $n = 101$  requires roughly 1.6 GB of memory. If the PDE is coupled and requires


This also allows us to compose complex operators with weights loaded from disk  $O(N * n)$  cost to assemble the indirect operators after  $O(N * n^3)$  cost of assembling direct operators means this approach has potential to save FLOPs in the long run

But the question is, how accurate is it? In situations where memory is critical and these FLOPs need to be saved (i.e., large  $N$  and complicated equations), would it be useful?

Author's Note: Q: how do direct vs indirect weights compare? Is the lsfc different sparsity with same approximation potentials? Author's Note: :end


### B.2.1 Comparison of Direct and Indirect Weights

We computed direct and indirect approaches for the MD-node sets with size  $N = \{121, 256, 400, 841, 1024, 2500, 4096, 6400, 8100, 10201, 16384, 27556\}$ .

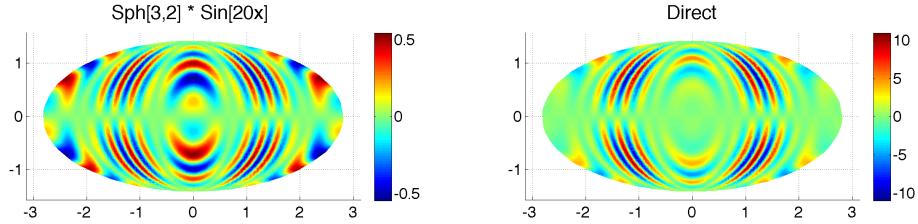

(a) Manufactured test function:  
 $f(\mathbf{x}) = Y_3^2(\mathbf{x}) \sin(20x)$ .

(b)  $x$ -component of the projected gradient:  
 $\mathbf{p}_x \cdot \nabla f(\mathbf{x})$ .

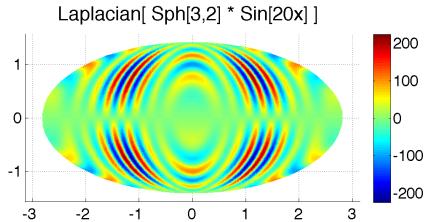

(c) Surface Laplacian:  $\Delta_S f(\mathbf{x})$ .

Figure B.1: Test function and its projected derivatives on the surface of the unit sphere.

We check the relative error of the approximation:

$$\text{relative } \ell_2 \text{ error} = \frac{\|f_{\text{approx}} - f_{\text{exact}}\|_2}{\|f_{\text{exact}}\|_2}$$

We also look at the difference of relative errors and its absolute value:

$$(\text{relative } \ell_2 \text{ error})_{\text{direct}} - (\text{relative } \ell_2 \text{ error})_{\text{indirect}}$$

We find that our indirect approach functions well compared to the direct method. For small node sizes ( $N < 2500$  nodes) we see that the direct method has the advantage with

### B.3 Conclusions

Although it is clear the indirect method functions well compared to the direct method, we must consider its usefulness. Typically, weights are computed only as necessary for the PDE. If the PDE is on the sphere, then directly computing the  $\mathbf{P} \cdot \nabla$  operator would be most efficient for both memory and computation. However, one could imagine a scenario such

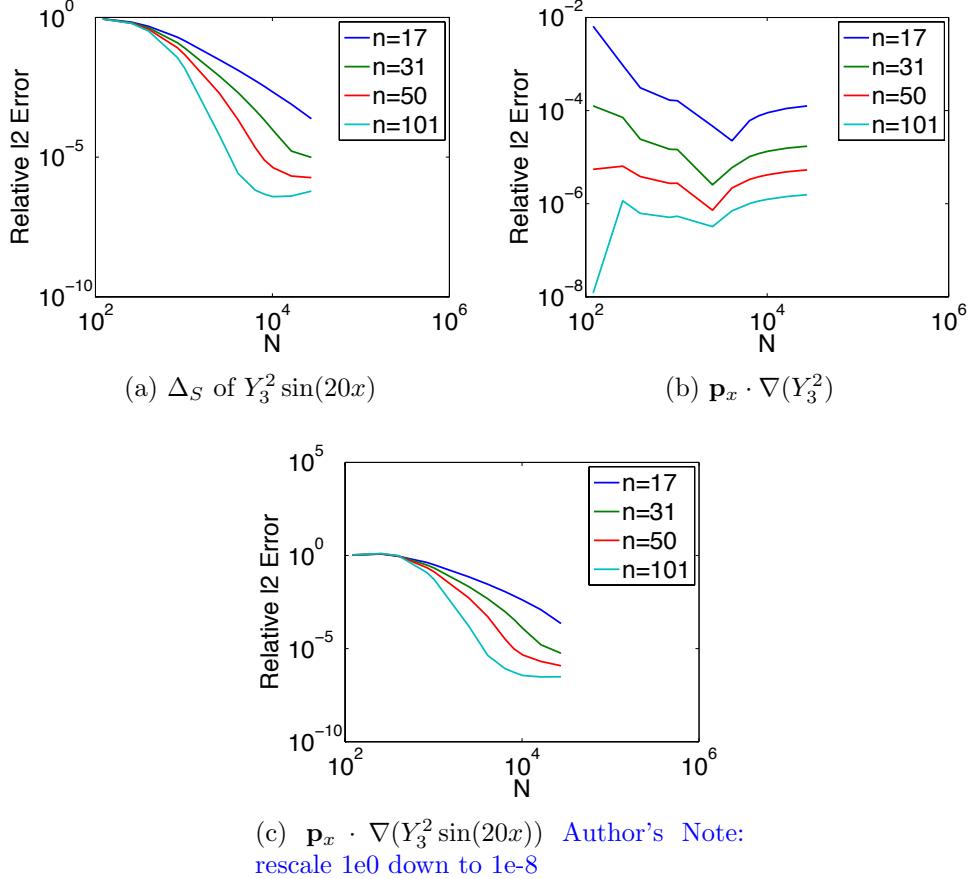


Figure B.2: Relative  $\ell_2$  error in differentiation.

as a 3-D spherical shell domain with physics on the boundaries that must be constrained to the surface, while the interior requires only an unprojected  $\nabla$  operator. In such cases, by simply computing for the  $\nabla$  operator, we assemble all necessary operators with minimal loss of accuracy and significant savings ( $3Nn$  doubles) in storage.

With  $N = 1e6$  nodes and stencil size  $n = 101$ , the matrix market file for weights is approximately 1.6 GB on disk. For a GPU with only 6 GB of global memory space available, it is worthwhile to consider possibilities for memory conservation.

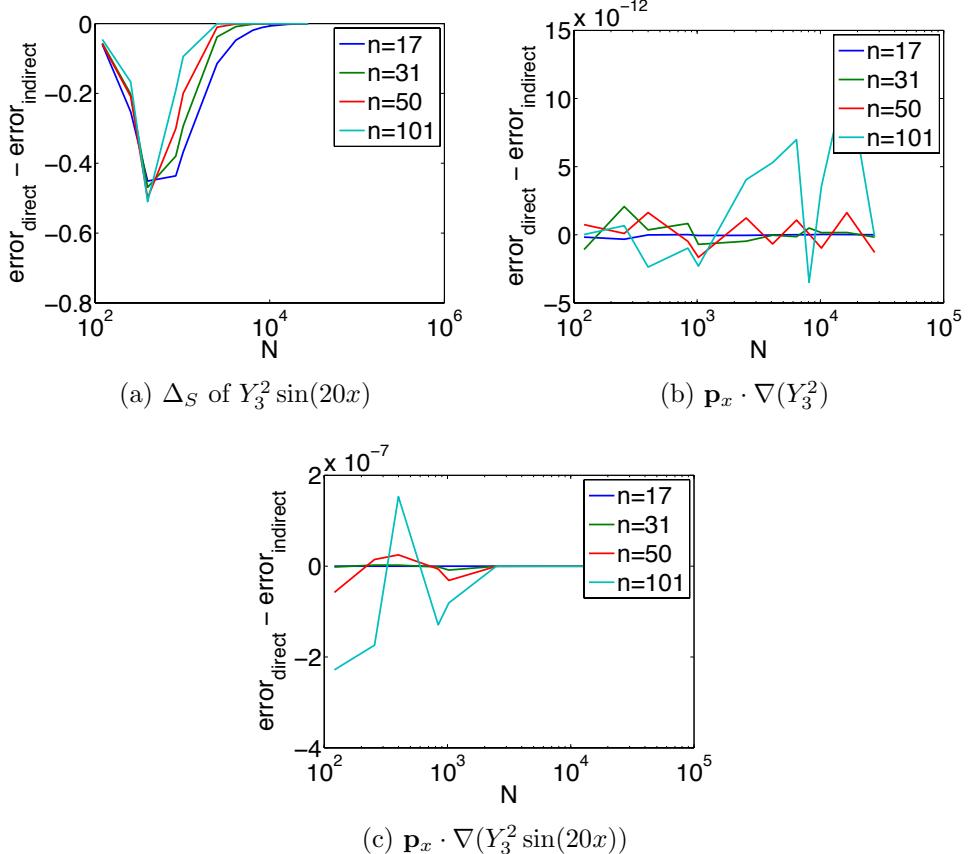


Figure B.3: Signed differences of relative  $\ell_2$  errors in differentiation between Direct and Indirect weights.

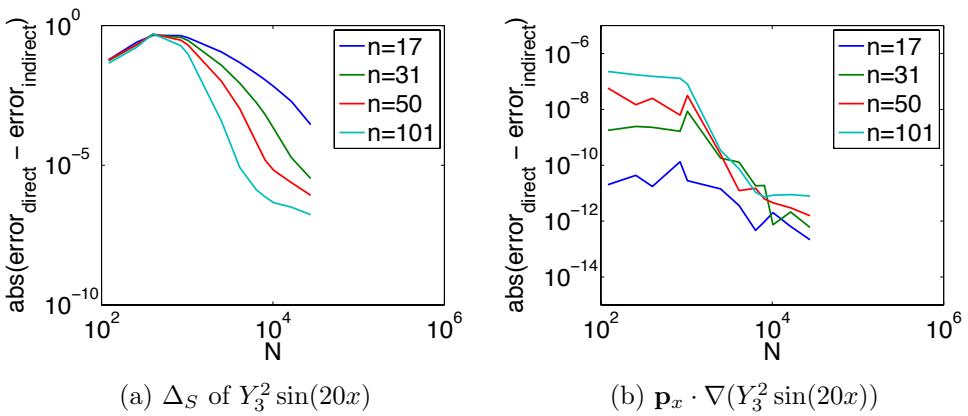


Figure B.4: Absolute differences of relative  $\ell_2$  errors in differentiation between Direct and Indirect weights.

## BIBLIOGRAPHY

- [1] HMPP Data Sheet. <http://www.caps-entreprise.com/upload/article/fichier/64fichier1.pdf>, 2009. [9](#)
- [2] AccelerEyes. *Jacket User Guide - The GPU Engine for MATLAB*, 1.2.1 edition, November 2009. [8](#)
- [3] Jacques M. Bahi, Raphaël Couturier, and Lilia Ziane Khodja. Parallel gmres implementation for solving sparse linear systems on gpu clusters. In Layne T. Watson, Gary W. Howell, William I. Thacker, and Steven Seidel, editors, *SpringSim (HPC)*, pages 12–19. SCS/ACM, 2011. [69](#), [71](#), [72](#)
- [4] Sylvie Barak. Gpu technology key to exascale says nvidia. <http://www.eetimes.com/electronics-news/4230659/GPU-technology-key-to-exascale-says-Nvidia>, November 2011. [2](#), [31](#)
- [5] R. K. Beatson, W. A. Light, and S. Billings. Fast Solution of the Radial Basis Function Interpolation Equations: Domain Decomposition Methods. *SIAM J. Sci. Comput.*, 22(5):1717–1740, 2000. [41](#)
- [6] Nathan Bell and Michael Garland. Implementing sparse matrix-vector multiplication on throughput-oriented processors. *Proceedings of the Conference on High Performance Computing Networking, Storage and Analysis - SC '09*, (1):1, 2009. [43](#), [50](#), [70](#)
- [7] E. F. Bollig. A Multi-CPU/GPU implementation of RBF-generated finite differences for PDEs on a Sphere. Poster. American Geophys. Union. San Francisco, CA, December 2011.
- [8] E. F. Bollig. Accelerating RBF-FD in Parallel Environments. Student Presentation. NSF CBMS Workshop: Radial Basis Functions Mathematical Developments and Applications. Darmouth, MA, June 2011.
- [9] E. F. Bollig. Multi-GPU Solutions of Hyperbolic and Elliptic PDEs with RBF-FD. Contributed Talk. SIAMSEAS Annual Meeting. Huntsville, AL, March 2012.
- [10] E. F. Bollig. Parallel Algorithms for RBF-FD Solutions to PDEs on the Sphere. Poster. FSU Dept. of Sci. Comp. Computational Xpo. Tallahassee, FL, March 2012.

- [11] Evan F. Bollig, Natasha Flyer, and Gordon Erlebacher. Solution to pdes using radial basis function finite-differences (rbf-fd) on multiple gpus. *Journal of Computational Physics*, (0):–, 2012. [7](#), [39](#)
- [12] Andreas Brandstetter and Alessandro Artusi. Radial Basis Function Networks GPU Based Implementation. *IEEE Transaction on Neural Network*, 19(12):2150–2161, December 2008. [8](#)
- [13] J. C. Carr, R. K. Beatson, J. B. Cherrie, T. J. Mitchell, W. R. Fright, B. C. McCallum, and T. R. Evans. Reconstruction and Representation of 3D Objects with Radial Basis Functions. In *SIGGRAPH '01: Proceedings of the 28th annual conference on Computer graphics and interactive techniques*, pages 67–76, New York, NY, USA, 2001. ACM. [25](#)
- [14] J. C. Carr, R. K. Beatson, B. C. McCallum, W. R. Fright, T. J. McLennan, and T. J. Mitchell. Smooth Surface Reconstruction from Noisy Range Data. In *GRAPHITE '03: Proceedings of the 1st international conference on Computer graphics and interactive techniques in Australasia and South East Asia*, pages 119–ff, New York, NY, USA, 2003. ACM. [8](#), [25](#)
- [15] Tom Cecil, Jianliang Qian, and Stanley Osher. Numerical Methods for High Dimensional Hamilton-Jacobi Equations Using Radial Basis Functions. *JOURNAL OF COMPUTATIONAL PHYSICS*, 196:327–347, 2004. [6](#), [7](#), [21](#), [31](#), [67](#)
- [16] G Chandhini and Y Sanyasiraju. Local RBF-FD Solutions for Steady Convection-Diffusion Problems. *International Journal for Numerical Methods in Engineering*, 72(3), 2007. [4](#), [7](#), [21](#), [31](#), [67](#)
- [17] P P Chinchapatnam, K Djidjeli, P B Nair, and M Tan. A compact RBF-FD based meshless method for the incompressible Navier–Stokes equations. *Proceedings of the Institution of Mechanical Engineers, Part M: Journal of Engineering for the Maritime Environment*, 223(3):275–290, March 2009. [7](#), [31](#), [67](#), [68](#)
- [18] Michael Connor and Piyush Kumar. Fast construction of k-nearest neighbor graphs for point clouds. *IEEE Transactions on Visualization and Computer Graphics*, 16:599–608, 2010. [50](#), [85](#)
- [19] CD Correa, D Silver, and M Chen. Volume Deformation via Scattered Data Interpolation. *Proceedings of Eurographics/IEEE VGTC Workshop on Volume Graphics*, pages 91–98, 2007. [21](#), [28](#)
- [20] A Corrigan and HQ Dinh. Computing and Rendering Implicit Surfaces Composed of Radial Basis Functions on the GPU. *International Workshop on Volume Graphics*, 2005. [8](#)
- [21] N Cuntz, M Leidl, TU Darmstadt, GA Kolb, CR Salama, M Böttinger, D Klimarechenzentrum, and G Hamburg. GPU-based Dynamic Flow Visualization for Climate Research Applications. *Proc. SimVis*, pages 371–384, 2007. [8](#)

- [22] K Dekker. Parallel GMRES and Domain Decomposition. Technical report, Delft University of Technology, Delft, The Netherlands, 2000. 69
- [23] E Divo and AJ Kassab. An Efficient Localized Radial Basis Function Meshless Method for Fluid Flow and Conjugate Heat Transfer. *Journal of Heat Transfer*, 129:124, 2007. 8, 21, 28, 41
- [24] Qiang Du, Vance Faber, and Max Gunzburger. Centroidal Voronoi Tessellations: Applications and Algorithms. *SIAM Rev.*, 41(4):637–676, 1999. 4
- [25] Qiang Du, Max Gunzburger, Lili Ju, and Xiaoqiang Wang. Centroidal Voronoi Tessellation Algorithms for Image Compression, Segmentation, and Multichannel Restoration. *Journal of Mathematical Imaging and Vision*, 24(2):177–194, 2006. 66
- [26] G. E. Fasshauer. RBF Collocation Methods and Pseudospectral Methods. Technical report, 2006. 16, 19, 21, 27, 28
- [27] Gregory E. Fasshauer. Solving Partial Differential Equations by Collocation with Radial Basis Functions. In *In: Surface Fitting and Multiresolution Methods A. Le M’ehaut’e, C. Rabut and L.L. Schumaker (eds.)*, Vanderbilt, pages 131–138. University Press, 1997. 18, 19, 21, 26
- [28] Gregory E. Fasshauer. *Meshfree Approximation Methods with MATLAB*, volume 6 of *Interdisciplinary Mathematical Sciences*. World Scientific Publishing Co. Pte. Ltd., 5 Toh Tuck Link, Singapore 596224, 2007. 3, 4, 5, 16, 17, 19, 20, 21, 23, 26, 28, 33, 36, 39
- [29] Gregory E. Fasshauer and Jack G. Zhang. On choosing “optimal” shape parameters for rbf approximation. *Numerical Algorithms*, 45(1-4):345–368, 2007. 20
- [30] A. I. Fedoseyev, M. J. Friedman, and E. J. Kansa. Improved Multiquadric Method for Elliptic Partial Differential Equations via PDE Collocation on the Boundary. *Computers & Mathematics with Applications*, 43(3-5):439 – 455, 2002. 18, 19, 21, 27
- [31] Natasha Flyer and Bengt Fornberg. Radial basis functions: Developments and applications to planetary scale flows. *Computers & Fluids*, 46(1):23–32, July 2011. 5, 15, 20, 21, 67
- [32] Natasha Flyer and Erik Lehto. Rotational transport on a sphere: Local node refinement with radial basis functions. *Journal of Computational Physics*, 229(6):1954–1969, March 2010. 5, 15, 21, 57, 67
- [33] Natasha Flyer, Erik Lehto, Sebastien Blaise, Grady B. Wright, and Amik St-Cyr. Rbf-generated finite differences for nonlinear transport on a sphere: shallow water simulations. *Submitted to Elsevier*, pages 1–29, 2011. 7, 21, 31, 33, 37, 38, 39, 56, 59, 67, 70, 75, 91

- [34] Natasha Flyer and Grady B. Wright. Transport schemes on a sphere using radial basis functions. *Journal of Computational Physics*, 226(1):1059 – 1084, 2007. [5](#), [15](#), [20](#), [21](#), [31](#), [57](#), [61](#), [63](#), [66](#), [67](#), [89](#)
- [35] Natasha Flyer and Grady B. Wright. A Radial Basis Function Method for the Shallow Water Equations on a Sphere. In *Proc. R. Soc. A*, volume 465, pages 1949–1976, December 2009. [5](#), [15](#), [20](#), [21](#), [37](#), [67](#), [75](#), [89](#), [90](#), [91](#)
- [36] B Fornberg, T Driscoll, G Wright, and R Charles. Observations on the behavior of radial basis function approximations near boundaries. *Computers & Mathematics with Applications*, 43(3-5):473–490, February 2002. [33](#), [70](#)
- [37] B. Fornberg and G. Wright. Stable computation of multiquadric interpolants for all values of the shape parameter. *Computers & Mathematics with Applications*, 48(5-6):853 – 867, 2004. [5](#), [16](#), [21](#), [22](#)
- [38] Bengt Fornberg and Natasha Flyer. Accuracy of Radial Basis Function Interpolation and Derivative Approximations on 1-D Infinite Grids. *Adv. Comput. Math.*, 23:5–20, 2005. [5](#)
- [39] Bengt Fornberg, Elisabeth Larsson, and Natasha Flyer. Stable Computations with Gaussian Radial Basis Functions in 2-D. Technical Report 2009-020, Uppsala University, August 2009. [22](#)
- [40] Bengt Fornberg, Elisabeth Larsson, and Natasha Flyer. Stable Computations with Gaussian Radial Basis Functions. *SIAM J. on Scientific Computing*, 33(2):869—892, 2011. [5](#), [16](#), [21](#), [33](#), [57](#)
- [41] Bengt Fornberg and Erik Lehto. Stabilization of RBF-generated finite difference methods for convective PDEs. *Journal of Computational Physics*, 230(6):2270–2285, March 2011. [7](#), [21](#), [31](#), [33](#), [38](#), [39](#), [57](#), [61](#), [62](#), [67](#), [70](#)
- [42] Bengt Fornberg and Cécile Piret. A Stable Algorithm for Flat Radial Basis Functions on a Sphere. *SIAM Journal on Scientific Computing*, 30(1):60–80, 2007. [5](#), [16](#), [22](#)
- [43] Bengt Fornberg and Cécile Piret. On Choosing a Radial Basis Function and a Shape Parameter when Solving a Convective PDE on a Sphere. *Journal of Computational Physics*, 227(5):2758 – 2780, 2008. [5](#), [16](#), [17](#), [21](#), [57](#)
- [44] Richard Franke. Scattered Data Interpolation: Tests of Some Method. *Mathematics of Computation*, 38(157):181–200, 1982. [16](#), [21](#)
- [45] E. J. Fuselier and G. B. Wright. A High-Order Kernel Method for Diffusion and Reaction-Diffusion Equations on Surfaces. *ArXiv e-prints*, May 2012. [3](#)
- [46] D Göddeke, SHM Buijssen, H Wobker, and S Turek. GPU Acceleration of an Unmodified Parallel Finite Element Navier–Stokes Solver. *High Performance Computing and Simulation*, 2009. [68](#)

- [47] Prashant Goswami, Philipp Schlegel, Barbara Solenthaler, and Renato Pajarola. Interactive sph simulation and rendering on the gpu. In *Proceedings of the 2010 ACM SIGGRAPH/Eurographics Symposium on Computer Animation*, SCA '10, pages 55–64, Aire-la-Ville, Switzerland, Switzerland, 2010. Eurographics Association. 39
- [48] R Hardy. Multiquadric Equations of Topography and Other Irregular Surfaces. *J. Geophysical Research*, (76):1–905, 1971. 5, 15, 16
- [49] Y. C. Hon and R. Schaback. On unsymmetric collocation by radial basis functions. *Appl. Math. Comput.*, 119(2-3):177–186, 2001. 19, 21, 23
- [50] Yiu-Chung Hon, Kwok Fai Cheung, Xian-Zhong Mao, and Edward J. Kansa. A Multiquadric Solution for the Shallow Water Equations. *ASCE J. Hydraulic Engineering*, 125:524–533, 1999. 20, 21
- [51] A. Iske. *Multiresolution Methods in Scattered Data Modeling*. Springer, 2004. 4, 5, 16, 21, 23, 24
- [52] L. Ivan, H. De Sterck, S. A. Northrup, and C. P. T. Groth. Three-Dimensional MHD on Cubed-Sphere Grids: Parallel Solution-Adaptive Simulation Framework. In *20th AIAA CFD Conference*, number 3382, pages 1325–1342, 2011. 43
- [53] R. Jakob-Chien, J.J. Hack, and D.L. Williamson. Spectral transform solutions to the shallow water test set. *Journal of Computational Physics*, 119(1):164–187, 1995. 56
- [54] Masanori Kameyama, Akira Kageyama, and Tetsuya Sato. Multigrid-based simulation code for mantle convection in spherical shell using Yin–Yang grid. *Physics of the Earth and Planetary Interiors*, 171(1-4):19–32, December 2008. 66
- [55] E J Kansa. Multiquadratics—A scattered data approximation scheme with applications to computational fluid-dynamics. I. Surface approximations and partial derivative estimates. *Computers Math. Applic.*, (19):127–145, 1990. 5, 9, 15, 16, 18, 19, 21, 25, 66
- [56] E J Kansa. Multiquadratics—A scattered data approximation scheme with applications to computational fluid-dynamics. II. Solutions to parabolic, hyperbolic and elliptic partial differential equations. *Computers Math. Applic.*, (19):147–161, 1990. 15, 16, 18, 19, 21, 25
- [57] George Karypis and Vipin Kumar. A fast and high quality multilevel scheme for partitioning irregular graphs. *SIAM Journal on Scientific Computing*, 20(1):359–392, 1999. 43
- [58] Khronos OpenCL Working Group. *The OpenCL Specification (Version: 1.0.48)*, October 2009. 9, 47, 49, 52
- [59] G Kosec and B Šarler. Solution of thermo-fluid problems by collocation with local pressure correction. *International Journal of Numerical Methods for Heat & Fluid Flow*, 18, 2008. 8, 21, 22, 41

- [60] Elisabeth Larsson and Bengt Fornberg. A Numerical Study of some Radial Basis Function based Solution Methods for Elliptic PDEs. *Comput. Math. Appl.*, 46:891–902, 2003. [5](#), [9](#), [16](#), [19](#), [21](#), [22](#), [26](#), [27](#)
- [61] Shaofan Li and Wing K. Liu. *Meshfree Particle Methods*. Springer Publishing Company, Incorporated, 2007. [4](#)
- [62] Yuxu Lin, Chun Chen, Mingli Song, and Zicheng Liu. Dual-RBF based surface reconstruction. *Vis Comput*, 25(5-7):599–607, May 2009. [21](#), [28](#)
- [63] X. Liu, G.R. Liu, K. Tai, and K.Y. Lam. Radial point interpolation collocation method (RPICM) for partial differential equations. *Computers & Mathematics with Applications*, 50(8-9):1425 – 1442, 2005. [21](#), [28](#)
- [64] Dave a. May and Louis Moresi. Preconditioned iterative methods for Stokes flow problems arising in computational geodynamics. *Physics of the Earth and Planetary Interiors*, 171(1-4):33–47, December 2008. [68](#)
- [65] Bryan S. Morse, Terry S. Yoo, Penny Rheingans, David T. Chen, and K. R. Subramanian. Interpolating implicit surfaces from scattered surface data using compactly supported radial basis functions. In *ACM SIGGRAPH 2005 Courses*, SIGGRAPH '05, New York, NY, USA, 2005. ACM. [20](#), [21](#)
- [66] C.T. Mouat and R.K. Beatson. RBF Collocation. Technical Report UCDMS2002/3, Department of Mathematics & Statistics, University of Canterbury, New Zealand, February 2002. [21](#), [22](#), [25](#)
- [67] Ramachandran D. Nair and Christiane Jablonowski. Moving Vortices on the Sphere: A Test Case for Horizontal Advection Problems. *Monthly Weather Review*, 136(2):699–711, February 2008. [56](#)
- [68] R.D. Nair, S.J. Thomas, and R.D. Loft. A discontinuous Galerkin transport scheme on the cubed sphere. *Monthly Weather Review*, 133(4):814–828, April 2005. [56](#), [61](#), [66](#)
- [69] NVidia. *NVIDIA CUDA - NVIDIA CUDA C - Programming Guide version 4.0*, March 2011. [9](#), [49](#), [50](#), [52](#)
- [70] Jia Pan and Dinesh Manocha. Fast GPU-based Locality Sensitive Hashing for K-Nearest Neighbor Computation. *Proceedings of the 19th ACM SIGSPATIAL GIS '11*, 2011. [39](#)
- [71] Portland Group Inc. *CUDA Fortran Programming Guide and Reference*, 1.0 edition, November 2009. [9](#)
- [72] DA Randall, TD Ringler, and RP Heikes. Climate modeling with spherical geodesic grids. *Computing in Science & Engineering*, pages 32–41, 2002. [43](#), [66](#)

- [73] Karl Rupp, Florian Rudolf, and Josef Weinbub. ViennaCL-A High Level Linear Algebra Library for GPUs and Multi-Core CPUs. In *Proc. GPUScA*, pages 51–56, 2010. [43](#), [69](#), [70](#)
- [74] Youcef Saad and Martin H. Schultz. GMRES: A generalized minimal residual algorithm for solving nonsymmetric linear systems. *SIAM J. Sci. Stat. Comput.*, 7(3):856–869, 1986. [70](#), [71](#)
- [75] Yousef Saad. *Iterative Methods for Sparse Linear Systems*. Society for Industrial Mathematics, second edition, 2003. [42](#), [55](#), [77](#), [85](#)
- [76] C. Sanderson. Armadillo: An open source c++ linear algebra library for fast prototyping and computationally intensive experiments. Technical report, NICTA, 2010. [58](#)
- [77] Robert Schaback. Multivariate Interpolation and Approximation by Translates of a Basis Function. In C.K. Chui and L.L. Schumaker, editors, *Approximation Theory VIII–Vol. 1: Approximation and Interpolation*, pages 491–514. World Scientific Publishing Co., Inc, 1995. [5](#), [16](#), [31](#)
- [78] J. Schmidt, C. Piret, B.J. Kadlec, D.A. Yuen, E. Sevre, N. Zhang, and Y. Liu. Simulating Tsunami Shallow-Water Equations with Graphics Accelerated Hardware (GPU) and Radial Basis Functions (RBF). In *South China Sea Tsunami Workshop*, 2008. [7](#), [41](#)
- [79] J. Schmidt, C. Piret, N. Zhang, B.J. Kadlec, D.A. Yuen, Y. Liu, G.B. Wright, and E. Sevre. Modeling of Tsunami Waves and Atmospheric Swirling Flows with Graphics Processing Unit (GPU) and Radial Basis Functions (RBF). *Concurrency and Computat.: Pract. Exper.*, 2009. [7](#), [8](#), [21](#), [41](#), [67](#), [68](#)
- [80] C. Shu, H. Ding, and K. S. Yeo. Local radial basis function-based differential quadrature method and its application to solve two-dimensional incompressible Navier-Stokes equations. *Computer Methods in Applied Mechanics and Engineering*, 192(7-8):941 – 954, 2003. [6](#), [7](#), [21](#), [31](#), [67](#)
- [81] C Shu, H Ding, and N Zhao. Numerical Comparison of Least Square-Based Finite-Difference (LSFD) and Radial Basis Function-Based Finite-Difference (RBFFD) Methods. *Computers and Mathematics with Applications*, 51(8):1297–1310, 2006. [21](#), [22](#), [31](#)
- [82] Ian H. Sloan and Robert S. Womersley. Extremal systems of points and numerical integration on the sphere. *Adv. Comput. Math*, 21:107–125, 2003. [57](#), [63](#)
- [83] D Stevens, H Power, M Lees, and H Morvan. The use of PDE centres in the local RBF Hermitian method for 3D convective-diffusion problems. *Journal of Computational Physics*, 2009. [7](#), [19](#), [21](#), [22](#), [27](#), [28](#), [31](#), [67](#)

- [84] David Stevens, Henry Power, Michael Lees, and Herve Morvan. A Meshless Solution Technique for the Solution of 3D Unsaturated Zone Problems, Based on Local Hermitean Interpolation with Radial Basis Functions. *Transp Porous Med*, 79(2):149–169, Sep 2008. [21](#), [22](#), [28](#)
- [85] David Stevens, Henry Power, and Herve Morvan. An order-N complexity meshless algorithm for transport-type PDEs, based on local Hermitian interpolation. *Engineering Analysis with Boundary Elements*, 33(4):425 – 441, 2008. [21](#), [22](#), [28](#), [41](#)
- [86] A. I. Tolstykh and D. A. Shirobokov. On using radial basis functions in a “finite difference mode” with applications to elasticity problems. In *Computational Mechanics*, volume 33, pages 68 – 79. Springer, December 2003. [6](#), [31](#), [67](#)
- [87] A.I. Tolstykh. On using RBF-based differencing formulas for unstructured and mixed structured-unstructured grid calculations. In *Proceedings of the 16 IMACS World Congress, Lausanne*, pages 1–6, 2000. [6](#), [30](#), [31](#), [67](#)
- [88] Robert Vertnik and Božidar Šarler. Meshless local radial basis function collocation method for convective-diffusive solid-liquid phase change problems. *International Journal of Numerical Methods for Heat & Fluid Flow*, 16(5):617–640, 2006. [21](#), [28](#)
- [89] J.S. Vetter, R. Glassbrook, J. Dongarra, K. Schwan, B. Loftis, S. McNally, J. Meredith, J. Rogers, P. Roth, K. Spafford, and S. Yalamanchili. Keeneland: Bringing heterogeneous GPU computing to the computational science community. *IEEE Computing in Science and Engineering*, 13(5):90–95, 2011. [10](#)
- [90] B. Šarler and R. Vertnik. Meshfree Explicit Local Radial Basis Function Collocation Method for Diffusion Problems. *Computers and Mathematics with Applications*, 51(8):1269–1282, 2006. [21](#), [28](#)
- [91] J. G. Wang and G. R. Liu. A point interpolation meshless method based on radial basis functions. *Int. J. Numer. Methods Eng.*, 54, 2002. [21](#), [28](#)
- [92] M Weiler, R Botchen, S Stegmaier, T Ertl, J Huang, Y Jang, DS Ebert, and KP Gaither. Hardware-Assisted Feature Analysis and Visualization of Procedurally Encoded Multifield Volumetric Data. *IEEE Computer Graphics and Applications*, 25(5):72–81, 2005. [8](#)
- [93] Holger Wendland. Piecewise polynomial, positive definite and compactly supported radial functions of minimal degree. *Advances in Computational Mathematics*, 4:389–396, 1995. 10.1007/BF02123482. [6](#)
- [94] Grady Wright and Bengt Fornberg. Scattered node mehrstellenverfahren-type formulas generated from radial basis functions. In *The International Conference on Computational Methods*, December 15-17 2004. [21](#), [31](#)
- [95] Grady B. Wright. *Radial Basis Function Interpolation: Numerical and Analytical Developments*. PhD thesis, University of Colorado, 2003. [6](#), [21](#), [30](#), [31](#), [33](#), [67](#)

- [96] Grady B. Wright, Natasha Flyer, and David A. Yuen. A hybrid radial basis function–pseudospectral method for thermal convection in a 3-d spherical shell. *Geochim. Geophys. Geosyst.*, 11(Q07003):18 pp., 2010. [5](#), [15](#), [20](#), [21](#), [28](#), [36](#), [66](#), [67](#), [75](#)
- [97] Grady B. Wright and Bengt Fornberg. Scattered node compact finite difference-type formulas generated from radial basis functions. *J. Comput. Phys.*, 212(1):99–123, 2006. [21](#), [22](#), [31](#), [33](#), [70](#)
- [98] Z M Wu. Hermite-Birkhoff interpolation of scattered data by radial basis functions. *Approx. Theory Appl.*, (8):1–10, 1992. [19](#)
- [99] Xuan Yang, Zhixiong Zhang, and Ping Zhou. Local Elastic Registration of Multimodal Medical Image Using Robust Point Matching and Compact Support RBF. In *BMEI '08: Proceedings of the 2008 International Conference on BioMedical Engineering and Informatics*, pages 113–117, Washington, DC, USA, 2008. IEEE Computer Society. [21](#), [28](#)
- [100] Rio Yokota, L.A. Barba, and Matthew G. Knepley. PetRBF — A parallel O( $N$ ) algorithm for radial basis function interpolation with Gaussians. *Computer Methods in Applied Mechanics and Engineering*, 199(25-28):1793–1804, May 2010. [8](#), [41](#), [68](#), [69](#)
- [101] Hao Zhang and Marc G. Genton. Compactly supported radial basis function kernels, 2004. [21](#)