




US 20170344721A1

(19) **United States**(12) **Patent Application Publication**
McIntyre et al.(10) **Pub. No.: US 2017/0344721 A1**(43) **Pub. Date: Nov. 30, 2017**(54) **METHOD AND DEVICE FOR DISPLAYING
PREDICTED VOLUME OF INFLUENCE****Publication Classification**(71) Applicant: **The Cleveland Clinic Foundation,**
Cleveland, OH (US)(72) Inventors: **Cameron C. McIntyre**, Lakewood, OH
(US); **Christopher R. Butson**,
Wauwatosa, WI (US); **John D. Hall**,
Grand Rapids, MI (US); **Jaimie M.**
Henderson, Redwood City, CA (US)(51) **Int. Cl.****G06F 19/00** (2011.01)**A61B 90/00** (2006.01)**A61N 1/36** (2006.01)**A61N 1/05** (2006.01)(52) **U.S. Cl.**CPC **G06F 19/3437** (2013.01); **A61N 1/36082**(2013.01); **A61B 90/37** (2016.02); **A61N****1/36135** (2013.01); **A61N 1/36146** (2013.01);**A61B 2090/364** (2016.02); **A61N 1/0534**(2013.01); **A61N 1/0539** (2013.01); **G06F****19/321** (2013.01)(21) Appl. No.: **15/666,364**(22) Filed: **Aug. 1, 2017****Related U.S. Application Data**(63) Continuation of application No. 14/504,621, filed on
Oct. 2, 2014, now Pat. No. 9,760,688, which is a
continuation of application No. 13/573,439, filed on
Sep. 14, 2012, now Pat. No. 8,983,155, which is a
continuation of application No. 12/287,389, filed on
Oct. 9, 2008, now Pat. No. 8,379,952, which is a
continuation of application No. 12/070,521, filed on
Feb. 19, 2008, now Pat. No. 7,904,134, which is a
continuation of application No. 10/885,982, filed on
Jul. 7, 2004, now Pat. No. 7,346,382.

(57)

ABSTRACT

This document discusses, among other things, brain stimulation models, systems, devices, and methods, such as for deep brain stimulation (DBS) or other electrical stimulation. In an example, volumetric imaging data representing an anatomical volume of a brain of a patient can be obtained and transformed to brain atlas data. A patient-specific brain atlas can be created using the inverse of the transformation to map the brain atlas data onto the volumetric imaging data and a volume of influence can be calculated using the patient-specific brain atlas. In certain examples, the volume of influence can include a predicted volume of tissue affected by an electrical stimulation delivered by an electrode at a corresponding at least one candidate electrode target location.

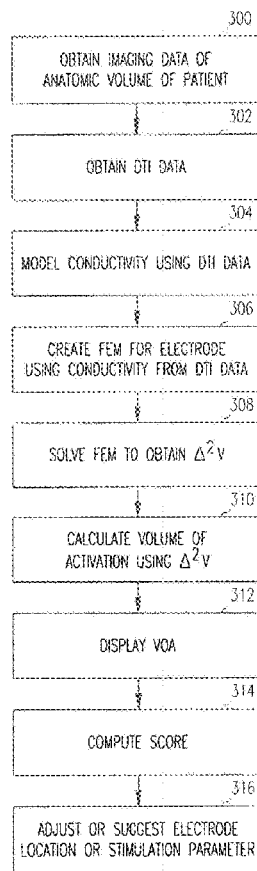

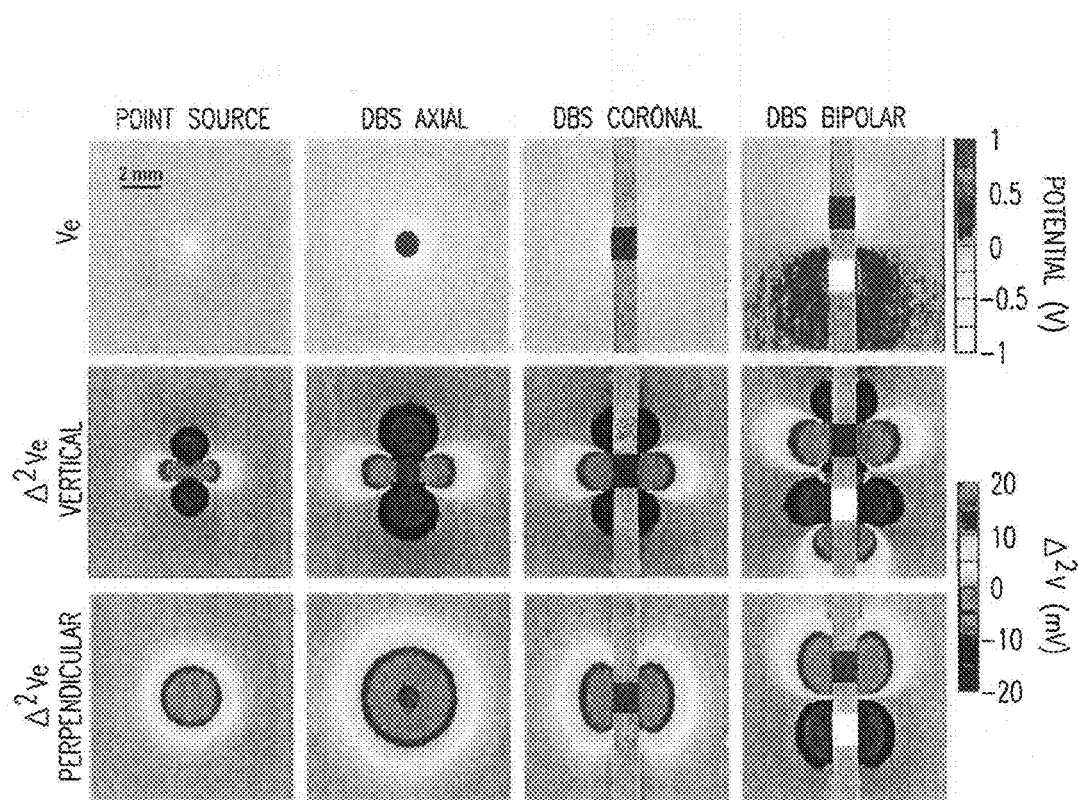


FIG. 1A

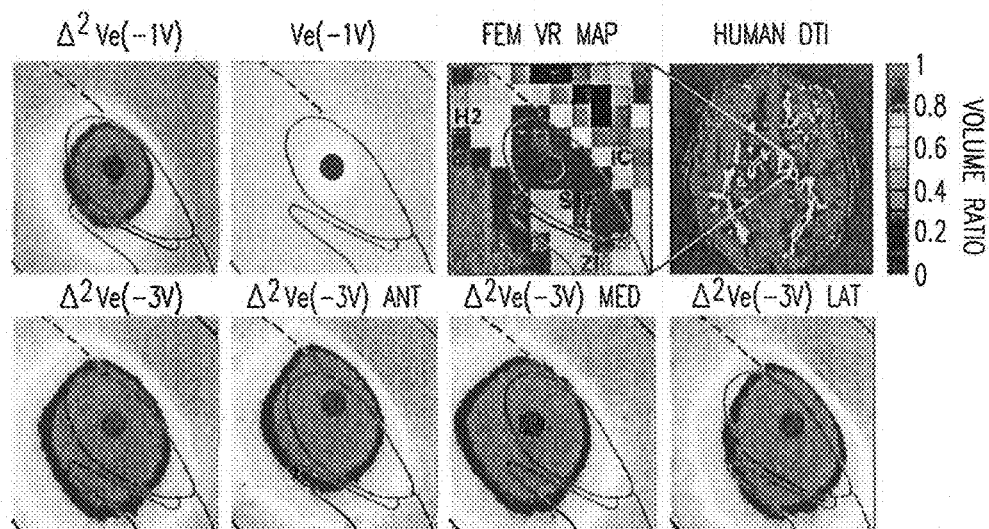


FIG. 1B

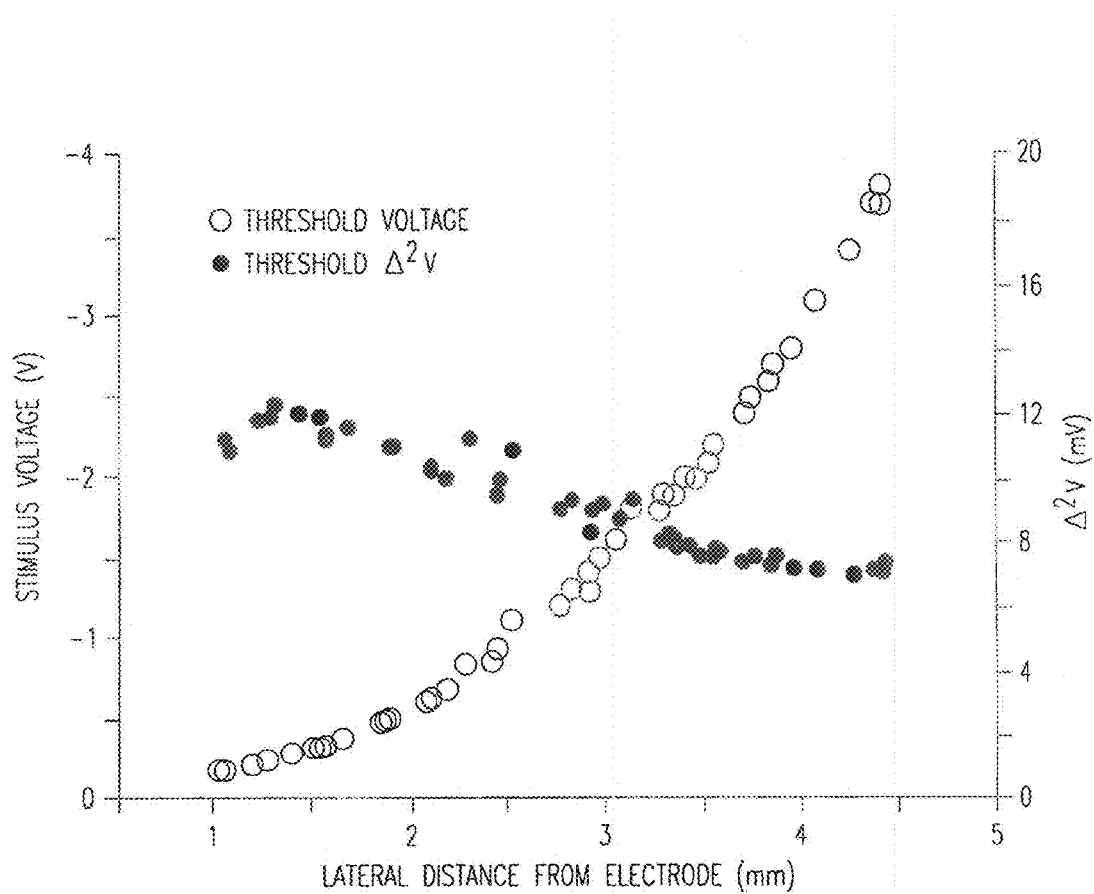


FIG. 2

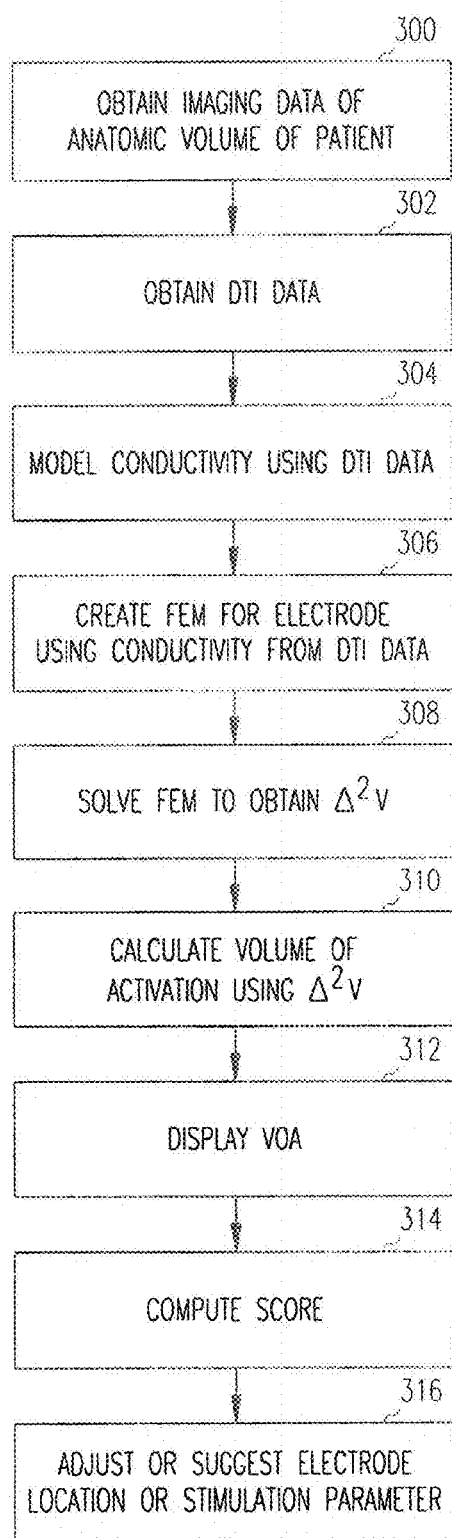


FIG. 3

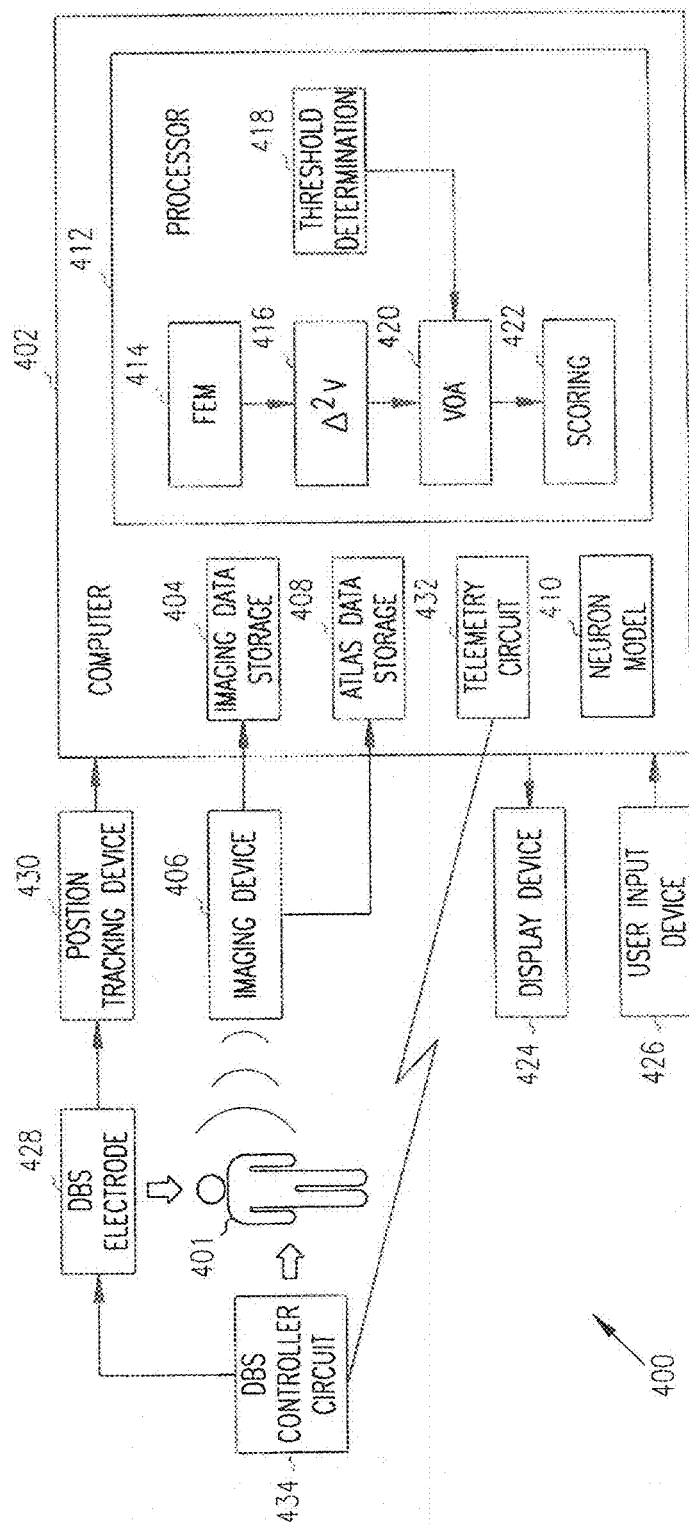


FIG. 4

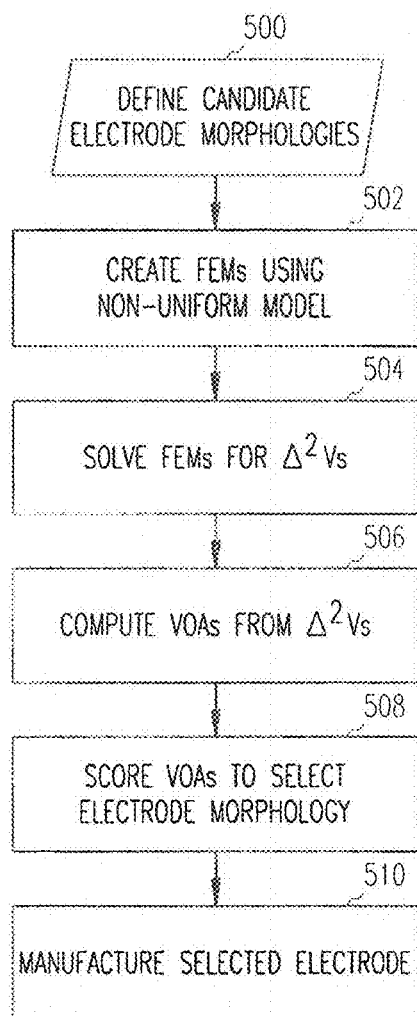


FIG. 5

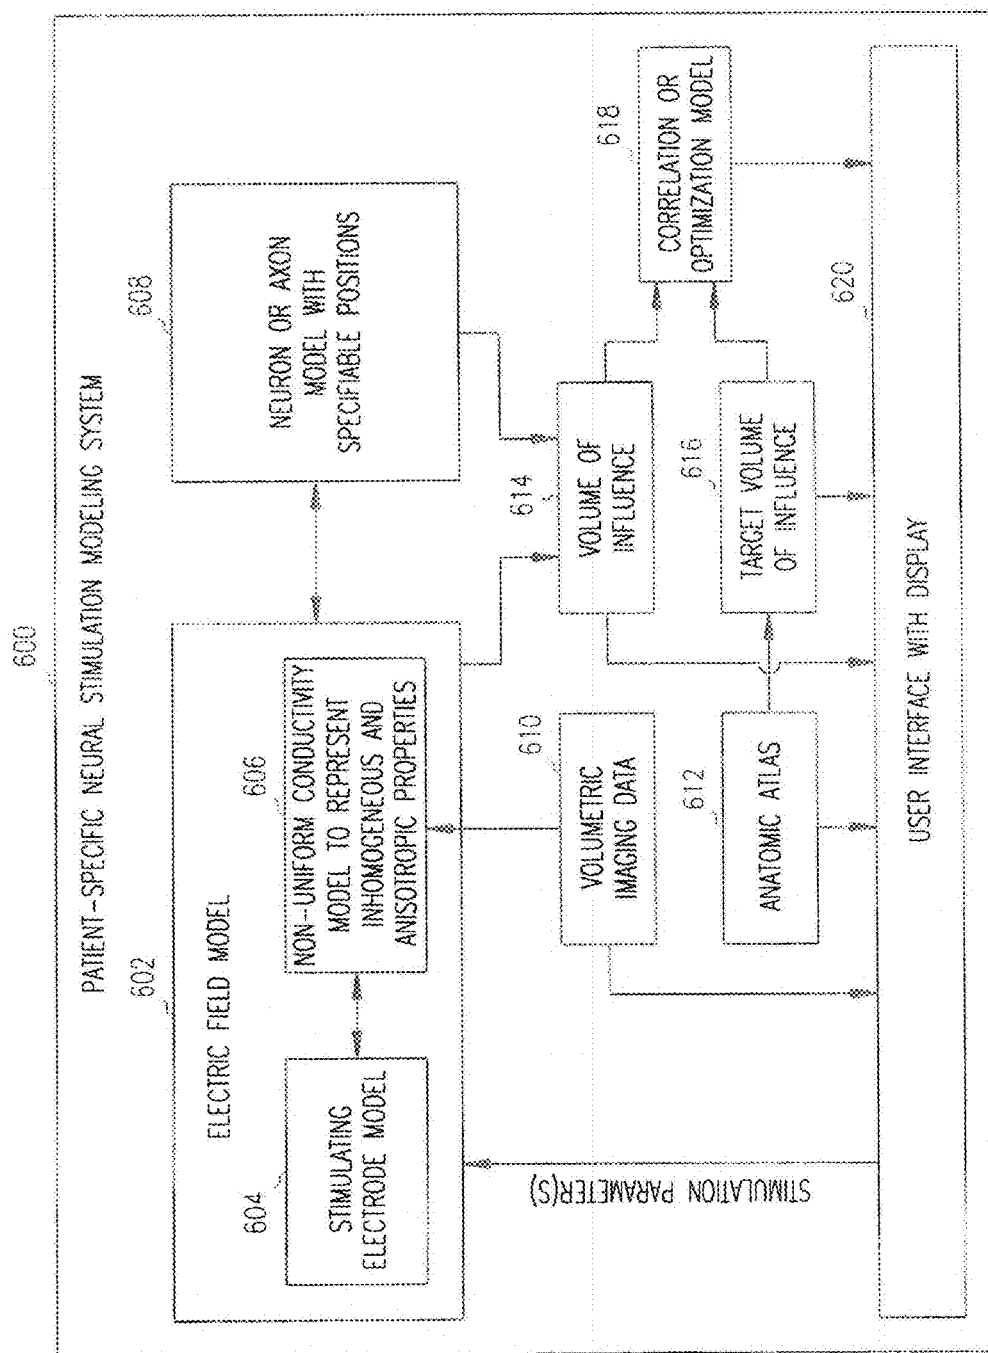


FIG. 6

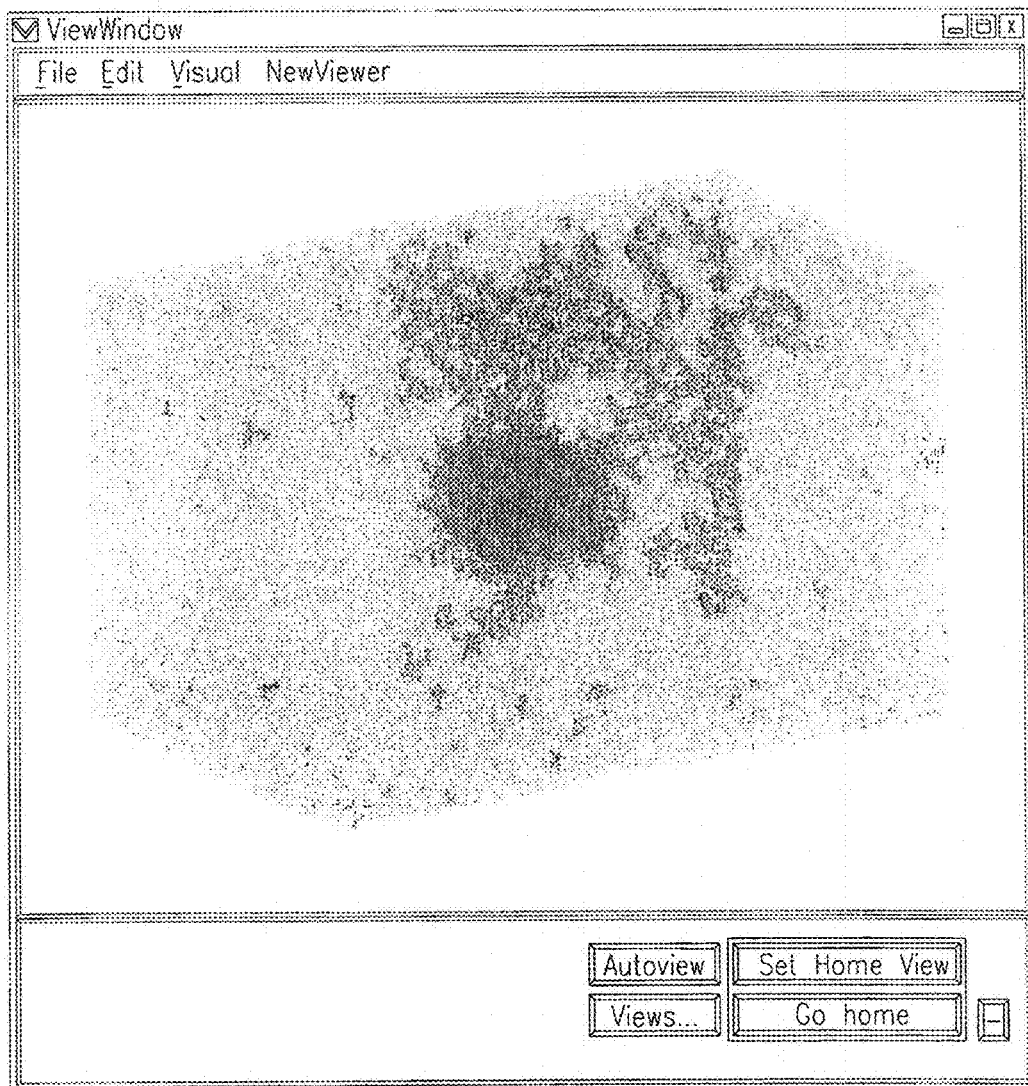


FIG. 7

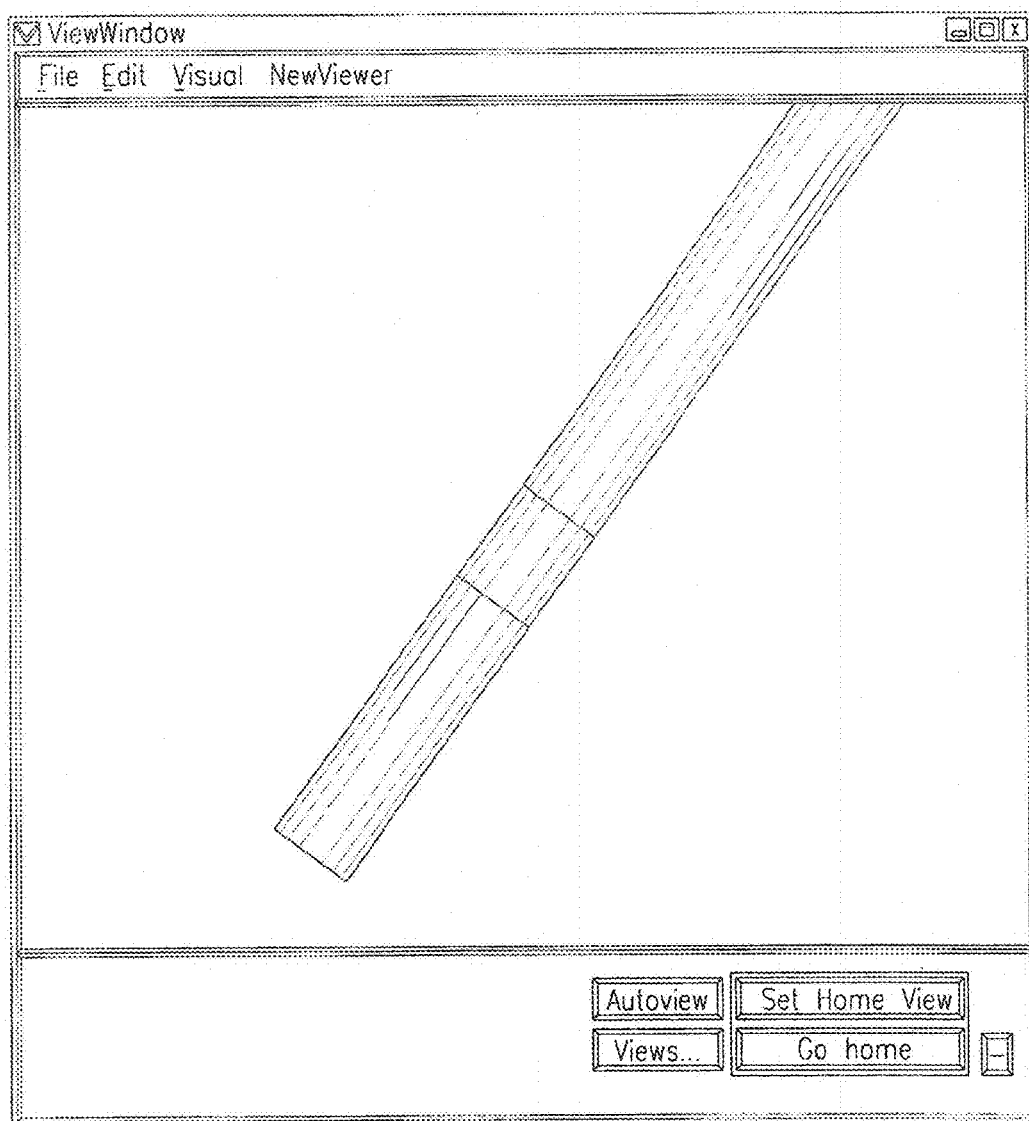


FIG. 8

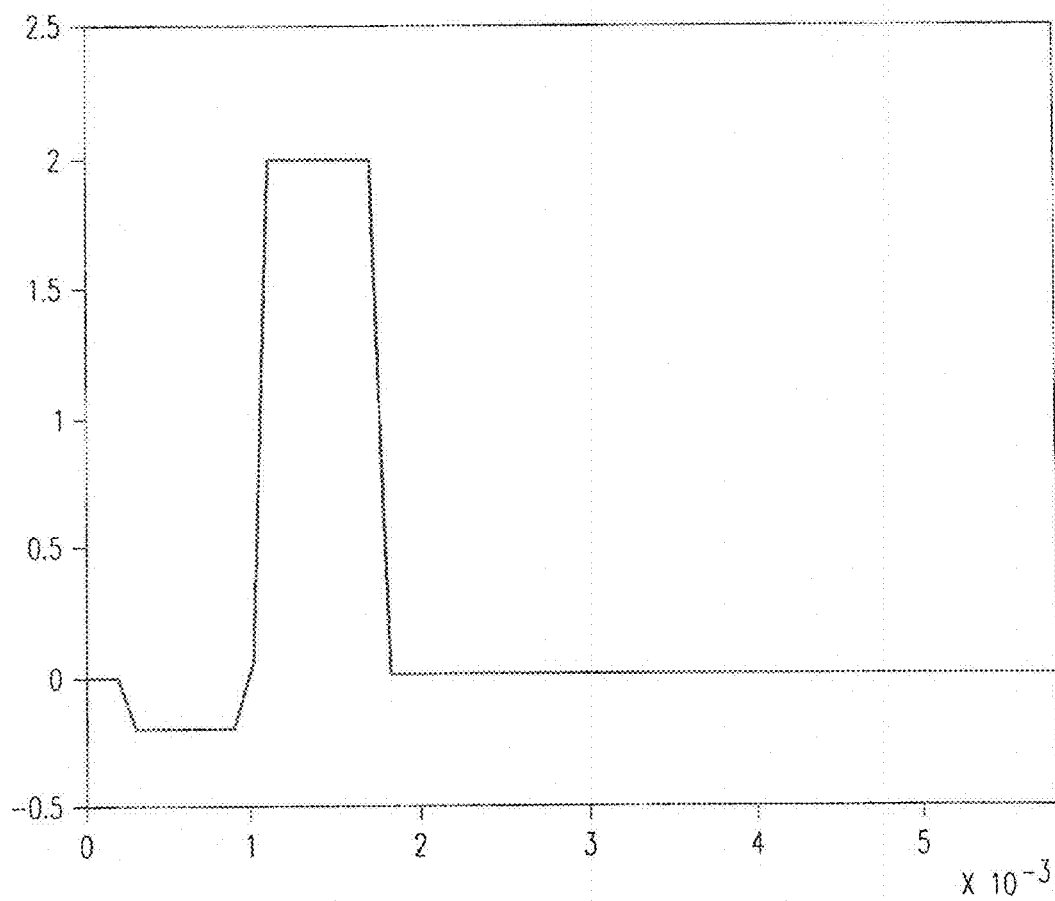


FIG. 9

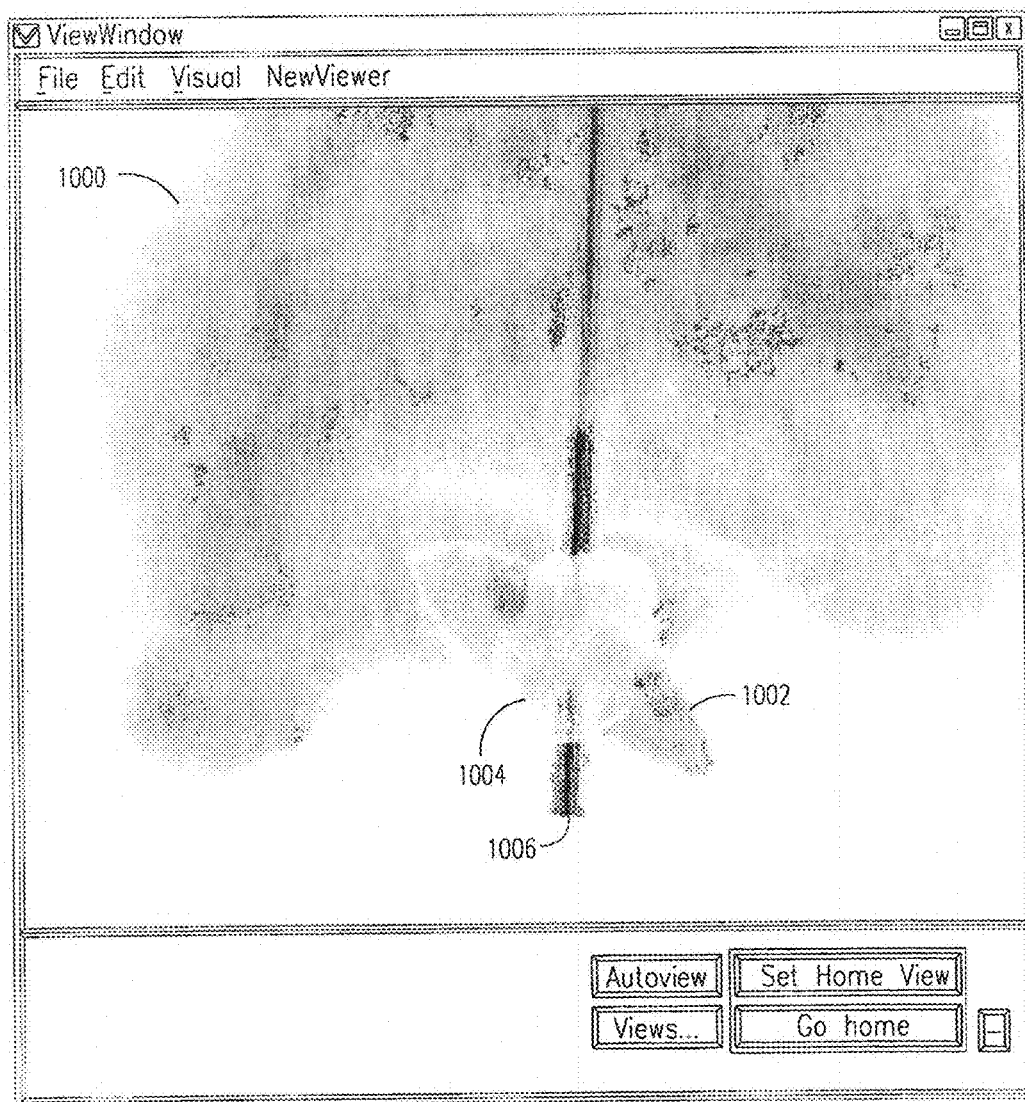


FIG. 10

METHOD AND DEVICE FOR DISPLAYING PREDICTED VOLUME OF INFLUENCE

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application is a continuation of U.S. application Ser. No. 12/070,521, filed Feb. 19, 2008, which is hereby incorporated herein by reference in its entirety.

TECHNICAL FIELD

[0002] This patent application pertains generally to neurosurgery and more particularly, but not by way of limitation, to brain stimulation models, systems, devices, and methods.

BACKGROUND

[0003] High frequency deep brain stimulation (DBS), such as of the thalamus or basal ganglia, represents a clinical technique for the treatment of disorders such as essential tremor and Parkinson's disease (PD). Pilot studies have also begun to examine the utility of DBS for treating dystonia, epilepsy, and obsessive-compulsive disorder. However, understanding of the therapeutic mechanisms of action remains elusive. It is also unclear what stimulation parameters, electrode geometries, or electrode locations are better suited for existing or future uses of DBS.

[0004] A DBS procedure typically involves first obtaining preoperative images of the patient's brain, such as by using a computed tomography (CT) scanner device, a magnetic resonance imaging (MRI) device, or any other imaging modality. This sometimes involves first affixing to the patient's skull spherical or other fiducial markers that are visible on the images produced by the imaging modality. The fiducial markers help register the preoperative images to the actual physical position of the patient in the operating room during the later surgical procedure.

[0005] After the preoperative images are acquired by the imaging modality, they are then loaded onto an image-guided surgical (IGS) workstation, such as the StealthStation® from the Surgical Navigation Technologies, Inc. (SNT) subsidiary of Medtronic, Inc., for example. Using the preoperative images being displayed on the IGS workstation, the neurosurgeon can select a target region within the brain, an entry point on the patient's skull, and a desired trajectory between the entry point and the target region. The entry point and trajectory are typically carefully selected to avoid intersecting or otherwise damaging certain nearby critical brain structures.

[0006] In the operating room, the patient is immobilized and the patient's actual physical position is registered to the preoperative images displayed on the IGS workstation, such as by using a remotely detectable IGS wand. In one example, the physician marks the entry point on the patient's skull, drills a burr hole at that location, and affixes a trajectory guide device about the burr hole. The trajectory guide device includes a bore that can be aimed using the IGS wand to obtain the desired trajectory to the target region. After aiming, the trajectory guide is locked to preserve the aimed trajectory toward the target region.

[0007] After the aimed trajectory has been locked in using the trajectory guide, a microdrive introducer is used to insert the surgical instrument along the trajectory toward the target region of the brain. The surgical instrument may include,

among other things, a recording electrode leadwire, for recording intrinsic electrical brain signals, a stimulation electrode leadwire, for providing electrical energy to the target region of the brain, or associated auxiliary guide catheters for steering a primary instrument toward target region of the brain. The recording electrode leadwire is typically used first to confirm, by interpreting the intrinsic electrical brain signals, that a particular location along the trajectory is indeed the desired target region of the brain. The stimulation electrode leadwire, which typically includes multiple closely-spaced electrically independent stimulation electrode contacts, is then introduced to deliver the therapeutic DBS stimulation to the target region of the brain. The stimulation electrode leadwire is then immobilized, such as by using an instrument immobilization device located at the burr hole entry in the patient's skull. The actual DBS therapy is often not initiated until a time period of about two-weeks to one month has elapsed. This is due primarily to the acute reaction of the brain tissue to the introduced DBS stimulation electrode leadwire (e.g., the formation of adjacent scar tissue), and stabilization of the patient's disease symptoms. At that time, a particular one of the stimulation electrode contacts is then selected for delivering the therapeutic DBS stimulation, and other DBS parameters are adjusted to achieve an acceptable level of therapeutic benefit. However, these parameter selections are typically currently achieved via arbitrary trial-and-error, without visual aids of the electrode location in the tissue medium or computational models of the volume of tissue influenced by the stimulation.

[0008] The subthalamic nucleus (STN) represents the most common target for DBS technology. Clinically effective STN DBS for PD has typically used electrode contacts in the anterior-dorsal STN. However, STN DBS exhibits a low threshold for certain undesirable side effects, such as tetanic muscle contraction, speech disturbance and ocular deviation. Highly anisotropic fiber tracks are located about the STN. Such nerve tracks exhibit high electrical conductivity in a particular direction. Activation of these tracks has been implicated in many of the DBS side effects. However, there exists a limited understanding of the neural response to DBS. The three-dimensional (3D) tissue medium near the DBS electrode typically includes both inhomogeneous and anisotropic characteristics. Such complexity makes it difficult to predict the particular volume of tissue influenced by DBS.

[0009] A treating physician typically would like to tailor the DBS parameters (such as which one of the stimulating electrodes to use, the stimulation pulse amplitude, the stimulation pulse width, or the stimulation frequency) for a particular patient to improve the effectiveness of the DBS therapy. This is a complex problem because there are several different DBS parameters than can be varied. Because selecting a particular DBS electrode contact and parameter combination setting is typically a trial-and-error process, it is difficult and time-consuming and, therefore, expensive. Moreover, it may not necessarily result in the best possible therapy or in avoiding the above-mentioned undesirable side effects. Therefore, there is a need to provide help to speed or otherwise improve this DBS parameter selection process or to otherwise enhance DBS techniques.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] The patent or application file contains at least one drawing executed in color. Copies of this patent or patent

application publication with color drawing(s) will be provided by the Office upon request and payment of the necessary fee.

[0011] In the drawings, which are not necessarily drawn to scale, like numerals describe substantially similar components throughout the several views. Like numerals having different letter suffixes represent different instances of substantially similar components. The drawings illustrate generally, by way of example, but not by way of limitation, various embodiments discussed in the present document.

[0012] FIG. 1A is a series of color panels illustrating examples of modeled potential distributions and second differences of potential distributions for various electrode configurations.

[0013] FIG. 1B is a series of color panels illustrating examples of a human diffusion tensor image, a volume ratio map representing a portion thereof, and a modeled potential distribution and second differences of potential distributions for various electrode positions.

[0014] FIG. 2 is a graph illustrating an example of lateral distance from an electrode plotted on a x-axis, and axon stimulating threshold voltage plotted on a first y-axis, and the axon stimulating second difference threshold voltage plotted on a second y-axis.

[0015] FIG. 3 is a flow chart illustrating generally one example of a method of using a model to calculate a volume of activation, as discussed above.

[0016] FIG. 4 is a block diagram illustrating generally one conceptualization of a system for performing at least some of the methods for deep brain stimulation (DBS) or other stimulation of a patient.

[0017] FIG. 5 is a flow chart illustrating generally one example of a method of using a model to calculate a volume of activation (VOA), and using the VOA to select a particular electrode morphology.

[0018] FIG. 6 is a block diagram illustrating generally one example of a computer-assisted patient-specific neural stimulation modeling system.

[0019] FIG. 7 is a computer display screenshot illustrating one example of a multi-resolution, finite-element tetrahedral mesh.

[0020] FIG. 8 is a computer display screenshot illustrating one example of a stimulation electrode shaft.

[0021] FIG. 9 is a voltage vs. time graph of an exemplary stimulation waveform.

[0022] FIG. 10 is a computer display screenshot illustrating one example of a displayed the target region together with the model-calculated volume of influence.

DETAILED DESCRIPTION

[0023] The following detailed description includes references to the accompanying drawings, which form a part of the detailed description. The drawings show, by way of illustration, specific embodiments in which the invention may be practiced. These embodiments, which are also referred to herein as “examples,” are described in enough detail to enable those skilled in the art to practice the invention. The embodiments may be combined, other embodiments may be utilized, or structural, logical and electrical changes may be made without departing from the scope of the present invention. The following detailed description is, therefore, not to be taken in a limiting sense, and the scope of the present invention is defined by the appended claims and their equivalents.

[0024] In this document, the terms “a” or “an” are used, as is common in patent documents, to include one or more than one. In this document, the term “or” is used to refer to a nonexclusive or, unless otherwise indicated. Furthermore, all publications, patents, and patent documents referred to in this document are incorporated by reference herein in their entirety, as though individually incorporated by reference. In the event of inconsistent usages between this document and those documents so incorporated by reference, the usage in the incorporated reference(s) should be considered supplementary to that of this document; for irreconcilable inconsistencies, the usage in this document controls.

1. Modeling Techniques

[0025] A. Introduction

[0026] One fundamental step toward understanding the neural response to DBS is characterizing the electric field generated by a stimulating electrode. The electric field is dependent on the shape of the electrode and the electrical conductivity of the tissue medium. DBS electrodes are three-dimensional structures and the tissue conductivity of the central nervous system (CNS) is both inhomogeneous (dependent on location) and anisotropic (dependent on direction). The tissue inhomogeneity and anisotropy surrounding the DBS electrode can alter the shape of the electric field and the subsequent neural response to stimulation. Therefore, in one example, we employed diffusion tensor imaging (DTI) to estimate the electrical conductivity tensor of the tissue medium surrounding one or more DBS electrodes. We incorporated the tissue conductivity data into a finite element model (FEM) tailored to accurately represent the structure of the particular clinical DBS electrode and surrounding tissue medium. We then used these models to predict the volume of tissue likely to be affected by typical stimulation parameters (e.g., stimulation pulse amplitude of between about 1 and 3 Volts, a stimulation pulsewidth of about 0.1 ms, and a stimulation frequency of about 150 Hz). We refer to this volume of tissue likely to be affected as the “volume of influence” (VOI) or “volume of activation” (VOA).

[0027] B. Exemplary Methods

[0028] We developed, among other things, three-dimensional finite element models (FEMs) of the Medtronic 3387-89 DBS lead (Medtronic, Inc., Minneapolis, Minn.). We examined at least two representations of the nearby tissue electrical properties. In one example, the finite element model used a constant homogenous isotropic tissue conductivity of about 0.3 S/m. In another example, the finite element model explicitly represented tissue anisotropy with conductivity tensors (a) derived from diffusion tensor magnetic resonance images. Both examples of finite element models used an about 0.2 mm thick sheath of encapsulation tissue (modeled with a conductivity of about 0.15 S/m) about the DBS electrode leadwire shaft. In one example, the FEM was implemented using 231,404 elements in a commercially available software package such as FEMLAB 2.3 (COMSOL Inc., Burlington, Mass.). In one example, a 100×100×100 mm³ cube about the electrode contact was used as a FEM model boundary, which was set to a boundary condition of 0 V. In this example of the FEM model, the electrode contact was set to a boundary condition of the DBS stimulus voltage. The potential distribution (V_e) generated in the tissue medium was calculated from the Laplace equation:

$$\nabla \cdot \sigma \nabla V_e = 0, \quad (\text{Eq. 1})$$

using a Good Broyden iterative solver and algebraic multi-grid preconditioner. Doubling the density of the FEM mesh or doubling the distance of the boundary from the electrode (i.e., quadrupling the size of the $100 \times 100 \times 100 \text{ mm}^3$ tissue box) yielded a potential distribution V_e that differed only by less than 2% when compared to the default model.

[0029] Diffusion tensor imaging (DTI) characterizes the diffusional behavior of water in tissue on a voxel-by-voxel basis in terms of a matrix quantity from which the diffusion coefficient can be obtained corresponding to any direction in space. The electrical conductivity tensor (σ) of a tissue medium is obtainable from the corresponding diffusion tensor (D). The hypothesized relationship between electrical conductivity and water diffusion in tissue is prompted by the observation that in a structured medium the two processes are related through mutual respect for the boundary conditions imposed by the tissue geometry. In our example, the conductivity tensor σ was directly solved for at each voxel using a linear transform of D :

$$\sigma = (\sigma_e/d_e)D, \quad (\text{Eq. 2})$$

where σ_e is the effective extracellular conductivity and d_e is the effective extracellular diffusivity. Our example used a ratio of $(\sigma_e/d_e = 0.736 \text{ (S-s)/mm}^2)$ as determined from published experimental and empirical data.

[0030] In one example, the DTI data was acquired using a 1.5 T Philips Gyroscan NT using a single-shot echo-planar imaging (EPI) sequence with the SENSE parallel imaging scheme (SENSEitivity Encoding, reduction factor $R=2.5$). In this example, the imaging matrix was 96×96 with a field of view of $240 \times 240 \text{ mm}$, which was zero-filled to 256×256 . In this example, axial slices of 2.5 mm thickness were acquired parallel to the anterior-posterior commissure line. In this example, the diffusion weighting was encoded along 30 independent orientations and the b-value was 700 s/mm^2 . In this example, the dorsal STN was located in axial slices using stereotactic coordinates and co-registration with the Schlattenbrand and Bailey [1959] brain atlas. We extracted the DTI data from the $10 \times 10 \text{ mm}$ region that surrounded our electrode location in the STN (in this example, the electrode was located 2 mm ventral, 10 mm lateral, and 1 mm posterior to the mid-commissural point). We then transformed the diffusion tensors to conductivity tensors, as discussed above. We then incorporated the conductivity tensors into co-registered subdomains in the FEM. Then, using the FEM, we solved for the potential distribution generated in the tissue medium by DBS, as discussed above.

[0031] C. Exemplary Results

[0032] Using the exemplary methods discussed above, we compared the electric field of a theoretical point source, a DBS electrode in an isotropic medium, and a DBS electrode in an anisotropic medium representative of the STN and surrounding tissue structures.

[0033] FIG. 1A shows examples of the potential distribution (V_e) generated in the tissue medium for each of these models (first row of FIG. 1A) as well as the second difference of the potential ($\Delta^2 V_e$) evaluated at 0.5 mm increments along different directions (i.e., $\Delta^2 V_e = V_e[n+0.5 \text{ mm}] + V_e[n-0.5 \text{ mm}] - 2 \cdot V_e[n]$). The $\Delta^2 V_e$ along individual neuronal processes induces transmembrane currents. The induced transmembrane currents result in direct polarization of the neuron by the applied electric field. The second difference $\Delta^2 V_e$ has both positive and negative components along any

given direction. This results in regions of both depolarization (positive $\Delta^2 V_e$) and hyperpolarization (negative $\Delta^2 V_e$) in neurons near the electrode, as illustrated in FIG. 1A.

[0034] FIG. 1A illustrates examples of a potential distribution (V_e) and its second difference ($\Delta^2 V_e$). FIG. 1A compares (for an isotropic tissue medium) a monopolar point source (-1 mA stimulation current; illustrated in the left column of FIG. 1A), a monopolar DBS leadwire electrode (-1 V stimulation voltage, illustrated in the middle two columns of FIG. 1A), and a bipolar DBS leadwire with two electrode contacts ($\pm 1 \text{ V}$ stimulation voltages, respectively, illustrated in the right column of FIG. 1A).

[0035] The top row of FIG. 1A shows V_e over a $10 \times 10 \text{ mm}^2$ area, with lighter color tones indicating a more negative potential, and darker color tones indicating a more positive potential.

[0036] The middle row of FIG. 1A shows $\Delta^2 V_e$ evaluated along a vertical direction relative to the displayed plane in the top row of FIG. 1A. The bottom row of FIG. 1A shows $\Delta^2 V_e$ evaluated along a direction perpendicular to the displayed plane in the top row of FIG. 1A. Positive $\Delta^2 V_e$ is representative of a depolarizing influence, which are indicated by redder color tones. Negative $\Delta^2 V_e$ is representative of a hyperpolarizing influence, which are indicated by bluer color tones. $\Delta^2 V_e$ values $> 20 \text{ mV}$ and $< -20 \text{ mV}$ are clipped to provide better resolution of the values of interest.

[0037] For the point source, $\Delta^2 V_e$ vertical (i.e., the left middle picture of FIG. 1A) has hyperpolarized top and bottom lobes and depolarized left and right lobes. For the axial view of the monopolar DBS source, $\Delta^2 V_e$ vertical (i.e., the second from left picture in the middle row of FIG. 1A) has hyperpolarized top and bottom lobes and depolarized left and right lobes. For the coronal view of the monopolar DBS source, $\Delta^2 V_e$ vertical (i.e., the second from right picture in the middle row of FIG. 1A) has hyperpolarized top and bottom lobes and depolarized left and right lobes. For the bipolar DBS source, $\Delta^2 V_e$ vertical (i.e., the right-most picture in the middle row of FIG. 1A) exhibits, for the upper (positive) electrode, hyperpolarized top and bottom lobes and depolarized left and right lobes. The bottom lobe is smaller than the top lobe. In this same picture, the lower (negative) electrode exhibits depolarized top and bottom lobes and hyperpolarized left and right lobes. The top lobe is smaller than the bottom lobe. The $\Delta^2 V_e$ perpendicular illustrated by the bottom row of FIG. 1A illustrates depolarization, except for the lower (negative) electrode of the DBS bipolar source in the right-most picture, which exhibits hyperpolarized lobes.

[0038] FIG. 1B illustrates an example of a monopolar DBS source in an anisotropic medium that is representative of the STN and surrounding tissue structures. The right two panels of the top row of FIG. 1B show the volume ratio (VR), that is, $\lambda_1 \lambda_2 \lambda_3 / [(\lambda_1 + \lambda_2 + \lambda_3)/3]^3$. The VR is a scalar that quantifies the degree of anisotropy in each voxel using the eigenvalues ($\lambda_1, \lambda_2, \lambda_3$) of the diffusion tensor, such as for the entire axial slice of the patient's brain (illustrated in the far right panel of the top row of FIG. 1B) and for the 10×10 region about the STN that was used in the FEM (illustrated in the middle right panel of the top row of FIG. 1B). For this 10×10 region, dark overlaid lines indicate, for reference purposes, the representative anatomical location of the STN as obtained using the Schlattenbrand and Bailey brain atlas or the like.

[0039] In the example of FIG. 1B, the middle left panel of the top row shows V_e generated from a -1 V stimulus from a monopolar DBS source. The far left panel in the top row of FIG. 1B shows Δ^2V_e evaluated along the direction perpendicular to the displayed plane in the middle left panel of the top row of FIG. 1B for a -1 V stimulus. The bottom row of FIG. 1B shows Δ^2V_e for a -3 V stimulus with the electrode located in the anterior-dorsal STN (far left panel of the bottom row of FIG. 1B), located 1 mm anterior (middle left panel of the bottom row of FIG. 1B), 1 mm medial (middle right panel of the bottom row of FIG. 1B), and 1 mm lateral (far right panel of the bottom row of FIG. 1B).

[0040] Because Δ^2V_e represents the effective volume of activation of nearby tissue, this model can be used to adjust the electrode location or stimulation parameters to obtain a desired volume of activation for the DBS stimulation, such as to activate substantially the entire STN, as illustrated by the location and the -3 V stimulation in the bottom far right panel of FIG. 1B, for example.

[0041] During extracellular stimulation of the CNS, axonal elements typically represent the most excitable components of neurons near the electrode. Evaluation of Δ^2V_e can provide qualitative predictions on the likelihood of neural activation by an extracellular source. Therefore, to provide a quantitative reference to the Δ^2V_e data in FIGS. 1A and 1B, we used the 5.7 μ m diameter myelinated axon model from Cameron C. McIntyre et al., "Modeling the Excitability of Mammalian Nerve Fibers: Influence of Afterpotentials on the Recovery Cycle," J. Neurophysiology, Vol. 87, February 2002, pp. 995-1006, which is incorporated herein by reference in its entirety, to draw correlations between axonal threshold and Δ^2V_e . (Alternatively, instead of using an axon model, a more detailed neuronal model could be used, such as described in Cameron C. McIntyre et al., "Cellular Effects of Deep Brain Stimulation: Model-Based Analysis of Activation and Inhibition," J. Neurophysiology 91: 1457-1469 (2004), which is incorporated by reference herein in its entirety). A Δx of 0.5 mm was used in evaluating Δ^2V_e as this distance represents the internodal spacing of the 5.7 μ m fiber axon model. Fifty modeled axons oriented parallel to the electrode shaft were randomly positioned in the tissue medium surrounding the electrode. Then, the Δ^2V_e was calculated for threshold stimulation of the modeled axons. The results are illustrated in FIG. 2.

[0042] FIG. 2 is a graph that illustrates generally one example of a current distance relationship of large diameter axons during DBS. In the example of FIG. 2, a threshold stimulus amplitude was calculated for fifty 5.7 μ m diameter myelinated axons to follow a 150 Hz train of 0.1 ms duration DBS stimulation pulses as a function of their distance from the DBS electrode. In this example, the axons were randomly positioned in the tissue medium and oriented parallel to the electrode shaft. The second difference of the potential distribution ($\Delta x=0.5$ mm) at threshold was calculated for each axon along its path length and at the point in axial plane that slices through the center of the stimulating contact (e.g., [Δ^2V_e perpendicular, DBS axial] of FIG. 1A).

[0043] This analysis revealed that for a 150 Hz train of cathodic stimuli 0.1 ms in duration a $\Delta^2V_e > 12$ mV always generated propagating action potentials at the stimulus frequency. When the axon was further than 3 mm from the electrode, a $\Delta^2V_e > 8$ mV was enough for activation. Also, in

this example, the axon model never blocked firing during -3 V; 0.1 ms; 150 Hz stimulation for any of the positions examined.

[0044] Returning to FIG. 1A, we evaluated Δ^2V_e along several directions relative to the electrode contact. The respective red and blue of Δ^2V_e vertical (shown in middle row in FIG. 1A) represent regions of respective depolarization and hyperpolarization that would be generated in neural elements running vertically in the displayed plane (i.e., up or down the page). Δ^2V_e perpendicular (shown in the bottom row of FIG. 1A) represents regions of depolarization and hyperpolarization that would be generated in neural elements running perpendicular to the displayed plane (i.e., into or out of the page). Δ^2V_e typically results in both positive and negative regions in the tissue medium. However, exemplary results from Δ^2V_e perpendicular (shown in the bottom row of FIG. 1A) only show depolarizing effects. In these examples, hyperpolarizing effects still exist in the tissue medium, but because of the 3D nature of the stimulation they are not within the field of view that is shown.

[0045] In FIG. 1A, a coupled comparison of (Δ^2V_e vertical, DBS axial) and (Δ^2V_e perpendicular, DBS coronal) or (Δ^2V_e perpendicular, DBS axial) and (Δ^2V_e vertical, DBS coronal) show orthogonal planes through the center of the electrode contact where Δ^2V_e has been evaluated along the same direction relative to the electrode and can give a sense of the 3D stimulation effects. In this example, the model results show that monopolar -1 V stimuli activated large diameter axons within about a 2.5 mm radius of the electrode contact, as illustrated by FIG. 1A and FIG. 2. Bipolar stimulation generated a more complex pattern of depolarization and hyperpolarization. However, bipolar stimulation did not dramatically alter the volume of tissue above-threshold for activating large diameter axons, as shown in FIG. 1A.

[0046] FIG. 1B illustrates the incorporation of tissue electrical properties representative of the STN and surrounding structures, as discussed above. As shown in FIG. 1B, this resulted in distortion of V_e and Δ^2V_e generated by DBS as compared to the isotropic case of FIG. 1A. More particularly, the strong dorsal-ventral anisotropy of the internal capsule (IC) limited stimulation anterior and lateral to the electrode. The moderate anterior-posterior anisotropy of the region around zona incerta (ZI) extended stimulation posterior to the electrode. Increasing the stimulus amplitude to -3 V resulted in a volume of activation (represented by the second difference Δ^2V_e) that was more dependent on the tissue anisotropy and spread outside the borders of the STN. In addition, medial-lateral and/or anterior-posterior variation in the electrode location within STN directly altered the shape and volume of activation, as shown in FIG. 1B. An electrode positioned near the anterior and/or lateral borders of the STN exhibited strong activation of IC, while an electrode located in the medial STN resulted in the largest overall volume of activation and resulted in only limited activation of the IC. These results show that a minor change (e.g., on the order of 1 mm) in the electrode location within the dorsal STN can have a substantial effect on the neural response to DBS.

[0047] D. Discussion of Exemplary Results

[0048] DBS represents an effective clinical therapy for movement disorders.

[0049] However, the existing limited understanding of the effects of stimulation on the underlying neural tissue hinders

future advancement of this technology. The electric field generated by one or more DBS electrodes, using therapeutic DBS stimulation parameters, can directly activate a large volume of tissue, as illustrated by FIGS. 1A, 1B, and 2. One example of our model provided results that show that the stimulating effect of the electric field can spread outside the borders of the dorsal STN and can result in activation of axonal elements in the zona incerta (ZI), fields of Forel (H2), and internal capsule (IC), as shown in FIG. 1B. These model predictions agree with clinical data indicating that stimulation amplitudes in the range of -3 V are often capable of inducing side effects that are associated with activation of the corticospinal and corticobulbar tracts of the IC. Our models suggest that the low threshold side effects of IC stimulation can be avoided with electrode locations slightly (e.g., about 1 mm) medial or posterior to the clinical target of the anterior-dorsal STN. However, given the intrinsic error in the DBS implantation procedure, it is typically not presently possible to position the electrode with sub-millimeter accuracy relative to the patient specific neuroanatomy. Also, the clinical effect of the spread of stimulation outside the borders of STN to ZI and H2 is unclear. Although the present model results act as a guide to the spread of stimulation, they may not alter present DBS implantation procedures. However, the present models may alter future DBS implantation procedures or present or future DBS parameter adjustments.

[0050] The present model provides quantitative results on the effects of DBS that would be difficult to achieve experimentally. Like most models, however, they involved some simplifying approximations worth noting. First, we used electrostatic analysis and the resolution of our diffusion tensor based tissue conductivities was on the order of 1 mm. In general, however CNS tissue typically has a small reactive component that results in slight increases in conductivity at higher frequencies. Also, micro-inhomogeneities exist on scales smaller than the 1 mm. However, a reactive component or higher resolution diffusion tensor based conductivity could be used with the present model techniques, if desired.

[0051] Second, neural activation that results from applied fields could be more accurately predicted by directly coupling the electric field data to multi-compartment cable models of individual neurons. The present model techniques, however, provide easier estimation of the volume of tissue supra-threshold, and our estimation is derived directly from the field data. By evaluating $\Delta^2 V_e$ in a plane containing the electrode contact, one can conceptualize the spatial characteristics of the depolarizing influence of the field, as illustrated in FIGS. 1A and 1B. By explicitly calculating the $\Delta^2 V_e$ needed to activate large diameter axons (8 mV for large electrode-to-axon distances), our models provide a worst-case scenario to address the spread of stimulation, as illustrated in FIG. 2, so as to avoid unwanted side effects. This simplified estimation of the spatial extent of DBS on large diameter axons typically has an associated error of several hundred micrometers. However, given the large volume tissue affected by DBS, this error is relatively small, especially for high stimulus amplitudes, as illustrated in FIG. 2. Nonetheless, our model of STN DBS represents a significant improvement over any model that attempts to characterize the spatial extent of stimulation using empirical observations that ignore the tissue electrical properties (e.g., inhomogeneity and anisotropy) and electrode geometry.

[0052] Extracellular stimulation typically generates a complex electric field in the tissue medium that is applied to the underlying neural processes as a distribution of extracellular potentials. As derived from the cable equation, the second derivative of the extracellular potentials along each process will typically produce both transmembrane and axial currents that will be distributed throughout the neuron. In turn, each neuron exposed to the applied field will typically experience both inward and outward transmembrane currents and regions of depolarization and hyperpolarization. These theoretical predictions have been verified in numerous experimental preparations demonstrating the differences between anodic, cathodic, and bipolar stimulation on the ability to both activate and block neural activity with extracellular stimulation.

[0053] Analysis of the effects of DBS is complicated by our limited understanding of the response of neurons near the electrode to the applied fields. Addressing the effects of high frequency DBS presents investigators with a paradox of how stimulation (traditionally thought to activate neurons) can result in similar therapeutic outcomes as lesioning target structures in the thalamus or basal ganglia. There exist two general philosophies on the effects of DBS: 1) DBS is believed to generate a functional ablation by suppressing or inhibiting the structure being stimulated or 2) DBS is believed to result in activation patterns in the stimulated network that override pathological network activity. Our model results support the latter theory by showing with detailed models and therapeutically effective stimulation parameters that axonal elements are activated over a large volume of tissue surrounding the electrode.

[0054] Experimental investigation on the effects of STN DBS has implicated activation of large diameter fiber tracks with therapeutic stimulation parameters. Predictions of the volume of tissue affected by DBS, using current-density calculations, have suggested that axonal elements would be activated over a 2.5 mm radius of the electrode contact using a -3 V stimulus. However, current-density is not directly related to the neural response to stimulation, and typically has a non-uniform distribution on DBS electrode contacts. A scaled version of the derivative of the current-density, $\Delta^2 V_e$, represents a value that more accurately quantifies the stimulating influence of the electric field. Using $\Delta^2 V_e$ in combination with tissue electrical properties derived from DTI we predict that -3 V STN DBS can activate axonal elements in STN, ZI, H2, and IC spreading as far as 4 mm from the electrode contact, as illustrated in FIG. 1B. Furthermore, the anisotropic tissue properties near the STN as well as the electrode location within the STN directly affect the size and shape of the activated volume of tissue.

2. Examples of Using a Model

[0055] FIG. 3 is a flow chart illustrating generally one example of a method of using a model to calculate a volume of activation, as discussed above. Portions of the method may be embodied in any machine-accessible medium carrying instructions for executing acts included in the method. Such a method applies to deep brain stimulation (DBS) or any other electrical tissue stimulation. At 300, imaging data of an anatomic volume of a patient is obtained. In one example, this includes obtaining imaging data of a patient's brain using an imaging modality, such as computed tomography (CT) or magnetic resonance (MR) imaging modalities, for example, or another suitable imaging modality. The

anatomic volume need not be all or part of the patient's brain, but could be all or part of any other anatomic structure.

[0056] At **302**, in one example, diffusion tensor imaging (DTI) data is obtained (this may occur at **300**, such as where a DTI MR imaging modality is used at **300**). In one example, the DTI data is obtained from the same patient being analyzed. Alternatively, "atlas" DTI data is obtained from at least one other patient. If atlas DTI data from another patient is used, it is typically spatially scaled to correspond to the anatomic size and shape of the patient being analyzed. In one example, the atlas DTI data is based on a composite from more than one other patient. The composite atlas DTI data typically spatially scales DTI data from the different patients before combining into the composite DTI atlas. The atlas DTI data avoids the need to obtain DTI data from the particular patient being analyzed. This is useful, for example, when a non-DTI imaging modality is used at **300**.

[0057] At **304**, a tissue conductivity model is created for all or part of the anatomic volume. The tissue conductivity model is typically a non-uniform spatial distribution. Such a model more accurately represents inhomogeneous and anisotropic characteristics of the tissue anatomy. For example, the conductivity of brain tissue varies from one brain region to another. Moreover, conductivity of the nervous system is preferential to a particular direction that is also dependent on the particular location in the brain. In one example, a non-uniform tissue conductivity model is created by transforming the DTI data into conductivity data, such as by using the linear transform techniques discussed above with respect to Equation 2.

[0058] It should be noted that it is not required to obtain non-uniform tissue conductivity data using DTI. There exist several alternatives to using DTI based approximations for the anisotropic and inhomogeneous tissue properties for the patient specific finite element volume conductor model. One example technique would be a simple designation of a white matter and a grey matter conductivity tensor. These two universal conductivity tensors could then be applied to the nodes of the FEM mesh using co-registration with the anatomical MRI. In this manner, the individual voxels of the MRI data are designated as either white matter or grey matter using post-processing image analysis. Then, each such voxel is assigned a conductivity dependent on whether it was classified as white matter or grey matter, which white matter voxels having a different conductivity value than grey matter voxels. A second example technique would define individual conductivity tensors for designated brain regions (e.g., nuclei, sub-nuclei, fiber tracts, etc.). This method would allow for a more detailed representation of the tissue electrical properties than the first example technique. The conductivity tensor of each designated brain region is defined, in one example, using explicit experimental tissue impedance results and anatomical information provided by a human brain atlas. In this technique, the anatomical MRI is sub-divided into different designated brain regions on a voxel-by-voxel basis using post-processing image analysis. The appropriate conductivity tensors for each designated brain region is then co-registered with the nodes of the FEM mesh.

[0059] At **306**, a finite element model (FEM) is created using the conductivity data obtained at **304**. In one example, the FEM model uses a default boundary condition that is appropriate for a typical electrode contact morphology.

However, in another example, the FEM model includes an electrode-specific boundary condition that is tailored to the morphology of a particular electrode contact or contacts to be used in the DBS or other procedure. The FEM model provides for non-uniform conductivity in the tissue, such as by using a DTI-derived other conductivity value at each node in the FEM mesh. The FEM model may include aspects that are not obtained from the DTI-derived data. In one such example, the FEM mesh models a thin encapsulation sheath about the electrode lead body, as discussed above, which is not derived from the DTI data.

[0060] At **308**, in one example, the FEM is solved for the electric potential distribution or the second difference (Δ^2V) of the electric potential distribution, as discussed above, such as by using FEM solver software. In one example, the FEM is solved for a normalized stimulation amplitude of 1V. In another example, for a different electric stimulation amplitude, the resulting electric potential distribution (or second difference of the electric potential distribution) is multiplied by a scale ratio of the different electric stimulation amplitude to the normalized electric stimulation amplitude.

[0061] At **310**, a volume of activation (VOA) or other volume of influence is calculated, in one example, using the second difference of the electric potential distribution. The VOA represents the region in which any neurons therein are expected to typically be activated, that is, they are expected to generate propagating action potentials at the stimulus frequency in response to the electrical stimulation delivered at the stimulation electrode contact. Conversely, neurons outside the VOA are expected to typically remain unactivated in response to the electrical stimulation. In one example, a particular threshold value of the second difference of the electric potential distribution defines the boundary surface of the VOA.

[0062] As discussed above, the particular threshold value defining the boundary of the VOA is determined as follows. First, model neuronal elements are positioned relative to the electrode using known neuroanatomical information about specific fiber pathways and nuclei of interest near the electrode. These generalized positions of the model neuronal elements are then refined, such as by using explicit "patient-specific" information provided in the DTI or anatomical MR imaging data. For example, the DTI imaging data describes the inhomogeneous and anisotropic tissue properties near the electrode. In this example, such DTI imaging data is used to explicitly define one or more axonal trajectories, if needed, or to help define nuclear boundaries specified in the anatomical MR.

[0063] A model of these neurons is then created. In one example, the neurons are modeled using an axon model, which is a simplified form of a neuron model. An example of an axon model is described in Cameron C. McIntyre et al., "Modeling the Excitability of Mammalian Nerve Fibers: Influence of Afterpotentials on the Recovery Cycle," J. Neurophysiology, Vol. 87, February 2002, pp. 995-1006, which is incorporated by reference herein in its entirety, including its disclosure of axon models. In another example, a more generalized neuronal model is used, an example of which is described in Cameron C. McIntyre et al., "Cellular Effects of Deep Brain Stimulation: Model-Based Analysis of Activation and Inhibition," J. Neurophysiology, Vol. 91, April 2004, pp. 1457-1469, which is incorporated by reference herein in its entirety, including its disclosure of neu-

ronal models. The neuron model describes how the neurons will respond to an applied electric field, that is, whether the neuron will fire and whether the neurons will generate a propagating action potential.

[0064] In one example, using this neuron model to simulate how the neurons (located as determined from the DTI-derived conductivity data, in one example) behave, the threshold value of the second difference of electric field that will result in such propagating action potentials is calculated. The stimulating influence of the electric field is applied to the model neurons to define a threshold value. This threshold value is then used to define the boundary of the VOA in the non-uniform conductivity tissue, as discussed above.

[0065] It should be noted that the neuron model may depend on one or more of the electrical parameters of the DBS stimulation being modeled. For example, the stimulation pulsewidth will affect the neuron response. Therefore, in one example, the neuron model is tailored to a specific value for one or more DBS stimulation parameters.

[0066] It should also be noted that calculation of explicit threshold criteria for each patient is not required. For example, in a more generalized situation, threshold criteria will have already been determined using the detailed neuron models under a wide variety of different stimulation conditions. Once these threshold criteria have been determined, they need not be re-determined for each subsequent patient.

[0067] It should also be noted that using a threshold criteria upon the second difference of the potential distribution in the tissue medium is a simplified technique for quickly determining a VOA or other volume of influence. The intermediate step of using the second difference of the potential distribution is not required. In an alternate example, the FEM model of is directly coupled to a detailed neuron model, such as a multi-compartment neuron model that is oriented and positioned in the FEM model to represent at least one actual nerve pathway in the anatomic volume.

[0068] At 312, the calculated VOA region is displayed, such as on a computer monitor. In one example, the VOA is displayed superimposed on the displayed imaging data or a volumetric representation derived from such imaging data. In another example, an anatomic boundary or other representation of an anatomic structure is superimposed on the VOA and imaging data or the like. The anatomic boundary data is typically obtained from an atlas of brain anatomy data, which can be scaled for the particular patient, as discussed above. Alternatively, the anatomic representation is extracted from the imaging data for the patient being analyzed. In one example, the anatomic representation is a line depicting one or more boundaries between particular nucleus structures or other regions of the brain, such as the STN, IC, or ZI illustrated above in FIG. 1B.

[0069] In any case, by viewing a representation emphasizing one or more brain regions displayed together with the VOA, the user can then determine whether a particular anatomic region falls within or outside of the modeled VOA. The user may want a particular anatomic region to be affected by the DBS, in which case that region should fall within the modeled VOA. Alternatively, the user may want a particular region to be unaffected by the DBS, such as to avoid certain unwanted DBS stimulation side effects, as discussed above. This evaluation of whether the VOA is

properly located can alternatively be performed by, or assisted by, a computer algorithm.

[0070] For example, the computer algorithm can evaluate various VOAs against either or both of the following input criteria: (a) one or more regions in which activation is desired; or (b) one or more regions in which activation should be avoided. In one example, at 314, the computer algorithm creates a score of how such candidate VOAs map against desired and undesired regions. In one example, the score is computed by counting how many VOA voxels map to the one or more regions in which activation is desired, then counting how many VOA voxels map to the one or more regions in which activation is undesired, and subtracting the second quantity from the first to yield the score. In another example, these two quantities may be weighted differently such as, for example, when avoiding activation of certain regions is more important than obtaining activation of other regions (or vice-versa). In yet another example, these two quantities may be used as separate scores.

[0071] At 316, the score can be displayed to the user to help the user select a particular VOA (represented by a particular electrode location and parameter settings). Alternatively, the algorithm can also automatically select the target electrode location and parameter settings that provide the best score for the given input criteria.

[0072] In one example, the VOA is displayed on a computer display monitor of an image-guided surgical (IGS) workstation, such as the StealthStation® from the Surgical Navigation Technologies, Inc. (SNT) subsidiary of Medtronic, Inc., for example. The VOA can be displayed on the IGS workstation monitor with at least one of the imaging data representing the anatomic volume, the target electrode location, a burr hole or other anatomic entry point, a trajectory between the anatomic entry point and the target electrode location, or an actual electrode location.

[0073] In one IGS workstation example, the displayed VOA corresponds to a target electrode location. Another IGS workstation example provides an intraoperatively displayed VOA corresponds to an actual electrode location of an electrode being introduced along the trajectory. The VOA is recomputed and redisplayed as the electrode is being introduced along the trajectory, such as by using position information tracking the position of the electrode being introduced. In one example, various VOAs along the trajectory are pre-computed, and the particular VOA is selected for display using the tracked position of the electrode as it is being introduced.

[0074] After the electrode is positioned at the target location, it is typically secured in place, such as by using a lead immobilizer located at the burr hole or other anatomic entry point. There remains the challenging task of adjusting the DBS stimulation parameters (e.g., the particular electrode contact(s) of a plurality of electrode contacts disposed on the same DBS leadwire, pulse amplitude, pulsewidth, electrode “polarity” (i.e., monopolar or bipolar electrode return path), electrode pulse polarity (i.e., positive or negative), frequency, etc.). In one example, the IGS workstation or a DBS pulse generator programmer includes the above-described VOA methods to assist the user in selecting an appropriate combination of DBS stimulation parameters, such as by using the scoring techniques discussed above.

[0075] FIG. 4 is a block diagram illustrating generally one conceptualization of a system 400 for performing at least some of the methods discussed above for DBS or other

stimulation of a patient **401**. In this example, the system **400** includes an IGS workstation or other computer **402**. The computer **402** includes imaging data storage **404** receiving imaging data from a medical imaging device **406**. In this example, the computer **402** also includes DTI or other atlas data storage **408**, and a neuron or axon model **410**, as discussed above. A processor **412** uses a finite element model (FEM) **414** to compute a second difference **416** on an electric potential distribution. A threshold determination module **418** is used to develop a threshold value of the second difference **416** of the electric potential distribution to compute a volume of activation (VOA) **420**, as discussed above. The processor **412** also includes a scoring module to compare the VOA against one or more desired or undesired anatomic regions, as discussed above, to determine whether the VOA will perform as desired. In one example, the VOA is displayed on a display device **424**, such as together with other data that is typically displayed on an IGS workstation display, as discussed above. A user input device **426** permits a user to input data, for example, particular information about the configuration or morphology of the DBS or other stimulation electrode **428** being used in the procedure. In one example, a position tracking device **430** tracks the location of the DBS electrode so that the location can be displayed on the display device **424**, such as with the VOA or scoring information discussed above. In a further example, the computer **402** includes a telemetry circuit **432** for programming or otherwise communicating with an implantable DBS controller circuit **434**, such as to adjust electrical stimulation parameters using the VOA or scoring information discussed above. Although FIG. 4 illustrates an IGS workstation example, it is understood that portions of the system **400** could alternatively be implemented outside the context of an IGS workstation such as, for example, in an external programmer device for an implantable DBS controller circuit **434**. Such an alternate example need not include any intraoperative imaging or position tracking.

[0076] FIG. 5 is a flow chart illustrating generally one example of a method of using a model to calculate a volume of activation, as discussed above, and using the VOA to select a particular electrode morphology. Portions of the method may be embodied in any machine-accessible medium carrying instructions for executing acts included in the method. Such a method applies to selecting an electrode morphology for deep brain stimulation (DBS) or for any other electrical tissue stimulation. At **500**, a set of N candidate electrode morphologies are defined, where N is an integer greater than 1. Defining the candidate morphologies typically includes providing information about the size, shape, or arrangement of electrode contacts on a leadwire. Such information is typically in a form in which it can be used as input to a finite element model (FEM). At **502**, a FEM is created for each candidate electrode morphology. The FEMs typically use non-uniform conductivity model of a desired region of interest, as discussed above. At **504**, each FEM is solved for a second difference in the electric potential distribution, as discussed above. At **506**, a volume of activation (VOA) is computed for each candidate electrode morphology from its corresponding second difference in the electric potential distribution. The boundary of the VOA is typically obtained from a threshold value that is based on a neuron or axon model, as discussed above. At **508**, the VOAs are scored, as discussed above, or otherwise evaluated to select one or more electrode morphologies that

exhibit a desired VOA, or a VOA that is deemed more desirable than the VOA of one or more other electrode morphologies. At **510**, at least one electrode is manufactured using the selected at least one electrode morphology.

3. Application in a Patient-Specific Neural Stimulation Modeling System

[0077] A. Overview

[0078] One application of the above-described neural response modeling techniques is in a patient-specific neural stimulation modeling system (PSNSMS), which can be implemented as a software package that, in one example, can be integrated into an IGS workstation or any other desired computer implementation. The PSNSMS allows interactive manipulation of patient-specific electrical models of the brain for analysis of brain stimulation methods. This provides a virtual laboratory for surgeons, technicians, or engineers to optimize or otherwise adjust neural stimulation treatment, such as by varying electrode position, stimulation protocol, or electrode design. In one example, the PSNSMS integrates data processing, numerical solution and visualization into one cohesive platform. In one example, the PSNSMS uses a modular framework that incorporates anatomical or functional magnetic resonance images, 3D geometric models of individual brain nuclei, volume conductor models of the electric field generated by the stimulation, biophysical models of the neural response to the stimulation, numerical solutions of the coupled electric field and neuron models, and 3D visualization of the model results and imaging data. Among other things, the PSNSMS outputs a volume of influence (neural activation or neural inhibition) generated by the stimulating electrode for a given position in the brain and given stimulation parameters.

[0079] Benefits of the PSNSMS may include, among other things: (1) pre-operative targeting of an optimal or desirable neural stimulation electrode position or trajectory in the brain tissue medium; (2) intra-operative monitoring or visualization of electrode position or trajectory and stimulation effects as a function of the stimulation parameters; (3) post-operative adjustment or optimization of one or more stimulation parameters for therapeutic benefit given knowledge of the actual electrode position in the brain; or (4) a design tool for evaluating or testing different electrode designs, such as for a given anatomical target.

[0080] Existing techniques for pre-operatively targeting specific nuclei for neurostimulation using magnetic resonance imaging data only account for certain anatomical considerations. They typically ignore the electric field generated by the stimulation and the subsequent neural response to the stimulation. Existing techniques for intra-operatively monitoring the electrode position in the brain, based on the spontaneous electrical activity of neurons surrounding the electrode, require highly skilled neurophysiologists to interpret the data. Moreover, such techniques are not linked with 3D visualization of the surrounding neuroanatomy. Furthermore, they do not enable prediction of the effects of stimulation as a function of the stimulation parameters. Existing techniques for defining effective stimulation parameter values typically rely on trial and error. They typically do not explicitly take into account the anatomical position of the electrode or the neural response to stimulation as it depends on changes in the stimulation parameters. Moreover, they typically do not use any optimization strategies to define the stimulator parameter settings.

[0081] The PSNSMS addresses these and other limitations. In one example, the PSNSMS uses a finite element model (FEM) of the electric field generated by the stimulation. In one example, the tissue electrical properties of the FEM are based on diffusion tensor magnetic resonance imaging analysis, also referred to as diffusion tensor imaging (DTI). DTI permits explicit characterization of the inhomogeneous and anisotropic tissue properties near a given electrode position. The inhomogeneous and anisotropic tissue properties distort the electric field. Therefore, they are important to consider when addressing the neural response to the stimulation.

[0082] In one example, the electric field model is then coupled to electrical models of individual neurons to predict their response to the applied stimulation and determine a volume of tissue that is directly influenced by the stimulation. In another example, simplifying assumptions allow the volume of activation (VOA) to be obtained directly from the electric field model using the second difference of the potential distribution in the tissue medium, as discussed above.

[0083] The PSNSMS also allows integration of MR imaging data, 3D anatomical volumes, neural stimulation electrode trajectory, and 3D neural stimulation response volume in a single platform or package. This platform or package can be used for, among other things, pre-operative targeting, intra-operative monitoring, post-operative stimulation parameter adjustment or optimization, or electrode design. One example of such a package is a image-guided surgical (IGS) workstation, which typically displays voxel data obtained from MR or CT images, and to which a display of a modeled 3D neural stimulation response volume of influence (or other information obtained from a modeled 3D neural stimulation response volume of influence) has been added.

[0084] B. Exemplary Methods

[0085] In one example, the PSNSMS allows, among other things, capture of the detailed interaction between the electric field and underlying non-uniform tissue medium. This enables more accurate estimation of the spatial extent of neural activation generated by one or more electrodes implanted in the nervous system. In one embodiment, the PSNSMS includes the following components: (1) a volume conductor electric field model such as a FEM mesh, which includes a model of the stimulating electrode and of any inhomogeneous and anisotropic electrical properties of nearby tissue; (2) one or more multi-compartment electrical models of individual neurons whose positions can be specified within the electric field (e.g., using anatomically-derived conductivity data to ascertain the locations of neural pathways) and their response to stimulation can be quantified; (3) integration of functional or anatomical imaging data into a visualization platform that can be combined with the electric field modeling results; or, (4) techniques to determine a desired or optimal electrode position or one or more desired or optimal stimulation parameters on a patient-specific basis.

[0086] FIG. 6 is a block diagram illustrating generally one example of such a computer-assisted patient-specific neural stimulation modeling system 600. In this example, the system 600 includes an electric field model 602. In one example, the electric field model 602 is implemented as a computer-solvable FEM mesh. It typically includes a stimulating electrode model 604. The stimulating electrode model

604 typically represents the morphology of the particular stimulation electrode. It may also include a representation of the conductivity of a thin layer of tissue encapsulating the particular electrode. The electric field model 602 also includes non-uniform tissue conductivity data 606. Such data represents any inhomogeneous or anisotropic properties of the tissue near the stimulation electrode, and can be obtained by DTI imaging or by using other techniques described elsewhere in this document.

[0087] In the example of FIG. 6, the system 600 also includes a neuron or axon model 608. In one example, a multi-compartment neuron or axon model positions the modeled neurons or axons at specifiable positions along one or more nerve pathways in the FEM mesh. Such nerve pathways can be ascertained using the DTI-derived imaging data, or by using anatomic atlas data, or any other technique. The example of FIG. 6 also includes stored volumetric imaging data 610 and volumetric anatomic atlas data 612. Using a computer FEM solver to solve the electric field model 602, together with the neuron or axon model 608 (optionally using the intermediate step of solving for a second difference in the electric potential distribution) a volume of influence 614 is calculated. The volume of influence 614 typically represents a volume of activation of region, but could also represent a volume of inhibition region. The model-computed volume of influence 614 is then compared to a target volume of influence 616, which, in one example, is specified by user input that is referenced to the anatomic atlas 612. In one example, a correlation between the two is computed at 618. In a further example, several model-computed volumes of influence (e.g., using different electrode locations or parameter settings) are computed and correlated to the target volume of influence, such as to optimize or otherwise select a desirable electrode location or stimulation parameter settings. The system 600 includes a user interface with a display, such as to display the volume of influence in conjunction with the volumetric imaging data 610, which may be annotated or segmented using anatomic boundaries obtained from the anatomic atlas 612, or otherwise. In one example, the display also provides an indication of information regarding the correlation or the optimization.

[0088] Our example demonstration of PSNSMS is based on deep brain stimulation (DBS) of the subthalamic nucleus (STN), but the concepts described in this document are transferable to any electrode design or to stimulation of any region of the nervous system. In one example, one or more portions of the PSNSMS is constructed using the shareware package SCIRun with BioPSE (Scientific Computing and Imaging Institute, University of Utah), which provides an integrated environment for data manipulation, analysis, and interactive visualization.

[0089] C. Volume Conductor Electric Field Model Example

[0090] In one example, detailed patient-specific electric field models of central nervous system stimulation were developed using anatomical and diffusion tensor magnetic resonance data (DTI). FIG. 7 is a computer display screenshot illustrating one example of a multi-resolution, finite-element tetrahedral mesh that was constructed to represent the brain volume near the electrode shaft in the computer display screenshot of FIG. 8. The example of FIG. 7 illustrates a generic mesh that includes a high density mesh around the electrode location and a low density mesh located

between the high density mesh and the model's peripheral boundary. The finite element method (FEM) allows complex geometric structures to be accurately represented where analytical solutions are complex or fail to exist. The multi-resolution method illustrated in FIG. 7 provides a dense enough mesh to accurately compute the FEM solution near the electrode, but reduces the size of the system of equations enough to allow interactive solution of the FEM, such as to experiment with different stimulation parameters or electrode locations. The accuracy of the solution for a given mesh density can be estimated using the L2 norm, and the mesh can be refined as needed.

[0091] In one example, the DTI data was used to estimate the inhomogeneous and anisotropic tissue conductivity properties on a patient-specific basis and this information was integrated into the FEM. As described above, the electrical conductivity tensor (σ) was determined from the diffusion tensor (D) at each voxel of the DTI, such as by using Equation 2.

[0092] After a pre-operative electrode target location or post-operative implanted electrode location is determined, in one example, the volumetric conductivity data from the DTI (also referred to as a DTI voxel map) is co-registered with the FEM illustrated in FIG. 6. Thus, the orientation of the coordinate systems of the DTI voxel map and the FEM need not be the same. In one example, the coordinate system of the FEM illustrated in FIG. 7 is defined with its origin at the electrode contact and its Z-axis extending along the electrode shaft illustrated in FIG. 8. The coordinate system of the DTI voxel map is determined by the patient head position in the imaging scanner. However, conductivity tensor data is not rotationally invariant. Therefore, in one example, a DTI-based conductivity tensor is rotated from its original acquisition reference frame to the electrode reference frame, such as by extracting the electrode angle with respect to the axial (α) and sagittal (β) planes using post-operative anatomical imaging results. In turn, the conductivity tensor used in the FEM (i.e., σ') is of the form:

$$\sigma' = R\sigma R^T \quad (\text{Eq. 3})$$

where R is the rotation matrix for the image transformation defined by α and β .

[0093] After this transformation, each node of the FEM mesh is assigned a conductivity tensor that is mapped to its corresponding location within the DTI voxel map. In one example, the FEM mesh illustrated in FIG. 7 serves as a template structure that can read in a for each node of the FEM mesh from a generic DTI voxel map data set. This template allows a single model geometry and FEM mesh (the most difficult and time consuming components of FEM development) to be used for each patient-specific model and/or for each candidate electrode location to which each patient-specific model is applied.

[0094] After the FEM is defined with the appropriate tissue conductivity data, appropriate boundary conditions are set, as discussed above. Then, Equation 1 is solved to determine the electric potential distribution generated in the tissue medium. Equation 1 is typically solved using one of two solvers, depending on the characteristics of the stimulation waveform used, an example of which is illustrated in voltage amplitude vs. time graph of FIG. 9. For steady-state analysis, when the quasi-static approximation is valid, the system is typically solved using a conjugate gradient solver and constant voltage stimulation. However, if the quasi-

static approximation is not valid and bulk capacitance is to be taken into account, then the system is typically solved using a Fourier FEM solver using a time-dependent stimulation waveform. The Fourier FEM solver decomposes the stimulus waveform into a collection of sine waves, each with known amplitude and phase. These sinusoidal sources are added to the right hand side of Equation 1, and complex impedances are added to the stiffness matrix (that is, the conductivity tensor (σ)). The system of equations is then solved for each component frequency using a complex solver. By virtue of linear superposition (i.e., the solutions at different frequencies do not significantly interact) and assuming small currents (i.e., there is no significant coupling between magnetic and electric fields), the solution for an arbitrary waveform can be found by summing the time-domain solutions at each frequency. Solving Equation 1 yields a record of the potential at each node in the FEM mesh as a function of time during the applied stimulation.

[0095] D. Example of Quantifying the Neural Response to Stimulation

[0096] Knowing the potential distribution in the tissue medium alone is not enough to predict the neural response to stimulation. Therefore, in one example, we use one or more multi-compartment cable models of individual neurons to address the neural response to the stimulation. Such neuron models represent electrically equivalent circuit representations of physiological neural signaling mechanisms. The models typically include an explicit representation of the complex neural geometry and individual ion channels that regulate generating of action potentials. The neuron model geometries are typically broken up into many (e.g., hundreds) of compartments and are co-registered within the FEM mesh. This allows calculation of the extracellular potentials from the applied electric field along the complex neural geometry. After the extracellular potentials are determined for each neural compartment as a function of time during the applied stimulation, for each neural position relative to the electrode, the model neuron is used to test whether the applied stimulus exceeded the neural threshold that triggers an action potential. The neural response to extracellular stimulation is dependent on several factors, such as, for example: (1) the electrode geometry; (2) the shape of the electric field (as determined by the inhomogeneous and anisotropic bulk tissue properties); (3) the neuron geometry; (4) the neuron position relative to the stimulating electrode; (5) the neuron membrane dynamics; and, (6) the applied stimulation parameters (e.g., stimulus waveform, stimulation frequency, etc.).

[0097] In one illustrative example, we used the 5.7 μm diameter double cable myelinated axon model described in Cameron C. McIntyre et al., "Modeling the Excitability of Mammalian Nerve Fibers: Influence of Afterpotentials on the Recovery Cycle," J. Neurophysiology, Vol. 87, February 2002, pp. 995-1006, which is incorporated herein by reference in its entirety. (Alternatively, instead of using an axon model, a more detailed neuronal model could be used, such as described in Cameron C. McIntyre et al., "Cellular Effects of Deep Brain Stimulation: Model-Based Analysis of Activation and Inhibition," J. Neurophysiology 91: 1457-1469 (2004), which is incorporated by reference herein in its entirety). We incorporated this model into our STN DBS FEM to quantify the neural response to stimulation. By positioning the axon in different locations relative to the electrode and modulating the stimulation parameters one can

determine the threshold stimulus necessary to activate the neuron. Likewise, for a given stimulation parameter setting (pulse duration, amplitude, frequency), the threshold characteristics of the model neuron can be determined as a function of space around the electrode. This information defines a volume of tissue for which the neural activation threshold is exceeded for the particular stimulation parameter setting. This volume of tissue is referred to as the volume of activation (VOA). In one example, a further simplification is made by determining a threshold value of the second difference of the potential distribution, which is representative of neural activation for a given stimulation parameter setting, as discussed above and as illustrated in FIG. 2. The threshold second difference value can then also be used to define the VOA boundaries.

[0098] When using PSNSMS to pre-operatively characterize stimulation effects, assumptions are typically made as to the appropriate model parameter values used to predict the volume of activation. However, during post-operative use, the PSNSMS model can be fit to patient-specific experimental threshold results. The tissue conductivity and electrode localization for each patient-specific FEM can be adjusted to match the clinically determined threshold stimulation results for activating major fiber tracts near the electrode. Detecting fiber tract activation may involve monitoring behavioral responses that are known to arise from such activation of specific fiber tracts. The clinical threshold to elicit these behavioral responses is determined. These fiber tracts can be explicitly visualized on the DTI voxel map. The location and trajectory of particular fiber tracts can be directly integrated into PSNSMS by positioning the axon models along the appropriate anatomical trajectory in the FEM. Three general variables can be adjusted to fit the FEM to the experimental data. First, the conductivity of the encapsulation layer about the electrode can be adjusted (e.g., $0.2 \text{ S/m} < \sigma_{\text{encap}} < 0.1 \text{ S/m}$) to fit the FEM to the experimental data. Alterations in this variable modulate the electrode input impedance. Such adjustments can be guided by clinical data from the stimulator programming unit. Second, the ratio of effective extracellular conductivity and the effective extracellular diffusivity ($0.6 < \sigma_e/d_e < 0.8 \text{ (S-s)/mm}^2$) can be adjusted. Altering this variable scales the absolute value of the conductivity tensor and modulates the stimulus amplitudes needed for axonal activation. A third variable is the X, Y, Z position of the electrode relative to the tissue medium. We expect about 1 mm error in our MR-based electrode localization due to the metallic distortion artifact generated by the electrode in the MR image. Therefore, in one example, we allow the electrode to be shifted by a maximum of 0.5 mm in any direction to allow convergence between the model-predicted threshold data and the clinical threshold data.

[0099] E. Example of Integrating Stimulation Modeling Results and Anatomic Imaging Data

[0100] Calculating the volume of activation as a function of the electrode location and stimulation parameters represents one component of PSNSMS. This provides even greater utility when it is integrated with patient-specific anatomical data. Anatomical data derived from MRI is commonly used to target stereotactic neurosurgical procedures. In one example, however, the PSNSMS integrates and displays the anatomical data with volume of activation data, as illustrated by the computer display screenshot of FIG. 10. In FIG. 10, the PSNSMS outputs a volume-rendered or other

data display indicating one or more of: one or more non-target regions **1000** of the brain; the target region **1002** of the brain (in this case, the STN); or the volume of influence (e.g., volume of activation or volume of inhibition) **1004**. In the example of FIG. 10, these also are coregistered to and displayed with the DBS electrode catheter **1006**.

[0101] In one example, the PSNSMS includes a patient-specific brain atlas. Such atlases can be generated from the pre-operative anatomical MR images using techniques originally described by Gary E. Christensen et al., "Volumetric Transformation of Brain Anatomy," IEEE Trans. on Medical Imaging, Vol. 16, No. 6, pp. 864-877, December 1997, which is incorporated herein by reference in its entirety. However, any variety of morphing algorithms could be used. One suitable algorithm includes a nonlinear transformation to register one MRI (the patient-specific image) to a second pre-labeled target MRI that serves as a canonical atlas for particular regions of the brain. Segmentation of the patient-specific MRI is achieved by using the inverse of this transformation to warp the canonical atlas back onto the patient's 3D MR image. In one example, the registration procedure operates in two stages. In the first stage, a low-dimensional registration is accomplished by constraining the transformation to be in a low-dimensional basis. In one example, the basis is defined by the Green's function of the elasticity operator placed at pre-defined locations in the anatomy and the eigenfunctions of the elasticity operator. In the second stage, high-dimensional large transformations are vector fields generated via the mismatch between the template and target-image volumes constrained to be the solution of a Navier-Stokes fluid model. The result of these transformations is a 3D brain atlas matched to the individual patient with specific volumes representing pre-labeled target nuclei. The 3D surface data derived from the patient-specific brain atlas is then co-registered and, in one example, is displayed with the electrode and volume of activation data, as illustrated in the example of FIG. 10.

[0102] F. Example of Model-Based Selection of Patient-Specific Target Electrode Locations or Stimulation Parameter Settings

[0103] One purpose of the PSNSMS is to determine optimal or desirable preoperative electrode locations or post-operative optimal or desirable stimulation parameters settings on a patient-specific basis. This typically involves determining a target volume of tissue that should be activated by the stimulation. In the PSNSMS, the geometry of this target VOA is typically determined based on the patient-specific 3D brain atlas. For example, in the case of STN DBS for Parkinson's disease, current anatomical and physiological knowledge indicate that the target volume of tissue is the dorsal half of the STN. Therefore, in this example, for each patient-specific 3D brain atlas we determine a target VOA defined by the dorsal half of the STN. We then determine test VOAs generated by a range of electrode positions within the STN and/or a range of stimulation parameter settings for each of those electrode locations. These test VOAs are then compared to the target VOA. The electrode position and/or stimulation parameter setting that generates a test VOA that most closely matches the target VOA is provided as the model-selected electrode position and/or stimulation parameter setting.

[0104] In one variant of this selection process, engineering optimization is used to assist the selection process. Examples of possible constraints on the selection process

include one or more of minimizing charge injection into the tissue, minimizing spread of the test VOA outside of the target VOA, maximizing overlap between the test VOA and target VOA, limiting the stimulus amplitude to being greater than -10 V and less than 10 V, limiting the stimulus pulse duration to being greater than 0 and less than 450 ms, limiting the stimulation frequency to being greater than 0 and less than 185 Hz. In one such example, limits on the stimulation parameters are determined by the output of the current clinical stimulator. Therefore, if new technology provides new output limits, our model limits could be refined to reflect these changes. In a further example, the engineering optimization uses one or more penalty functions, which can be applied for test VOAs that spread into neighboring anatomical structures that are known to induce side effects.

[0105] When using PSNSMS pre-operatively, in one example, both the electrode location and stimulation parameters can be varied to determine test VOAs that match the target VOA. This helps determine a pre-operative target for stereotactic neurosurgical implantation of the electrode.

[0106] When using PSNSMS post-operatively, in one example, the modeled electrode position in the tissue medium is established using the actual implanted electrode location. Then, one or more stimulation parameters are varied to determine test VOAs, which are compared to the target VOA to determine which test VOA (and hence, which parameter setting(s)) obtain the closest match to the target VOA. This indicates which chronic stimulation parameter settings maximize or otherwise provide the desired therapeutic benefit.

[0107] It is to be understood that the above description is intended to be illustrative, and not restrictive. For example, the above-described embodiments (and/or aspects thereof) may be used in combination with each other. Many other embodiments will be apparent to those of skill in the art upon reviewing the above description, and aspects of described methods will be computer-implementable as instructions on a machine-accessible medium. The scope of the invention should, therefore, be determined with reference to the appended claims, along with the full scope of equivalents to which such claims are entitled. In the appended claims, the terms “including” and “in which” are used as the plain-English equivalents of the respective terms “comprising” and “wherein.” Also, in the following claims, the terms “including” and “comprising” are open-ended, that is, a system, device, article, or process that includes elements in addition to those listed after such a term in a claim are still deemed to fall within the scope of that claim. Moreover, in the following claims, the terms “first,” “second,” and “third,” etc. are used merely as labels, and are not intended to impose numerical requirements on their objects.

What is claimed is:

1. A system for determining an estimated volume of tissue activated by at least one electrode implanted inside a patient, the system comprising:

a display device; and

a processor coupled to the display device and configured to perform steps comprising:

determining a distribution of electrical values to be generated by the at least one electrode using a first set of settings over a plurality of positions in the patient's tissue;

determining at least one threshold value for tissue activation;

determining, by applying the at least one threshold value to the electrical values, an estimated volume of tissue activated by the at least one electrode using the first set of settings; and

outputting, on the display device, a graphical representation of the determined estimated volume.

2. The system of claim 1, wherein the outputting comprises displaying the graphical representation relative to an anatomical atlas.

3. The system of claim 1, wherein the steps further comprise determining conductivity at a plurality of tissue regions, wherein the determination of the distribution of the electrical values is based on the determined conductivity.

4. The system of claim 3, wherein the determined conductivity is patient specific.

5. The system of claim 1, wherein the determining of the distribution of the electrical values and the determining of the estimated volume of tissue activated is performed for each of a plurality of different sets of settings for the at least one electrode with different estimated volumes of tissue activated being determined for the different sets of settings.

6. The system of claim 1, wherein the estimated volume is a combination of, and is determined by the processor by combining, regions at which those of the electrical values that satisfy the at least one threshold are located.

7. The system of claim 1, wherein determining, by applying the at least one threshold value to the electrical values, the estimated volume of tissue activated by the at least one electrode using the first set of settings further comprises:

determining, by applying the at least one threshold value to the electrical values, an estimated volume of tissue activated by the at least one electrode using the first set of settings, wherein the region in which the distribution of the electrical values was determined exceeds the estimated volume of tissue activated.

8. The system of claim 1, wherein determining the distribution of the electrical values to be generated by the at least one electrode using the first set of settings comprises:

determining at least one of one or more estimated inhomogeneous electrical properties of the patient's tissue in the region surrounding the at least one electrode or one or more estimated anisotropic electrical properties of the patient's tissue in the region surrounding the at least one electrode; and

determining the distribution of the electrical values based on the at least one of the one or more estimated inhomogeneous electrical properties or the one or more estimated anisotropic electrical properties.

9. The system of claim 1, wherein determining the distribution of the electrical values to be generated by the at least one electrode using the first set of settings comprises:

determining at least one of one or more geometries of the at least one electrode or one or more structures of the at least one electrode; and

determining the distribution of the electrical values based on the at least one of the one or more electrode geometries or the one or more electrode structures.

10. The system of claim 1, wherein determining the distribution of the electrical values to be generated by the at least one electrode using a first set of settings comprises:

determining at least one of one or more neuron geometries, one or more neuron positions relative to the at least one electrode, or one or more neuron membrane dynamics; and

determining the distribution of the electrical values based on the at least one of the one or more one or more neuron geometries, the one or more neuron positions relative to the at least one electrode, or the one or more neuron membrane dynamics.

11. The system of claim **1**, wherein determining the distribution of the electrical values to be generated by the at least one electrode using the first set of settings comprises: creating a finite element model of the at least one electrode and tissue around the at least one electrode.

12. The system of claim **1**, wherein determining the distribution of the electrical values to be generated by the at least one electrode using the first set of settings comprises: determining an electrical potential distribution for the at least one electrode and first set of settings.

13. The system of claim **1**, wherein determining the distribution of the electrical values to be generated by the at least one electrode using the first set of settings comprises: determining a second derivative of an electrical potential distribution for the at least one electrode and first set of settings.

14. The system of claim **1**, wherein determining, by applying the at least one threshold value to the electrical values, the estimated volume of tissue comprises:

determining, by applying the at least one threshold value to the second derivative of the electrical potential distribution, the estimated volume of tissue activated by the at least one electrode using the first set of settings.

15. The system of claim **1**, wherein the steps further comprise:

determining a score for the estimated volume of tissue based on at least one criteria selected from a) one or more regions of tissue in which activation is desired or b) one or more regions of tissue in which activation should be avoided.

16. The system of claim **15**, wherein determining the score comprises determining the score based on a) the one or more regions of tissue in which activation is desired and b) the one or more regions of tissue in which activation should be avoided.

17. The system of claim **15**, further comprising a user input device, wherein the steps further comprise:

receiving, from the user input device, at least one of a) the one or more regions of tissue in which activation is desired or b) the one or more regions of tissue in which activation should be avoided.

18. The system of claim **15**, wherein the determining of the distribution of the electrical values and the determining of the estimated volume of tissue activated is performed for each of a plurality of different sets of settings for the at least one electrode with different estimated volumes of tissue activated being determined for the different sets of settings, and

wherein determining the score comprises determining the score for each of the different estimated volumes of tissue activated.

19. The system of claim **18**, wherein the steps further comprise identifying, on the display device, the set of settings corresponding the estimated volume of tissue activated with the best score.

20. The system of claim **19**, further comprising displaying, on the display device, the estimated volume of tissue activated with the best score.

* * * * *