





US 20190164011A1

(19) **United States**(12) **Patent Application Publication** (10) **Pub. No.: US 2019/0164011 A1**
(43) **Pub. Date: May 30, 2019**(54) **COMPUTER ARCHITECTURE FOR
EMULATING AN ASYNCHRONOUS
CORRELITHM OBJECT PROCESSING
SYSTEM**(52) **U.S. Cl.**
CPC **G06K 9/6229** (2013.01); **G06K 9/6298**
(2013.01); **G06N 20/00** (2019.01); **G06N**
3/126 (2013.01); **G06F 16/313** (2019.01)(71) Applicant: **BANK OF AMERICA
CORPORATION**, Charlotte, NC (US)(57) **ABSTRACT**(72) Inventor: **Patrick N. Lawrence**, Plano, TX (US)(21) Appl. No.: **16/239,184**(22) Filed: **Jan. 3, 2019****Related U.S. Application Data**(63) Continuation of application No. 15/983,883, filed on
May 18, 2018, now Pat. No. 10,217,026, which is a
continuation of application No. 15/824,782, filed on
Nov. 28, 2017, now Pat. No. 10,019,650.**Publication Classification**(51) **Int. Cl.**
G06K 9/62 (2006.01)
G06F 16/31 (2006.01)
G06N 3/12 (2006.01)

A device that includes a node engine configured to emulate a first node, a second node, and a third node. The first node is configured to receive a first correlithm object, fetch a second correlithm object based on the first correlithm object, and output the second correlithm object to the second node and the third node.

Each correlithm object is a point in an n-dimensional space represented by a binary string. The second node is configured to receive the second correlithm object, fetch a third correlithm object based on the second correlithm object, and output the third correlithm object to the third node. The third node is configured to receive the second correlithm object, receive the third correlithm object, fetch a fourth correlithm object based on the second correlithm object and the third correlithm object, and output the fourth correlithm object.

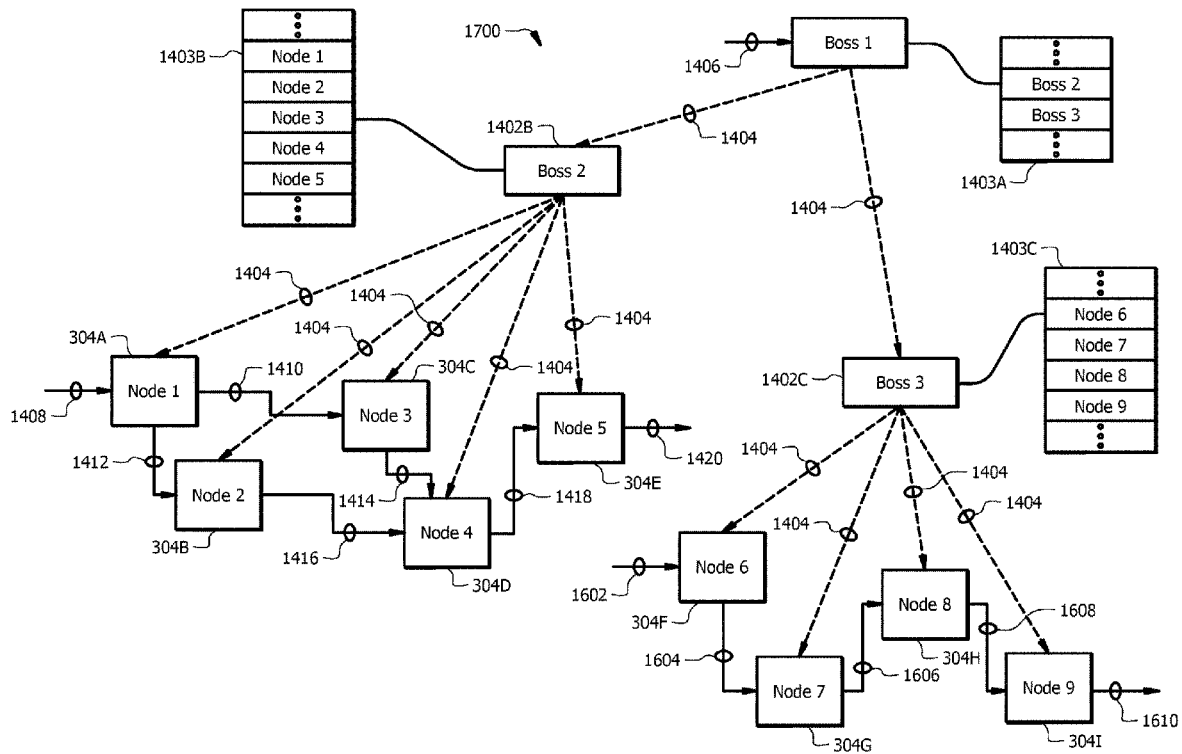

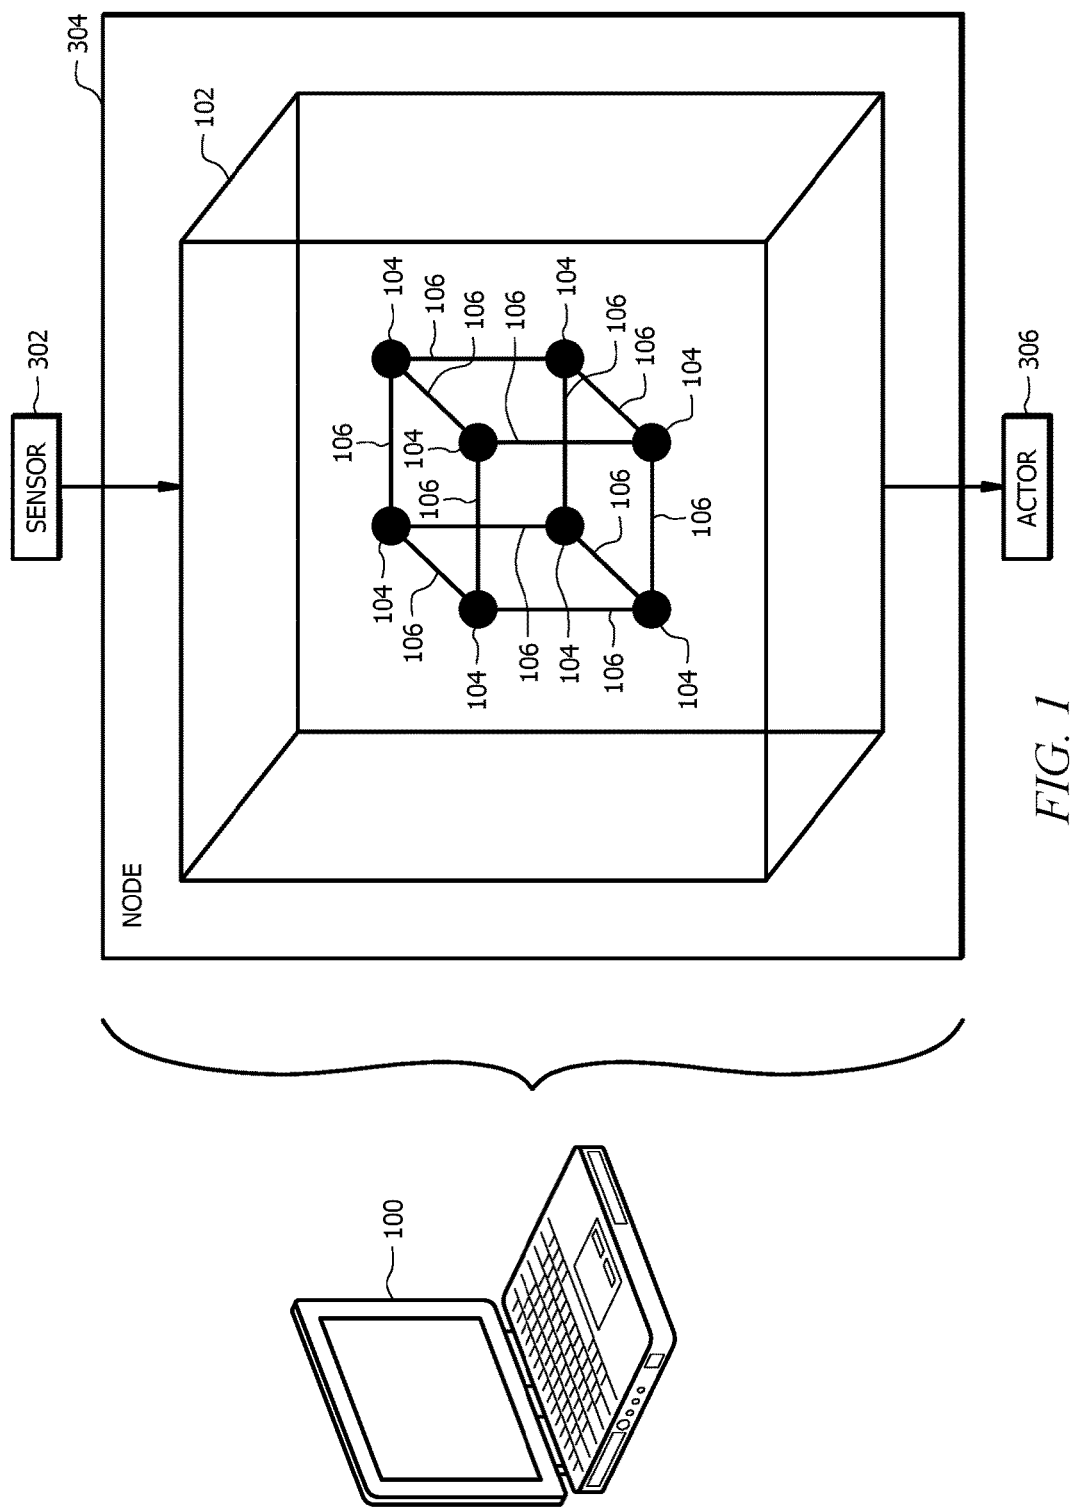

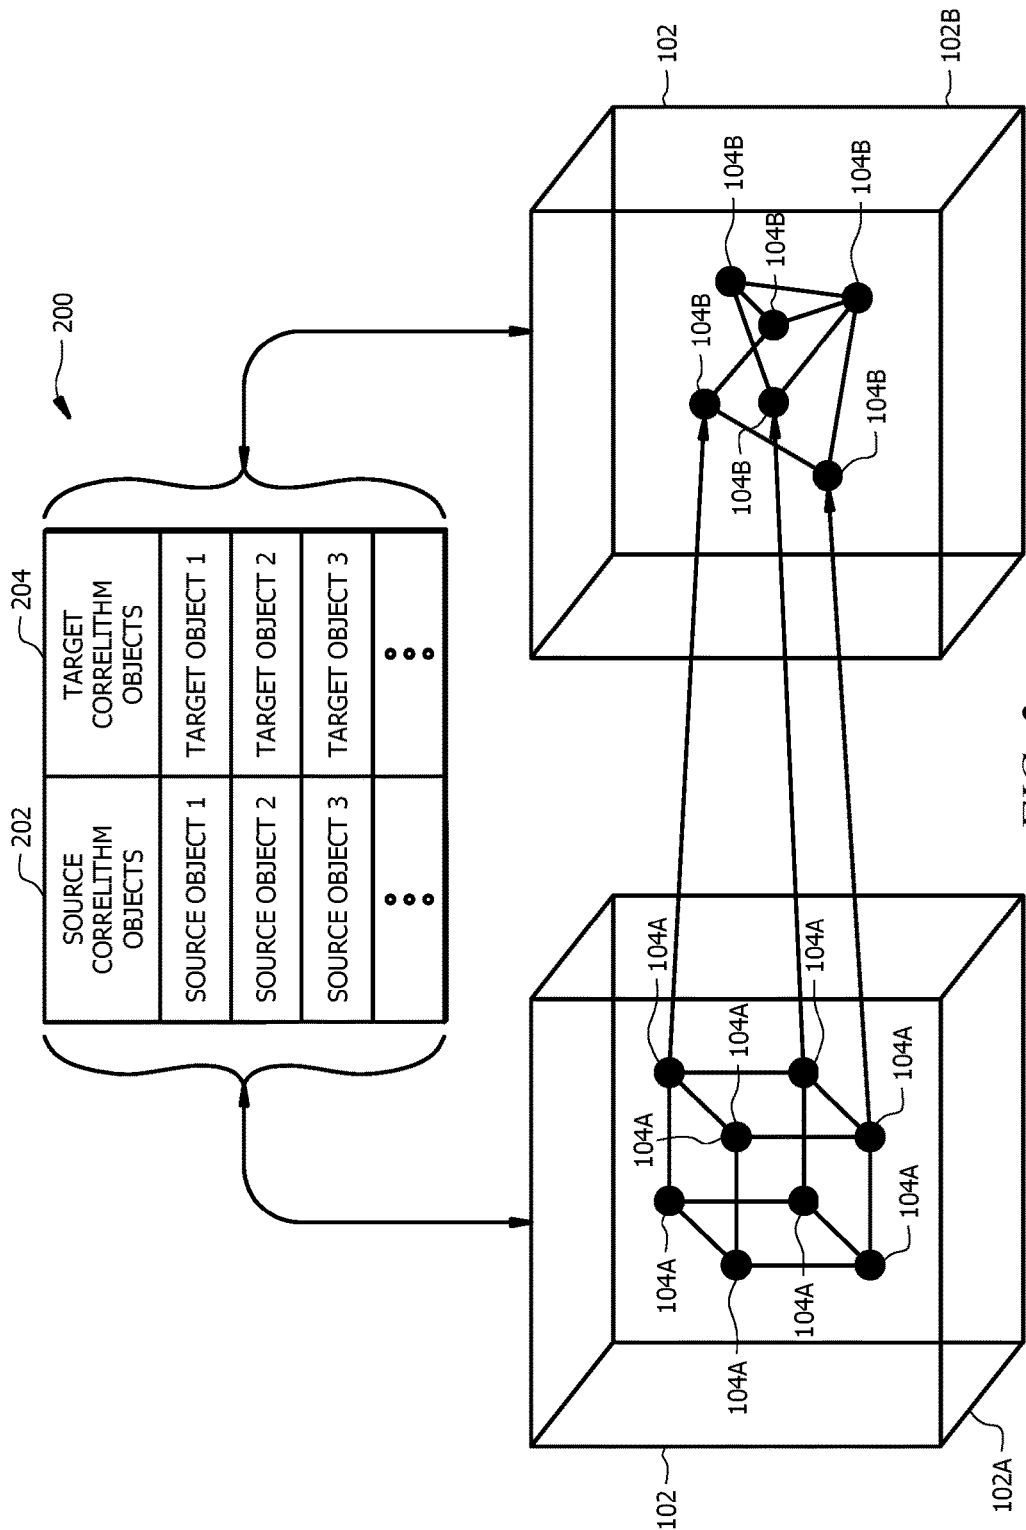
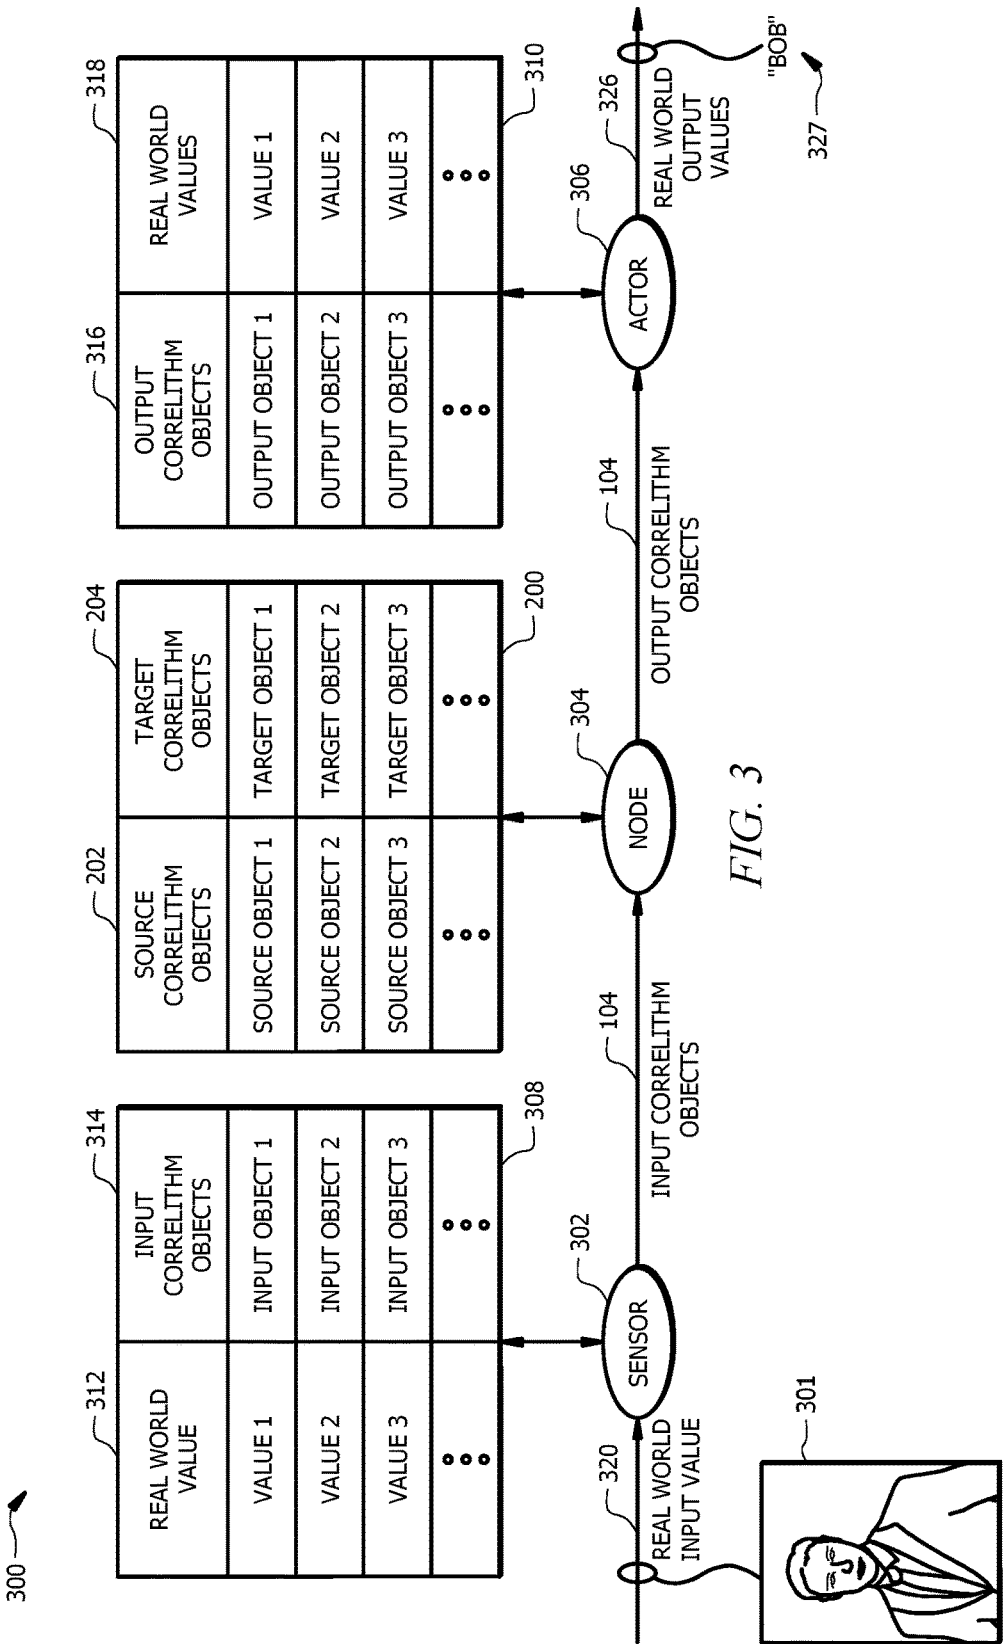


FIG. 2



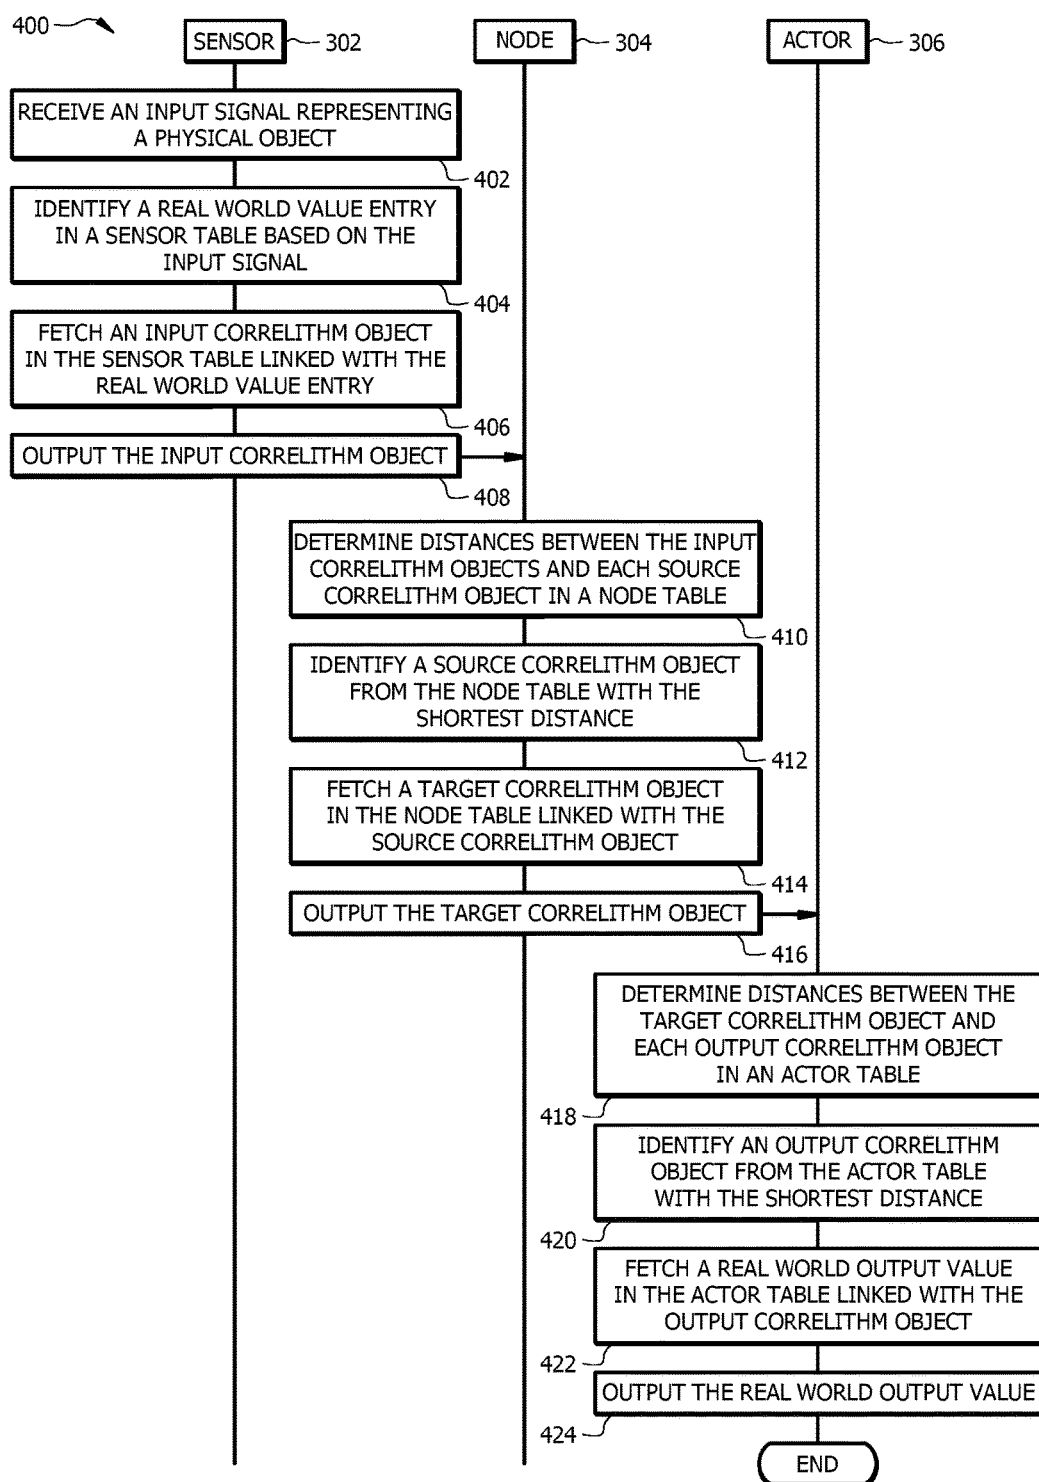


FIG. 4

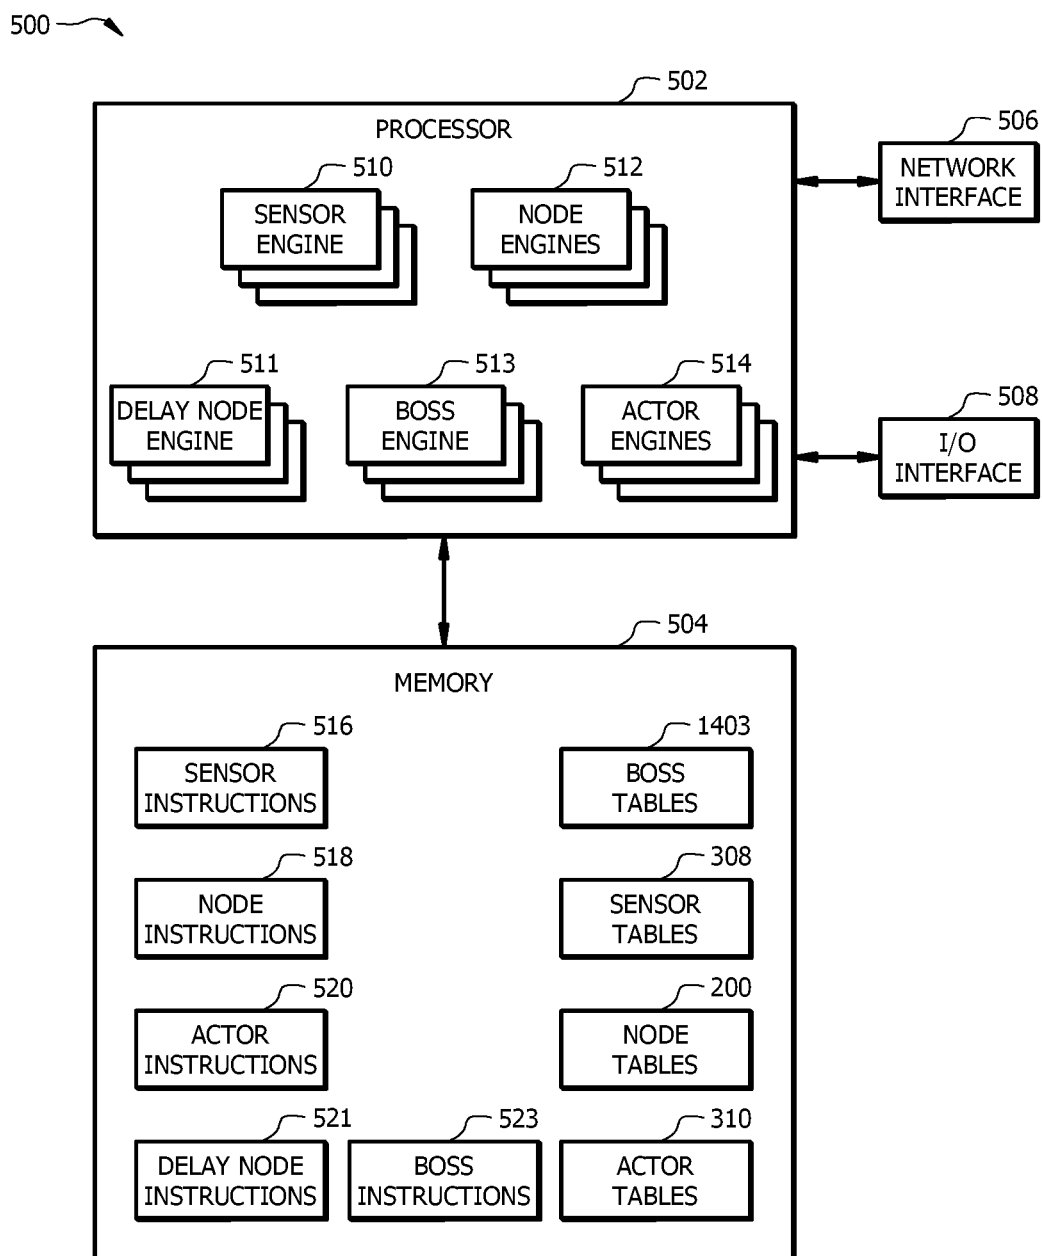


FIG. 5

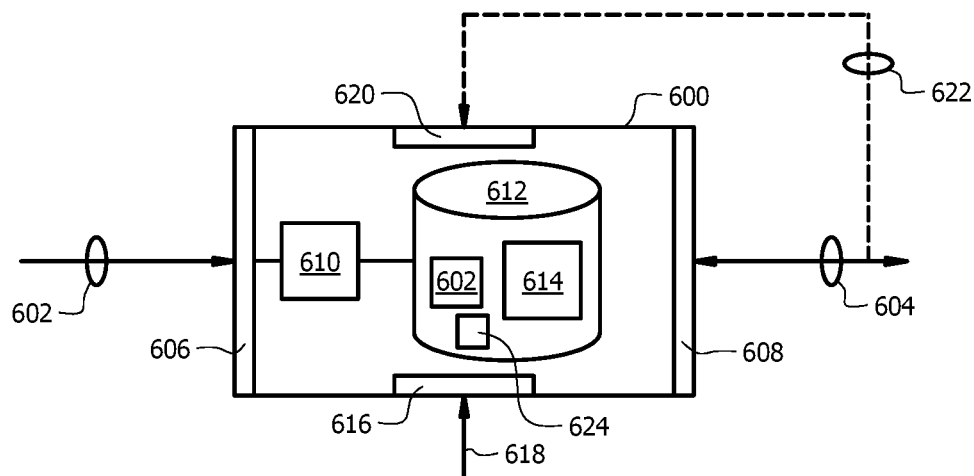


FIG. 6

702	704	706	
Time	Input	Output	700
T0	X0		708
T1	X0	X0	
T2	X0	X0	
T3	X1	X0	
T4	X1	X1	
T5	X1	X1	

FIG. 7A

752	754	756	758	
Time	Input	State Input	Output	750
T0	X0			760
T1			X0	
T2		X0	X0	
T3	X1	X0	X0	
T4			X1	
T5		X1	X1	

FIG. 7B

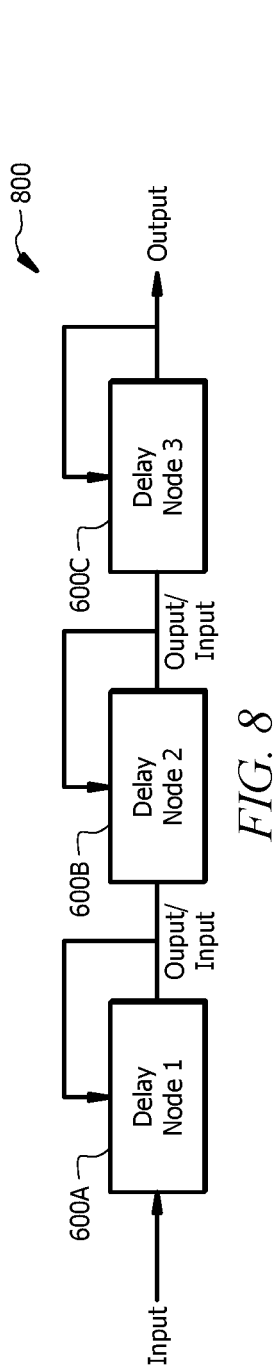


FIG. 8

Node 600A		Node 600B		Node 600C	
Input 904	Output 906	Input 908	Output 910	Input 912	Output 914
T0	X0				
T1	X0				
T2	X1	X0			
T3	X2	X1	X0		
T4	X3	X2	X1	X0	
T5	X4	X3	X2	X1	X0

FIG. 9

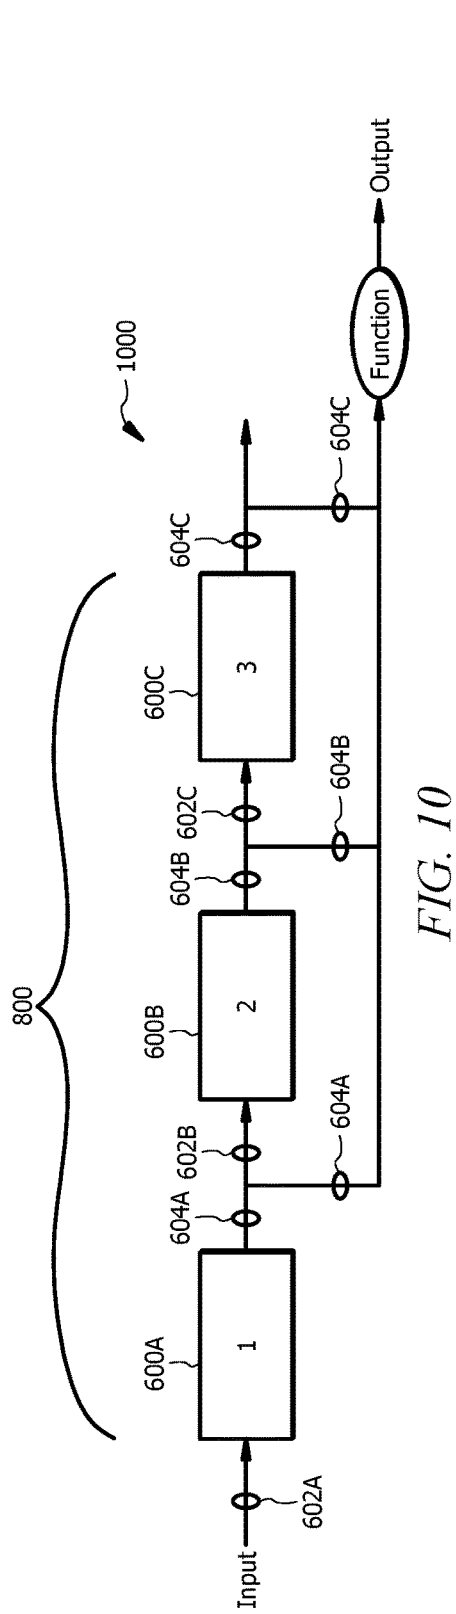


FIG. 10

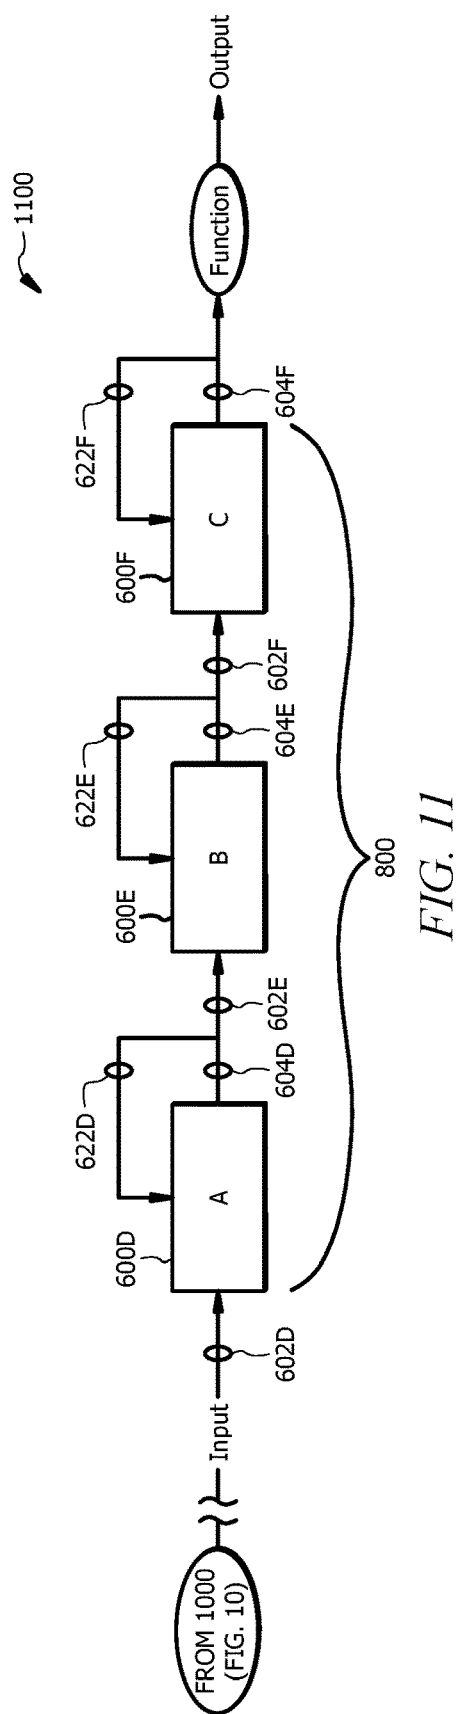


FIG. 11

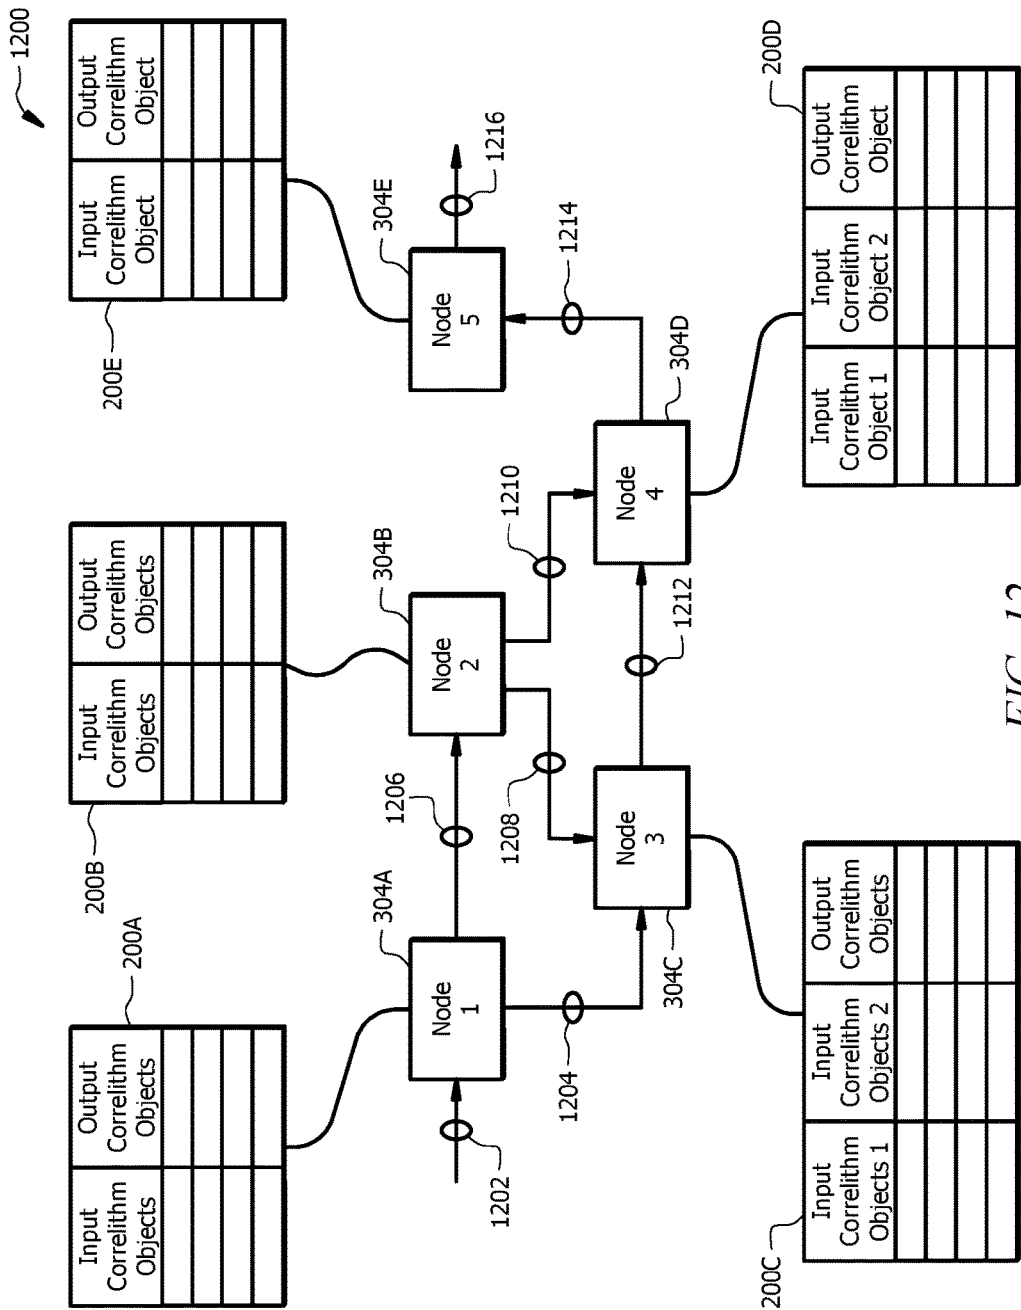


FIG. 12

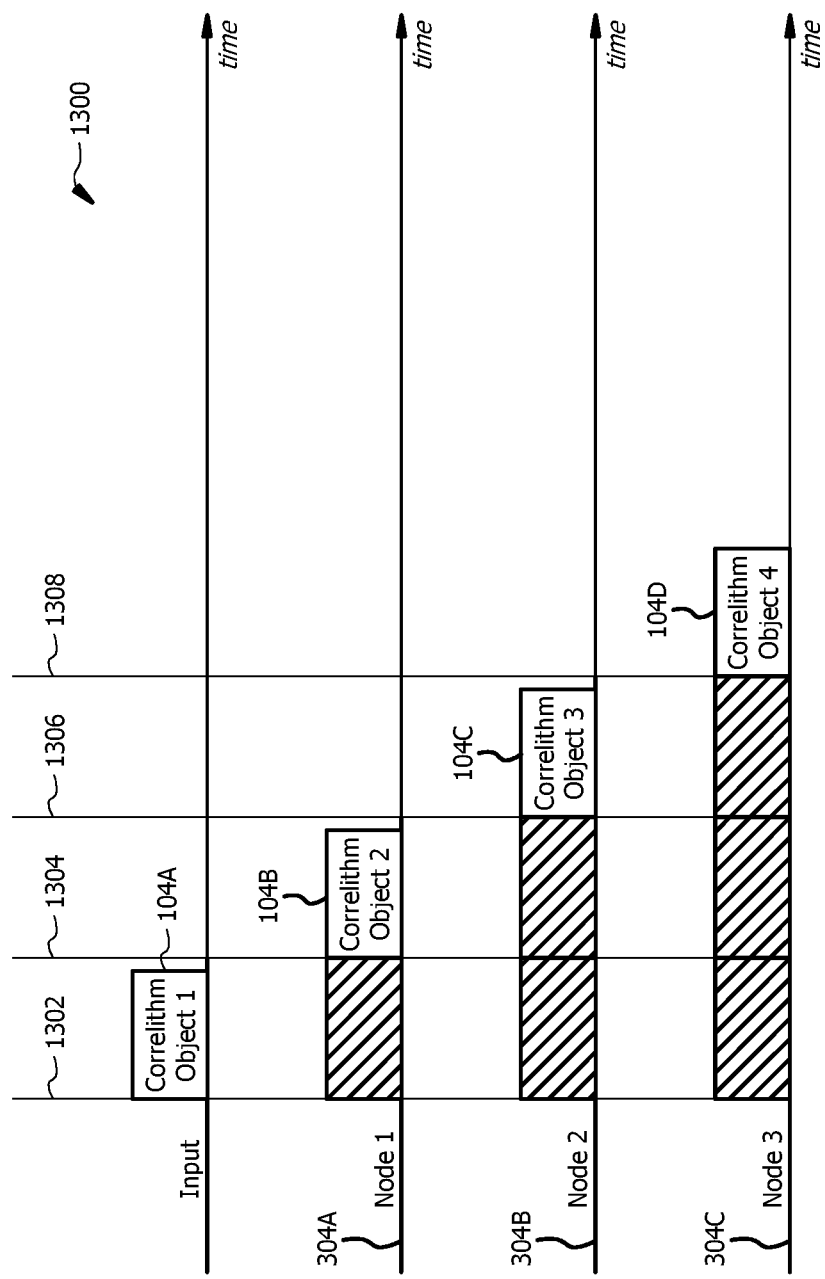


FIG. 13




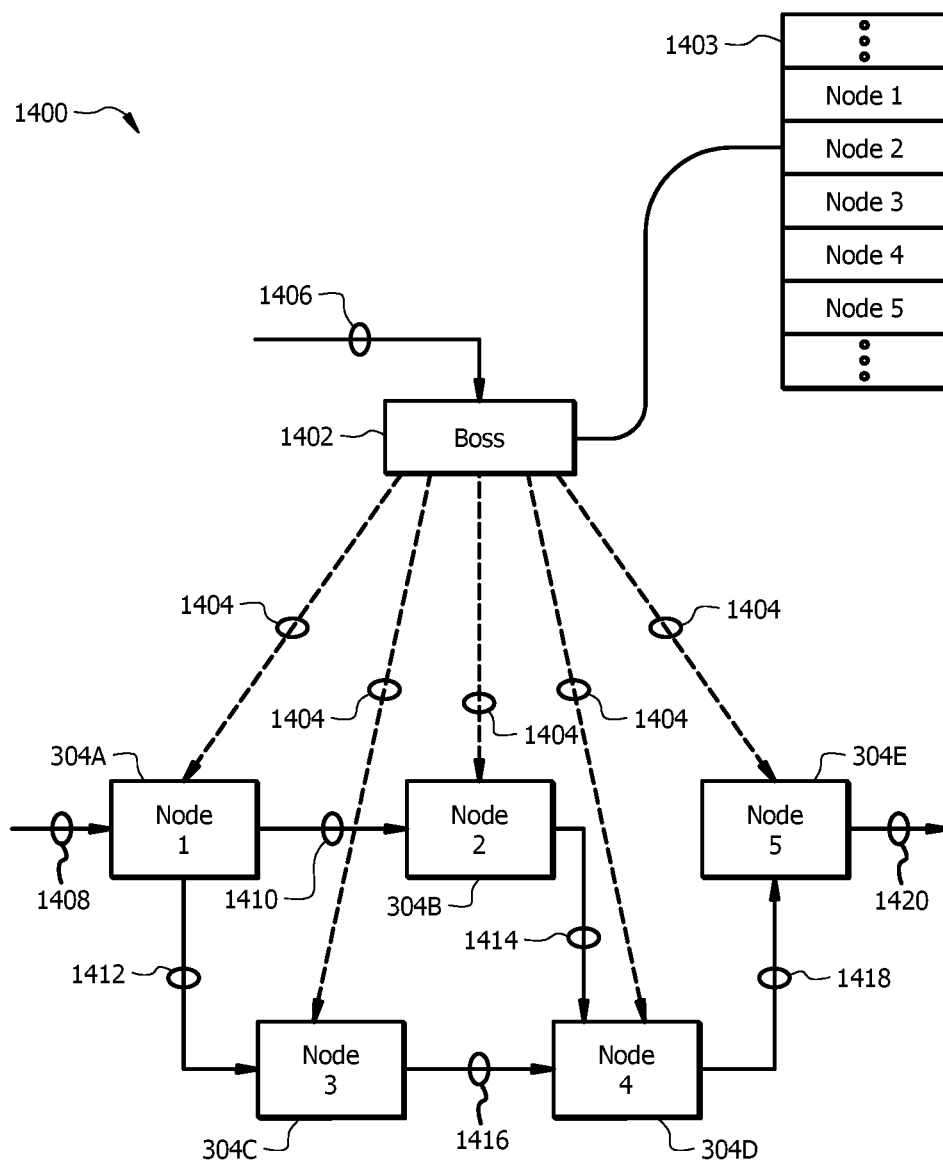


FIG. 14

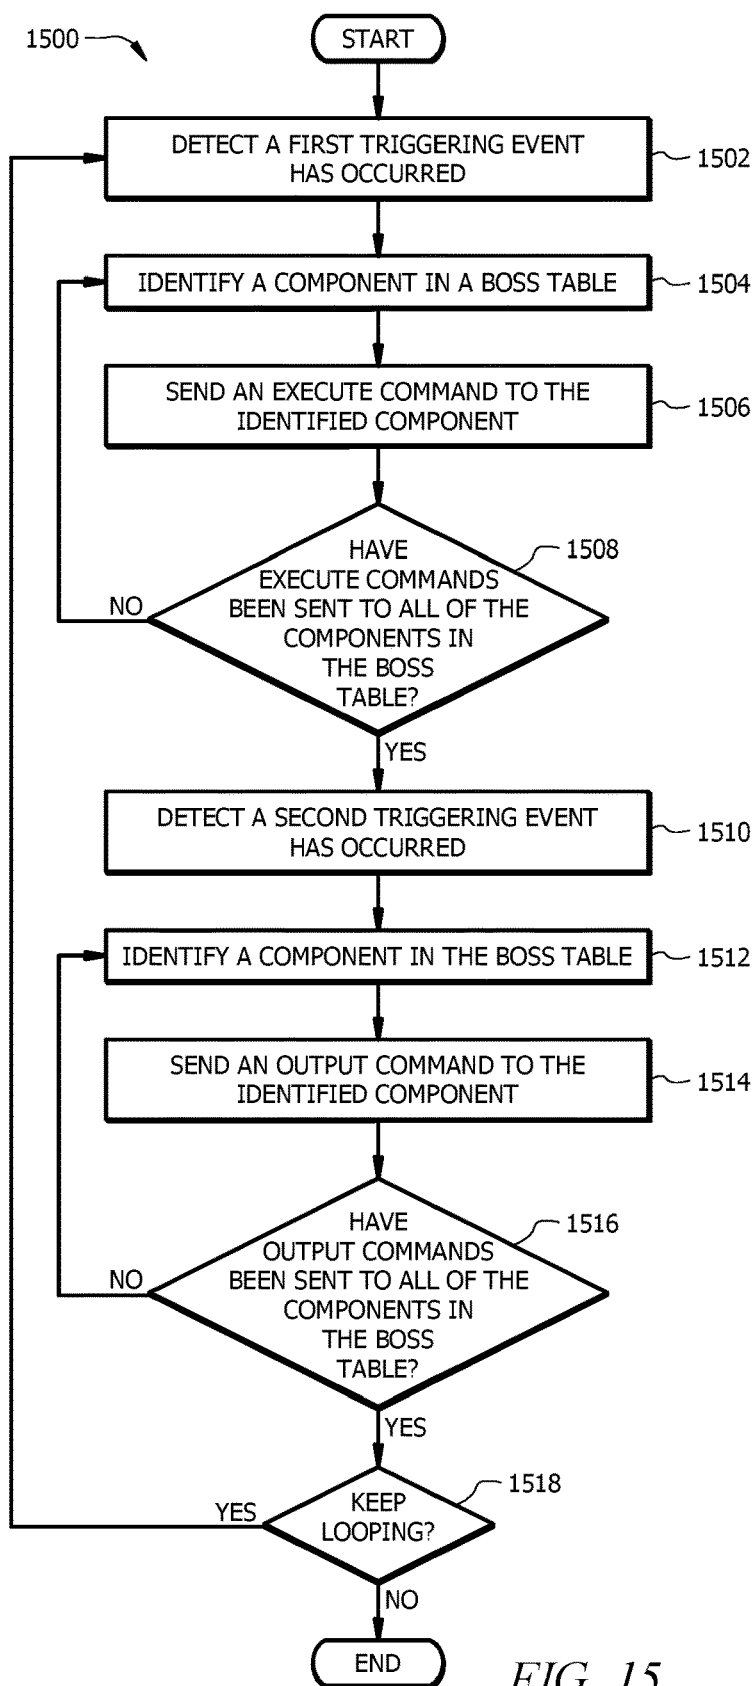

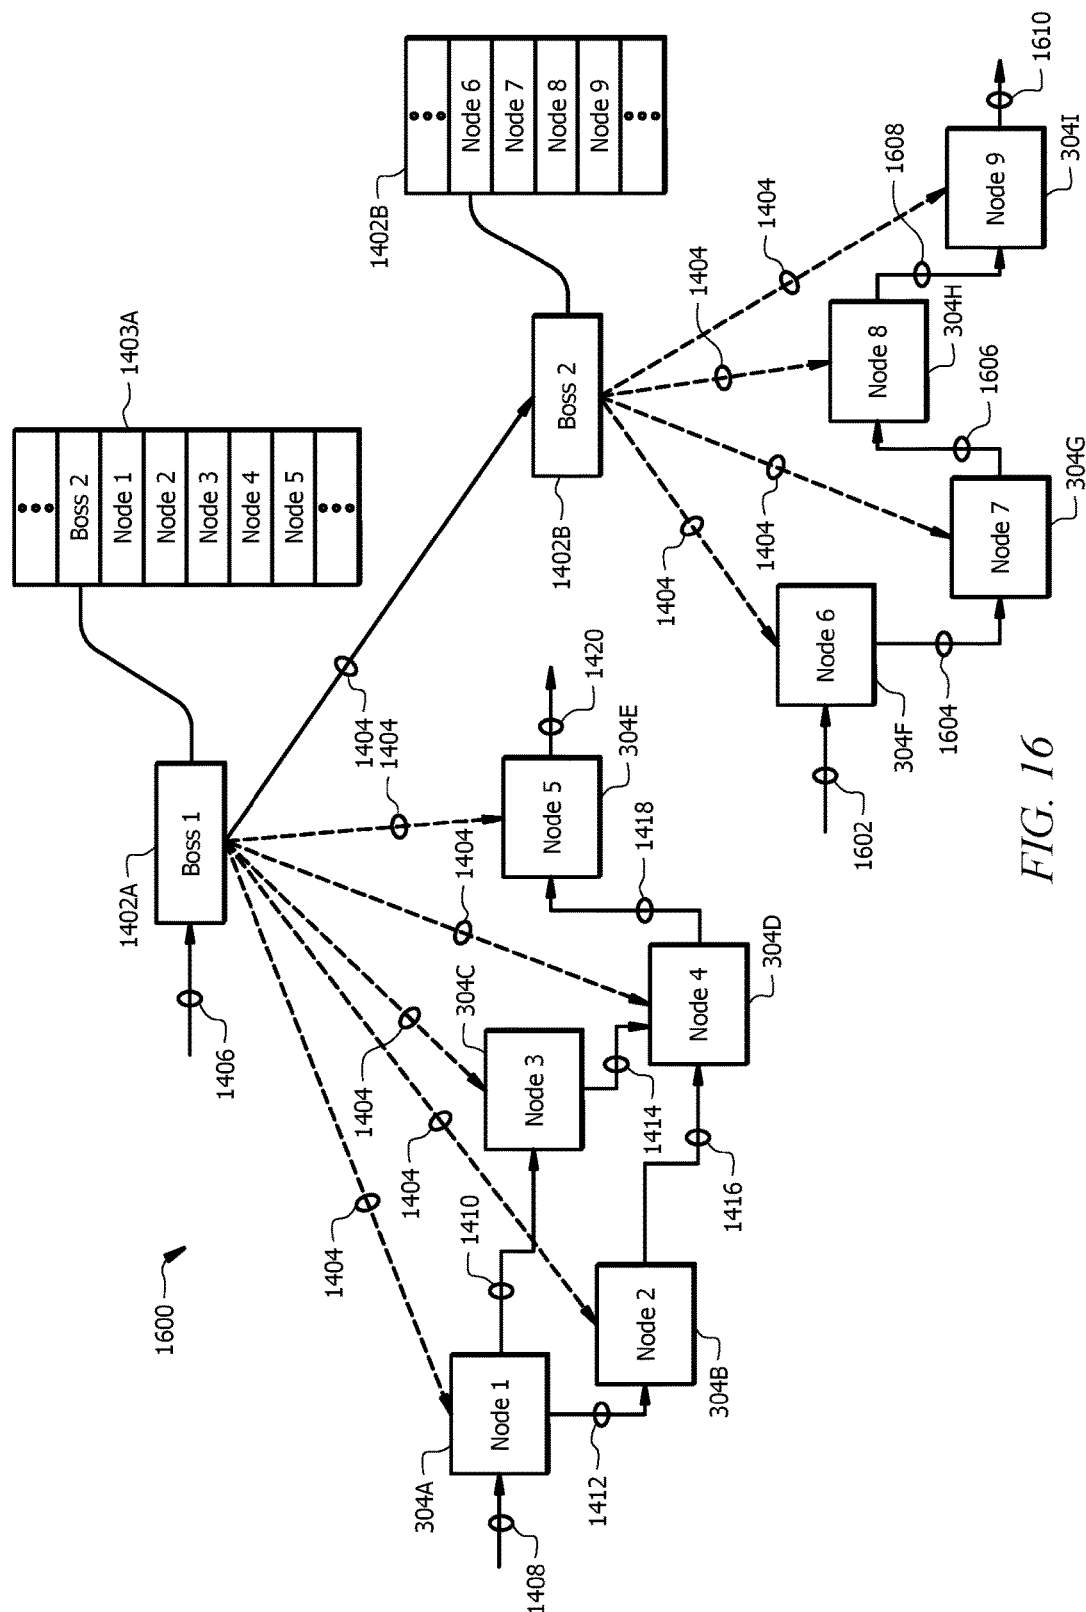

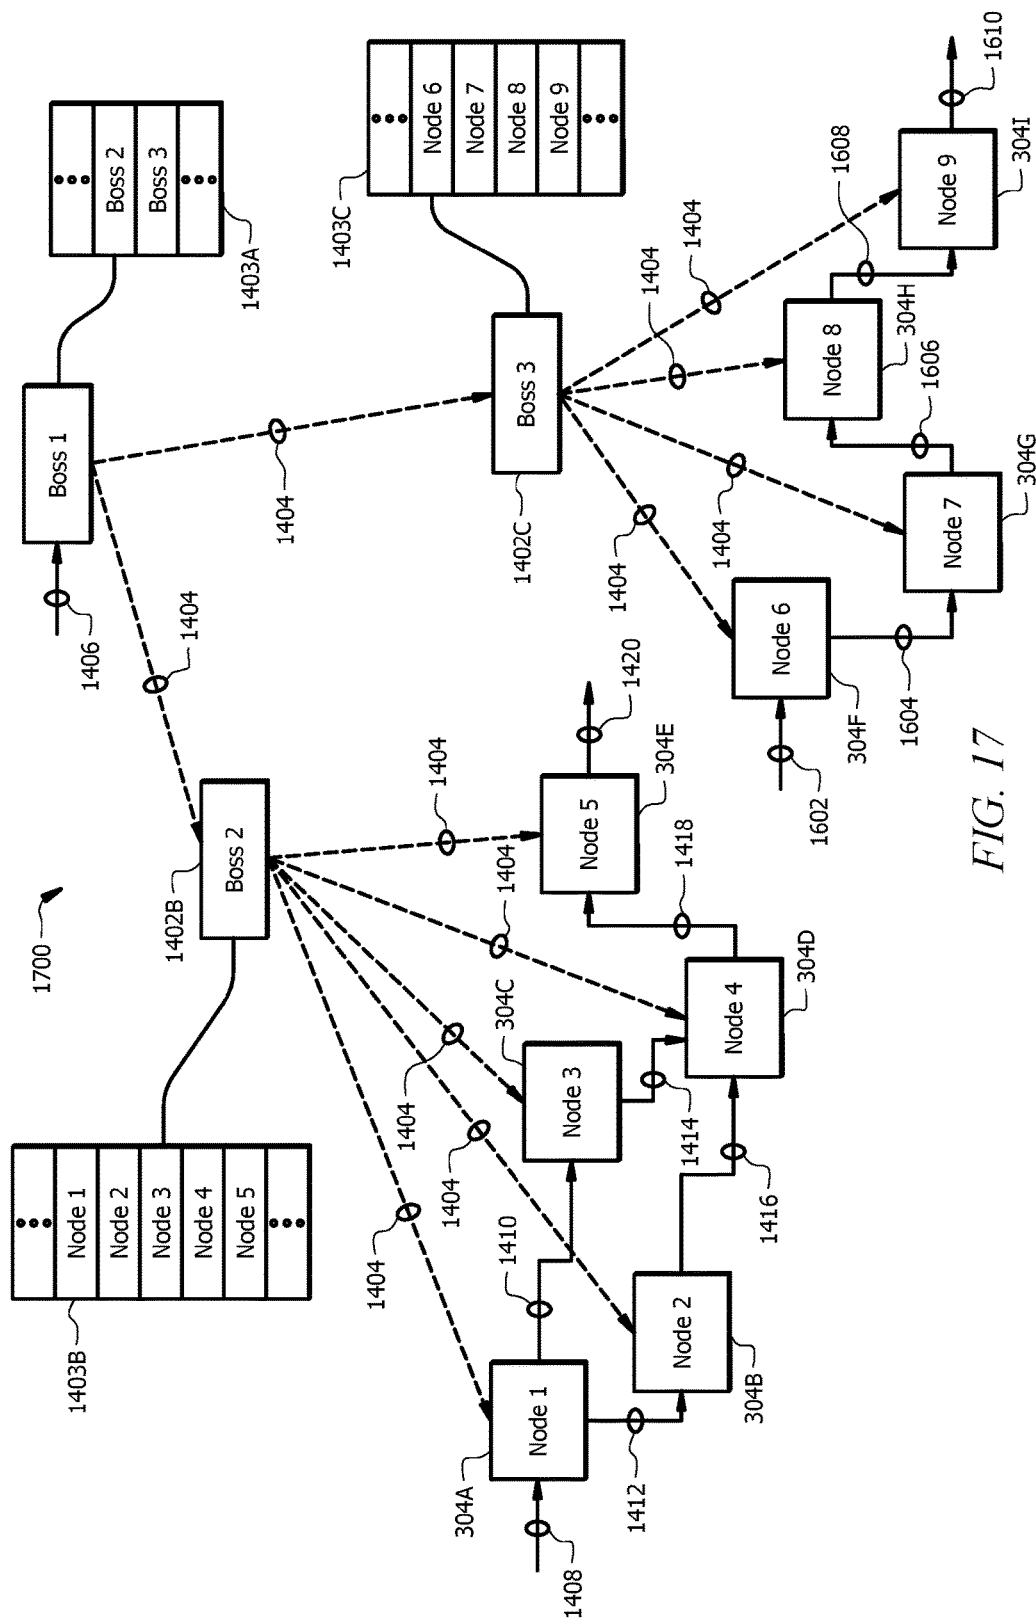

COMPUTER ARCHITECTURE FOR EMULATING AN ASYNCHRONOUS CORRELITHM OBJECT PROCESSING SYSTEM

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] The present application is a continuation of U.S. Non-provisional application Ser. No. 15/983,883 filed May 18, 2018, by Patrick N. Lawrence and titled "COMPUTER ARCHITECTURE FOR EMULATING AN ASYNCHRONOUS CORRELITHM OBJECT PROCESSING SYSTEM," which is a continuation of U.S. Non-provisional application Ser. No. 15/824,782 filed Nov. 28, 2017 by Patrick N. Lawrence and titled "COMPUTER ARCHITECTURE FOR EMULATING AN ASYNCHRONOUS CORRELITHM OBJECT PROCESSING SYSTEM," which is hereby incorporated by reference as if reproduced in its entirety.

TECHNICAL FIELD

[0002] The present disclosure relates generally to computer architectures for emulating a processing system, and more specifically to computer architectures for emulating a correlithm object processing system.

BACKGROUND

[0003] Conventional computers are highly attuned to using operations that require manipulating ordinal numbers, especially ordinal binary integers. The value of an ordinal number corresponds with its position in a set of sequentially ordered number values. These computers use ordinal binary integers to represent, manipulate, and store information. These computers rely on the numerical order of ordinal binary integers representing data to perform various operations such as counting, sorting, indexing, and mathematical calculations. Even when performing operations that involve other number systems (e.g. floating point), conventional computers still resort to using ordinal binary integers to perform any operations.

[0004] Ordinal based number systems only provide information about the sequence order of the numbers themselves based on their numeric values. Ordinal numbers do not provide any information about any other types of relationships for the data being represented by the numeric values such as similarity. For example, when a conventional computer uses ordinal numbers to represent data samples (e.g. images or audio signals), different data samples are represented by different numeric values. The different numeric values do not provide any information about how similar or dissimilar one data sample is from another. Unless there is an exact match in ordinal number values, conventional systems are unable to tell if a data sample matches or is similar to any other data samples. As a result, conventional computers are unable to use ordinal numbers by themselves for comparing different data samples and instead these computers rely on complex signal processing techniques. Determining whether a data sample matches or is similar to other data samples is not a trivial task and poses several technical challenges for conventional computers. These technical challenges result in complex processes that consume processing power which reduces the speed and performance of the system. The ability to compare unknown

data samples to known data samples is crucial for many security applications such as face recognition, voice recognition, and fraud detection.

[0005] Thus, it is desirable to provide a solution that allows computing systems to efficiently determine how similar different data samples are to each other and to perform operations based on their similarity.

SUMMARY

[0006] Conventional computers are highly attuned to using operations that require manipulating ordinal numbers, especially ordinal binary integers. The value of an ordinal number corresponds with its position in a set of sequentially ordered number values. These computers use ordinal binary integers to represent, manipulate, and store information. These computers rely on the numerical order of ordinal binary integers representing data to perform various operations such as counting, sorting, indexing, and mathematical calculations. Even when performing operations that involve other number systems (e.g. floating point), conventional computers still resort to using ordinal binary integers to perform any operations.

[0007] Ordinal based number systems only provide information about the sequence order of the numbers themselves based on their numeric values. Ordinal numbers do not provide any information about any other types of relationships for the data being represented by the numeric values such as similarity. For example, when a conventional computer uses ordinal numbers to represent data samples (e.g. images or audio signals), different data samples are represented by different numeric values. The different numeric values do not provide any information about how similar or dissimilar one data sample is from another. Unless there is an exact match in ordinal number values, conventional systems are unable to tell if a data sample matches or is similar to any other data samples. As a result, conventional computers are unable to use ordinal numbers by themselves for comparing different data samples and instead these computers rely on complex signal processing techniques. Determining whether a data sample matches or is similar to other data samples is not a trivial task and poses several technical challenges for conventional computers. These technical challenges result in complex processes that consume processing power which reduces the speed and performance of the system. The ability to compare unknown data samples to known data samples is crucial for many applications such as security application (e.g. face recognition, voice recognition, and fraud detection).

[0008] The system described in the present application provides a technical solution that enables the system to efficiently determine how similar different objects are to each other and to perform operations based on their similarity. In contrast to conventional systems, the system uses an unconventional configuration to perform various operations using categorical numbers and geometric objects, also referred to as correlithm objects, instead of ordinal numbers. Using categorical numbers and correlithm objects on a conventional device involves changing the traditional operation of the computer to support representing and manipulating concepts as correlithm objects. A device or system may be configured to implement or emulate a special purpose computing device capable of performing operations using correlithm objects. Implementing or emulating a correlithm object processing system improves the operation of

a device by enabling the device to perform non-binary comparisons (i.e. match or no match) between different data samples. This enables the device to quantify a degree of similarity between different data samples. This increases the flexibility of the device to work with data samples having different data types and/or formats, and also increases the speed and performance of the device when performing operations using data samples. These technical advantages and other improvements to the device are described in more detail throughout the disclosure.

[0009] In one embodiment, the system is configured to use binary integers as categorical numbers rather than ordinal numbers which enables the system to determine how similar a data sample is to other data samples. Categorical numbers provide information about similar or dissimilar different data samples are from each other. For example, categorical numbers can be used in facial recognition applications to represent different images of faces and/or features of the faces. The system provides a technical advantage by allowing the system to assign correlithm objects represented by categorical numbers to different data samples based on how similar they are to other data samples. As an example, the system is able to assign correlithm objects to different images of people such that the correlithm objects can be directly used to determine how similar the people in the images are to each other. In other words, the system is able to use correlithm objects in facial recognition applications to quickly determine whether a captured image of a person matches any previously stored images without relying on conventional signal processing techniques.

[0010] Correlithm object processing systems use new types of data structures called correlithm objects that improve the way a device operates, for example, by enabling the device to perform non-binary data set comparisons and to quantify the similarity between different data samples. Correlithm objects are data structures designed to improve the way a device stores, retrieves, and compares data samples in memory. Correlithm objects also provide a data structure that is independent of the data type and format of the data samples they represent. Correlithm objects allow data samples to be directly compared regardless of their original data type and/or format.

[0011] A correlithm object processing system uses a combination of a sensor table, a node table, and/or an actor table to provide a specific set of rules that improve computer-related technologies by enabling devices to compare and to determine the degree of similarity between different data samples regardless of the data type and/or format of the data sample they represent. The ability to directly compare data samples having different data types and/or formatting is a new functionality that cannot be performed using conventional computing systems and data structures.

[0012] In addition, correlithm object processing system uses a combination of a sensor table, a node table, and/or an actor table to provide a particular manner for transforming data samples between ordinal number representations and correlithm objects in a correlithm object domain. Transforming data samples between ordinal number representations and correlithm objects involves fundamentally changing the data type of data samples between an ordinal number system and a categorical number system to achieve the previously described benefits of the correlithm object processing system.

[0013] Using correlithm objects allows the system or device to compare data samples (e.g. images) even when the input data sample does not exactly match any known or previously stored input values. For example, an input data sample that is an image may have different lighting conditions than the previously stored images. The differences in lighting conditions can make images of the same person appear different from each other. The device uses an unconventional configuration that implements a correlithm object processing system that uses the distance between the data samples which are represented as correlithm objects and other known data samples to determine whether the input data sample matches or is similar to the other known data samples. Implementing a correlithm object processing system fundamentally changes the device and the traditional data processing paradigm. Implementing the correlithm object processing system improves the operation of the device by enabling the device to perform non-binary comparisons of data samples. In other words, the device is able to determine how similar the data samples are to each other even when the data samples are not exact matches. In addition, the device is able to quantify how similar data samples are to one another. The ability to determine how similar data samples are to each other is unique and distinct from conventional computers that can only perform binary comparisons to identify exact matches.

[0014] The problems associated with comparing data sets and identifying matches based on the comparison are problems necessarily rooted in computer technologies. As described above, conventional systems are limited to a binary comparison that can only determine whether an exact match is found. Emulating a correlithm object processing system provides a technical solution that addresses problems associated with comparing data sets and identifying matches. Using correlithm objects to represent data samples fundamentally changes the operation of a device and how the device views data samples. By implementing a correlithm object processing system, the device can determine the distance between the data samples and other known data samples to determine whether the input data sample matches or is similar to the other known data samples. In addition, the device is able to determine a degree of similarity that quantifies how similar different data samples are to one another.

[0015] Certain embodiments of the present disclosure may include some, all, or none of these advantages. These advantages and other features will be more clearly understood from the following detailed description taken in conjunction with the accompanying drawings and claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] For a more complete understanding of this disclosure, reference is now made to the following brief description, taken in connection with the accompanying drawings and detailed description, wherein like reference numerals represent like parts.

[0017] FIG. 1 is a schematic view of an embodiment of a special purpose computer implementing correlithm objects in an n-dimensional space;

[0018] FIG. 2 is a perspective view of an embodiment of a mapping between correlithm objects in different n-dimensional spaces;

[0019] FIG. 3 is a schematic view of an embodiment of a correlithm object processing system;

[0020] FIG. 4 is a protocol diagram of an embodiment of a correlithm object process flow;

[0021] FIG. 5 is a schematic diagram of an embodiment a computer architecture for emulating a correlithm object processing system;

[0022] FIG. 6 is a schematic diagram of an embodiment of a correlithm object delay node for a correlithm object processing system;

[0023] FIG. 7A is an embodiment of a table demonstrating a delay operation for correlithm object delay node;

[0024] FIG. 7B is an embodiment of a table demonstrating a state hold delay operation for correlithm object delay node;

[0025] FIG. 8 is a schematic diagram of an embodiment of a correlithm object delay line that includes multiple stages of correlithm object delay nodes;

[0026] FIG. 9 is an embodiment of a table that demonstrating an example delay operation for correlithm object delay line;

[0027] FIG. 10 is a schematic diagram of an embodiment of a finite impulse response filter 1000 implemented using correlithm object delay nodes;

[0028] FIG. 11 is a schematic diagram of an embodiment of an infinite impulse response filter implemented using correlithm object delay nodes;

[0029] FIG. 12 is schematic diagram of an embodiment of an asynchronous correlithm object processing system;

[0030] FIG. 13 is an embodiment of a timing diagram for an asynchronous correlithm object processing system;

[0031] FIG. 14 is a schematic diagram of an embodiment of a synchronous correlithm object processing system;

[0032] FIG. 15 is a flowchart of an embodiment of a process for emulating a synchronous correlithm object processing system;

[0033] FIG. 16 is a schematic diagram of an embodiment of a synchronous correlithm object processing system with a master boss and a slave boss; and

[0034] FIG. 17 is a schematic diagram of an embodiment of a synchronous correlithm object processing system with a master boss and multiple slave bosses.

DETAILED DESCRIPTION

[0035] FIGS. 1-5 generally describe various embodiments of how a correlithm object processing system may be implemented or emulated in hardware, such as a special purpose computer.

[0036] FIG. 1 is a schematic view of an embodiment of a user device 100 implementing correlithm objects 104 in an n-dimensional space 102. Examples of user devices 100 include, but are not limited to, desktop computers, mobile phones, tablet computers, laptop computers, or other special purpose computer platforms. The user device 100 is configured to implement or emulate a correlithm object processing system that uses categorical numbers to represent data samples as correlithm objects 104 in a high-dimensional space 102, for example a high-dimensional binary cube. Additional information about the correlithm object processing system is described in FIG. 3. Additional information about configuring the user device 100 to implement or emulate a correlithm object processing system is described in FIG. 5.

[0037] Conventional computers rely on the numerical order of ordinal binary integers representing data to perform various operations such as counting, sorting, indexing, and mathematical calculations. Even when performing opera-

tions that involve other number systems (e.g. floating point), conventional computers still resort to using ordinal binary integers to perform any operations. Ordinal based number systems only provide information about the sequence order of the numbers themselves based on their numeric values. Ordinal numbers do not provide any information about any other types of relationships for the data being represented by the numeric values, such as similarity. For example, when a conventional computer uses ordinal numbers to represent data samples (e.g. images or audio signals), different data samples are represented by different numeric values. The different numeric values do not provide any information about how similar or dissimilar one data sample is from another. In other words, conventional computers are only able to make binary comparisons of data samples which only results in determining whether the data samples match or do not match. Unless there is an exact match in ordinal number values, conventional systems are unable to tell if a data sample matches or is similar to any other data samples. As a result, conventional computers are unable to use ordinal numbers by themselves for determining similarity between different data samples, and instead these computers rely on complex signal processing techniques. Determining whether a data sample matches or is similar to other data samples is not a trivial task and poses several technical challenges for conventional computers. These technical challenges result in complex processes that consume processing power which reduces the speed and performance of the system.

[0038] In contrast to conventional systems, the user device 100 operates as a special purpose machine for implementing or emulating a correlithm object processing system. Implementing or emulating a correlithm object processing system improves the operation of the user device 100 by enabling the user device 100 to perform non-binary comparisons (i.e. match or no match) between different data samples. This enables the user device 100 to quantify a degree of similarity between different data samples. This increases the flexibility of the user device 100 to work with data samples having different data types and/or formats, and also increases the speed and performance of the user device 100 when performing operations using data samples. These improvements and other benefits to the user device 100 are described in more detail below and throughout the disclosure.

[0039] For example, the user device 100 employs the correlithm object processing system to allow the user device 100 to compare data samples even when the input data sample does not exactly match any known or previously stored input values. Implementing a correlithm object processing system fundamentally changes the user device 100 and the traditional data processing paradigm. Implementing the correlithm object processing system improves the operation of the user device 100 by enabling the user device 100 to perform non-binary comparisons of data samples. In other words, the user device 100 is able to determine how similar the data samples are to each other even when the data samples are not exact matches. In addition, the user device 100 is able to quantify how similar data samples are to one another. The ability to determine how similar data samples are to each others is unique and distinct from conventional computers that can only perform binary comparisons to identify exact matches.

[0040] The user device's 100 ability to perform non-binary comparisons of data samples also fundamentally changes traditional data searching paradigms. For example,

conventional search engines rely on finding exact matches or exact partial matches of search tokens to identify related data samples. For instance, conventional text-based search engine are limited to finding related data samples that have text that exactly matches other data samples. These search engines only provide a binary result that identifies whether or not an exact match was found based on the search token. Implementing the correlithm object processing system improves the operation of the user device 100 by enabling the user device 100 to identify related data samples based on how similar the search token is to other data sample. These improvements result in increased flexibility and faster search time when using a correlithm object processing system. The ability to identify similarities between data samples expands the capabilities of a search engine to include data samples that may not have an exact match with a search token but are still related and similar in some aspects. The user device 100 is also able to quantify how similar data samples are to each other based on characteristics besides exact matches to the search token. Implementing the correlithm object processing system involves operating the user device 100 in an unconventional manner to achieve these technological improvements as well as other benefits described below for the user device 100.

[0041] Computing devices typically rely on the ability to compare data sets (e.g. data samples) to one another for processing. For example, in security or authentication applications a computing device is configured to compare an input of an unknown person to a data set of known people (or biometric information associated with these people). The problems associated with comparing data sets and identifying matches based on the comparison are problems necessarily rooted in computer technologies.

[0042] As described above, conventional systems are limited to a binary comparison that can only determine whether an exact match is found. As an example, an input data sample that is an image of a person may have different lighting conditions than previously stored images. In this example, different lighting conditions can make images of the same person appear different from each other. Conventional computers are unable to distinguish between two images of the same person with different lighting conditions and two images of two different people without complicated signal processing. In both of these cases, conventional computers can only determine that the images are different. This is because conventional computers rely on manipulating ordinal numbers for processing.

[0043] In contrast, the user device 100 uses an unconventional configuration that uses correlithm objects to represent data samples. Using correlithm objects to represent data samples fundamentally changes the operation of the user device 100 and how the device views data samples. By implementing a correlithm object processing system, the user device 100 can determine the distance between the data samples and other known data samples to determine whether the input data sample matches or is similar to the other known data samples, as explained in detail below. Unlike the conventional computers described in the previous example, the user device 100 is able to distinguish between two images of the same person with different lighting conditions and two images of two different people by using correlithm objects 104. Correlithm objects allow the user device 100 to determine whether there are any similarities between data samples, such as between two images that are different from

each other in some respects but similar in other respects. For example, the user device 100 is able to determine that despite different lighting conditions, the same person is present in both images.

[0044] In addition, the user device 100 is able to determine a degree of similarity that quantifies how similar different data samples are to one another. Implementing a correlithm object processing system in the user device 100 improves the operation of the user device 100 when comparing data sets and identifying matches by allowing the user device 100 to perform non-binary comparisons between data sets and to quantify the similarity between different data samples. In addition, using a correlithm object processing system results in increased flexibility and faster search times when comparing data samples or data sets. Thus, implementing a correlithm object processing system in the user device 100 provides a technical solution to a problem necessarily rooted in computer technologies.

[0045] The ability to implement a correlithm object processing system provides a technical advantage by allowing the system to identify and compare data samples regardless of whether an exact match has been previously observed or stored. In other words, using the correlithm object processing system the user device 100 is able to identify similar data samples to an input data sample in the absence of an exact match. This functionality is unique and distinct from conventional computers that can only identify data samples with exact matches.

[0046] Examples of data samples include, but are not limited to, images, files, text, audio signals, biometric signals, electric signals, or any other suitable type of data. A correlithm object 104 is a point in the n-dimensional space 102, sometimes called an "n-space." The value of n represents the number of dimensions of the space. For example, an n-dimensional space 102 may be a 3-dimensional space, a 50-dimensional space, a 100-dimensional space, or any other suitable dimension space. The number of dimensions depends on its ability to support certain statistical tests, such as the distances between pairs of randomly chosen points in the space approximating a normal distribution. In some embodiments, increasing the number of dimensions in the n-dimensional space 102 modifies the statistical properties of the system to provide improved results. Increasing the number of dimensions increases the probability that a correlithm object 104 is similar to other adjacent correlithm objects 104. In other words, increasing the number of dimensions increases the correlation between how close a pair of correlithm objects 104 are to each other and how similar the correlithm objects 104 are to each other.

[0047] Correlithm object processing systems use new types of data structures called correlithm objects 104 that improve the way a device operates, for example, by enabling the device to perform non-binary data set comparisons and to quantify the similarity between different data samples. Correlithm objects 104 are data structures designed to improve the way a device stores, retrieves, and compares data samples in memory. Unlike conventional data structures, correlithm objects 104 are data structures where objects can be expressed in a high-dimensional space such that distance 106 between points in the space represent the similarity between different objects or data samples. In other words, the distance 106 between a pair of correlithm objects 104 in the n-dimensional space 102 indicates how similar the correlithm objects 104 are from each other and the data

samples they represent. Correlithm objects **104** that are close to each other are more similar to each other than correlithm objects **104** that are further apart from each other. For example, in a facial recognition application, correlithm objects **104** used to represent images of different types of glasses may be relatively close to each other compared to correlithm objects **104** used to represent images of other features such as facial hair. An exact match between two data samples occurs when their corresponding correlithm objects **104** are the same or have no distance between them. When two data samples are not exact matches but are similar, the distance between their correlithm objects **104** can be used to indicate their similarities. In other words, the distance **106** between correlithm objects **104** can be used to identify both data samples that exactly match each other as well as data samples that do not match but are similar. This feature is unique to a correlithm processing system and is unlike conventional computers that are unable to detect when data samples are different but similar in some aspects.

[0048] Correlithm objects **104** also provide a data structure that is independent of the data type and format of the data samples they represent. Correlithm objects **104** allow data samples to be directly compared regardless of their original data type and/or format. In some instances, comparing data samples as correlithm objects **104** is computationally more efficient and faster than comparing data samples in their original format. For example, comparing images using conventional data structures involves significant amounts of image processing which is time consuming and consumes processing resources. Thus, using correlithm objects **104** to represent data samples provides increased flexibility and improved performance compared to using other conventional data structures.

[0049] In one embodiment, correlithm objects **104** may be represented using categorical binary strings. The number of bits used to represent the correlithm object **104** corresponds with the number of dimensions of the n-dimensional space **102** where the correlithm object **102** is located. For example, each correlithm object **104** may be uniquely identified using a 64-bit string in a 64-dimensional space **102**. As another example, each correlithm object **104** may be uniquely identified using a 10-bit string in a 10-dimensional space **102**. In other examples, correlithm objects **104** can be identified using any other suitable number of bits in a string that corresponds with the number of dimensions in the n-dimensional space **102**.

[0050] In this configuration, the distance **106** between two correlithm objects **104** can be determined based on the differences between the bits of the two correlithm objects **104**. In other words, the distance **106** between two correlithm objects can be determined based on how many individual bits differ between the correlithm objects **104**. The distance **106** between two correlithm objects **104** can be computed using hamming distance or any other suitable technique.

[0051] As an example using a 10-dimensional space **102**, a first correlithm object **104** is represented by a first 10-bit string (1001011011) and a second correlithm object **104** is represented by a second 10-bit string (1000011011). The hamming distance corresponds with the number of bits that differ between the first correlithm object **104** and the second correlithm object **104**. In other words, the hamming distance between the first correlithm object **104** and the second correlithm object **104** can be computed as follows:

```
1001011011
1000011011
...
0001000000
```

In this example, the hamming distance is equal to one because only one bit differs between the first correlithm object **104** and the second correlithm object. As another example, a third correlithm object **104** is represented by a third 10-bit string (0110100100). In this example, the hamming distance between the first correlithm object **104** and the third correlithm object **104** can be computed as follows:

```
1001011011
0110100100
...
1111111111
```

The hamming distance is equal to ten because all of the bits are different between the first correlithm object **104** and the third correlithm object **104**. In the previous example, a hamming distance equal to one indicates that the first correlithm object **104** and the second correlithm object **104** are close to each other in the n-dimensional space **102**, which means they are similar to each other. In the second example, a hamming distance equal to ten indicates that the first correlithm object **104** and the third correlithm object **104** are further from each other in the n-dimensional space **102** and are less similar to each other than the first correlithm object **104** and the second correlithm object **104**. In other words, the similarity between a pair of correlithm objects can be readily determined based on the distance between the pair correlithm objects.

[0052] As another example, the distance between a pair of correlithm objects **104** can be determined by performing an XOR operation between the pair of correlithm objects **104** and counting the number of logical high values in the binary string. The number of logical high values indicates the number of bits that are different between the pair of correlithm objects **104** which also corresponds with the hamming distance between the pair of correlithm objects **104**.

[0053] In another embodiment, the distance **106** between two correlithm objects **104** can be determined using a Minkowski distance such as the Euclidean or “straight-line” distance between the correlithm objects **104**. For example, the distance **106** between a pair of correlithm objects **104** may be determined by calculating the square root of the sum of squares of the coordinate difference in each dimension.

[0054] The user device **100** is configured to implement or emulate a correlithm object processing system that comprises one or more sensors **302**, nodes **304**, and/or actors **306** in order to convert data samples between real world values or representations and to correlithm objects **104** in a correlithm object domain. Sensors **302** are generally configured to convert real world data samples to the correlithm object domain. Nodes **304** are generally configured to process or perform various operations on correlithm objects in the

correlithm object domain. Actors 306 are generally configured to convert correlithm objects 104 into real world values or representations. Additional information about sensors 302, nodes 304, and actors 306 is described in FIG. 3.

[0055] Performing operations using correlithm objects 104 in a correlithm object domain allows the user device 100 to identify relationships between data samples that cannot be identified using conventional data processing systems. For example, in the correlithm object domain, the user device 100 is able to identify not only data samples that exactly match an input data sample, but also other data samples that have similar characteristics or features as the input data samples. Conventional computers are unable to identify these types of relationships readily. Using correlithm objects 104 improves the operation of the user device 100 by enabling the user device 100 to efficiently process data samples and identify relationships between data samples without relying on signal processing techniques that require a significant amount of processing resources. These benefits allow the user device 100 to operate more efficiently than conventional computers by reducing the amount of processing power and resources that are needed to perform various operations.

[0056] FIG. 2 is a schematic view of an embodiment of a mapping between correlithm objects 104 in different n-dimensional spaces 102. When implementing a correlithm object processing system, the user device 100 performs operations within the correlithm object domain using correlithm objects 104 in different n-dimensional spaces 102. As an example, the user device 100 may convert different types of data samples having real world values into correlithm objects 104 in different n-dimensional spaces 102. For instance, the user device 100 may convert data samples of text into a first set of correlithm objects 104 in a first n-dimensional space 102 and data samples of audio samples as a second set of correlithm objects 104 in a second n-dimensional space 102. Conventional systems require data samples to be of the same type and/or format in order to perform any kind of operation on the data samples. In some instances, some types of data samples cannot be compared because there is no common format available. For example, conventional computers are unable to compare data samples of images and data samples of audio samples because there is no common format. In contrast, the user device 100 implementing a correlithm object processing system is able to compare and perform operations using correlithm objects 104 in the correlithm object domain regardless of the type or format of the original data samples.

[0057] In FIG. 2, a first set of correlithm objects 104A are defined within a first n-dimensional space 102A and a second set of correlithm objects 104B are defined within a second n-dimensional space 102B. The n-dimensional spaces may have the same number dimensions or a different number of dimensions. For example, the first n-dimensional space 102A and the second n-dimensional space 102B may both be three dimensional spaces. As another example, the first n-dimensional space 102A may be a three dimensional space and the second n-dimensional space 102B may be a nine dimensional space. Correlithm objects 104 in the first n-dimensional space 102A and second n-dimensional space 102B are mapped to each other. In other words, a correlithm object 104A in the first n-dimensional space 102A may reference or be linked with a particular correlithm object 104B in the second n-dimensional space 102B. The corre-

lithm objects 104 may also be linked with and referenced with other correlithm objects 104 in other n-dimensional spaces 102.

[0058] In one embodiment, a data structure such as table 200 may be used to map or link correlithm objects 194 in different n-dimensional spaces 102. In some instances, table 200 is referred to as a node table. Table 200 is generally configured to identify a first plurality of correlithm objects 104 in a first n-dimensional space 102 and a second plurality of correlithm objects 104 in a second n-dimensional space 102. Each correlithm object 104 in the first n-dimensional space 102 is linked with a correlithm object 104 in the second n-dimensional space 102. For example, table 200 may be configured with a first column 202 that lists correlithm objects 104A as source correlithm objects and a second column 204 that lists corresponding correlithm objects 104B as target correlithm objects. In other examples, table 200 may be configured in any other suitable manner or may be implemented using any other suitable data structure. In some embodiments, one or more mapping functions may be used to convert between a correlithm object 104 in a first n-dimensional space and a correlithm object 104 in a second n-dimensional space.

[0059] FIG. 3 is a schematic view of an embodiment of a correlithm object processing system 300 that is implemented by a user device 100 to perform operations using correlithm objects 104. The system 300 generally comprises a sensor 302, a node 304, and an actor 306. The system 300 may be configured with any suitable number and/or configuration of sensors 302, nodes 304, and actors 306. An example of the system 300 in operation is described in FIG. 4. In one embodiment, a sensor 302, a node 304, and an actor 306 may all be implemented on the same device (e.g. user device 100). In other embodiments, a sensor 302, a node 304, and an actor 306 may each be implemented on different devices in signal communication with each other for example over a network. In other embodiments, different devices may be configured to implement any combination of sensors 302, nodes 304, and actors 306.

[0060] Sensors 302 serve as interfaces that allow a user device 100 to convert real world data samples into correlithm objects 104 that can be used in the correlithm object domain. Sensors 302 enable the user device 100 compare and perform operations using correlithm objects 104 regardless of the data type or format of the original data sample. Sensors 302 are configured to receive a real world value 320 representing a data sample as an input, to determine a correlithm object 104 based on the real world value 320, and to output the correlithm object 104. For example, the sensor 302 may receive an image 301 of a person and output a correlithm object 322 to the node 304 or actor 306. In one embodiment, sensors 302 are configured to use sensor tables 308 that link a plurality of real world values with a plurality of correlithm objects 104 in an n-dimensional space 102. Real world values are any type of signal, value, or representation of data samples. Examples of real world values include, but are not limited to, images, pixel values, text, audio signals, electrical signals, and biometric signals. As an example, a sensor table 308 may be configured with a first column 312 that lists real world value entries corresponding with different images and a second column 314 that lists corresponding correlithm objects 104 as input correlithm objects. In other examples, sensor tables 308 may be configured in any other suitable manner or may be implemented

using any other suitable data structure. In some embodiments, one or more mapping functions may be used to translate between a real world value **320** and a correlithm object **104** in a n-dimensional space **102**. Additional information for implementing or emulating a sensor **302** in hardware is described in FIG. 5.

[0061] Nodes **304** are configured to receive a correlithm object **104** (e.g. an input correlithm object **104**), to determine another correlithm object **104** based on the received correlithm object **104**, and to output the identified correlithm object **104** (e.g. an output correlithm object **104**). In one embodiment, nodes **304** are configured to use node tables **200** that link a plurality of correlithm objects **104** from a first n-dimensional space **102** with a plurality of correlithm objects **104** in a second n-dimensional space **102**. A node table **200** may be configured similar to the table **200** described in FIG. 2. Additional information for implementing or emulating a node **304** in hardware is described in FIG. 5.

[0062] Actors **306** serve as interfaces that allow a user device **100** to convert correlithm objects **104** in the correlithm object domain back to real world values or data samples. Actors **306** enable the user device **100** to convert from correlithm objects **104** into any suitable type of real world value. Actors **306** are configured to receive a correlithm object **104** (e.g. an output correlithm object **104**), to determine a real world output value **326** based on the received correlithm object **104**, and to output the real world output value **326**. The real world output value **326** may be a different data type or representation of the original data sample. As an example, the real world input value **320** may be an image **301** of a person and the resulting real world output value **326** may be text **327** and/or an audio signal identifying the person. In one embodiment, actors **306** are configured to use actor tables **310** that link a plurality of correlithm objects **104** in an n-dimensional space **102** with a plurality of real world values. As an example, an actor table **310** may be configured with a first column **316** that lists correlithm objects **104** as output correlithm objects and a second column **318** that lists real world values. In other examples, actor tables **310** may be configured in any other suitable manner or may be implemented using any other suitable data structure. In some embodiments, one or more mapping functions may be employed to translate between a correlithm object **104** in an n-dimensional space and a real world output value **326**. Additional information for implementing or emulating an actor **306** in hardware is described in FIG. 5.

[0063] A correlithm object processing system **300** uses a combination of a sensor table **308**, a node table **200**, and/or an actor table **310** to provide a specific set of rules that improve computer-related technologies by enabling devices to compare and to determine the degree of similarity between different data samples regardless of the data type and/or format of the data sample they represent. The ability to directly compare data samples having different data types and/or formatting is a new functionality that cannot be performed using conventional computing systems and data structures. Conventional systems require data samples to be of the same type and/or format in order to perform any kind of operation on the data samples. In some instances, some types of data samples are incompatible with each other and cannot be compared because there is no common format available. For example, conventional computers are unable

to compare data samples of images with data samples of audio samples because there is no common format available. In contrast, a device implementing a correlithm object processing system uses a combination of a sensor table **308**, a node table **200**, and/or an actor table **310** to compare and perform operations using correlithm objects **104** in the correlithm object domain regardless of the type or format of the original data samples. The correlithm object processing system **300** uses a combination of a sensor table **308**, a node table **200**, and/or an actor table **310** as a specific set of rules that provides a particular solution to dealing with different types of data samples and allows devices to perform operations on different types of data samples using correlithm objects **104** in the correlithm object domain. In some instances, comparing data samples as correlithm objects **104** is computationally more efficient and faster than comparing data samples in their original format. Thus, using correlithm objects **104** to represent data samples provides increased flexibility and improved performance compared to using other conventional data structures. The specific set of rules used by the correlithm object processing system **300** go beyond simply using routine and conventional activities in order to achieve this new functionality and performance improvements.

[0064] In addition, correlithm object processing system **300** uses a combination of a sensor table **308**, a node table **200**, and/or an actor table **310** to provide a particular manner for transforming data samples between ordinal number representations and correlithm objects **104** in a correlithm object domain. For example, the correlithm object processing system **300** may be configured to transform a representation of a data sample into a correlithm object **104**, to perform various operations using the correlithm object **104** in the correlithm object domain, and to transform a resulting correlithm object **104** into another representation of a data sample. Transforming data samples between ordinal number representations and correlithm objects **104** involves fundamentally changing the data type of data samples between an ordinal number system and a categorical number system to achieve the previously described benefits of the correlithm object processing system **300**.

[0065] FIG. 4 is a protocol diagram of an embodiment of a correlithm object process flow **400**. A user device **100** implements process flow **400** to emulate a correlithm object processing system **300** to perform operations using correlithm object **104** such as facial recognition. The user device **100** implements process flow **400** to compare different data samples (e.g. images, voice signals, or text) are to each other and to identify other objects based on the comparison. Process flow **400** provides instructions that allows user devices **100** to achieve the improved technical benefits of a correlithm object processing system **300**.

[0066] Conventional systems are configured to use ordinal numbers for identifying different data samples. Ordinal based number systems only provide information about the sequence order of numbers based on their numeric values, and do not provide any information about any other types of relationships for the data samples being represented by the numeric values such as similarity. In contrast, a user device **100** can implement or emulate the correlithm object processing system **300** which provides an unconventional solution that uses categorical numbers and correlithm objects **104** to represent data samples. For example, the system **300** may be configured to use binary integers as categorical

numbers to generate correlithm objects **104** which enables the user device **100** to perform operations directly based on similarities between different data samples. Categorical numbers provide information about how similar different data sample are from each other. Correlithm objects **104** generated using categorical numbers can be used directly by the system **300** for determining how similar different data samples are from each other without relying on exact matches, having a common data type or format, or conventional signal processing techniques.

[0067] A non-limiting example is provided to illustrate how the user device **100** implements process flow **400** to emulate a correlithm object processing system **300** to perform facial recognition on an image to determine the identity of the person in the image. In other examples, the user device **100** may implement process flow **400** to emulate a correlithm object processing system **300** to perform voice recognition, text recognition, or any other operation that compares different objects.

[0068] At step **402**, a sensor **302** receives an input signal representing a data sample. For example, the sensor **302** receives an image of person's face as a real world input value **320**. The input signal may be in any suitable data type or format. In one embodiment, the sensor **302** may obtain the input signal in real-time from a peripheral device (e.g. a camera). In another embodiment, the sensor **302** may obtain the input signal from a memory or database.

[0069] At step **404**, the sensor **302** identifies a real world value entry in a sensor table **308** based on the input signal. In one embodiment, the system **300** identifies a real world value entry in the sensor table **308** that matches the input signal. For example, the real world value entries may comprise previously stored images. The sensor **302** may compare the received image to the previously stored images to identify a real world value entry that matches the received image. In one embodiment, when the sensor **302** does not find an exact match, the sensor **302** finds a real world value entry that closest matches the received image.

[0070] At step **406**, the sensor **302** identifies and fetches an input correlithm object **104** in the sensor table **308** linked with the real world value entry. At step **408**, the sensor **302** sends the identified input correlithm object **104** to the node **304**. In one embodiment, the identified input correlithm object **104** is represented in the sensor table **308** using a categorical binary integer string. The sensor **302** sends the binary string representing to the identified input correlithm object **104** to the node **304**.

[0071] At step **410**, the node **304** receives the input correlithm object **104** and determines distances **106** between the input correlithm object **104** and each source correlithm object **104** in a node table **200**. In one embodiment, the distance **106** between two correlithm objects **104** can be determined based on the differences between the bits of the two correlithm objects **104**. In other words, the distance **106** between two correlithm objects can be determined based on how many individual bits differ between a pair of correlithm objects **104**. The distance **106** between two correlithm objects **104** can be computed using hamming distance or any other suitable technique. In another embodiment, the distance **106** between two correlithm objects **104** can be determined using a Minkowski distance such as the Euclidean or "straight-line" distance between the correlithm objects **104**. For example, the distance **106** between a pair of

correlithm objects **104** may be determined by calculating the square root of the sum of squares of the coordinate difference in each dimension.

[0072] At step **412**, the node **304** identifies a source correlithm object **104** from the node table **200** with the shortest distance **106**. A source correlithm object **104** with the shortest distance from the input correlithm object **104** is a correlithm object **104** either matches or most closely matches the received input correlithm object **104**.

[0073] At step **414**, the node **304** identifies and fetches a target correlithm object **104** in the node table **200** linked with the source correlithm object **104**. At step **416**, the node **304** outputs the identified target correlithm object **104** to the actor **306**. In this example, the identified target correlithm object **104** is represented in the node table **200** using a categorical binary integer string. The node **304** sends the binary string representing to the identified target correlithm object **104** to the actor **306**.

[0074] At step **418**, the actor **306** receives the target correlithm object **104** and determines distances between the target correlithm object **104** and each output correlithm object **104** in an actor table **310**. The actor **306** may compute the distances between the target correlithm object **104** and each output correlithm object **104** in an actor table **310** using a process similar to the process described in step **410**.

[0075] At step **420**, the actor **306** identifies an output correlithm object **104** from the actor table **310** with the shortest distance **106**. An output correlithm object **104** with the shortest distance from the target correlithm object **104** is a correlithm object **104** either matches or most closely matches the received target correlithm object **104**.

[0076] At step **422**, the actor **306** identifies and fetches a real world output value in the actor table **310** linked with the output correlithm object **104**. The real world output value may be any suitable type of data sample that corresponds with the original input signal. For example, the real world output value may be text that indicates the name of the person in the image or some other identifier associated with the person in the image. As another example, the real world output value may be an audio signal or sample of the name of the person in the image. In other examples, the real world output value may be any other suitable real world signal or value that corresponds with the original input signal. The real world output value may be in any suitable data type or format.

[0077] At step **424**, the actor **306** outputs the identified real world output value. In one embodiment, the actor **306** may output the real world output value in real-time to a peripheral device (e.g. a display or a speaker). In one embodiment, the actor **306** may output the real world output value to a memory or database. In one embodiment, the real world output value is sent to another sensor **302**. For example, the real world output value may be sent to another sensor **302** as an input for another process.

[0078] FIG. **5** is a schematic diagram of an embodiment a computer architecture **500** for emulating a correlithm object processing system **300** in a user device **100**. The computer architecture **500** comprises a processor **502**, a memory **504**, a network interface **506**, and an input-output (I/O) interface **508**. The computer architecture **500** may be configured as shown or in any other suitable configuration.

[0079] The processor **502** comprises one or more processors operably coupled to the memory **504**. The processor **502** is any electronic circuitry including, but not limited to,

state machines, one or more central processing unit (CPU) chips, logic units, cores (e.g. a multi-core processor), field-programmable gate array (FPGAs), application specific integrated circuits (ASICs), graphics processing units (GPUs), or digital signal processors (DSPs). The processor **502** may be a programmable logic device, a microcontroller, a micro-processor, or any suitable combination of the preceding. The processor **502** is communicatively coupled to and in signal communication with the memory **204**. The one or more processors are configured to process data and may be implemented in hardware or software. For example, the processor **502** may be 8-bit, 16-bit, 32-bit, 64-bit or of any other suitable architecture. The processor **502** may include an arithmetic logic unit (ALU) for performing arithmetic and logic operations, processor registers that supply operands to the ALU and store the results of ALU operations, and a control unit that fetches instructions from memory and executes them by directing the coordinated operations of the ALU, registers and other components.

[0080] The one or more processors are configured to implement various instructions. For example, the one or more processors are configured to execute instructions to implement sensor engines **510**, delay node engines **511**, node engines **512**, boss engines **513**, and actor engines **514**. In an embodiment, the sensor engines **510**, the node engines **512**, and the actor engines **514** are implemented using logic units, FPGAs, ASICs, DSPs, or any other suitable hardware.

[0081] In one embodiment, the sensor engine **510** is configured to receive a real world value **320** as an input, to determine a correlithm object **104** based on the real world value **320**, and to output the correlithm object **104**. Examples of the sensor engine **510** in operation are described in FIGS. **4** and **11**.

[0082] In one embodiment, the node engine **512** is configured to receive a correlithm object **104** (e.g. an input correlithm object **104**), to determine another correlithm object **104** based on the received correlithm object **104**, and to output the identified correlithm object **104** (e.g. an output correlithm object **104**). The node engine **512** is also configured to compute distances between pairs of correlithm objects **104**. Examples of the node engine **512** in operation are described in FIGS. **4**, **6-12**, **14**, **15A**, **15B**, and **18**.

[0083] In one embodiment, the delay node engine **511** is configured to receive a correlithm object **104** and then output the correlithm object **104** after a predetermined amount of time has elapsed. In other words, the delay node engine **511** is configured to provide delays or delay lines for a correlithm object processing system. Examples of the delay node engine **511** in operation are described in FIGS. **6-11**.

[0084] In one embodiment, the boss engine **513** is configured to control and synchronize components within a correlithm object processing system. The boss engine **513** is configured to send commands (e.g. execute commands or output commands) to components within a correlithm object processing system to control their operation. Examples of the boss engine **513** in operation are described in FIGS. **14-17**.

[0085] In one embodiment, the actor engine **514** is configured to receive a correlithm object **104** (e.g. an output correlithm object **104**), to determine a real world output value **326** based on the received correlithm object **104**, and

to output the real world output value **326**. Examples of the actor engine **514** in operation are described in FIGS. **4** and **11**.

[0086] The memory **504** comprises one or more non-transitory disks, tape drives, or solid-state drives, and may be used as an over-flow data storage device, to store programs when such programs are selected for execution, and to store instructions and data that are read during program execution. The memory **504** may be volatile or non-volatile and may comprise read-only memory (ROM), random-access memory (RAM), ternary content-addressable memory (TCAM), dynamic random-access memory (DRAM), and static random-access memory (SRAM). The memory **504** is operable to store sensor instructions **516**, node instructions **518**, actor instructions **520**, sensor tables **308**, node tables **200**, actor tables **310**, and/or any other data or instructions. The sensor instructions **516**, the node instructions **518**, the delay node instructions **521**, the boss instructions **523**, and the actor instructions **520** comprise any suitable set of instructions, logic, rules, or code operable to execute the sensor engine **510**, node engine **512**, the delay node engine **511**, the boss engine **513**, and the actor engine **514**, respectively.

[0087] The sensor tables **308**, the node tables **200**, and the actor tables **310** may be configured similar to the sensor tables **308**, the node tables **200**, and the actor tables **310** described in FIG. **3**, respectively. The boss table **1403** generally comprises a list of components within a correlithm object processing system. Additional information about boss tables **1403** is described in FIGS. **14-17**.

[0088] The network interface **506** is configured to enable wired and/or wireless communications. The network interface **506** is configured to communicate data with any other device or system. For example, the network interface **506** may be configured for communication with a modem, a switch, a router, a bridge, a server, or a client. The processor **502** is configured to send and receive data using the network interface **506**.

[0089] The I/O interface **508** may comprise ports, transmitters, receivers, transceivers, or any other devices for transmitting and/or receiving data with peripheral devices as would be appreciated by one of ordinary skill in the art upon viewing this disclosure. For example, the I/O interface **508** may be configured to communicate data between the processor **502** and peripheral hardware such as a graphical user interface, a display, a mouse, a keyboard, a key pad, and a touch sensor (e.g. a touch screen).

[0090] FIGS. **6-11** generally describe embodiments for how delay nodes and delay lines may be emulated or implemented in a correlithm object processing system **300** by a device **100**. Using delay nodes and delay lines allows the device **100** to introduce delays into a correlithm object processing system **300**. These delays can be used to control data flow within an asynchronous or synchronous correlithm object processing system. Examples of an asynchronous or synchronous correlithm object processing system are described in FIGS. **12-17**. Controlling data flow improves the speed and efficiency of the device **100** when implementing a correlithm object processing system **300**.

[0091] FIG. **6** illustrates one embodiment of a correlithm object delay node **600** that receives an input correlithm object **602** and communicates an output correlithm object **604** after a delay time, as described in detail below. Delay node **600** includes an input interface **606**, output interface

608, processor 610, and memory 612. Processor 610 and memory 612 may be the same or different than processor 502 and memory 504, respectively, described above. In some embodiments, memory 612 includes correlithm object values 614 that are used to validate input correlithm object 602, as described in detail below. In some embodiments, delay node 600 further includes a clock input interface 616 that receives a clock signal 618 that can be used to control the delay time between receiving the input correlithm object 602 and communicating the output correlithm object 604. For example, a delay node 600 may be configured to emulate one digital clock cycle. In another example, the delay node 600 may be configured to emulate more than one digital clock cycle. For instance, the delay node 600 may emulate a delay of two clock cycles, five clock cycles, or any other suitable number of clock cycles. In some embodiments, delay node 600 further includes a state input interface 620 that receives a feedback signal 622 to implement a state hold delay operation, as described in further detail below.

[0092] In operation, input interface 606 of correlithm object delay node 600 receives input correlithm object 602 at a first time (e.g., T₀) and communicates it as an output correlithm object 605 at a second time (e.g., T₁) later than the first time. In one embodiment, delay node 600 validates input correlithm object 602 to confirm that it is not noise or some other spurious signal by comparing it against a plurality of correlithm object values 614 stored in memory 612. Correlithm object values 614 represent correlithm objects that are predetermined to be valid inputs or outputs within the correlithm object processing system. For example, these may be correlithm objects that have been processed by other nodes within the correlithm object processing system. In another example, these may be correlithm objects that have been determined to represent real-world data by a sensor 302. To determine the validity of an input correlithm object 602, processor 610 determines the Hamming distance between input correlithm object 602 and each of the correlithm object values 614 stored in memory 612. If any of the determined Hamming distances are within a predetermined threshold of validity, then the input correlithm object 602 is determined to be valid and is stored in memory 612. By first determining that the input correlithm object 602 is valid, delay node 600 can avoid storing and communicating noise or some other spurious signal that is not, in fact, a valid input.

[0093] The predetermined threshold of validity can be, for example, a predetermined number of bits that can be different between the input correlithm object 602 and a corresponding one of the correlithm object values 614 while still indicating that the n-dimensional space 102 between input correlithm object 602 and that correlithm object value 614 is small enough to conclude with a high degree of likelihood that the input correlithm object 602 is that correlithm object value 614. For example, if the input correlithm object 602 and the correlithm object values 614 are each 64-bit digital values, then a Hamming distance of up to 8 bits signifies to a high degree of probability that the input correlithm object 602 and a corresponding correlithm object value 614 are the same. Similarly, if the input correlithm object 602 and the correlithm object values 614 are each 128-bit digital values, then a Hamming distance of up to 30 bits signifies to a high degree of probability that the input correlithm object 602 and a corresponding correlithm object value 614 are the same.

[0094] In some embodiments, the delay node 600 may be configured to receive input correlithm object 602 at a first time (e.g., T₀) and communicate it as an output correlithm object 605 at a second time (e.g., T₁) later than the first time without determining whether the input correlithm object 602 is a predetermined valid input. For example, the delay node 600 may communicate a received correlithm object 602 as an output correlithm object 605 after a predetermined amount of delay regardless of the correlithm object's value.

[0095] Delay node 600 determines an appropriate delay between the time at which it receives input correlithm object 602 and the time it communicates it as output correlithm object 604. In one embodiment, the correlithm object delay node 600 communicates output correlithm object 604 asynchronously, such as by communicating output correlithm object 604 as soon as possible, or according to the schedules of other nodes rather than according to a synchronized clock. In another embodiment, the delay node 600 communicates output correlithm object 604 according to synchronized clock signal 618 that may be associated with one or more Boss nodes, as explained in further detail below. In another embodiment, the delay node 600 communicates output correlithm object 604 according to a digital clock signal generated or provided by the delay node 600. In another embodiment, the delay node 600 communicates output correlithm object 604 according to a digital clock signal provided by a processor (e.g. processor 502).

[0096] In one embodiment, delay node 600 receives output correlithm object 604 as a feedback signal 622 at state input interface 620. The output correlithm object 604 is stored as state information 624 in memory 612. This state information 624 is used to implement a state hold delay operation as described below in conjunction with FIG. 7B.

[0097] The correlithm object delay node 600 provides technical advantages in the implementation of either synchronous or asynchronous logic. With regard to synchronous logic, the delay node 600 helps to ensure that any changes to logic signals throughout a circuit system begin at the same time, at regular intervals, synchronized by a clock signal 618. Clock signal 618 may be a sequence of repetitive pulses generated by an electronic oscillator or clock generator. One technical problem with implementing synchronous digital circuitry is that the logic gates which perform the operations on data require a finite amount of time to respond to changes to their inputs. This is referred to as propagation delay. The interval between clock pulses should be long enough so that all the logic gates have time to respond to the changes and their outputs "settle" to stable logic values, before the next clock pulse occurs. The delay node 600 helps to ensure that the state of a synchronous circuit changes on clock pulses. At each cycle, the next state can be determined by the current state and the value of the input signals when the clock pulse occurs, as described in greater detail below. This promotes stability and reliability in the operation of synchronous digital circuits.

[0098] With regard to asynchronous logic, the outputs of the circuit change directly in response to changes in inputs and the speed of a logic gate device is potentially limited only by the propagation delays of the logic gates that are used. However, asynchronous logic can be more difficult to design and is subject to problems not encountered in synchronous designs. The main problem is that digital memory elements are sensitive to the order that their input signals arrive. For example, if two signals arrive at a logic gate at

roughly the same time, which state the circuit goes into can depend on which signal gets to the gate first. Therefore, the circuit can go into the wrong state, depending on small differences in the propagation delays of the logic gates. This is called a race condition. Delay node 600 helps to ensure that input signals arrive at logic gates in the proper order, thereby solving a technical problem inherent in asynchronous digital circuitry.

[0099] FIG. 7A illustrates a table 700 demonstrating a delay operation for correlithm object delay node 600. Table 700 includes a time column 702, an input column 704, and an output column 706. Rows 708 are filled with an example to demonstrate the operation of delay node 600. According to the illustrated example, delay node 600 receives an input correlithm object 602 signified as X0 at time T0. After a time delay (e.g., one clock pulse), at time T1, delay node 600 communicates correlithm object 602 signified as X0 as output correlithm object 604. A new input correlithm object 602 is not yet received at time T1 or by time T2. Thus, delay node 600 maintains its most recent input correlithm object 602 signified as X0 at times T1 and T2. Because no new input correlithm object 602 is received by time T1, delay node 600 continues to communicate output correlithm object 602 signified as X0 at time T2. Delay node 600 then receives a new input correlithm object 602 signified as X1 at time T3, and continues to communicate output correlithm object 602 signified as X0 at time T3. After a time delay (e.g., one clock pulse), at time T4, delay node 600 communicates the correlithm object 602 signified as X1 as output correlithm object 604. A new input correlithm object 602 is not yet received at time T4 or by time T5. Because no new input correlithm object 602 is received by time T4, delay node 600 continues to communicate output correlithm object 602 signified as X1 at time T5. The operation of delay node 600 can be expanded beyond the times T0-T5 illustrated in table 700.

[0100] FIG. 7B illustrates a table 750 demonstrating an example state hold delay operation for correlithm object delay node 600 utilizing feedback signal 722. Table 750 includes a time column 752, an input column 754, a state input column 756, and an output column 758. Rows 760 are filled with an example to demonstrate the operation of delay node 600. According to the illustrated example, delay node 600 receives an input correlithm object 602 signified as X0 at time T0. After a time delay (e.g., one clock pulse), at time T1, delay node 600 communicates correlithm object 602 signified as X0 as output correlithm object 604. A new input correlithm object 602 is not yet received at time T1 or by time T2. Thus, no input correlithm object 602 is indicated in column 754 for times T1 and T2. Moreover, output correlithm object 604 signified by X0 is received as feedback signal 622 at state input interface 620 at time T2 and stored in memory 612. In the absence of an input correlithm object 602 in column 754 for time T1, the correlithm object signified by X0 in state input column 756 controls the output correlithm object 604 communicated by delay node 600 at time T2. Delay node 600 receives a new input correlithm object 602 signified as X1 at time T3. Also at time T3, state input column 756 continues to store a correlithm object signified as X0. If the input interface 606 receives a new input correlithm object 602, as it does at time T3, then that correlithm object 602 appears as the output correlithm object 604 a delay time later (e.g., one clock pulse), as illustrated in table 750 for time T4, regardless of what correlithm object

value appears in the state input column 756. A new input correlithm object 602 is not yet received at time T4 or by time T5. Thus, no input correlithm object 602 is indicated in input column 754 for times T4 and T5. Moreover, output correlithm object 604 signified as X1 is received as feedback signal 622 at state input interface 620 at time T5 and stored in memory 612. In the absence of an input correlithm object 602 in column 754 for time T4, the correlithm object 602 signified as X1 in state input column 756 controls the output correlithm object 604 communicated by delay node 600 at time T5.

[0101] FIG. 8 illustrates one embodiment of a correlithm object delay line 800 that includes multiple stages (e.g., three) of correlithm object delay nodes 600A, 600B, and 600C communicatively coupled to each other in series. Each correlithm object delay node 600A-600C of delay line 800 is described in greater detail above with respect to FIGS. 6 and 7A-7B. First correlithm object delay node 600A receives an input correlithm object 602 and communicates an output correlithm object 604 an appropriate delay time later. This output correlithm object 604 of the first correlithm object delay node 600A is then received by second correlithm object delay node 600B as an input correlithm object 602 and communicated as an output correlithm object 604 an appropriate delay time later. The output correlithm object 604 of second delay node 600B is received by third correlithm object delay node 600C as an input correlithm object 602 and communicated as an output correlithm object 604 an appropriate delay time later. In one embodiment, one or more of the correlithm object delay nodes 600A-600C communicates its output correlithm object 604 as a feedback signal 622 back to itself to implement, for example, a state hold delay operation, as described above. Although FIG. 8 illustrates a three-stage correlithm object delay line 800, it should be understood that correlithm object delay line 800 can be implemented with two or more correlithm object delay nodes 600 communicatively coupled in series.

[0102] FIG. 9 illustrates a table 900 demonstrating an example delay operation for correlithm object delay line 800. Table 900 includes a time column 902, an input column 904 and an output column 906 for the first correlithm object delay node 600A, an input column 908 and an output column 910 for the second correlithm object delay node 600B, and an input column 912 and an output column 914 for the third correlithm object delay node 600C. Rows 916 are filled with an example to demonstrate the operation of delay line 800. In operation, the correlithm objects signified as X0-X5 propagate through and among each correlithm object delay node 600A-600C according to suitable time delays.

[0103] For example, with respect to the correlithm object signified as X0, correlithm object delay node 600A receives it as an input correlithm object 602A at time T0 and communicates it as output correlithm object 604A after a suitable delay (e.g., one clock pulse) at time T1; correlithm object delay node 600B receives it as an input correlithm object 602B at time T2 and communicates it as output correlithm object 604B after a suitable delay at time T3; and correlithm object delay node 600C receives it as an input correlithm object 602C at time T4 and communicates it as output correlithm object 604C after a suitable delay at time T5.

[0104] With respect to the correlithm object signified as X1, the correlithm object delay node 600A receives it as an

input correlithm object **602A** at time **T1** and communicates it as output correlithm object **604A** after a suitable delay at time **T2**; the correlithm object delay node **600B** receives it as an input correlithm object **602B** at time **T3** and communicates it as output correlithm object **604B** after a suitable delay at time **T4**; and correlithm object delay node **600C** receives it as an input correlithm object **602C** at time **T5** and communicates it as output correlithm object **604C** after a suitable delay, although it is not illustrated in table **900**.

[**0105**] With respect to the correlithm object signified as **X2**, correlithm object delay node **600A** receives it as an input correlithm object **602A** at time **T2** and communicates it as output correlithm object **604A** after a suitable delay at time **T3**; and correlithm object delay node **600B** receives it as an input correlithm object **602B** at time **T4** and communicates it as output correlithm object **604B** after a suitable delay at time **T5**.

[**0106**] With respect to the correlithm object signified as **X3**, the correlithm object delay node **600A** receives it as an input correlithm object **602A** at time **T3** and communicates it as output correlithm object **604A** after a suitable delay at time **T4**;

[**0107**] and correlithm object delay node **600B** receives it as an input correlithm object **602B** at time **T5** and communicates it as output correlithm object **604B** after a suitable delay, although it is not illustrated in table **900**.

[**0108**] With respect to the correlithm object signified as **X4**, the correlithm object delay node **600A** receives it as an input correlithm object **602A** at time **T4** and communicates it as output correlithm object **604A** after a delay at time **T5**.

[**0109**] With respect to the correlithm object signified as **X5**, the correlithm object delay node **600A** receives it as an input correlithm object **602A** at time **T5** and communicates it as output correlithm object **604A** after a suitable delay, although it is not illustrated in table **900**.

[**0110**] FIG. **10** illustrates one embodiment of a finite impulse response (FIR) filter **1000** implemented using delay nodes **600A-600C** arranged in series as a correlithm object delay line **800**. In signal processing, a finite impulse response filter is a filter whose impulse response (or response to any finite length input) is of finite duration, because it settles to zero in finite time. The filter **1000** applies a suitable function on the time delayed outputs of each stage of the correlithm object delay line **800** (e.g., $f(1, 2, 3)$). Examples of functions include, but are not limited to, an equals function, a summation function, a multiplication function, a subtraction function, a division function, or any other suitable type of function. In some embodiments, the filter **1000** is configured to apply any suitable number of functions to the outputs of the delay nodes **600A-600C**.

[**0111**] FIG. **11** illustrates one embodiment of an infinite impulse response (IIR) filter **1100** implemented using correlithm object delay nodes **600D-600F** arranged in series as a correlithm object delay line **800**, where each delay node **600** has a feedback signal **622**. The presence of feedback in the topology of a discrete-time filter generally creates an IIR response. IIR filter **1100** has an impulse response that does not become exactly zero past a certain point, but continues indefinitely. This is in contrast to a FIR filter **1000** in which the impulse response does because zero after a finite duration. The IIR filter **1100** applies a suitable function on the time delayed outputs of each stage of the correlithm object delay line **800** (e.g., $f(A, B, C)$). In a particular embodiment, the output of a FIR filter **1000** may be input to the IIR filter

1100 such that it applies a suitable function, such as $f(1, 2, 3, A, B, C)$, to generate its output. In another embodiment, the IIR filter **1100** may be independent from FIR filter **1000**. For example, the IIR filter **1100** may be configured to receive an input from another component instead of the FIR filter **1000**. By implementing FIR filter **1000** and IIR filter **1100** using correlithm object delay nodes **600** arranged in a correlithm object delay line **800**, these filters can derive the benefit of using correlithm objects **104** to represent data, which, among other things as described above, facilitates noise immunity, stability, and data accuracy to the system. In some embodiments, the filter **1100** is configured to apply any suitable number of functions to the outputs of the delay nodes **600D-600F**.

[**0112**] FIGS. **12-13** generally describe an embodiment of an asynchronous correlithm object processing system. In one embodiment, components (e.g. sensors **302**, nodes **304**, delay nodes **600**, and actors **306**) in an asynchronous correlithm object processing system are configured to provide an output value in response to receiving an input value. In this configuration, the components are not governed or synchronized by a control signal or clock signal. For example, when a node **304** in an asynchronous correlithm object processing system receives an input correlithm object **104**, the node **304** will output an output correlithm object **104** as soon as the output correlithm object **104** has been determined without waiting for a triggering event or signal that synchronizes the node **304** with the other components of the asynchronous correlithm object processing system.

[**0113**] Using correlithm objects **104** in an asynchronous correlithm object processing system provides a layer of noise immunity for operations performed by the device **100**. For example, a node **304** in the correlithm object processing system **300** is able to use the hamming distance between a received correlithm object **104** and valid correlithm object entries in a node table **200** to identify a correct correlithm object value even in the presence of bit errors. For example, a received correlithm object **104** may have one or more bit errors (i.e. incorrect bit values) that changes the original correlithm object value. In this example, a node **304** is still able to correctly identify the original correlithm object value despite the bit errors. This ability to correctly identify the original correlithm object value despite the bit errors is a technical advantage over conventional systems that are unable to resolve signals with bit errors.

[**0114**] FIG. **12** is schematic diagram of an embodiment of an asynchronous correlithm object processing system **1200** that comprises a first node **304A**, a second node **304B**, a third node **304C**, a fourth node **304D**, and a fifth node **304E**. In other embodiments, the asynchronous correlithm object processing system **1200** may comprise any other suitable type and/or number of components. The components in the asynchronous correlithm object processing system **1200** may also be configured in any other suitable configuration.

[**0115**] In one embodiment, nodes **304A-304E** are configured to detect when a correlithm object **104** is loaded into their respective buffer. For example, the first node **304** may be configured to set a flag (e.g. a flag bit) that indicates that a new correlithm object **104** has been loaded in its buffer and is ready for processing.

[**0116**] The first node **304A** is configured to receive an input correlithm object **1202**. The input correlithm object **1202** may be received from a sensor **302**, a node **304**, a delay node **600**, or any other suitable component. The first node

304A is configured to determine an output correlithm based on the input correlithm object **1202** and to output the output correlithm object to the second node **304B** (shown as correlithm object **1206**) and the third node **304C** (shown as correlithm object **1204**). As an example, the first node **304A** may use node table **200A** to identify an output correlithm object **104** based on the received input correlithm object **104**. The first node **304A** may compute the hamming distance between the input correlithm object **1202** and input correlithm object entries in the node table **200A**. The first node **304A** may identify the input correlithm object from the node table **200A** with the smallest hamming distance and fetch the output correlithm object in the node table **200A** linked with the identified input correlithm object. In one embodiment, the input correlithm objects and the output correlithm objects in the node table **200A** are members of the same n-dimensional space **102**. In another embodiment, the input correlithm objects and the output correlithm objects in the node table **200A** are members of the different n-dimensional spaces **102**.

[0117] The second node **304B** is configured to receive an input correlithm object **1206** from the first node **304A** and to determine an output correlithm object based on the input correlithm object **1206**. The second node **304B** is configured to output the output correlithm object to the third node **304C** (shown as correlithm object **1208**) and to the fourth node **304D** (shown as correlithm object **1210**). For example, the second node **304B** may use node table **200B** to identify an output correlithm object **104** based on the received input correlithm object **1206** using a process similar to the process described for the first node **304A**.

[0118] The third node **304C** is configured to receive a first input correlithm **1204** from the first node **304A** and a second input correlithm **1208** from the second node **304B**. The third node **304C** is configured to determine an output correlithm object based on the first input correlithm object **104** and the second correlithm object **104A** and to output the output correlithm object to the fourth node **304D** (shown as correlithm object **1212**). For example, the third node **304C** may use node table **200C** to identify an output correlithm object **104** based on the first input correlithm object **1204** and the second correlithm object **1208**. As an example, the third node **304C** may compute the hamming distance between the first input correlithm object **1204** and a first set of input correlithm object entries in the node table **200C**. The third node **304C** may identify a first input correlithm object from the node table **200C** with the smallest hamming distance. The third node **304C** may then compute the hamming distance between the second input correlithm object **1208** and a second set of input correlithm object entries in the node table **200C**. The third node **304C** may identify a second input correlithm object from the node table **200C** with the smallest hamming distance. The third node **304C** may then fetch the output correlithm object in the node table **200** linked with the identified input correlithm objects.

[0119] In this example, the third node **304C** is unable to determine a valid output correlithm object **104** until it receives input correlithm objects **1204** and **1208** from the first node **304A** and the second node **304B**, respectively. In one embodiment, the third node **304C** may be configured to refrain from providing an output correlithm object until both input correlithm objects have been received. In another

embodiment, the output of the third node **304C** may be unknown or invalid until both input correlithm objects have been received.

[0120] The fourth node **304D** is configured to receive a first input correlithm **1210** from the second node **304B** and a second input correlithm **1212** from the third node **304C**. The fourth node **304D** is configured to determine an output correlithm object based on the first input correlithm object **1210** and the second correlithm object **1212** and to output the output correlithm object to the fifth node **304E** (shown as correlithm object **1214**). For example, the fourth node **304D** may use node table **200D** to identify an output correlithm object **104** based on the first input correlithm object **104** using a process similar to the process described for the third node **304C**.

[0121] In this example, the fourth node **304D** is configured similar to the third node **304C** in that the fourth node **304D** is unable to determine a valid output correlithm object until it receives input correlithm objects **1210** and **1212** from the second node **304B** and the third node **304C**, respectively. In one embodiment, the fourth node **304D** may be configured to refrain from providing an output correlithm object until both input correlithm objects have been received. In another embodiment, the output of the fourth node **304D** may be unknown or invalid until both input correlithm objects **104** have been received.

[0122] The fifth node **304E** is configured to receive an input correlithm object **1214** from the fourth node **304D** and to determine an output correlithm **104** based on the input correlithm object **1214**. The fifth node **304E** is configured to output the output correlithm object **1216**. For example, the fifth node **304E** may use node table **200E** to identify an output correlithm object **104** based on the received input correlithm object **1214** using a process similar to the process described for the first node **304A**. The output correlithm object **104** may be sent to a node **304**, a delay node **600**, an actor **306**, a peripheral device, or any other suitable component.

[0123] FIG. 13 is an embodiment of a timing diagram **1300** for an asynchronous correlithm object processing system **1200**. In this example, the timing diagram **1300** illustrates input and output values over time for the first node **304A**, the second node **304B**, and third node **304C** from the asynchronous correlithm object processing system **1200** described in FIG. 12.

[0124] At time **1302**, a first correlithm object **104A** (e.g. correlithm object **1202**) is received at the input of the first node **304A**. Prior to receiving the first correlithm object **104A**, the initial outputs of the first node **304A**, the second node **304B**, and the third node **304C** may be unknown or invalid.

[0125] At time **1304**, the first node **304A** outputs a second correlithm object **104B** (e.g. correlithm objects **1204** and **1206**) in response to receiving the first correlithm object **104A**. The first node **304A** may determine or compute the second correlithm object **104B** using any suitable technique. At this time, the outputs for the second node **304B** and the third node **304C** are still unknown or invalid because these nodes have not received input correlithm objects yet.

[0126] At time **1306**, the second node **304B** outputs a third correlithm object **104C** (e.g. correlithm object **1208**) in response to receiving the second correlithm object **104B**. The second node **304B** may determine or compute the third correlithm object **104C** using any suitable technique. At this

time, the output for the third node **304C** is still unknown or invalid because the third node **304C** needs an input correlithm object from both the first node **304A** and the second node **304B** to generate an output correlithm object. The third node **304C** is still waiting to receive an input correlithm object from the second node **304B**.

[10127] At time **1308**, the third node **304C** outputs a fourth correlithm object **104D** (e.g. correlithm object **1212**) in response to receiving the second correlithm object **104B** from first node **304A** and the third correlithm object **104C** from the second node **304B**.

[10128] In one embodiment, nodes **304A-304C** may hold their current output value until a new input correlithm object is received. In another embodiment, the output values of nodes **304A-304C** may not longer be valid after a predetermined amount of time. In other words, the output values of nodes **304A-304C** may only be valid for a predetermined amount of time.

[10129] FIGS. **14-17** generally describe an embodiment of a synchronous correlithm object processing system. In one embodiment, components (e.g. sensors **302**, nodes **304**, a delay node **600**, and actors **306**) in a synchronous correlithm object processing system are configured to provide an output value in response to detecting a triggering event, for example, a control signal or digital clock signal. For example, when a node **304** in a synchronous correlithm object processing system receives an input correlithm object **104**, the node **304** outputs an output correlithm object **104** in response to a triggering event rather than automatically outputting the output correlithm object **104** once it has been determined like in an asynchronous correlithm object processing system. The triggering event is an event or signal that is used to synchronize the components of the synchronous correlithm object processing system. An example of a synchronous correlithm object processing system in operation is described in FIG. **15**.

[10130] Emulating or implementing a synchronous correlithm object processing system allows a device **100** to implement a correlithm object processing system **300** using parallel processing. Parallel processing provides a technical advantage by increasing the processing speed and efficiency of the device **100** when performing operations in the correlithm object domain. With parallel processing, components in the correlithm object processing system are able to work in parallel which reduces the amount of time required to perform operations and increase the throughput of the device **100**. Device **100** may be configured with any suitable hardware and/or software configuration for scheduling and implementing parallel processing capabilities as would be appreciated by one of ordinary skill in the art. For example, device **100** may be configured with hardware for implementing master-slave parallel processing, symmetric multiprocessing, distributed computing, cluster computing, massively parallel processing, or any other suitable type of parallel processing.

[10131] In addition, using correlithm objects **104** in a synchronous correlithm object processing system provides a layer of noise immunity for operations performed by the device **100**. For example, a node **304** in the correlithm object processing system **300** is able to use the hamming distance between a received correlithm object **104** and valid correlithm objects in a node table **200** to identify a correct correlithm object value even in the presence of bit errors. For example, a received correlithm object **104** may have one

or more bit errors (i.e. incorrect bit values) that changes the original correlithm object value. In this example, a node **304** is still able to correctly identify the original correlithm object value despite the bit errors. This ability to correctly identify the original correlithm object value despite the bit errors is a technical advantage over conventional systems that are unable to resolve signals with bit errors.

[10132] FIG. **14** is a schematic diagram of an embodiment of a synchronous correlithm object processing system **1400** that comprises a boss **1402**, a first node **304A**, a second node **304B**, a third node **304C**, a fourth node **304D**, and a fifth node **304E**. In other embodiments, the synchronous correlithm object processing system **1400** may comprise any other suitable type and/or number of components. The components in the synchronous correlithm object processing system **1400** may also be configured in any other suitable configuration.

[10133] The boss **1402** is generally configured to control the operation of the synchronous correlithm object processing system **1400** by sending commands to every component to control the timing of when different operations are performed. For example, in a first phase, the boss **1402** sends commands **1404** (e.g. execute commands) to every component that triggers the components execute an operation on one or more correlithm objects **104** or real world values. In a second phase, the boss **1402** sends commands **1404** (e.g. output commands) to every component that triggers the components to provide an output (e.g. a correlithm object **104** or a real world value). The boss **1402** may repeat the process of sending execute commands and output commands to control and synchronize the components in the synchronous correlithm object processing system **1400**.

[10134] The boss **1402** is configured to store and/or access a boss table **1403** that identifies the components in the synchronous correlithm object processing system **1400**. For example, the boss table **1403** may be stored in memory **504** described in FIG. **5**. In one embodiment, the boss table **1403** is a data structure (e.g. a table or an data array) that identifies the components in the synchronous correlithm object processing system **1400**. The boss table **1403** may use any suitable identifier for identifying the components in the synchronous correlithm object processing system **1400**. In some embodiments, the boss table **1403** may comprise additional information linked with the components in the synchronous correlithm object processing system **1400**. For example, the boss table **1403** may comprise flags that indicate whether a particular command (e.g. an execute command or an output command) has been sent to a component. The boss table **1403** may further comprise indexes or any other suitable information linked with the components in the synchronous correlithm object processing system **1400**. An example of a boss **1402** in operation is described in FIG. **15**.

[10135] The boss **1402** is in signal communication with the components in the synchronous correlithm object processing system **1400**. The boss **1402** is configured to use any suitable type of the signal channels to send commands or instructions **1404** to the components the synchronous correlithm object processing system **1400**. The signal channels **14024** may be any suitable type of channel or mechanism for sending commands **1404** to the components in the synchronous correlithm object processing system **1400**. The boss **1402** may be configured to send commands **1404** to each of the components individually or all at once.

[0136] In one embodiment, the boss 1402 may send commands 1404 in the form of an analog or digital voltage or current signal. For example, the boss 1402 may send a command 1404 as a voltage signal to trigger an action (e.g. execute or output) to be performed by hardware components in the synchronous correlithm object processing system 1400.

[0137] In one embodiment, the boss 1402 is configured to receive an input signal 1406. The input signal 1406 may be a trigger signal used to provide a triggering event to the boss 1402 to control the operation of the boss 1402. For example, the boss 1402 may be configured to output a first command or instructions (e.g. an execute command) in response to receiving a first trigger signal and to output a second command or instructions (e.g. an output command) in response to receiving a second trigger signal. The second trigger signal may be the same as or different than the first trigger signal. Examples of the trigger signal include, but are not limited to, a clock signal or a control signal. The trigger signal may be any suitable type of analog or digital signal as would be appreciated by one of ordinary skill in the art.

[0138] In another embodiment, the trigger signal may be used to activate the boss 1402 to send commands 1404 to components in the synchronous correlithm object processing system 1400. For example, the boss 1402 may be configured to transition from an inactive state where the boss 1402 does not output any commands 1404 to an active state where the boss 1402 outputs commands 1404 (e.g. execute commands and output commands). In one example, the boss 1402 continuously outputs commands 1404 once the boss 1402 transitions to the active state without waiting for additional trigger signals. The boss 1402 may be further configured to transition from the active state to the inactive state in response to receiving a second trigger signal.

[0139] In another embodiment, the boss 1402 is configured to start or default in the active state where the boss 1402 outputs commands 1404 to the components in the synchronous correlithm object processing system 1400. In this example, the boss 1402 does not rely on a trigger signal to transition the boss 1402 from an inactive state to the active state. The boss 1402 may be configured to use a digital clock to coordinate when to output commands 1404 to the components in the synchronous correlithm object processing system 1400. The digital clock signal may be an internal digital clock provided by the boss 1402 or it may be a digital clock provided by another component (e.g. processor 502 described in FIG. 5).

[0140] In another embodiment, the boss 1402 may be configured to receive a correlithm object 104 as a trigger signal. In this example, the boss 1402 may access a table (not shown) that identifies valid correlithm object values. The boss 1402 may compare the received correlithm object 104 to entries in the table to determine whether the correlithm object 104 is a valid trigger signal based on its hamming distance. The received correlithm object 104 may be determined to be a valid trigger signal when the hamming distance between the received correlithm object 104 and an entry in the table is less than a predetermined threshold. In some embodiment, the table may comprise a list of valid correlithm objects 104 that correspond with different types of commands and/or trigger signals. For instance, a first correlithm object entry may be linked with instructions to send execute commands and a second correlithm object entry may be linked with instructions to send output commands.

[0141] The first node 304A is configured to receive an input correlithm object 1408 similar to the first node 304A described in FIG. 12. The first node 304A is configured to determine an output correlithm object in response to receiving an execute command from the boss 1402. The first node 304A may determine the output correlithm object using any suitable technique, for example, using a node table 200. The first node 304A is further configured to output the output correlithm object in response to receiving an output command from the boss 1402. In this example, the first node 304A is configured to output the output correlithm object 104 to the second node 304B (shown as correlithm object 1410) and the third node 304C (shown as correlithm object 1412).

[0142] The second node 304B is configured to receive an input correlithm object 1410 from the first node 304A and to determine an output correlithm based on the input correlithm object 1410. The second node 304B determines the output correlithm object in response to receiving an execute command from the boss 1402. The second node 304B may determine the output correlithm object 104 using any suitable technique. The second node 304B is further configured to output the output correlithm object in response to receiving an output command from the boss 1402. In this example, the second node 304B is configured to output the output correlithm object to the fourth node 304D (shown as correlithm object 1414).

[0143] The third node 304C is configured to receive an input correlithm object 1412 from the first node 304A and to determine an output correlithm based on the input correlithm object 1412. The third node 304C determines the output correlithm object in response to receiving an execute command from the boss 1402. The third node 304C may determine the output correlithm object 104 using any suitable technique. The third node 304C is further configured to output the output correlithm object 104 in response to receiving an output command from the boss 1402. In this example, the third node 304C is configured to output the output correlithm object to the fourth node 304D (shown as correlithm object 1416).

[0144] The fourth node 304D is configured to receive a first input correlithm object 1414 from the second node 304B and a second input correlithm object 1416 from the third node 304C. The fourth node 304D is configured to determine an output correlithm based on the first input correlithm object 1414 and the second correlithm object 1416 in response to receiving an execute command from the boss 1402. The fourth node 304D may determine the output correlithm object 104 using any suitable technique. The fourth node 304D is further configured to output the output correlithm object in response to receiving an output command from the boss 1402. In this example, the fourth node 304D is configured to output the output correlithm object 104 to the fifth node 304E (shown as correlithm object 1418).

[0145] The fifth node 304E is configured to receive an input correlithm object 1418 from the fourth node 304D and to determine an output correlithm based on the input correlithm object 1418. The fifth node 304E determines the output correlithm object in response to receiving an execute command from the boss 1402. The fifth node 304E may determine the output correlithm object 104 using any suitable technique. The fifth node 304E is further configured to output the output correlithm object 1420 in response to

receiving an output command from the boss 1402. The output correlithm object 104 may be sent to a node 304, a delay node 600, an actor 306, a peripheral device, or any other suitable component.

[0146] FIG. 15 is a flowchart of an embodiment of a process 1500 for emulating a synchronous correlithm object processing system 1400. Process 1500 provides instructions that allows the user device 100 to emulate or implement a synchronous correlithm object processing system 1400.

[0147] A non-limiting example is provided below to illustrate how the user device 100 uses process flow 1500 to emulate or implement a synchronous correlithm object processing system 1400. Process 1500 may be applied to any application that involves timing or synchronization between multiple components. In this example, process 1500 is implemented to control the synchronous correlithm object processing system 1400 described in FIG. 14.

[0148] At step 1502, the boss 1402 detects a first triggering event has occurred. In one embodiment, the first triggering event is detected when a boss 1402 receives a first trigger signal 1406. The first trigger signal 1406 may be sent by any other component or device. For example, the first trigger signal 1406 may be a command that instructs the boss 1402 to send execute commands to the components in the synchronous correlithm object processing system 1400. As another example, the first trigger signal 1406 may be a portion of a clock signal. For example, the first trigger signal may be a rising edge, a falling edge, a logical high, or logic low portion of a digital clock signal.

[0149] In another embodiment, the first trigger signal 1406 may be a command that instructs the boss 1402 to transition from an inactive state to an active state to send execute commands to the components in the synchronous correlithm object processing system 1400. When the boss 1402 transitions to the activate state the boss 1402 may use an internal or external clock signal for coordinating when commands are sent to the components in the synchronous correlithm object processing system 1400.

[0150] In another embodiment, the boss 1402 may use a portion of a digital clock signal generated or provided by the boss 1402 as the first trigger signal. For example, the first trigger signal may be a rising edge, a falling edge, a logical high, or logic low portion of a digital clock signal provided by the boss 1402.

[0151] At step 1504, the boss 1402 identifies a component in the boss table 1403. The boss 1402 sequentially and iteratively identifies each of the components in the boss table 1403. For example, the boss 1402 may identify the first node 304A on the first iteration of detecting the first triggering event, then identify the second node 304B on the second iteration of detecting the first triggering event, then identify the third node 304C on the third iteration of detecting the first triggering event, and so on. In one embodiment, the boss 1402 may use a pointer (e.g. an array pointer) or index to identify a component in the boss table 1403. The pointer or index may be increment with each iteration to identify the next component in the boss table 1403.

[0152] At step 1506, the boss 1402 sends an execute command to the identified component. For example, on the first iteration of detecting the first triggering event, the boss 1402 identifies the first node 304A and sends an execute command to the first node 304A that instructs the first node 304A use an input correlithm object 104 to determine an output correlithm object 104. The execute command may be

any suitable type signal or message. The boss 1402 may send the execute command using any suitable protocol as would be appreciated by one of ordinary skill in the art.

[0153] At step 1508, the boss 1402 determines whether execute commands have been sent to all of the components in the boss table 1403. In one embodiment, the boss 1402 may use flags (e.g. flag bits) to track which components the boss 1402 has sent execute commands to. The boss 1402 may determine that the boss 1402 has sent execute commands to all of the components when all of the flags are set. In another embodiment, the boss 1402 may use a pointer or index to track which components the boss 1402 has sent execute commands to. The boss 1402 may determine that the boss 1402 has sent execute commands to all of the components when the pointer references the last component in the boss table 1403. In other embodiments, the boss 1402 may use any other suitable technique for tracking which components the has sent execute commands to. The boss 1402 may reset any flags or pointers in response to determining that the boss 1402 has sent execute commands to all of the components in the boss table 1403. The boss 1402 proceeds to step 1510 in response to determining that execute commands have been sent to all of the components in the boss table 1403. Otherwise, the boss 1402 returns to step 1504 to select another component from the boss table 1403. For example, after the first iteration of detecting the first triggering event, the boss 1402 returns to step 1504 to identify and send an execute command to the second node 304B.

[0154] At step 1510, the boss 1402 detects a second triggering event has occurred. The boss 1402 may detect the second triggering event using a process similar to the process described in step 1502. For example, the second triggering event is detected when a boss 1402 receives a second trigger signal 1406 from another component or device. The second trigger signal may be a command that instructs the boss 1402 to send output commands to the components in the synchronous correlithm object processing system 1400. As another example, the second trigger signal 1406 may be another portion of a clock signal. For instance, the second trigger signal 1406 may be a rising edge when the first trigger signal 1406 was a falling edge or vice-versa. As another example, the second trigger signal 1406 may be a logical high portion of a clock signal when the first trigger signal is a logic low portion of the clock signal or vice-versa.

[0155] At step 1512, the boss 1402 identifies a component from the boss table 1403. The boss 1402 repeats the selection process described in step 1504 to iteratively identify all of the components in the boss table 1403. At step 1514, the boss 1402 sends an output command to the identified component. For example, on the first iteration after detecting the second triggering event, the boss 1402 identifies the first node 304A and sends an output command to the first node 304A that instructs the first node 304A to output the determine output correlithm object 104. The output command may be any suitable type signal or message. The boss 1402 may send the output command using any suitable protocol as would be appreciated by one of ordinary skill in the art.

[0156] At step 1516, the boss 1402 determines whether output commands have been sent to all of the components in the boss table 1403. The boss 1402 may use a process similar to the process described in step 1508 to determine whether output commands have been sent to all of the components in the boss table 1403. For example, the boss 1402 may use flags, pointers, indexes, or any other suitable technique. The

boss **1402** proceeds to step **1518** in response to determining that output commands have been sent to all of the components in the boss table **1403**. Otherwise, the boss **1402** returns to step **1512** to select another component from the boss table **1403**.

[0157] At step **1518**, the boss **1402** determines whether to loop back to wait for another triggering event to repeat process **1500**. In one embodiment, the boss **1402** may be configured to loop back to step **1502** to wait for another triggering event to be detected to repeat process **1500**. In another embodiment, the boss **1402** may be configured to only execute process **1500** one time and then terminate **1500**.

[0158] FIG. **16** is a schematic diagram of an embodiment of a synchronous correlithm object processing system **1600** with a master boss and a slave boss. A boss **1402** that sends commands to another boss **1402** may be referred to as a master boss. A boss **1402** that receives commands from another boss **1402** may be referred to as a slave boss. In FIG. **16**, boss **1402A** is a master boss **1402** that sends commands to control boss **1402B** which is a slave boss. Using master bosses and slave bosses allows a synchronous correlithm object **1600** to distribute and synchronize components that may not be implemented on the same processor or device. In other words, a device **100** may use master bosses and slave bosses to allow the synchronous correlithm object processing system **1600** to be implemented using parallel processing with two or more processors, processing cores, or devices. The ability to implement a correlithm object processing system **300** using parallel processing provides a technical advantage by increasing the processing speed and efficiency of the device **100** when performing operations in the correlithm object domain. With parallel processing, components in the correlithm object processing system are able to work in parallel which reduces the amount of time required to perform operations and increase the throughput of the device **100**.

[0159] In FIG. **16**, the synchronous correlithm object processing system **1600** comprises a first boss **1402A** in signal communication with a first node **304A**, a second node **304B**, a third node **304C**, a fourth node **304D**, a fifth node **304E**, and a second boss **1402B**. The first boss **1402A** is configured to operate in a manner similar to the boss **1402** described in FIG. **14**. For example, the first boss **1402A** is configured to send commands or instructions (e.g. execute commands and output commands) to the first node **304A**, the second node **304B**, the third node **304C**, the fourth node **304D**, the fifth node **304E**, and the second boss **1402B**. The first node **304A**, the second node **304B**, the third node **304C**, the fourth node **304D**, and the fifth node **304E** may be configured to operate similar to the first node **304A**, the second node **304B**, the third node **304C**, the fourth node **304D**, and the fifth node **304E** described in FIG. **14**, respectively.

[0160] The second boss **1402B** is in signal communication with a sixth node **304F**, a seventh node **304G**, an eighth node **304H**, and a ninth node **304I**. The second boss **1402B** is also configured to operate a manner similar to the boss **1402** described in FIG. **14**. In this example, the second boss **1402B** is configured to receive trigger signals (e.g. commands **1404**) from the first boss **1402A**. The second boss **1402B** is configured to send commands or instructions (e.g. execute commands and output commands) to the sixth node

304F, the seventh node **304G**, the eighth node **304H**, and the ninth node **304I** in response to receiving a trigger signal from the first boss **1402A**.

[0161] The sixth node **304F** is configured to receive an input correlithm object **104 1602** similar to the first node **304A** described in FIG. **12**. The sixth node **304F** is configured to determine an output correlithm object in response to receiving an execute command from the second boss **1402B**. The sixth node **304F** may determine the output correlithm object using any suitable technique. The sixth node **304F** is further configured to output the output correlithm object in response to receiving an output command from the second boss **1402B**. In this example, the sixth node **304F** is configured to output the output correlithm object **104** to the seventh node **304G** (shown as correlithm object **1604**).

[0162] The seventh node **304G** is configured to receive an input correlithm object **1604** from the sixth node **304F** and to determine an output correlithm based on the input correlithm object **1604**. The seventh node **304G** determines the output correlithm object in response to receiving an execute command from the boss **1402B**. The seventh node **304G** may determine the output correlithm object using any suitable technique. The seventh node **304G** is further configured to output the output correlithm object in response to receiving an output command from the boss **1402B**. In this example, the seventh node **304G** is configured to output the output correlithm object to the eighth node **304H** (shown as correlithm object **1606**).

[0163] The eighth node **304H** is configured to receive an input correlithm object **1606** from the seventh node **304G** and to determine an output correlithm based on the input correlithm object **1606**. The eighth node **304H** determines the output correlithm object in response to receiving an execute command from the boss **1402B**. The eighth node **304H** may determine the output correlithm object using any suitable technique. The eighth node **304H** is further configured to output the output correlithm object in response to receiving an output command from the boss **1402B**. In this example, the eighth node **304H** is configured to output the output correlithm object **104** to the ninth node **304I** (shown as correlithm object **1608**).

[0164] The ninth node **304I** is configured to receive an input correlithm object **1608** from the eighth node **304H** and to determine an output correlithm based on the input correlithm object **1608**. The ninth node **304I** determines the output correlithm object in response to receiving an execute command from the boss **1402B**. The ninth node **304I** may determine the output correlithm object using any suitable technique. The ninth node **304I** is further configured to output the output correlithm object in response to receiving an output command from the boss **1402B**. In this example, the ninth node **304I** is configured to output the output correlithm object **1610**. The output correlithm object **1610** may be sent to a node **304**, a delay node **600**, an actor **306**, a peripheral device, or any other suitable component.

[0165] FIG. **17** is a schematic diagram of an embodiment of a synchronous correlithm object processing system **1700** with a master boss and multiple slave bosses. In FIG. **17**, nodes **304A-304I** may be configured similar to nodes **304A-304I** described in FIG. **16**. In other embodiments, the synchronous correlithm object processing system **1700** may comprise any other suitable type and/or number of components (e.g. sensors **302**, nodes **304**, or actors **306**). The

synchronous correlithm object processing system **1700** may also be configured using any other suitable configuration.

[0166] Boss **1402B** is configured to control nodes **304A-304E** and boss **1402C** is configured to control nodes **304F-304I**. Boss **1402A** is in signal communication with bosses **1402B** and **1402C** and configured to control bosses **1402B** and **1402C** by sending commands **1404** to the bosses **1402B** and **1402C**. Boss **1402A** uses the commands **1404** to synchronize the components controlled by the bosses **1402B** and **1402C**. In this example, boss **1402A** is configured as a master boss and bosses **1402B** and **1402C** are configured as slave bosses. In this configuration, boss **1402A** has boss table **1403A** that identifies bosses **1402B** and **1402C**. Boss **1402A** is configured to iteratively send trigger signals to the bosses **1402B** and **1402C**. In some embodiments, boss **1402A** may be further configured to send trigger signals to other components (not shown).

[0167] In this configuration, a master boss can control multiple slave bosses and their components in parallel. A device **100** is able to achieve improved speed and efficiency benefits from parallel processing by distributing the slave bosses and their components among different processing cores or devices. For example, each slave boss may be emulated by a different processing core or device. The master boss allows the device **100** to synchronize and coordinate operations among the different processors or devices.

[0168] While several embodiments have been provided in the present disclosure, it should be understood that the disclosed systems and methods might be embodied in many other specific forms without departing from the spirit or scope of the present disclosure. The present examples are to be considered as illustrative and not restrictive, and the intention is not to be limited to the details given herein. For example, the various elements or components may be combined or integrated in another system or certain features may be omitted, or not implemented.

[0169] In addition, techniques, systems, subsystems, and methods described and illustrated in the various embodiments as discrete or separate may be combined or integrated with other systems, modules, techniques, or methods without departing from the scope of the present disclosure. Other items shown or discussed as coupled or directly coupled or communicating with each other may be indirectly coupled or communicating through some interface, device, or intermediate component whether electrically, mechanically, or otherwise. Other examples of changes, substitutions, and alterations are ascertainable by one skilled in the art and could be made without departing from the spirit and scope disclosed herein.

[0170] To aid the Patent Office, and any readers of any patent issued on this application in interpreting the claims appended hereto, applicants note that they do not intend any of the appended claims to invoke 35 U.S.C. § 112(f) as it exists on the date of filing hereof unless the words “means for” or “step for” are explicitly used in the particular claim.

1. A device configured to emulate an asynchronous correlithm object processing system, comprising:

a node engine configured to emulate:

a first node linked with a first node table, wherein:

the first node table identifies:

a first plurality of correlithm objects, wherein each correlithm object in the first plurality of corre-

lithm objects is a point in a first n-dimensional space represented by a binary string; and

a second plurality of correlithm objects linked with the first plurality of correlithm objects, wherein each correlithm object in the second plurality of correlithm objects is a point in a second n-dimensional space represented by a binary string; and

the first node is configured to:

receive a first correlithm object;

fetch a second correlithm object from among the second plurality of correlithm objects based on the first correlithm object, wherein fetching the second correlithm object comprises:

determining Hamming distances between the first correlithm object and each of the first plurality of correlithm objects;

identifying a correlithm object with the shortest Hamming distance between the first correlithm object and each of the first plurality of correlithm objects; and

identifying an entry in the first node table that corresponds with the identified correlithm object; and

output the second correlithm object to a second node.

2. The device of claim 1, wherein determining Hamming distances between the first correlithm object and each of the first plurality of correlithm objects:

performing an XOR operation between the first correlithm object and each of the first plurality of correlithm objects to generate a resulting binary string;

counting the number of logical high values in the resulting binary string; and

identify a correlithm object with the smallest number of logical high values; and

identifying an entry in the first node table that corresponds with the identified correlithm object.

3. The device of claim 1, wherein the first node is configured to receive the first correlithm object from a sensor configured to convert a real world value into the first correlithm object.

4. The device of claim 1, wherein the first node is configured to receive the first correlithm object from a node configured to convert a correlithm object into the first correlithm object.

5. The device of claim 1, wherein the first n-dimensional space and the second n-dimensional space both have the same number of dimensions.

6. The device of claim 1, wherein the first n-dimensional space has a different number of dimensions than the second n-dimensional space.

7. The device of claim 1, wherein the first node outputs the second correlithm object to a third node.

8. A method for emulating an asynchronous correlithm object processing system, comprising:

receiving, by a first node implemented by a node engine, a first correlithm object;

fetching, by the first node, a second correlithm object from a first node table based on the first correlithm object, wherein the first node table identifies:

a first plurality of correlithm objects, wherein each correlithm object in the first plurality of correlithm

objects is a point in a first n-dimensional space represented by a binary string; and

a second plurality of correlithm objects linked with the first plurality of correlithm objects, wherein each correlithm object in the second plurality of correlithm objects is a point in a second n-dimensional space represented by a binary string; and

wherein fetching the second correlithm object comprises:

- determining Hamming distances between the first correlithm object and each of the first plurality of correlithm objects;
- identifying a correlithm object with the shortest Hamming distance between the first correlithm object and each of the first plurality of correlithm objects; and
- identifying an entry in the first node table that corresponds with the identified correlithm object; and

outputting, by the first node, the second correlithm object to a second node implemented by the node engine.

9. The method of claim **8**, wherein determining Hamming distances between the first correlithm object and each of the first plurality of correlithm objects:

- performing an XOR operation between the first correlithm object and each of the first plurality of correlithm objects to generate a resulting binary string;
- counting the number of logical high values in the resulting binary string; and
- identify a correlithm object with the smallest number of logical high values; and
- identifying an entry in the first node table that corresponds with the identified correlithm object.

10. The method of claim **8**, further comprising receiving, by the first node, the first correlithm object from a sensor configured to convert a real world value into the first correlithm object.

11. The method of claim **8**, further comprising receiving, by the first node, the first correlithm object from a node configured to convert a correlithm object into the first correlithm object.

12. The method of claim **8**, wherein the first n-dimensional space and the second n-dimensional space both have the same number of dimensions.

13. The method of claim **8**, wherein the first n-dimensional space has a different number of dimensions than the second n-dimensional space.

14. The method of claim **8**, wherein the first node outputs the second correlithm object to a third node.

15. A computer program product comprising executable instructions stored in a non-transitory computer readable medium such that when executed by a processor causes the processor to emulate an asynchronous correlithm object processing system configured to:

implement a first node using a node engine;

receive, using the first node, a first correlithm object;

fetch, using the first node, a second correlithm object from a first node table based on the first correlithm object, wherein the first node table identifies:

- a first plurality of correlithm objects, wherein each correlithm object in the first plurality of correlithm objects is a point in a first n-dimensional space represented by a binary string; and
- a second plurality of correlithm objects linked with the first plurality of correlithm objects, wherein each correlithm object in the second plurality of correlithm objects is a point in a second n-dimensional space represented by a binary string; and

wherein fetching the second correlithm object comprises:

- determining Hamming distances between the first correlithm object and each of the first plurality of correlithm objects;
- identifying a correlithm object with the shortest Hamming distance between the first correlithm object and each of the first plurality of correlithm objects; and
- identifying an entry in the first node table that corresponds with the identified correlithm object; and

output, using the first node, the second correlithm object to a second.

16. The computer program product of claim **15**, wherein determining Hamming distances between the first correlithm object and each of the first plurality of correlithm objects:

- performing an XOR operation between the first correlithm object and each of the first plurality of correlithm objects to generate a resulting binary string;
- counting the number of logical high values in the resulting binary string; and
- identify a correlithm object with the smallest number of logical high values; and
- identifying an entry in the first node table that corresponds with the identified correlithm object.

17. The computer program product of claim **15**, wherein the first node is configured to receive the first correlithm object from a sensor configured to convert a real world value into the first correlithm object.

18. The computer program product of claim **15**, wherein the first node is configured to receive the first correlithm object from a node configured to convert a correlithm object into the first correlithm object.

19. The computer program product of claim **15**, wherein the first n-dimensional space and the second n-dimensional space both have the same number of dimensions.

20. The computer program product of claim **15**, wherein the first n-dimensional space has a different number of dimensions than the second n-dimensional space.

* * * * *